### Flexi Wood A75 White





#### Main Office, R&D and Logistics

Avenida do Polo 3, nº159, 4590-137 Carvalhosa Paços de Ferreira - Portugal Tlm . +351 917 851 019

#### Office 2

Rua Quinta do Bom Retiro nº16, Armazém 9 2820-690 Charneca da Caparica - Portugal Tel. +351 212 964 100 Fax - +351 212 964 101

### Vicoustic USA

5701 Sixth Avenue South, Suite 229 Seattle, WA 98108 Tel . (206) 767-2020 E-mail . info@vicousticusa.com


www.vicousticusa.com

Flexi Wood A75 is a panel dedicated to the control of medium and medium-low frequencies. It acts simultaneously as an absorber and a reflector, controlling excess energy in a room without compromising its ambience. This helps to create listening spaces with a natural, bright sound.

The panel's revolutionary design is further enhanced by the addition of a wood surface. Long known for its excellent acoustic properties, the wood also adds elegance and modernity to the panel, making it suitable for use in any type of space.

The Flexi Wood panel is available in two different thicknesses for use in different frequency ranges. Flexi Wood A75 acts as a Helmholtz resonator performing between 200Hz and 2000Hz.

# Graph

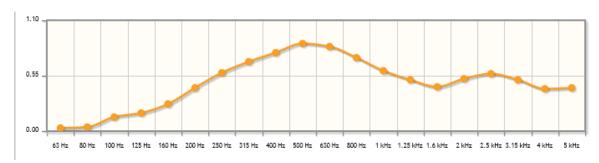

### **Main Info**

Ref: B00054

EAN13: 5600301841095 HS-Code: 39211310

Dimensions: 600.0 x 600.0 x 77.0 mm

Scratch Resistance: No

Washable: No

### **Performance**

Functionality: Absorption

Absorption Frequency: Medium

Absorption Class: D

alpha with Shape Indicators: 0.55 (M)

NRC: 0.650

Fire Class European (EN): Euroclass F

Technical File

## Flexi Wood A75 White



Fire Class France (NF P): M1

Shipping Units Per Box: 6 boxes

Box Dimensions: 620.0 x 620.0 x 495.0 mm

Box Weight: 9.4 kg

Row Materials | Material: Wood, Foam

Wood Type: Mdf Painted

Foam Type: M1

Design Wood Color: White

Edges: Angled

Installation Place: Wall, Ceiling

Fixing Type: Glued

Technical File