Super Bass Extreme Nordik



Main Office, R&D and Logistics

Avenida do Polo 3, nº159, 4590-137 Carvalhosa Paços de Ferreira - Portugal Tlm . +351 917 851 019

Office

Rua Quinta do Bom Retiro nº16, Armazém 9 2820-690 Charneca da Caparica - Portugal Tel. + 351 212 964 100 Fax. + 351 212 964 101

Vicoustic USA

5701 Sixth Avenue South, Suite 229 Seattle, WA 98108 Tel . (206) 767-2020 E-mail . info@vicousticusa.com


www.vicousticusa.com

Optimized for corner mounting, Super Bass Extreme's elegant wooden front is based on Vicoustic's flagship Wave Wood panel. This is combined with a membrane, two high-density foam layers and a micro-perforated rear panel, with 1mm holes, that acts as a Helmholtz resonator. Designed to provide effective low frequency absorption between 60-125 Hz, it delivers maximum effectiveness between 75 -100Hz.

The wooden front panel has two functions, providing sufficient mid-high frequency absorption to control corner reflections without deadening the sound, while simultaneously acting as a diffuser. When porous materials such as foam are applied to corners or walls, they become less efficient in dealing with low frequencies, because the particle velocity or air movement associated with long wavelengths is low. However, the sound pressure is at its maximum. Super Bass Extreme's internal membrane transforms this high pressure by converting the pressure fluctuations into air motion. The membrane sympathetically vibrates over a frequency range of 75-85 Hz, causing the air to pass through a layer of high-density foam that absorbs the low frequencies. Because of the high pressure it has also been possible to introduce a further technique for aiding absorption, with the micro-perforated panel at the back of the unit acting as a tuned Helmholtz resonator. Tests actually showed the perforations to give 20% more efficiency, compared to using a non-perforated panel.

Super Bass Extreme is highly recommended for smaller rooms with low frequency issues. The panel can be used in different corner positions and its modular structure allows further units to be added as required. With an eye to interior design compatibility, Super Bass Extreme is available in five elegant wood finishes that match Vicoustic's range of Wave Wood panels.

Graph

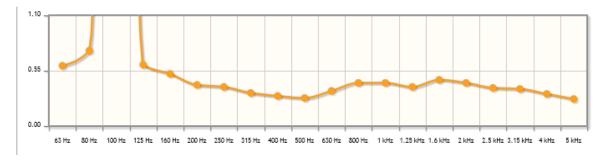

Main Info

Ref: B00166

EAN13: 5600301840029 HS-Code: 39211310

Dimensions: 600.0 x 150.0 x 600.0 mm

Scratch Resistance: No

Washable: No

Technical File

Super Bass Extreme Nordik



Performance

Functionality: Absorption

Absorption Frequency: Low

Absorption Class: D

alpha with Shape Indicators: 0.4

NRC: 0.400

Fire Class European (EN): Euroclass F

Fire Class France (NF P): M1

Shipping

Units Per Box: 2 boxes

Box Dimensions: 630.0 x 630.0 x 335.0 mm

Box Weight: 9.4 kg

Row Materials

Material: Wood, Foam

Wood Type: Mdf Painted Foam Type: Recycled

Design

Wood Color: Nordik

Edges: Angled

Installation

Place: Corner

Technical File