

Main Office, R&D and Logistics

Avenida do Polo 3, nº159,
4590-137 Carvalhosa
Paços de Ferreira - Portugal
Tlm. : +351 917 851 019

Office 2

Rua Quinta do Bom Retiro nº16, Armazém 9
2820-690 Charneca da Caparica - Portugal
Tel. : +351 212 964 100
Fax : +351 212 964 101
E-mail : info@vicoustic.com

Vicoustic USA

5701 Sixth Avenue South, Suite 229
Seattle, WA 98108
Tel. : (206) 767-2020
E-mail : info@vicousticusa.com

www.vicousticusa.com

Colored foam oxidates over time, turning yellow, but Vicoustic has now found a perfect solution to ensure that colored panels maintain their smart appearance. Our new Flexi Pol A50 and Flexi Pol A75 panels have a special polyurethane coloured surface which is not only durable, but also offers a range of creative design options.

With its revolutionary design, Vicoustic's Flexi Panel A75 is truly effective when applied in any type of space. A scientific combination of material, absorption surface and cavity thickness means that the panel's absorption performance is extremely efficient in the treatment of 1st reflections.

Flexi Panel A75 Poli offers you the best performance on medium and high frequencies.

More information regarding Flexi Foam Technology:


Commonly applied in particularly demanding rooms such as recording or broadcast studios, the panel provides one of the best acoustic solutions on the market, at an attractive price. It also has a unique characteristic - when placed in a sequence the panel junctions become undetectable, allowing you to hide cables in the cavities. - Innovative design

- High acoustic performance
- Easy to install
- Versatile
- Unique Vicoustic technology

Applications :

Conference and Teleconference Rooms, Home Theatres, Recording and Broadcast Studios, Post Production Studios, Rehearsal Rooms, Public Spaces, Auditoriums, Performance Spaces, etc.

Graph

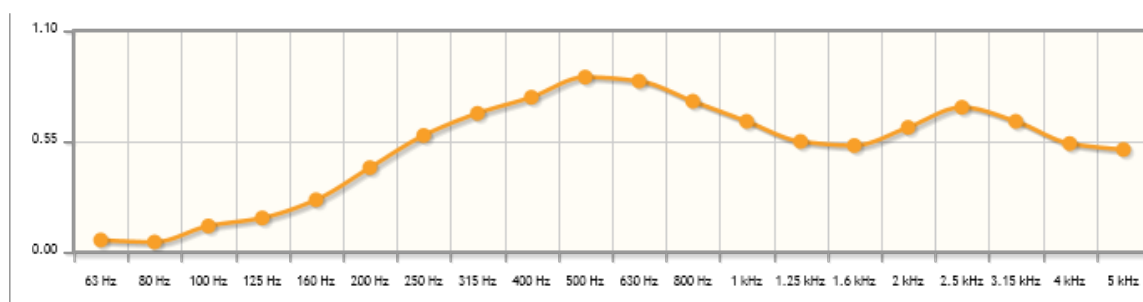

Main Info

Ref: B00043

EAN13: 5600301840418

HS-Code: 39211310

Dimensions: 600.0 x 600.0 x 77.0 mm

Technical File

Scratch Resistance: No

Washable: No

Performance

Functionality: Absorption

Absorption Frequency: Medium

Absorption Class: C

alpha with Shape Indicators: 0.65

NRC: 0.700

Fire Class European (EN): Euroclass F

Fire Class France (NF P): M1

Shipping

Units Per Box: 6 boxes

Box Dimensions: 620.0 x 620.0 x 495.0 mm

Box Weight: 6.0 kg

Row Materials

Material: Foam

Foam Type: M1

Design

Fabric Color: Blue

Edges: Angled

Installation

Place: Wall, Ceiling

Fixing Type: Glued

Technical File