Fabrica

Project							
Name:	Fabrica	**Creation time:**	07/07/2026 05:37:26	**Last change**	09/28/2026 11:36:48	**Author:**	Administrator
Last modified by:	Administrator	**Version:**					
Comment:							

Operating system	
Name	**Description**
Operating system	Microsoft Windows Server 2022 Standard
Version of the operating system	10.0.20348.0
Operating system service pack	
Version of the Internet Explorer	11.1.20348.0
Computer name	WIN-LJ8EJFB9ESN
User name	WIN-LJ8EJFB9ESN\Administrator
Installation path of the TIA Portal	C:\Program Files\Siemens\Automation\Portal V19


Components		
Name	**Version**	**Release**
AWB V2 - Automation License Manager Plugin V2.0 (AWB_V2)	V2.0	V02.00.00.00_01.04.00.03
AWB V2 - Software Management Plugin V2.0 (AWB_V2)	V2.0	V02.00.00.00_01.04.00.03
AWB V2 - TIA Addin V2.0 (AWB_V2)	V2.0	V02.00.00.00_01.04.00.03
AWB V2 - Host V2.1 (AWB_V2)	V2.1	02.01.00.00_01.00.00.50
HelpViewer_WebApp - HelpViewer_WebApp V1.0 (HVWebApp)	V1.0	V01.00.00.00_02.00.00.58
S7-PLCSIM - S7-PLCSIM Setup V19.0 (PLCSIM_V19)	V19.0	V19.00.00.00_08.07.00.01
TIA Portal Project Server - TIA Portal Project Server Single SetupPackage V1.2 (ProjectServer)	V1.2	V01.02.00.00_00.00.04.16
AWB Host - TIAAdminV3 V3.0 (TIAAdminV3)	V3.0	V03.00.00.00_01.06.00.11
AWB Host - Automation License Manager Plugin V3.0 (TIAAdminV3)	V3.0	V03.00.00.00_01.06.00.11
AWB Host - Software Management Plugin V3.0 (TIAAdminV3)	V3.0	V03.00.00.00_01.06.00.11
AWB Host - TIA Addin V3.0 (TIAAdminV3)	V3.0	V03.00.00.00_01.06.00.11
AWB Host - Central User Management Plugin V3.0 (TIAAdminV3)	V3.0	V03.00.00.00_01.06.00.11
Totally Integrated Automation Portal V19 - TIA Portal Single SetupPackage V19.0 (TIAP19)	V19.0	V19.00.00.00_68.01.00.03
Siemens Totally Integrated Automation Portal V19 - HelpViewer Server V19.0 (TIAP19)	V19.0	V19.00.00.00_68.01.00.03
Siemens Totally Integrated Automation Portal V19 - HM All Editions Single SetupPackage V19.0 (TIAP19)	V19.0	V19.00.00.00_68.01.00.03
Siemens Totally Integrated Automation Portal V19 - HM NoBasic Single SetupPackage V19.0 (TIAP19)	V19.0	V19.00.00.00_68.01.00.03
Siemens Totally Integrated Automation Portal V19 - Hardware Support Base Package 0 V19.0 (TIAP19)	V19.0	V19.00.00.00_66.01.00.07
Siemens Totally Integrated Automation Portal V19 - Multiuser Client Single SetupPackage V19.0 (TIAP19)	V19.0	V19.00.00.00_68.01.00.03
Siemens Totally Integrated Automation Portal V19 - Version Control Interface SetupPackage V19.0 (TIAP19)	V19.0	V19.00.00.00_68.01.00.03
Siemens Totally Integrated Automation Portal V19 - STEP 7 Safety Single SetupPackage V19.0 (TIAP19)	V19.0	V19.00.00.00_68.01.00.03
Siemens Totally Integrated Automation Portal V19 - SESSP Single SetupPackage V19.0 (TIAP19)	V19.0	V19.00.00.00_68.01.00.03
Siemens Totally Integrated Automation Portal V19 - STEP 7 Single SetupPackage V19.0 (TIAP19)	V19.0	V19.00.00.00_68.01.00.03
Siemens Totally Integrated Automation Portal V19 - Hardware Support Base Package 02 V19.0 (TIAP19)	V19.0	V19.00.00.00_66.01.00.07
Siemens Totally Integrated Automation Portal V19 - Hardware Support Base Package 03 V19.0 (TIAP19)	V19.0	V19.00.00.00_66.01.00.07
Siemens Totally Integrated Automation Portal V19 - Hardware Support Base Package 04 V19.0 (TIAP19)	V19.0	V19.00.00.00_66.01.00.07
Siemens Totally Integrated Automation Portal V19 - Support Base Package TO-01 V19.0 (TIAP19)	V19.0	V19.00.00.00_66.01.00.07
Siemens Totally Integrated Automation Portal V19 - Support Base Package TO-02 V19.0 (TIAP19)	V19.0	V19.00.00.00_66.01.00.07
Siemens Totally Integrated Automation Portal V19 - Hardware Support Base Package WCF-01 V19.0 (TIAP19)	V19.0	V19.00.00.00_66.01.00.07
Siemens Totally Integrated Automation Portal V19 - TIACOMPCHECK Single SetupPackage V19.0 (TIAP19)	V19.0	V19.00.00.00_68.01.00.03
Siemens Totally Integrated Automation Portal V19 - TIA Portal Security Audit Log Single SetupPackage V19.0 (TIAP19)	V19.0	V19.00.00.00_68.01.00.03
Siemens Totally Integrated Automation Portal V19 - TIA Portal Shim Single SetupPackage V19.0 (TIAP19)	V19.0	V19.00.00.00_68.01.00.03
Siemens Totally Integrated Automation Portal V19 - Simatic Single SetupPackage V19.0 (TIAP19)	V19.0	V19.00.00.00_68.01.00.03
Siemens Totally Integrated Automation Portal V19 - WinCC Basic ES Single SetupPackage V19.0 (TIAP19)	V19.0	V19.00.00.00_68.01.00.03
Siemens Totally Integrated Automation Portal V19 - WinCC CA ES Single SetupPackage V19.0 (TIAP19)	V19.0	V19.00.00.00_68.01.00.03
Siemens Totally Integrated Automation Portal V19 - Openness SetupPackage V19.0 (TIAP19)	V19.0	V19.00.00.00_68.01.00.03
Siemens Totally Integrated Automation Portal V19 - WinCC Unified ES Single SetupPackage V19.0 (TIAP19)	V19.0	V19.00.00.00_68.01.00.03
Siemens Totally Integrated Automation Portal V19 - WinCC Transfer Mandatory Single SetupPackage V19.0 (TIAP19)	V19.0	V19.00.00.00_68.01.00.03
User Management Component - UserManagementComponentx64 V2.12 (UMC64)	V2.12	V02.12.00.00_00.00.00.15
User Management Component - umtrayiconx64 V2.12 (UMC64)	V2.12	V02.12.00.00_00.00.00.15
WinCC Unified PC V19 - WinCC Unified PC V5.0 (WinCCUnified)	V5.0	V05.00.00.00_64.02.00.01
WinCC Unified PC V19 - LocalLogging V5.0 (WinCCUnified)	V5.0	V05.00.00.00_64.02.00.01


Name	Version	Release
WinCC Unified Station Configurator - WinCC Unified Station Configurator V5.0 (WinCC_USC)	V5.0	V05.00.00.00_64.02.00.01
WinCC Runtime Advanced V17.0 - SIMATIC WinCC Runtime Advanced V17.0 (HMIRTM_V11)	V17.0 UPD6	V17.00.00.06_05.02.00.01
WinCC Runtime Advanced V17.0 - HMIRTM Tagging Package 01 Single SetupPackage V17.0 UPD6 (HMIRTM_V11)	V17.0 UPD6	V17.00.00.06_05.02.00.01
PLCSIM Advanced Single SetupPackage - PLCSIM Advanced Single Setup-Package V6.0 (PLCSIMADV)	V6.0	V06.00.00.00_68.01.00.03
SIMATIC S7-PCT - SIMATIC S7-PCT V3.5 SP3 Upd3 (S7PCT)	V3.5 + SP3 + Upd3	V03.05.03.03_01.05.00.01
Siemens Totally Integrated Automation Portal V19 - Simatic Single Setup-Package 32 Bit V19.0 (TIAP19)	V19.0	V19.00.00.00_68.01.00.03
Siemens Totally Integrated Automation Portal V19 - WinCC Basic ES Single SetupPackage 32 Bit V19.0 (TIAP19)	V19.0	V19.00.00.00_68.01.00.03
AddinRolloutService	19.0.0.0	V19.00.00.00_68.01.00.03
SIMATIC HMI License Manager Panel Plugin (x64)	19.0.0.0	V19.00.00.00_68.01.00.03
SIMATIC WinCC Runtime Advanced Driver (x64)	19.0.0.0	V19.00.00.00_68.01.00.03
ETWEventCollector	19.0.0.0	V19.00.00.00_68.01.00.03
SIMATIC NCM FWL 64	5.6.0.3	K5.6.0.3_1.1.0.2
NCM GPRS 64	01.02.00.00	V1.2.0.0_2.1.0.1
Open SSL 3	3.0.2.1	V03.00.02.01_00.00.00.01
SIMATIC PLCSIM 64	19.00.00	19.00.00.00_01.07.00.01
SIMATIC PLCSIM Advanced Driver64	6.0.0.0	V06.00.00.00_68.01.00.03
SIMATIC Device Drivers	9.3	09.03.05.00_01.02.00.26
TelemetryConnector	2.1.0.3	V02.01.00.03_01.00.00.00
SIEMENS OPC	3.9	03.09.12.02_01.01.00.04
SIMATIC PLCSIM Advanced SimRT	6.0.0.0	V06.00.00.00_68.01.00.03
SIMATIC HMI ProSave	19.0.0.0	V19.00.00.00_68.01.00.03
SIMATIC HMI Symbol Library	17.0.0.6	V17.00.00.06_05.02.00.01
SIMATIC HMI Touch Input	17.0.0.6	V17.00.00.06_05.02.00.01
SIMATIC Device Drivers WoW	29.3	29.03.05.00_01.02.00.26
SIMATIC Event Database	5.7	05.07.02.00_01.01.00.01
SeCon	2.9	V02.09.00.00_01.03.00.01
WinCC Runtime Advanced Simulator	17.0.0.0	V17.00.00.00_43.02.00.01

Products		
Name	**Version**	**Release**
TIA Portal Help Viewer	V1.0	V01.00.00.00_02.00.00.43
S7-PLCSIM	V19	19.00.00.00_08.07.00.01
TIA Portal Project Server	V1.2	V01.02.00.00_00.00.04.16
TIA Administrator	V3.0	V03.00.00.00_01.06.00.11
SIMATIC STEP 7 Prof - STEP 7 Safety - WinCC Adv + Unified + Prof	V19.0	V19.00.00.00_68.01.00.03
User Management Component	V2.10	V02.10.00.00_00.00.00.38
UMC Status Application	V2.10	V02.10.00.00_00.00.00.38
SIMATIC WinCC Unified PC	V19	19.00.00.00_00.00.64.02
WinCC Unified Station Configurator	V5.0	05.00.00.00_64.02.00.01
SIMATIC WinCC Runtime Advanced Simulation	V17.0 Upd6	V17.00.00.06_05.02.00.01
S7-PLCSIM Advanced	V6.0	V06.00.00.00_68.01.00.03
S7-PCT	V3.5 SP3 Upd3	V03.05.03.03_01.05.00.01
Automation License Manager	V6.0 + SP9 + Upd4	06.00.09.04_01.01.00.03
S7-PLCSIM	V5.4 + SP8 + Upd2	V05.04.08.02_02.40.00.01
SIMATIC ProSave	V19.0	V19.00.00.00_68.01.00.03
S7-PCT	V3.5 SP3 Upd3	K3.5.3.3_1.5.0.1

Fabrica

PLC_1 [CPU 1511-1 PN]

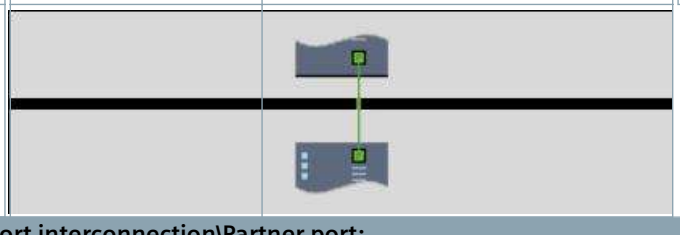PLC_1					
General\Project information					
Name	PLC_1	**Author**	Administrator	**Comment**	
Rack	0	**Slot**	1		
General\Catalog information					
Short designation	CPU 1511-1 PN	**Description**	CPU with display; work memory 150 KB code and 1 MB data; 60 ns bit operation time; 4-stage protection concept, technology functions: motion control, closed-loop control, counting and measuring; tracing; Runtime options; isochronous mode (central); for all PROFINET interfaces: transport protocol TCP/IP, secure Open User Communication, S7 communication, S7 routing, IP forwarding, Web server, DNS client, OPC UA: Server DA, Client DA, methods, companion specifications; PROFINET IO controller, supports RT/IRT, performance upgrade PROFINET V2.3, 2 ports, I-Device, MRP, MRPD, isochronous mode; firmware V2.9	**Article number**	6ES7 511-1AK02-0AB0
Firmware version	V2.9		False		
General\Identification & Maintenance					
Plant designation		**Location identifier**		**Installation date**	2026-07-07 05:39:27.667
Additional information					
General\Checksums					
Text lists	FA 70 E8 75 1D 5A 8E 29	**Software**	F2 89 3A 4C 69 1E 2F 09		
PROFINET interface [X1]\General					
Name	PROFINET interface_1	**Author**	Administrator	**Comment**	
PROFINET interface [X1]\Ethernet addresses\Interface networked with					
Subnet:	PN/IE_1				
PROFINET interface [X1]\Ethernet addresses\Internet protocol version 4 (IPv4)					
IP configuration	Set IP address in the project	**IP address:**	192.168.1.1	**Subnet mask:**	255.255.255.0
Use router	False				
PROFINET interface [X1]\Ethernet addresses\PROFINET					
PROFINET device name is set directly at the device	False	**Generate PROFINET device name automatically**	True	**PROFINET device name:**	plc_1.profinet interface_1
Converted name:	plcxb1.profinetxainterfacexb1036c	**Device number:**	0		
PROFINET interface [X1]\Time-of-day synchronization\NTP mode					
Time-of-day synchronization	Disabled	**NTP Server 1**		**NTP Server 2**	
NTP Server 3		**NTP Server 4**		**Update interval**	10s
PROFINET interface [X1]\Operating mode					
IO controller	True	**IO system**	PROFINET IO-System (100)	**Device number**	0
IO device	False				
PROFINET interface [X1]\Advanced options\Interface options					
Maintain PROFINET IO communication on data record communication timeout	False	**Call the user program if communication errors occur**	False	**Support device replacement without exchangeable medium**	True
Permit overwriting of device names of all assigned IO devices	False	**Limit data infeed into the network**	True	**Use IEC V2.2 LLDP mode**	False
Keep-Alive connection monitoring:	30s				
PROFINET interface [X1]\Advanced options\Media redundancy					
MRP domain	mrpdomain-1	**Media redundancy role:**	Not device in the ring		
PROFINET interface [X1]\Advanced options\Real time settings\IO communication					
Send clock:	1.000ms				
PROFINET interface [X1]\Advanced options\Real time settings\Synchronization					
Sync domain:	Sync-Domain_1	**Synchronization role:**	Unsynchronized	**RT class:**	RT,IRT
PROFINET interface [X1]\Advanced options\Real time settings\Real time options					
Calculated bandwidth for cyclic IO data:	0.007ms	**Calculated bandwidth for cyclic IO data:**	0.704%		
PROFINET interface [X1]\Advanced options\Port [X1 P1 R]\General					
Name	Port_1	**Author**	Administrator	**Comment**	
PROFINET interface [X1]\Advanced options\Port [X1 P1 R]\Port interconnection\Local port:					
Local port:	PLC_1\PROFINET interface_1 [X1]\Port_1 [X1 P1 R]	**Medium:**	Copper	**Cable name:**	---
					
PROFINET interface [X1]\Advanced options\Port [X1 P1 R]\Port interconnection\Partner port:					
	Monitoring of partner port is executed	**Alternative partners**	False	**Partner port:**	IE general_1\PROFINET interface [X1]\Port_1 [X1 P1]
Medium:	Copper	**Cable length:**			

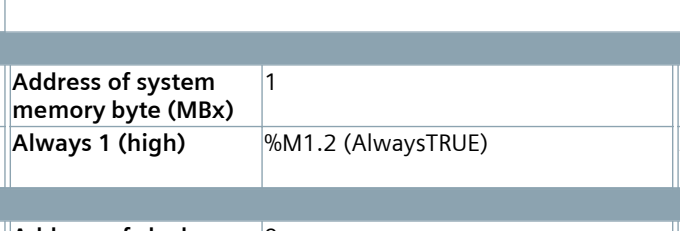PROFINET interface [X1]\Advanced options\Port [X1 P1 R]\Port options\Activate					
Activate this port for use	True				
PROFINET interface [X1]\Advanced options\Port [X1 P1 R]\Port options\Connection					
Transmission rate / duplex:	Automatic	**Monitor**	False	**Enable autonegotiation**	True
PROFINET interface [X1]\Advanced options\Port [X1 P1 R]\Port options\Boundaries					
End of detection of accessible devices	False	**End of topology discovery**	False	**End of the sync domain**	False
PROFINET interface [X1]\Advanced options\Port [X1 P2 R]\General					
Name	Port_2	**Author**	Administrator	**Comment**	
PROFINET interface [X1]\Advanced options\Port [X1 P2 R]\Port interconnection\Local port:					
Local port:	PLC_1\PROFINET interface_1 [X1]\Port_2 [X1 P2 R]	**Medium:**	Copper	**Cable name:**	---
					
PROFINET interface [X1]\Advanced options\Port [X1 P2 R]\Port interconnection\Partner port:					
	Monitoring of partner port is not possible	**Alternative partners**	False	**Partner port:**	Any partner
PROFINET interface [X1]\Advanced options\Port [X1 P2 R]\Port options\Activate					
Activate this port for use	True				
PROFINET interface [X1]\Advanced options\Port [X1 P2 R]\Port options\Connection					
Transmission rate / duplex:	Automatic	**Monitor**	False	**Enable autonegotiation**	True
PROFINET interface [X1]\Advanced options\Port [X1 P2 R]\Port options\Boundaries					
End of detection of accessible devices	False	**End of topology discovery**	False	**End of the sync domain**	False
PROFINET interface [X1]\Web server access					
Note	The Web server must also be activated in the properties of the PLC.	**Enable Web server via IP address of this interface**	False		
Startup					
Startup after POWER ON	Warm restart - Operating mode before POWER OFF	**Comparison preset to actual configuration**	Startup CPU even if mismatch	**Configuration time**	60000ms
Cycle					
Maximum cycle time	150ms			**Enable minimum cycle time for cyclic OBs**	True
Minimum cycle time	1ms				
Communication load					
Cycle load due to communication	50%				
System and clock memory\System memory bits					
Enable the use of system memory byte	True	**Address of system memory byte (MBx)**	1	**First cycle**	%M1.0 (FirstScan)
Diagnostic status changed	%M1.1 (DiagStatusUpdate)	**Always 1 (high)**	%M1.2 (AlwaysTRUE)	**Always 0 (low)**	%M1.3 (AlwaysFALSE)
System and clock memory\Clock memory bits					
Enable the use of clock memory byte	True	**Address of clock memory byte (MBx)**	0	**10 Hz clock**	%M0.0 (Clock_10Hz)
5 Hz clock	%M0.1 (Clock_5Hz)	**2.5 Hz clock**	%M0.2 (Clock_2.5Hz)	**2 Hz clock**	%M0.3 (Clock_2Hz)
1.25 Hz clock	%M0.4 (Clock_1.25Hz)	**1 Hz clock**	%M0.5 (Clock_1Hz)	**0.625 Hz clock**	%M0.6 (Clock_0.625Hz)
0.5 Hz clock	%M0.7 (Clock_0.5Hz)				
SIMATIC Memory Card\Diagnostics					
Aging of the SIMATIC memory card	False	**Threshold value**	80%		
System diagnostics					
Use fixed numbers for alarm IDs	True	**Report network faults as maintenance instead of fault**	False		
PLC alarms\General					
Central alarm management in the PLC	True				
Web server\General					
Activate web server on this module	False	**Permit access only with HTTPS**	True		
Web server\Automatic update					
Enable automatic update	True	**Update interval**	0s		

Web server\User management

User name	User rights
Everybody	

Web server\User-defined web pages

Application name	HTML source path	Default HTML page	Files with dynamic content	Web DB number	Fragment DB number
		index.htm	.htm;.html	333	334

Web server\Overview of interfaces

Device	Interface	Enabled web server access
PLC_1	PROFINET interface_1	False

Display\General\Display standby mode			
Time to standby mode	30 minutes		
Display\General\Energy saving mode			
Time to energy saving mode	15 minutes		

Display\General\Display language					
Default language on display	English				
Display\Automatic update					
Time to update	5 seconds				
Display\Password\Display protection					
Enable write access	True	**Enable display protection**	False		
Display\User-defined logo					
User logo activated	False	**Adapt logo**	False	**Resolution**	128x120
Company logo	---				

User interface languages	
Assign project language	**User interface languages**
English (United States)	German
English (United States)	English
English (United States)	French
English (United States)	Spanish
English (United States)	Italian
English (United States)	Japanese
English (United States)	Chinese (simplified)
English (United States)	Korean
English (United States)	Russian
English (United States)	Turkish
English (United States)	Portuguese (Brazil)

Time of day\Local time					
Time zone	(UTC) Dublin, Edinburgh, Lisbon, London				
Time of day\Time-of-day synchronization\NTP mode					
Time-of-day synchronization	Disabled	**NTP Server 1**		**NTP Server 2**	
NTP Server 3		**NTP Server 4**		**Update interval**	10s
Time of day\Daylight saving time					
Activate daylight saving time	True	**Difference between standard and daylight saving time**	60min		
Time of day\Daylight saving time\Start of daylight saving time					
Week	Last	**Day**	Sunday	**in**	March
at	1:00 a.m.				
Time of day\Daylight saving time\Start of standard time					
Week	Last	**Day**	Sunday	**in**	October
at	2:00 a.m.				
Protection					
Level of protection	Full access (no protection)				
Protection\Protection of the PLC configuration data					
Protect confidential PLC configuration data	False				
Protection\Connection mechanisms					
Permit access with PUT/GET communication from remote partner	False				
Protection\Security event					
Summarize security events in case of high message volume	True	**Length of an interval**	20	**Unit**	seconds
OPC UA\Accessibility of the server					
Activate OPC UA server	False				
System power supply\General					
General	Connection to supply voltage L+				

System power supply\Power segment overview		
Module	**Slot**	**Supply/consumption**
PLC_1	1	10.00W
DI 16x24VDC HF_1	2	-1.10W
DI 16x24VDC HF_2	3	-1.10W
DI 16x24VDC HF_3	4	-1.10W
DQ 16x24VDC/0.5A ST_1	5	-1.10W
AI 8xU/I HS_1	6	-1.15W
AQ 2xU/I ST_1	7	-0.65W
	Summary	3.80W

Advanced configuration\DNS configuration	
No DNS server address is configured.	
Advanced configuration\IP Forwarding\Configuration IPv4 Forwarding	
Enable IPv4 forwarding for interfaces of this PLC	False
Advanced configuration\Configuration control\Configuration control for central configuration	
Allow reconfiguration of device via the user program	False

Connection resources\				
	Station resources - Reserved - Maximum	**Station resources - Reserved - Configured**	**Station resources - Dynamic - Configured**	**Module resources - PLC_1 [CPU 1511-1 PN] - Configured**
Maximum number of resources:		10	54	64
	Maximum	Configured	Configured	Configured
PG communication:	4	-	-	-
HMI communication:	4	2	0	2
S7 communication:	0	-	0	0
Open user communication:	0	-	0	0
Web communication:	2	-	-	-
OPC UA client/server communication:	0	-	-	-
Other communication:	-	-	0	0
Total resources used:		2	0	2
Available resources:		8	54	62

Overview of addresses\Overview of addresses\Overview of addresses					
Inputs	True	**Outputs**	True	**Address gaps**	False
Slot	True				

Type	Addr. from	Addr. to	Module	PIP	OB	Device name	Device number	Size	Master / IO system	Rack	Slot
I	16	17	DI 16x24VDC HF_1	Automatic update	-	PLC_1 [CPU 1511-1 PN]	-	2 Bytes	-	0	2
I	18	19	DI 16x24VDC HF_2	Automatic update	-	PLC_1 [CPU 1511-1 PN]	-	2 Bytes	-	0	3
I	20	21	DI 16x24VDC HF_3	Automatic update	-	PLC_1 [CPU 1511-1 PN]	-	2 Bytes	-	0	4
O	0	1	DQ 16x24VDC/ 0.5A ST_1	Automatic update	-	PLC_1 [CPU 1511-1 PN]	-	2 Bytes	-	0	5
I	0	15	AI 8xU/I HS_1	Automatic update	-	PLC_1 [CPU 1511-1 PN]	-	16 Bytes	-	0	6
O	2	5	AQ 2xU/I ST_1	Automatic update	-	PLC_1 [CPU 1511-1 PN]	-	4 Bytes	-	0	7

Runtime licenses\OPC UA\Runtime licenses			
Type of required license	None	**Type of purchased license**	No license

Runtime licenses\ProDiag\Supervisions	
Number of used supervisions	0

Runtime licenses\ProDiag\Runtime licenses			
Number of required licenses	None (<= 25 supervisions)	**Used ProDiag licenses**	No license

Runtime licenses\Energy Suite\Energy objects	
Number of configured energy objects	0

Runtime licenses\Energy Suite\Runtime licenses	
Total number of licensed energy objects	0

Runtime licenses\Energy Suite\Runtime licenses\Number of purchased licenses			
License type '5 energy objects'	No license	**License type '10 energy objects'**	No license

Runtime licenses\MAC\Runtime licenses	
Type of purchased license	No license

Fabrica / PLC_1 [CPU 1511-1 PN]

Software units

This folder is empty.

Fabrica / PLC_1 [CPU 1511-1 PN] / Program blocks

Main [OB1]

Main Properties							
General							
Name	Main	**Number**	1	**Type**	OB	**Language**	LAD
Numbering	Automatic						
Information							
Title	"Main Program Sweep (Cycle)"	**Author**		**Comment**		**Family**	
Version	0.1	**User-defined ID**					

Name	Data type	Default value	Comment
▼ Input			
Initial_Call	Bool		Initial call of this OB
Remanence	Bool		=True, if remanent data are available
Temp			
Constant			

Network 1: Simulare ON/OFF

```
0001 IF NOT "Simulation_Mode" THEN
0002     // --- Intrarea de Senzori Generali / Limitatori ---
0003     "dbIOs".ZS11 := "ZS11";
0004     "dbIOs".ZS12 := "ZS12";
0005     "dbIOs".ZS21 := "ZS21";
0006     "dbIOs".ZS22 := "ZS22";
0007
0008     // --- Senzori de Pozitie Vane (Home / Work) ---
0009     // Vane de Intrare
0010     "dbIOs".IN1_Home := "IN1_Home";
0011     "dbIOs".IN1_Work := "IN1_Work";
0012     "dbIOs".IN2_Home := "IN2_Home";
0013     "dbIOs".IN2_Work := "IN2_Work";
0014
0015     // Vane de Iesire
0016     "dbIOs".OUT1_Home := "OUT1_Home";
0017     "dbIOs".OUT1_Work := "OUT1_Work";
0018     "dbIOs".OUT2_Home := "OUT2_Home";
0019     "dbIOs".OUT2_Work := "OUT2_Work";
0020     "dbIOs".OUT3_Home := "OUT3_Home";
0021     "dbIOs".OUT3_Work := "OUT3_Work";
0022
0023     // Senzori ZS
0024     "dbIOs".OUT1_ZS1 := "OUT1_ZS1";
0025     "dbIOs".OUT1_ZS2 := "OUT1_ZS2";
0026     "dbIOs".OUT2_ZS1 := "OUT2_ZS1";
0027     "dbIOs".OUT2_ZS2 := "OUT2_ZS2";
0028     "dbIOs".OUT3_ZS1 := "OUT3_ZS1";
0029     "dbIOs".OUT3_ZS2 := "OUT3_ZS2";
0030
0031     // Senzori Vane de Proces (XV21, XV22, XV81, XV91, XV51)
0032     "dbIOs".PLS_XV21_Home := "PLS_XV21_Home";
0033     "dbIOs".PLS_XV21_Work := "PLS_XV21_Work";
0034     "dbIOs".PLS_XV22_Home := "PLS_XV22_Home";
0035     "dbIOs".PLS_XV22_Work := "PLS_XV22_Work";
0036
0037     "dbIOs".PRS_XV21_Home := "PRS_XV21_Home";
0038     "dbIOs".PRS_XV21_Work := "PRS_XV21_Work";
0039     "dbIOs".PRS_XV22_Home := "PRS_XV22_Home";
0040     "dbIOs".PRS_XV22_Work := "PRS_XV22_Work";
0041
0042     "dbIOs".PLS_XV81_Home := "PLS_XV81_Home";
0043     "dbIOs".PLS_XV81_Work := "PLS_XV81_Work";
0044     "dbIOs".PRS_XV81_Home := "PRS_XV81_Home";
0045     "dbIOs".PRS_XV81_Work := "PRS_XV81_Work";
0046
0047     "dbIOs".PLS_XV91_Home := "PLS_XV91_Home";
0048     "dbIOs".PLS_XV91_Work := "PLS_XV91_Work";
0049     "dbIOs".PRS_XV91_Home := "PRS_XV91_Home";
0050     "dbIOs".PRS_XV91_Work := "PRS_XV91_Work";
0051
0052     "dbIOs".PRS_XV51_Home := "PRS_XV51_Home";
0053     "dbIOs".PRS_XV51_Work := "PRS_XV51_Work";
0054     "dbIOs".PLS_XV51_Home := "PLS_XV51_Home";
0055     "dbIOs".PLS_XV51_Work := "PLS_XV51_Work";
0056
0057     // --- Intrari Analogice (Presiune / Debit) ---
0058     "dbIOs".PRS_PT13_Input := "PRS_PT13_Input";
0059     "dbIOs".PLS_PT13_Input := "PLS_PT13_Input";
0060
0061     // --- Comenzi Iesire Vane (DB -> Hardware) ---
0062     "dbIOs".Vana_IN1 := "Vana_IN1";
0063     "dbIOs".Vana_IN2 := "Vana_IN2";
```

```
0064      "dbIOs".Vana_OUT1 := "Vana_OUT1";
0065      "dbIOs".Vana_OUT2 := "Vana_OUT2";
0066      "dbIOs".Vana_OUT3 := "Vana_OUT3";
0067
0068      "dbIOs".PLS_XV21 := "PLS_XV21";
0069      "dbIOs".PRS_XV21 := "PRS_XV21";
0070      "dbIOs".PLS_XV22 := "PLS_XV22";
0071      "dbIOs".PRS_XV22 := "PRS_XV22";
0072      "dbIOs".PLS_XV81 := "PLS_XV81";
0073      "dbIOs".PRS_XV81 := "PRS_XV81";
0074      "dbIOs".PLS_XV91 := "PLS_XV91";
0075      "dbIOs".PRS_XV91 := "PRS_XV91";
0076      "dbIOs".PLS_XV51 := "PLS_XV51";
0077      "dbIOs".PRS_XV51 := "PRS_XV51";
0078
0079      "dbIOs".PRS_PCV51 := "PRS_PCV51";
0080      "dbIOs".PLS_PCV51 := "PLS_PCV51";
0081  END_IF;
```


Network 2: Revenire din simulare ON / OFF

```
0001  IF FALSE THEN
0002      // --- Intrarea de Senzori Generali / Limitatori ---
0003      "ZS11" := "dbIOs".ZS11;  // model
0004      "ZS12" := "dbIOs".ZS12;
0005      "ZS21" := "dbIOs".ZS21;
0006      "ZS22" := "dbIOs".ZS22;
0007
0008      // --- Senzori de Pozitie Vane (Home / Work) ---
0009      // Vane de Intrare
0010      "IN1_Home" := "dbIOs".IN1_Home;
0011      "IN1_Work" := "dbIOs".IN1_Work;
0012      "IN2_Home" := "dbIOs".IN2_Home;
0013      "IN2_Work" := "dbIOs".IN2_Work;
0014
0015      // Vane de Iesire
0016      "OUT1_Home" := "dbIOs".OUT1_Home;
0017      "OUT1_Work" := "dbIOs".OUT1_Work;
0018      "OUT2_Home" := "dbIOs".OUT2_Home;
0019      "OUT2_Work" := "dbIOs".OUT2_Work;
0020      "OUT3_Home" := "dbIOs".OUT3_Home;
0021      "OUT3_Work" := "dbIOs".OUT3_Work;
0022
0023      // Senzori ZS
0024      "OUT1_ZS1" := "dbIOs".OUT1_ZS1;
0025      "OUT1_ZS2" := "dbIOs".OUT1_ZS2;
0026      "OUT2_ZS1" := "dbIOs".OUT2_ZS1;
0027      "OUT2_ZS2" := "dbIOs".OUT2_ZS2;
0028      "OUT3_ZS1" := "dbIOs".OUT3_ZS1;
0029      "OUT3_ZS2" := "dbIOs".OUT3_ZS2;
0030
0031      // Senzori Vane de Proces (XV21, XV22, XV81, XV91, XV51)
0032      "PLS_XV21_Home" := "dbIOs".PLS_XV21_Home;
0033      "PLS_XV21_Work" := "dbIOs".PLS_XV21_Work;
0034      "PLS_XV22_Home" := "dbIOs".PLS_XV22_Home;
0035      "PLS_XV22_Work" := "dbIOs".PLS_XV22_Work;
0036
0037      "PRS_XV21_Home" := "dbIOs".PRS_XV21_Home;
0038      "PRS_XV21_Work" := "dbIOs".PRS_XV21_Work;
0039      "PRS_XV22_Home" := "dbIOs".PRS_XV22_Home;
0040      "PRS_XV22_Work" := "dbIOs".PRS_XV22_Work;
0041
0042      "PLS_XV81_Home" := "dbIOs".PLS_XV81_Home;
0043      "PLS_XV81_Work" := "dbIOs".PLS_XV81_Work;
0044      "PRS_XV81_Home" := "dbIOs".PRS_XV81_Home;
0045      "PRS_XV81_Work" := "dbIOs".PRS_XV81_Work;
0046
0047      "PLS_XV91_Home" := "dbIOs".PLS_XV91_Home;
0048      "PLS_XV91_Work" := "dbIOs".PLS_XV91_Work;
0049      "PRS_XV91_Home" := "dbIOs".PRS_XV91_Home;
0050      "PRS_XV91_Work" := "dbIOs".PRS_XV91_Work;
0051
0052      "PRS_XV51_Home" := "dbIOs".PRS_XV51_Home;
0053      "PRS_XV51_Work" := "dbIOs".PRS_XV51_Work;
0054      "PLS_XV51_Home" := "dbIOs".PLS_XV51_Home;
0055      "PLS_XV51_Work" := "dbIOs".PLS_XV51_Work;
0056
0057      // --- Intrari Analogice (Presiune / Debit) ---
0058      "PRS_PT13_Input" := "dbIOs".PRS_PT13_Input;
0059      "PLS_PT13_Input" := "dbIOs".PLS_PT13_Input;
0060
0061      // --- Comenzi Iesire Vane (DB -> Hardware) ---
0062      "Vana_IN1" := "dbIOs".Vana_IN1;
0063      "Vana_IN2" := "dbIOs".Vana_IN2;
0064      "Vana_OUT1" := "dbIOs".Vana_OUT1;
0065      "Vana_OUT2" := "dbIOs".Vana_OUT2;
0066      "Vana_OUT3" := "dbIOs".Vana_OUT3;
```

```
0067
0068      "PLS_XV21" := "dbIOs".PLS_XV21;
0069      "PRS_XV21" := "dbIOs".PRS_XV21;
0070      "PLS_XV22" := "dbIOs".PLS_XV22;
0071      "PRS_XV22" := "dbIOs".PRS_XV22;
0072      "PLS_XV81" := "dbIOs".PLS_XV81;
0073      "PRS_XV81" := "dbIOs".PRS_XV81;
0074      "PLS_XV91" := "dbIOs".PLS_XV91;
0075      "PRS_XV91" := "dbIOs".PRS_XV91;
0076      "PLS_XV51" := "dbIOs".PLS_XV51;
0077      "PRS_XV51" := "dbIOs".PRS_XV51;
0078
0079      "PRS_PCV51" := "dbIOs".PRS_PCV51;
0080      "PLS_PCV51" := "dbIOs".PLS_PCV51;
0081  END_IF;
```

Network 3: |----------PAS 0


Network 4: Pozitie porcusori initiala

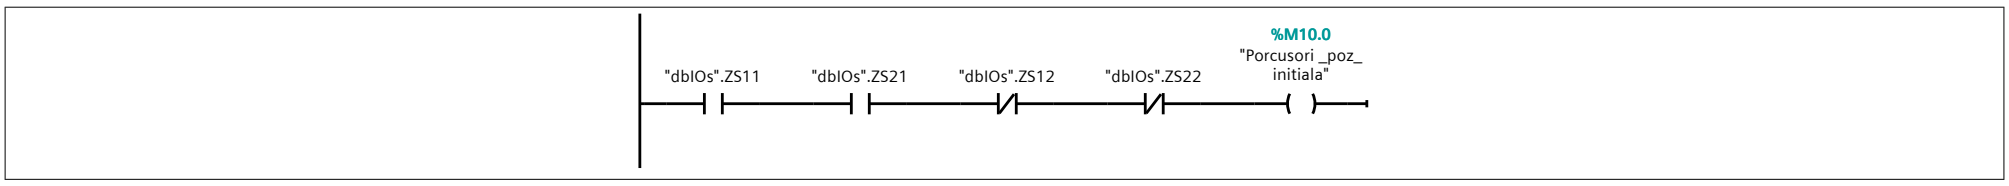


Network 5: Verificare vane inchise Sender pozitie initiala

NO pentru Home: contactul se închide (lasă curentul să treacă) când vana este fizic închisă (Home = TRUE).
sau
NC pentru Work: contactul se deschide (întrerupe curentul) când începe să se deschidă/este deschisă(Work = TRUE).


"FB_Control_Vane_DB".PLS_XV21.bInSignalHome este echivalent cu intrarea %I19.2

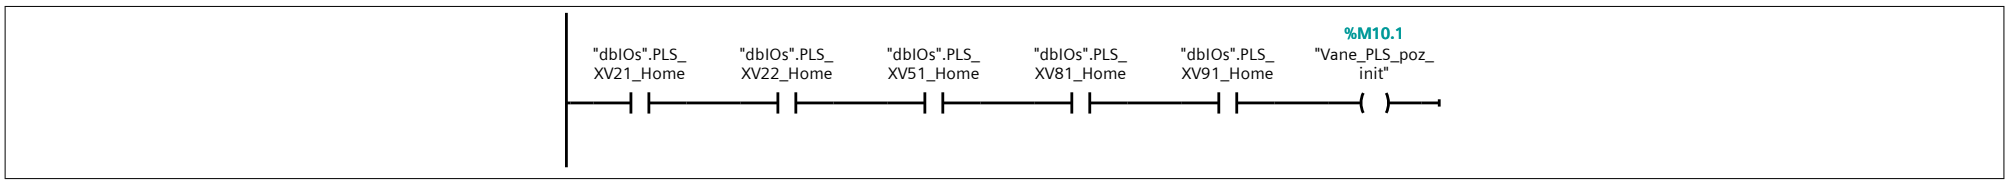


Network 6: Verificare vane inchise Receiver pozitie initiala

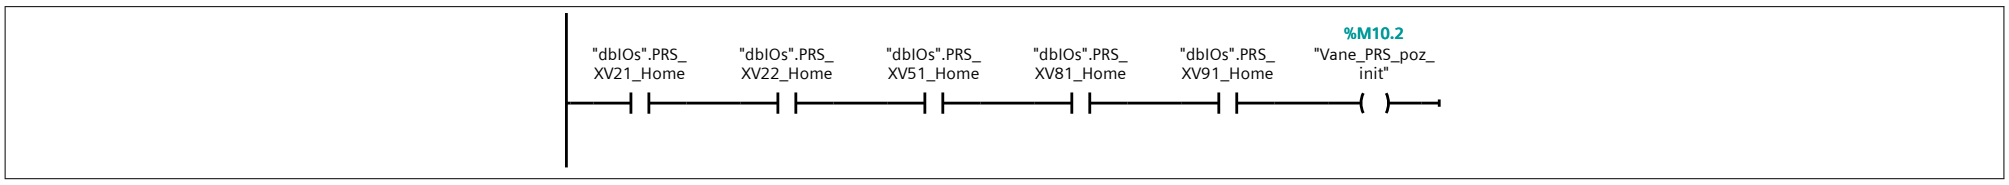


Network 7: Verificare poz initiala vane IN + OUT

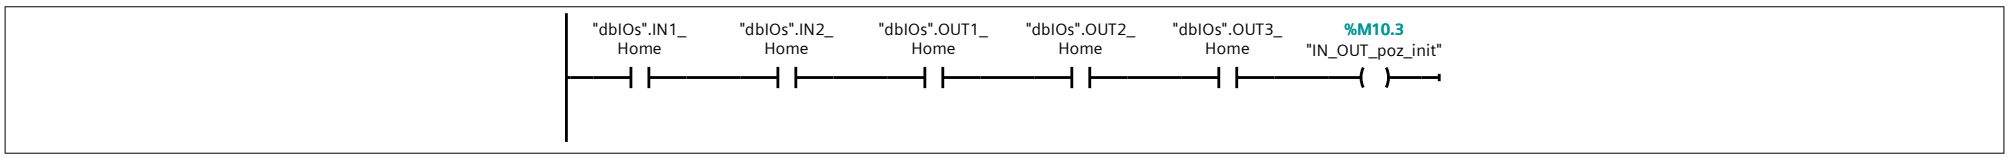


Network 8: Scalare senzor presiune PLS

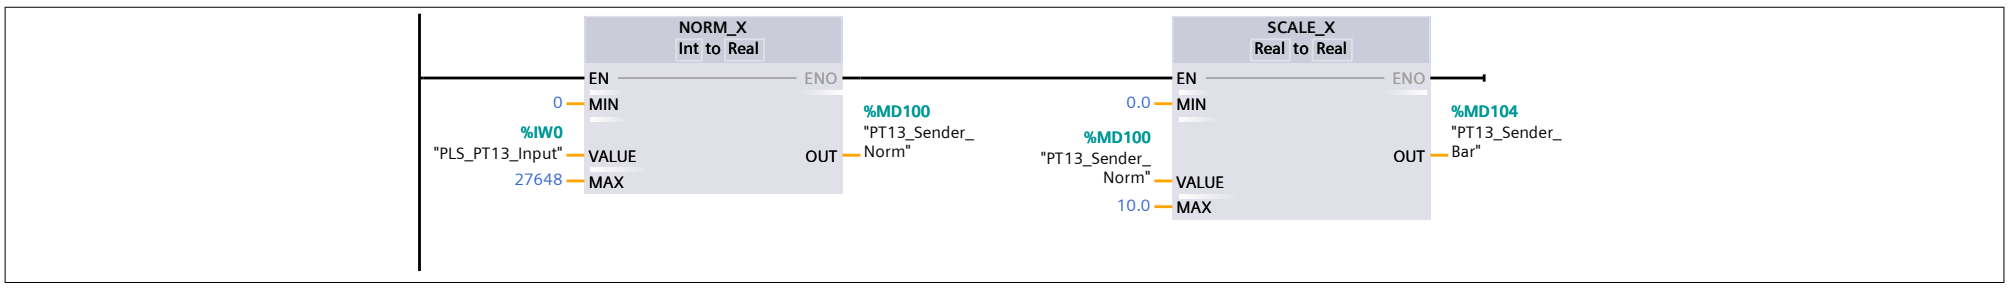


Network 9: Scalare senzor presiune PRS

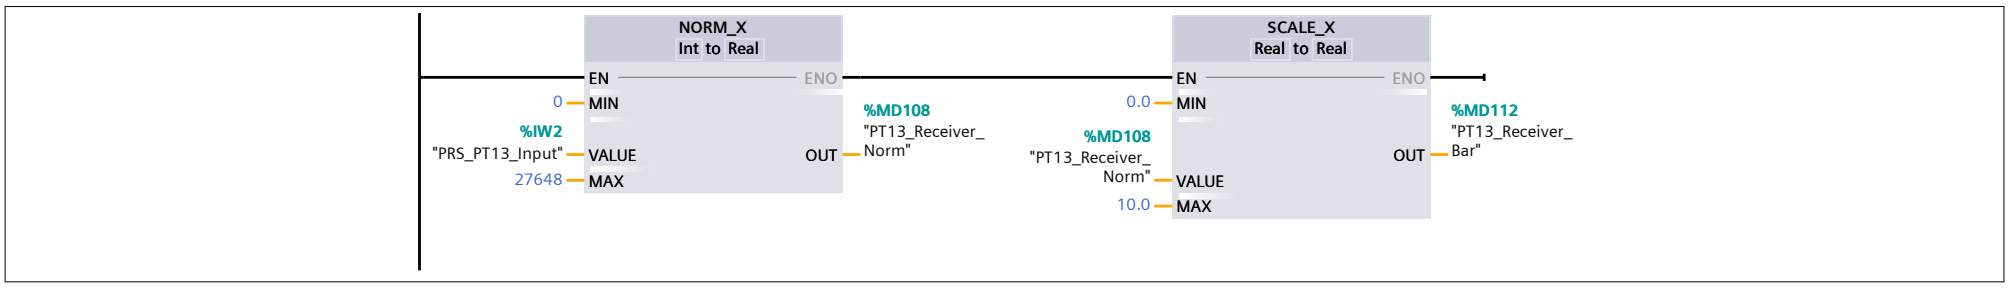


Network 10: Verificare senzor presiune PLS

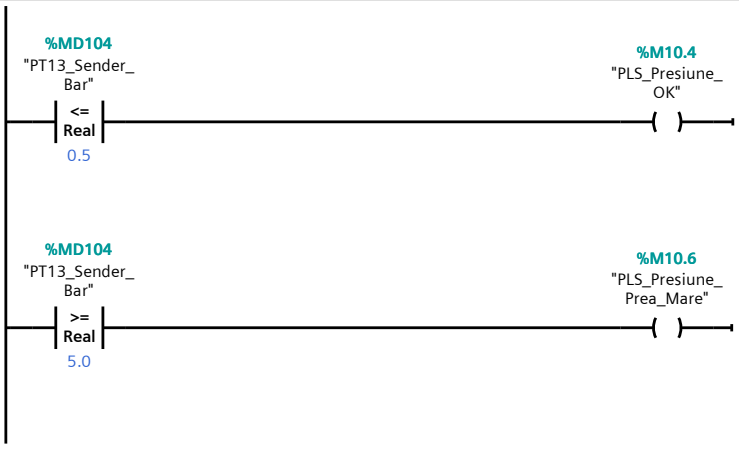


Network 11: Verificare senzor presiune PRS

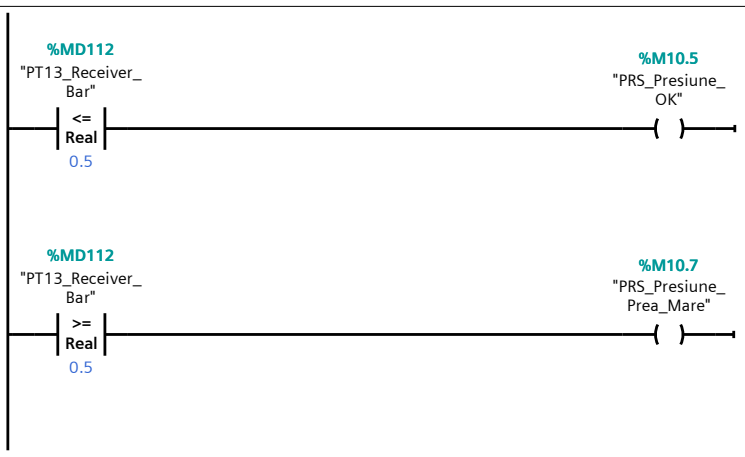


Network 12: Verificare finala parametrii pozitie start

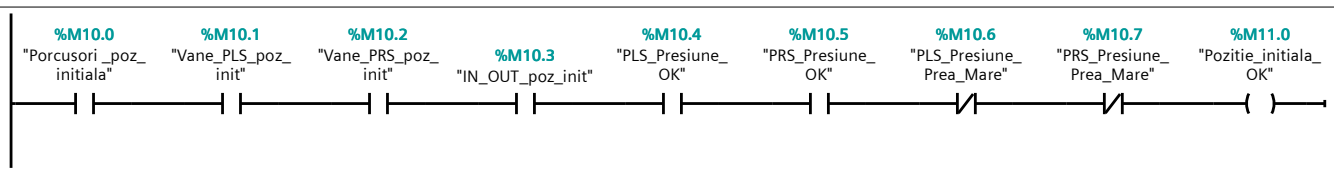


Network 13: Selectie Intrare (IN1 / IN2)

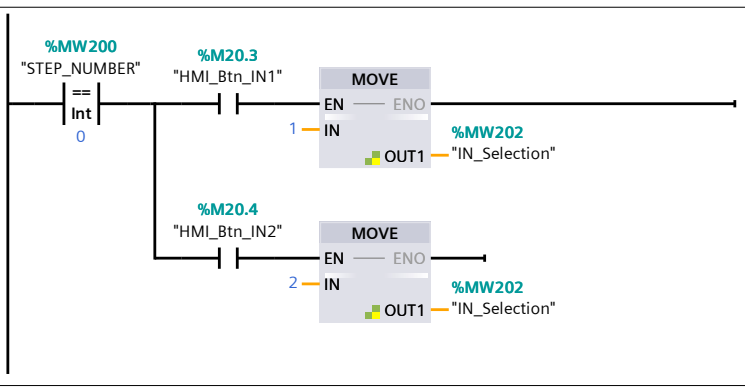

Network 14: Selectie Iesire (OUT1 / OUT2 / OUT3)

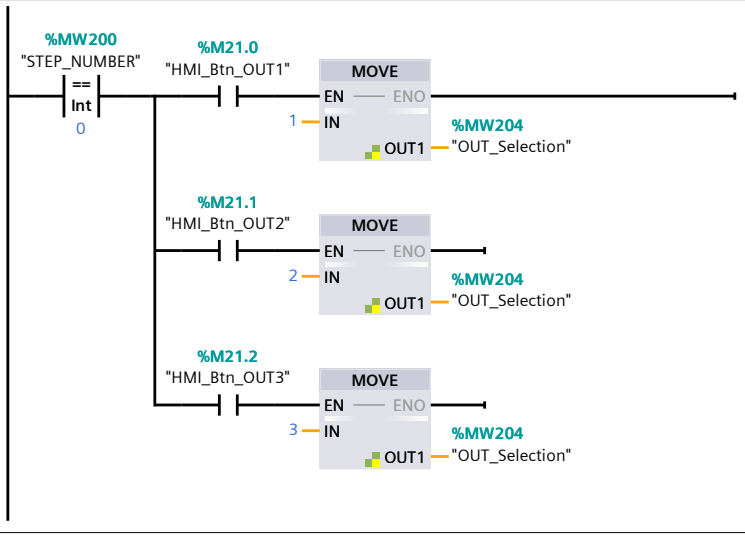


Network 15: Verificare traseu valid

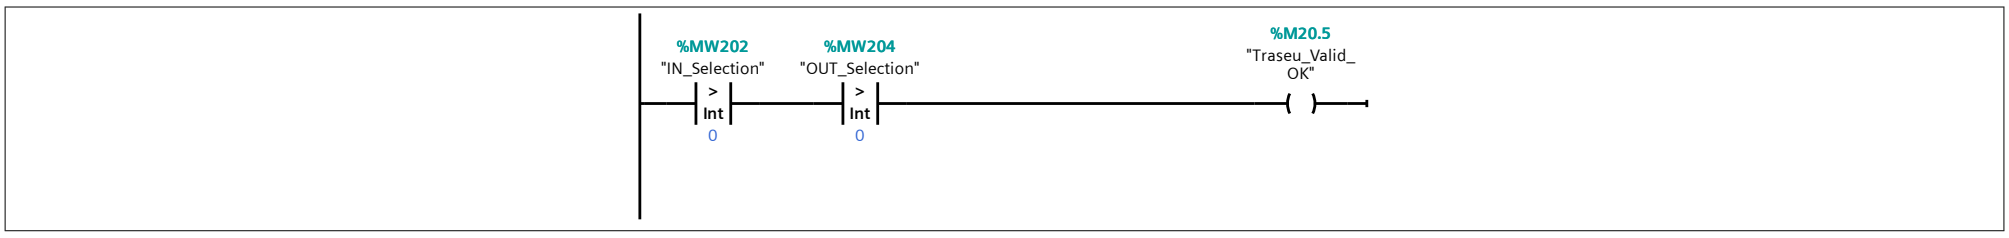


Network 16: |---------- PAS1

Network 17: Inceperea procesului

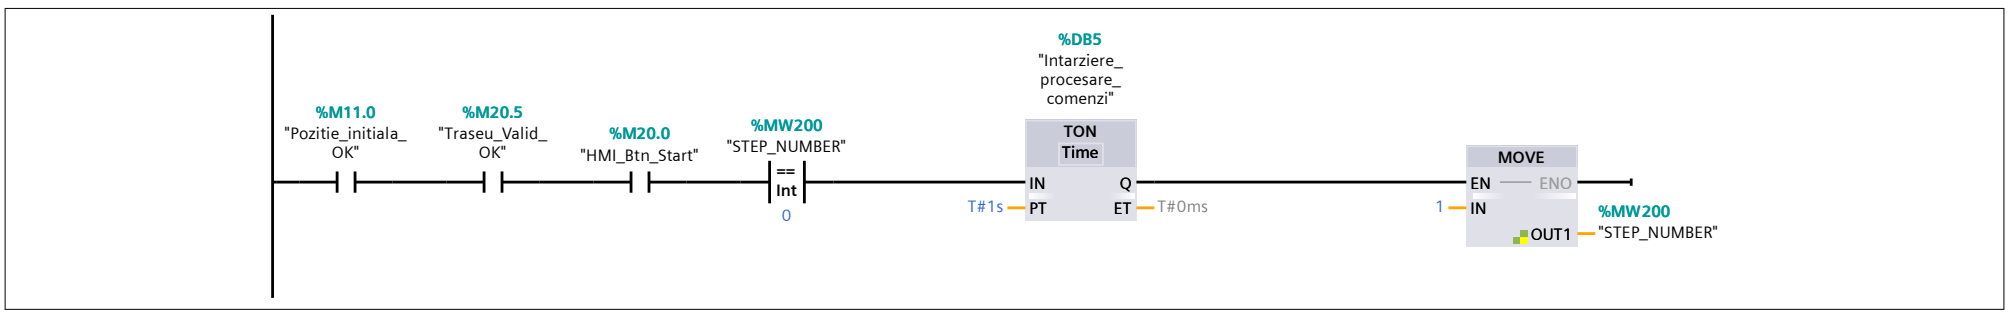


Network 18: Inchidere vana IN dupa 10s

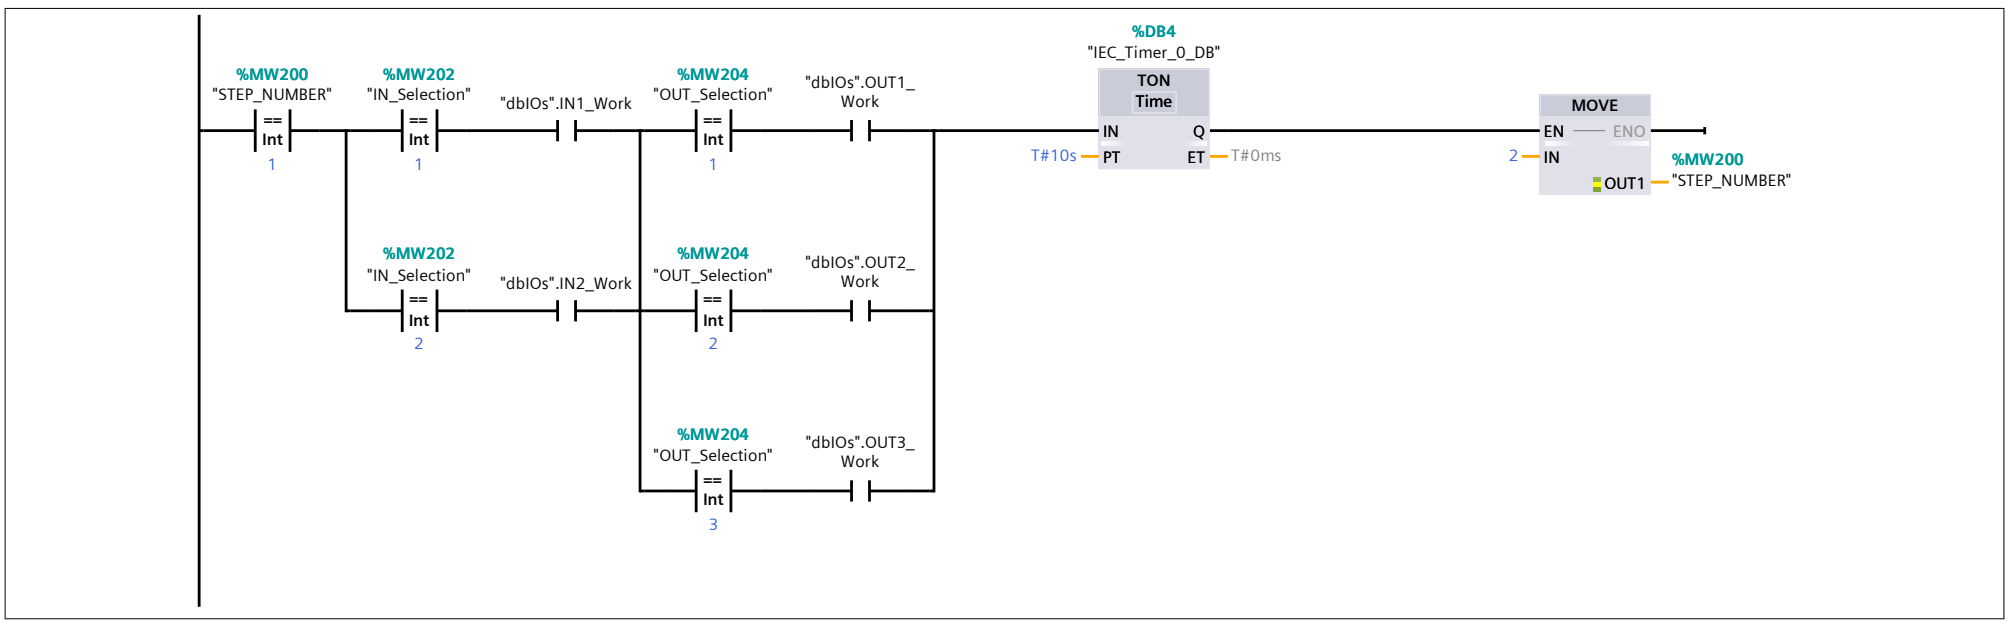


Network 19: |---------- PAS2

Network 20: Mutare porcusori pana la VANA OUT

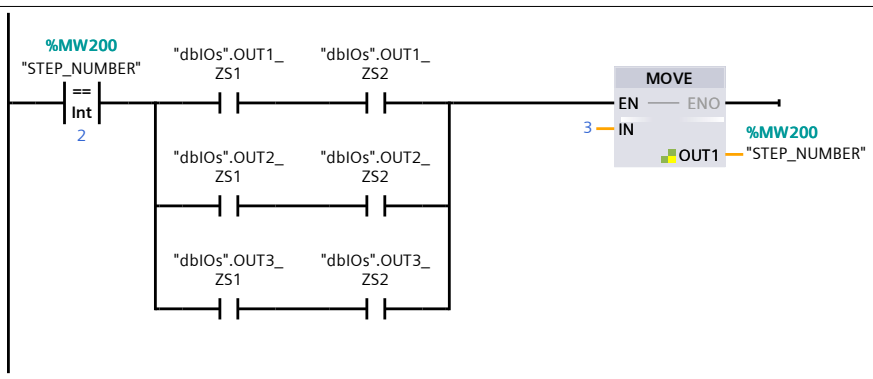


Network 21: |----------PAS3

Network 22: Crestere presiune tevi cand porcusorii sunt la OUT

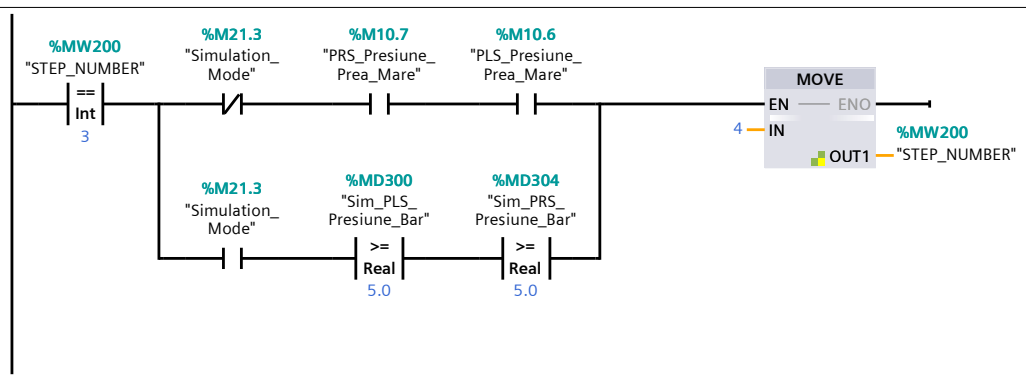


Network 23: |----------PAS4

Network 24: Echilibrare nivel tevi + inchidere vana OUT

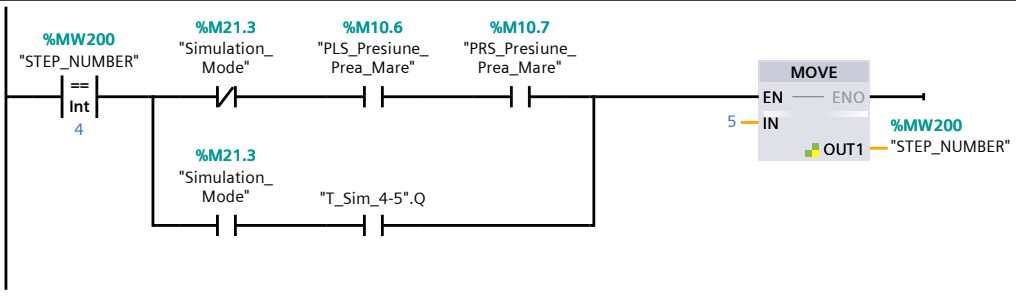


Network 25: |----------PAS5

Network 26: Verificare teava libera (vane IN + OUT inchise)

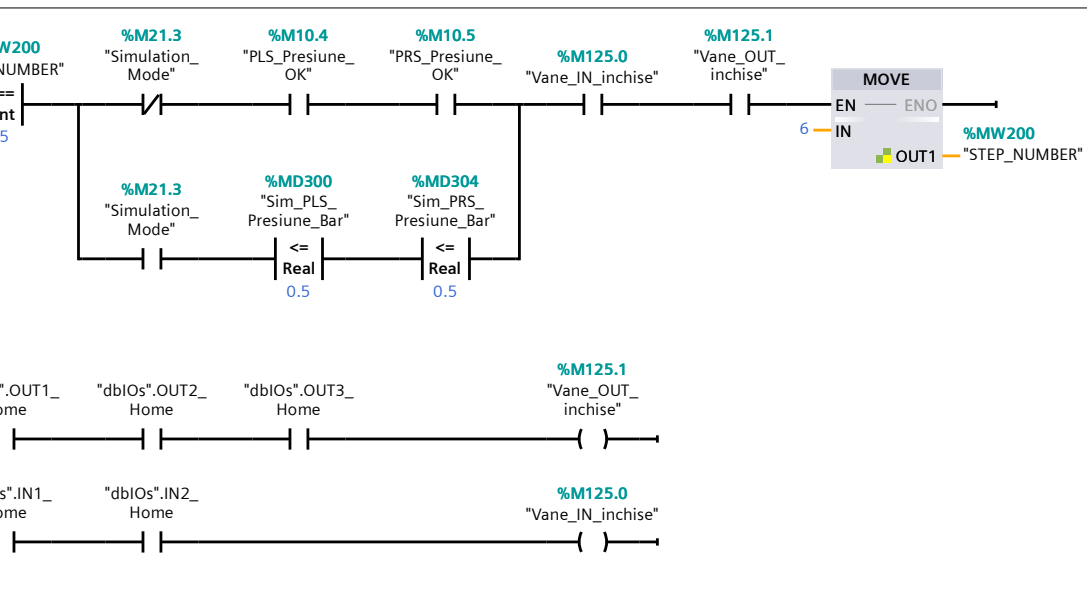


Network 27: |----------PAS6

Network 28: Verificare porcusori PRS si senzori presiune etapa 1

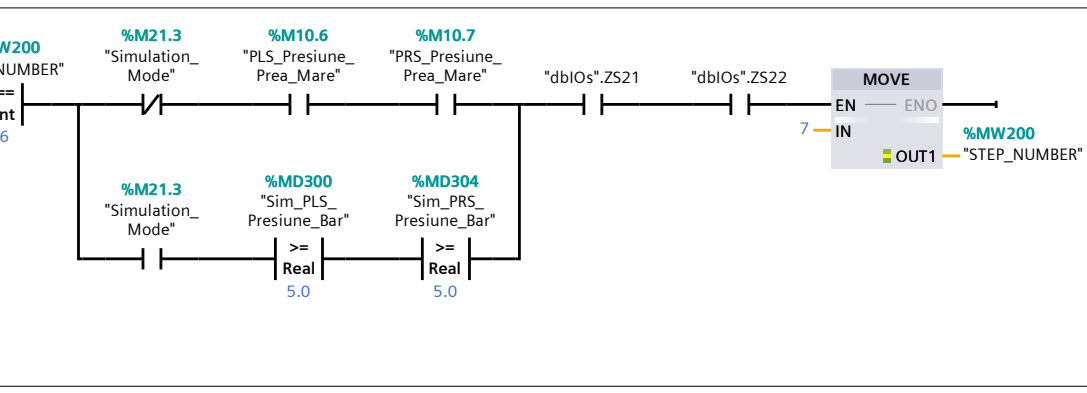

Network 29: |----------PAS7


Network 30: Verificare porcusori PRS si senzori presiune etapa 2

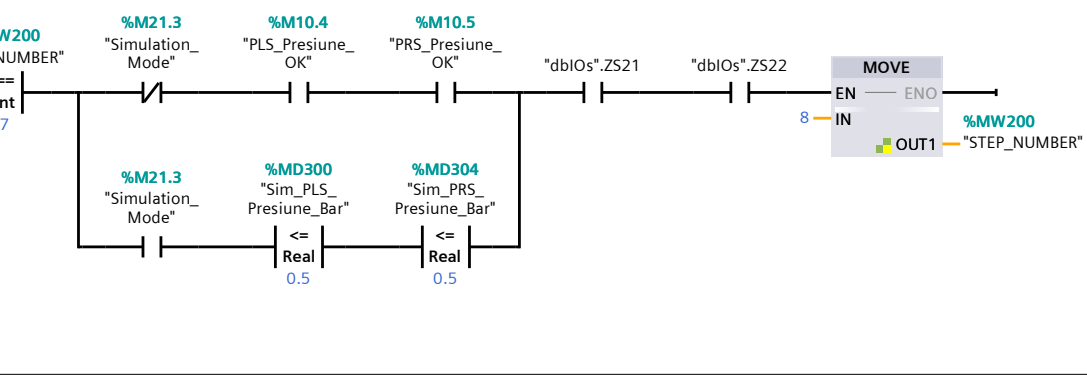


Network 31: |----------PAS8

Network 32: Umplere cu apa intre porcusori


Fara reset, TONR ar alimenta move 9 chiar si daca nu am fi in pasul 8
S-a folosit TONR in loc de TON deoarece vreau ca pompa sa umple cu apa 5s cumulativ, chiar daca se opreste dupa un timp mai scurt

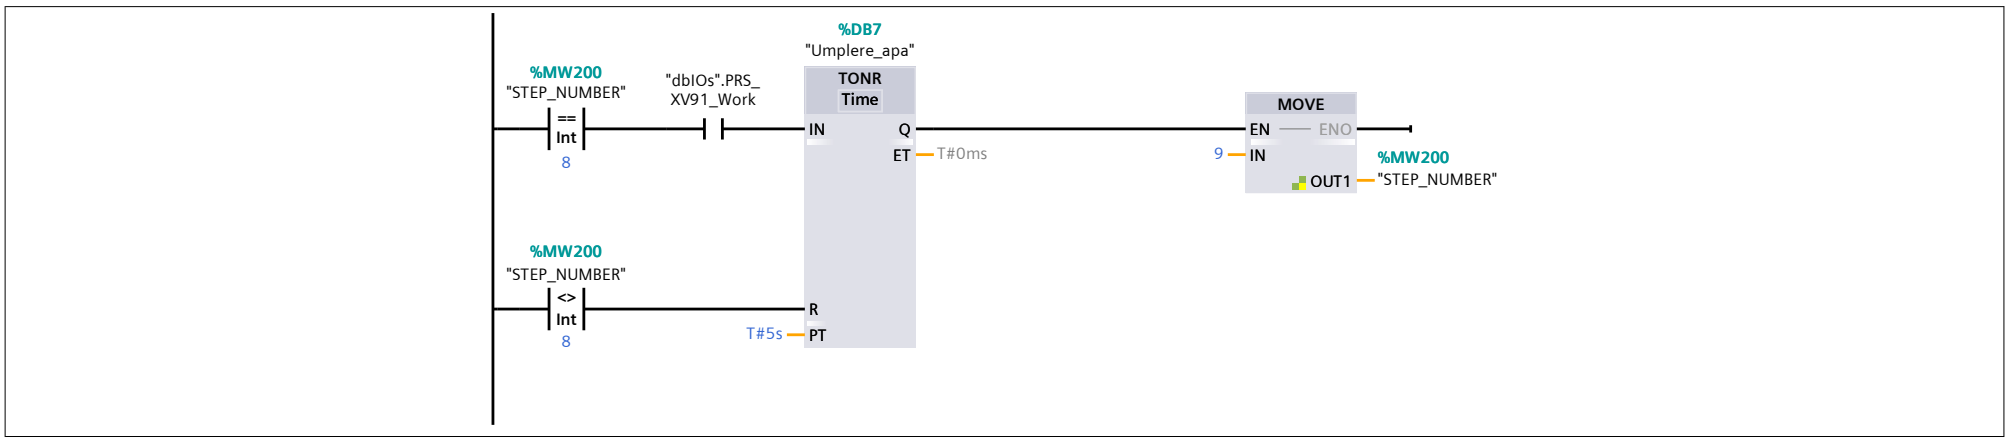

Network 33: |----------PAS9




Network 34: Verificare incheiere proces umplere apa

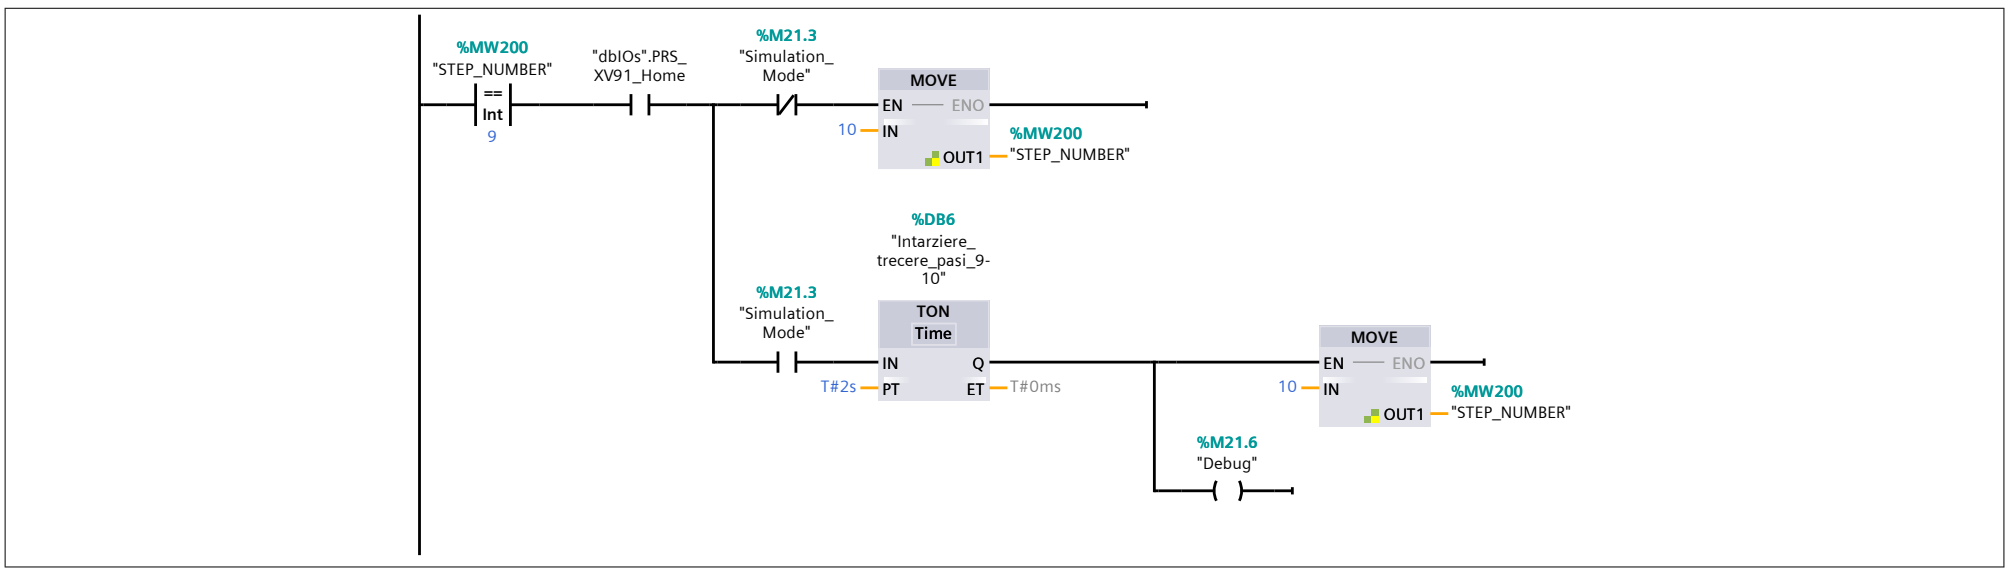


Network 35: |----------PAS10

Network 36: Verificare porci PLS

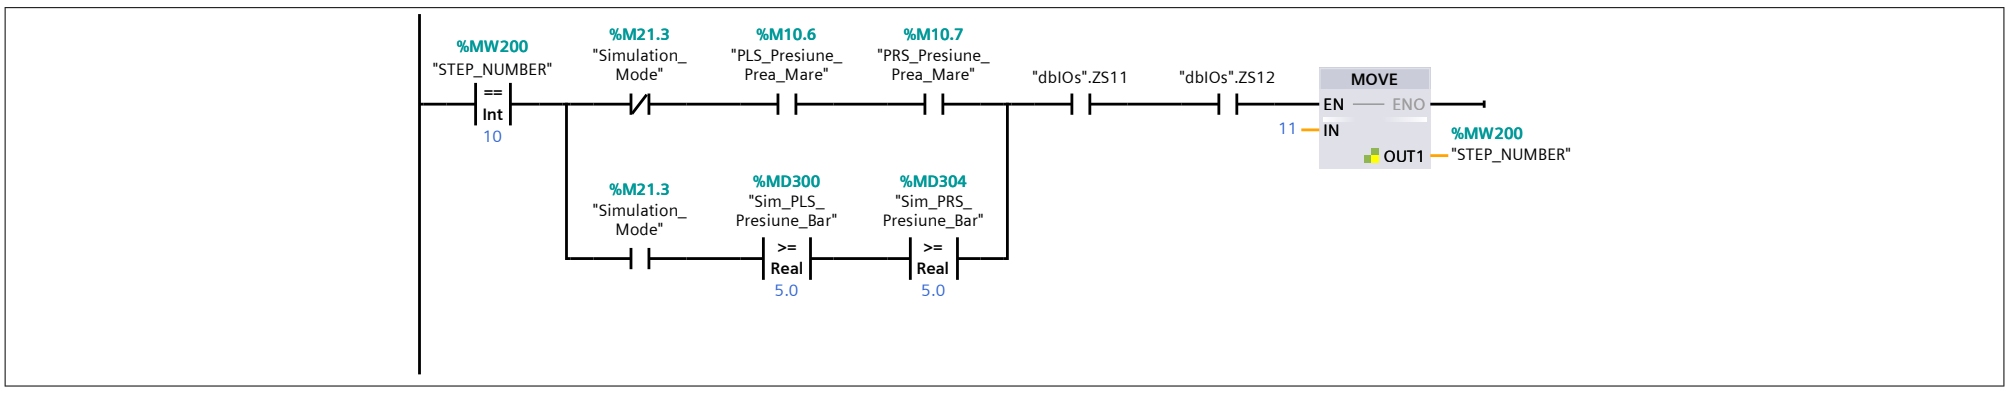


Network 37: |----------PAS11

Network 38: Depresurizare teava porcusori PLS

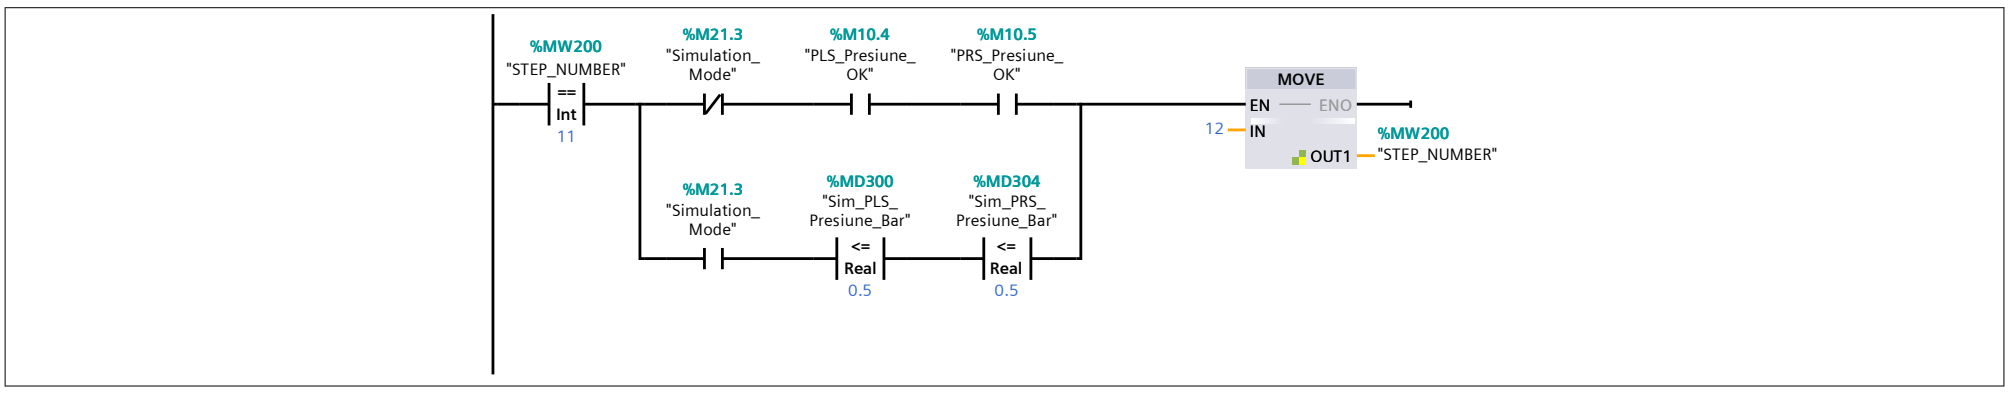


Network 39: |----------PAS12

Network 40: Deplasare porcusor catre PRS

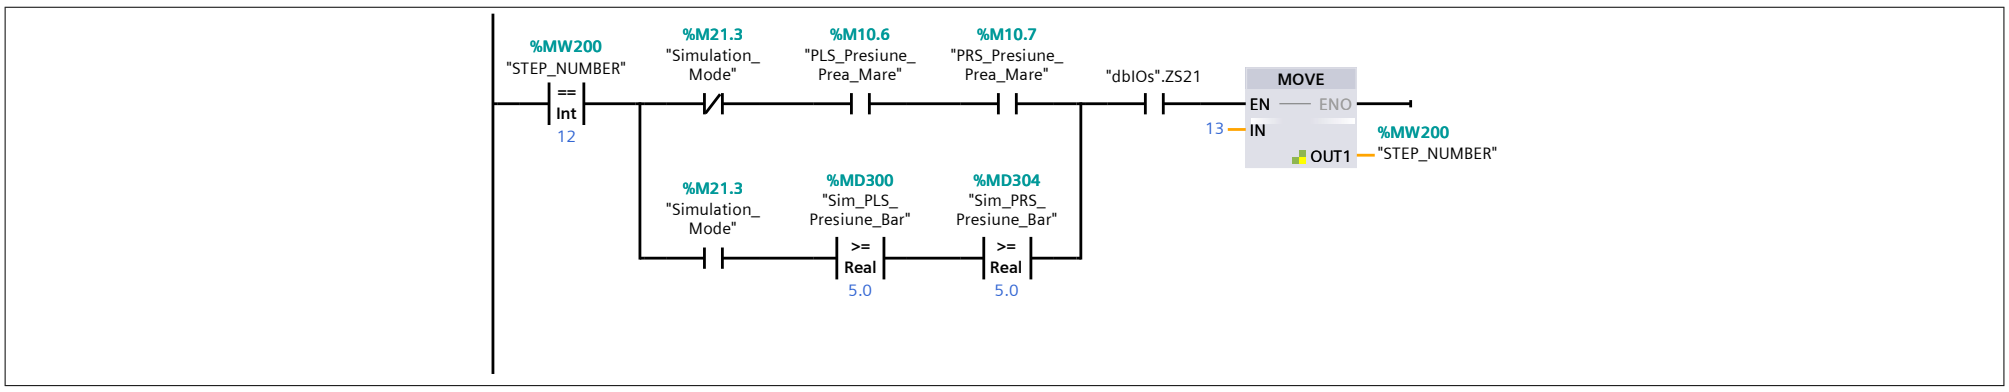


Network 41: |----------PAS13


Network 42: Depresurizare porcusori

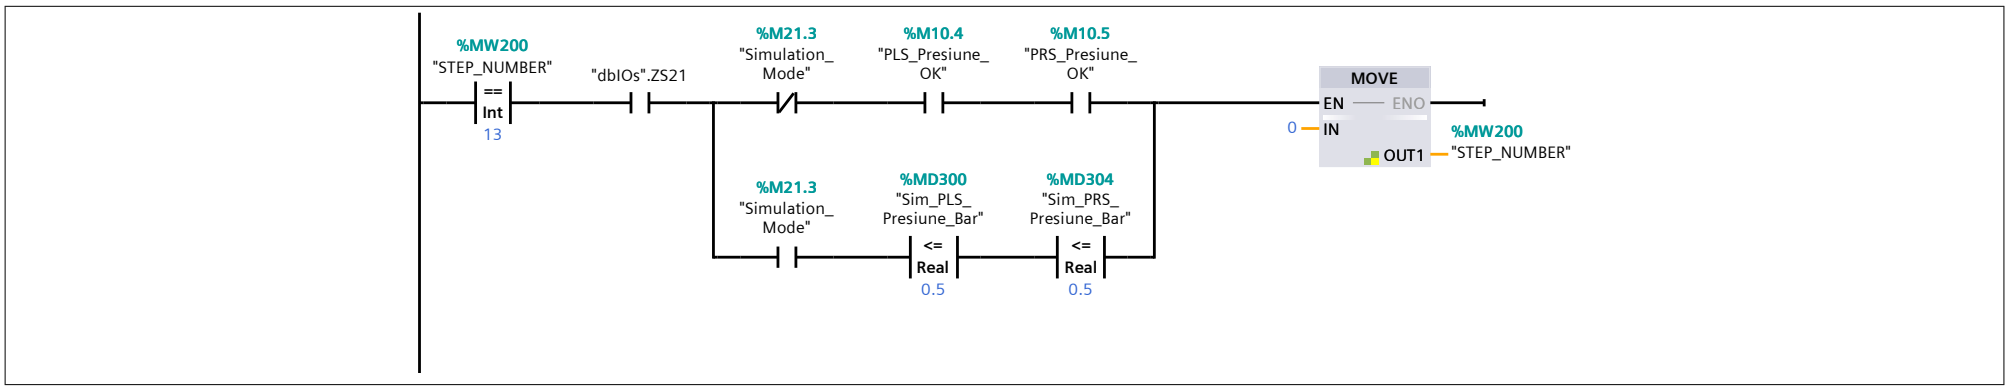


Network 43: |----------




Network 44: Conditii pornire VANE IN

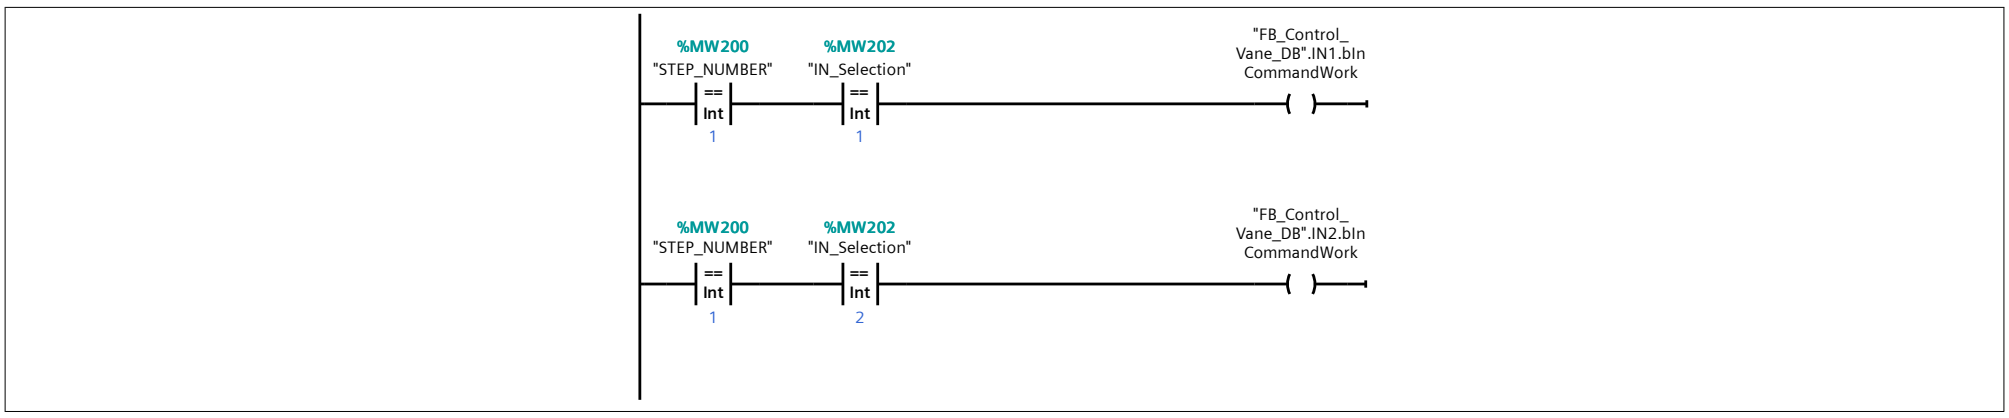


Network 45: Conditii pornire VANE OUT

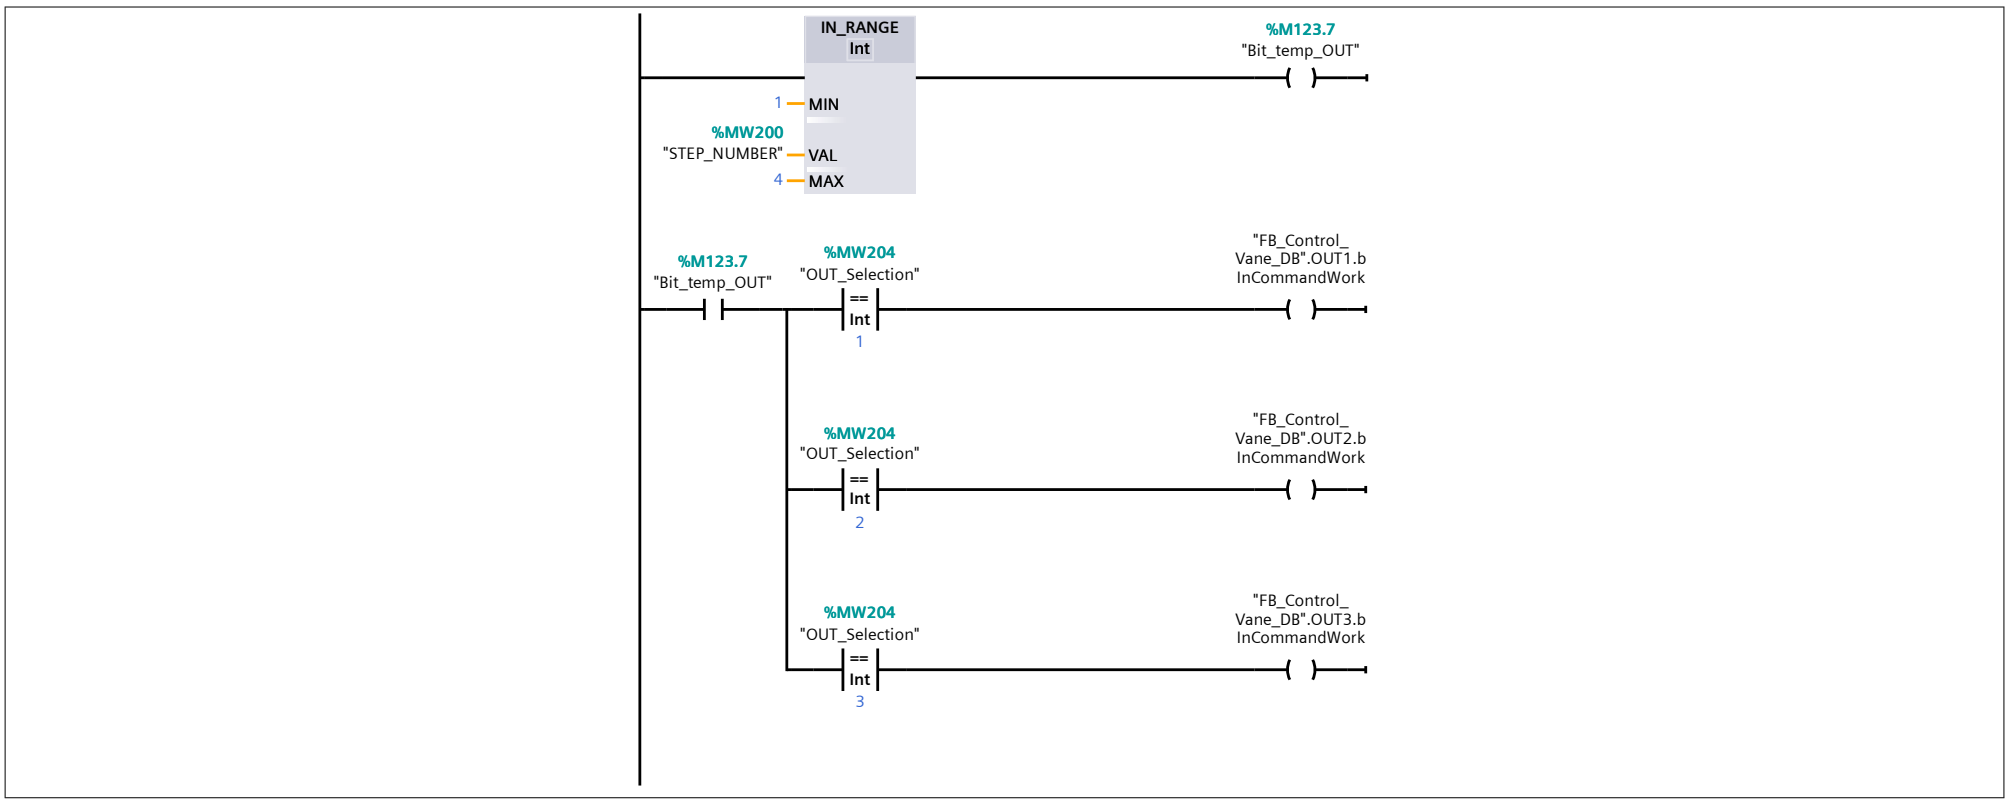


Network 46: Conditii pornire VANE PLS

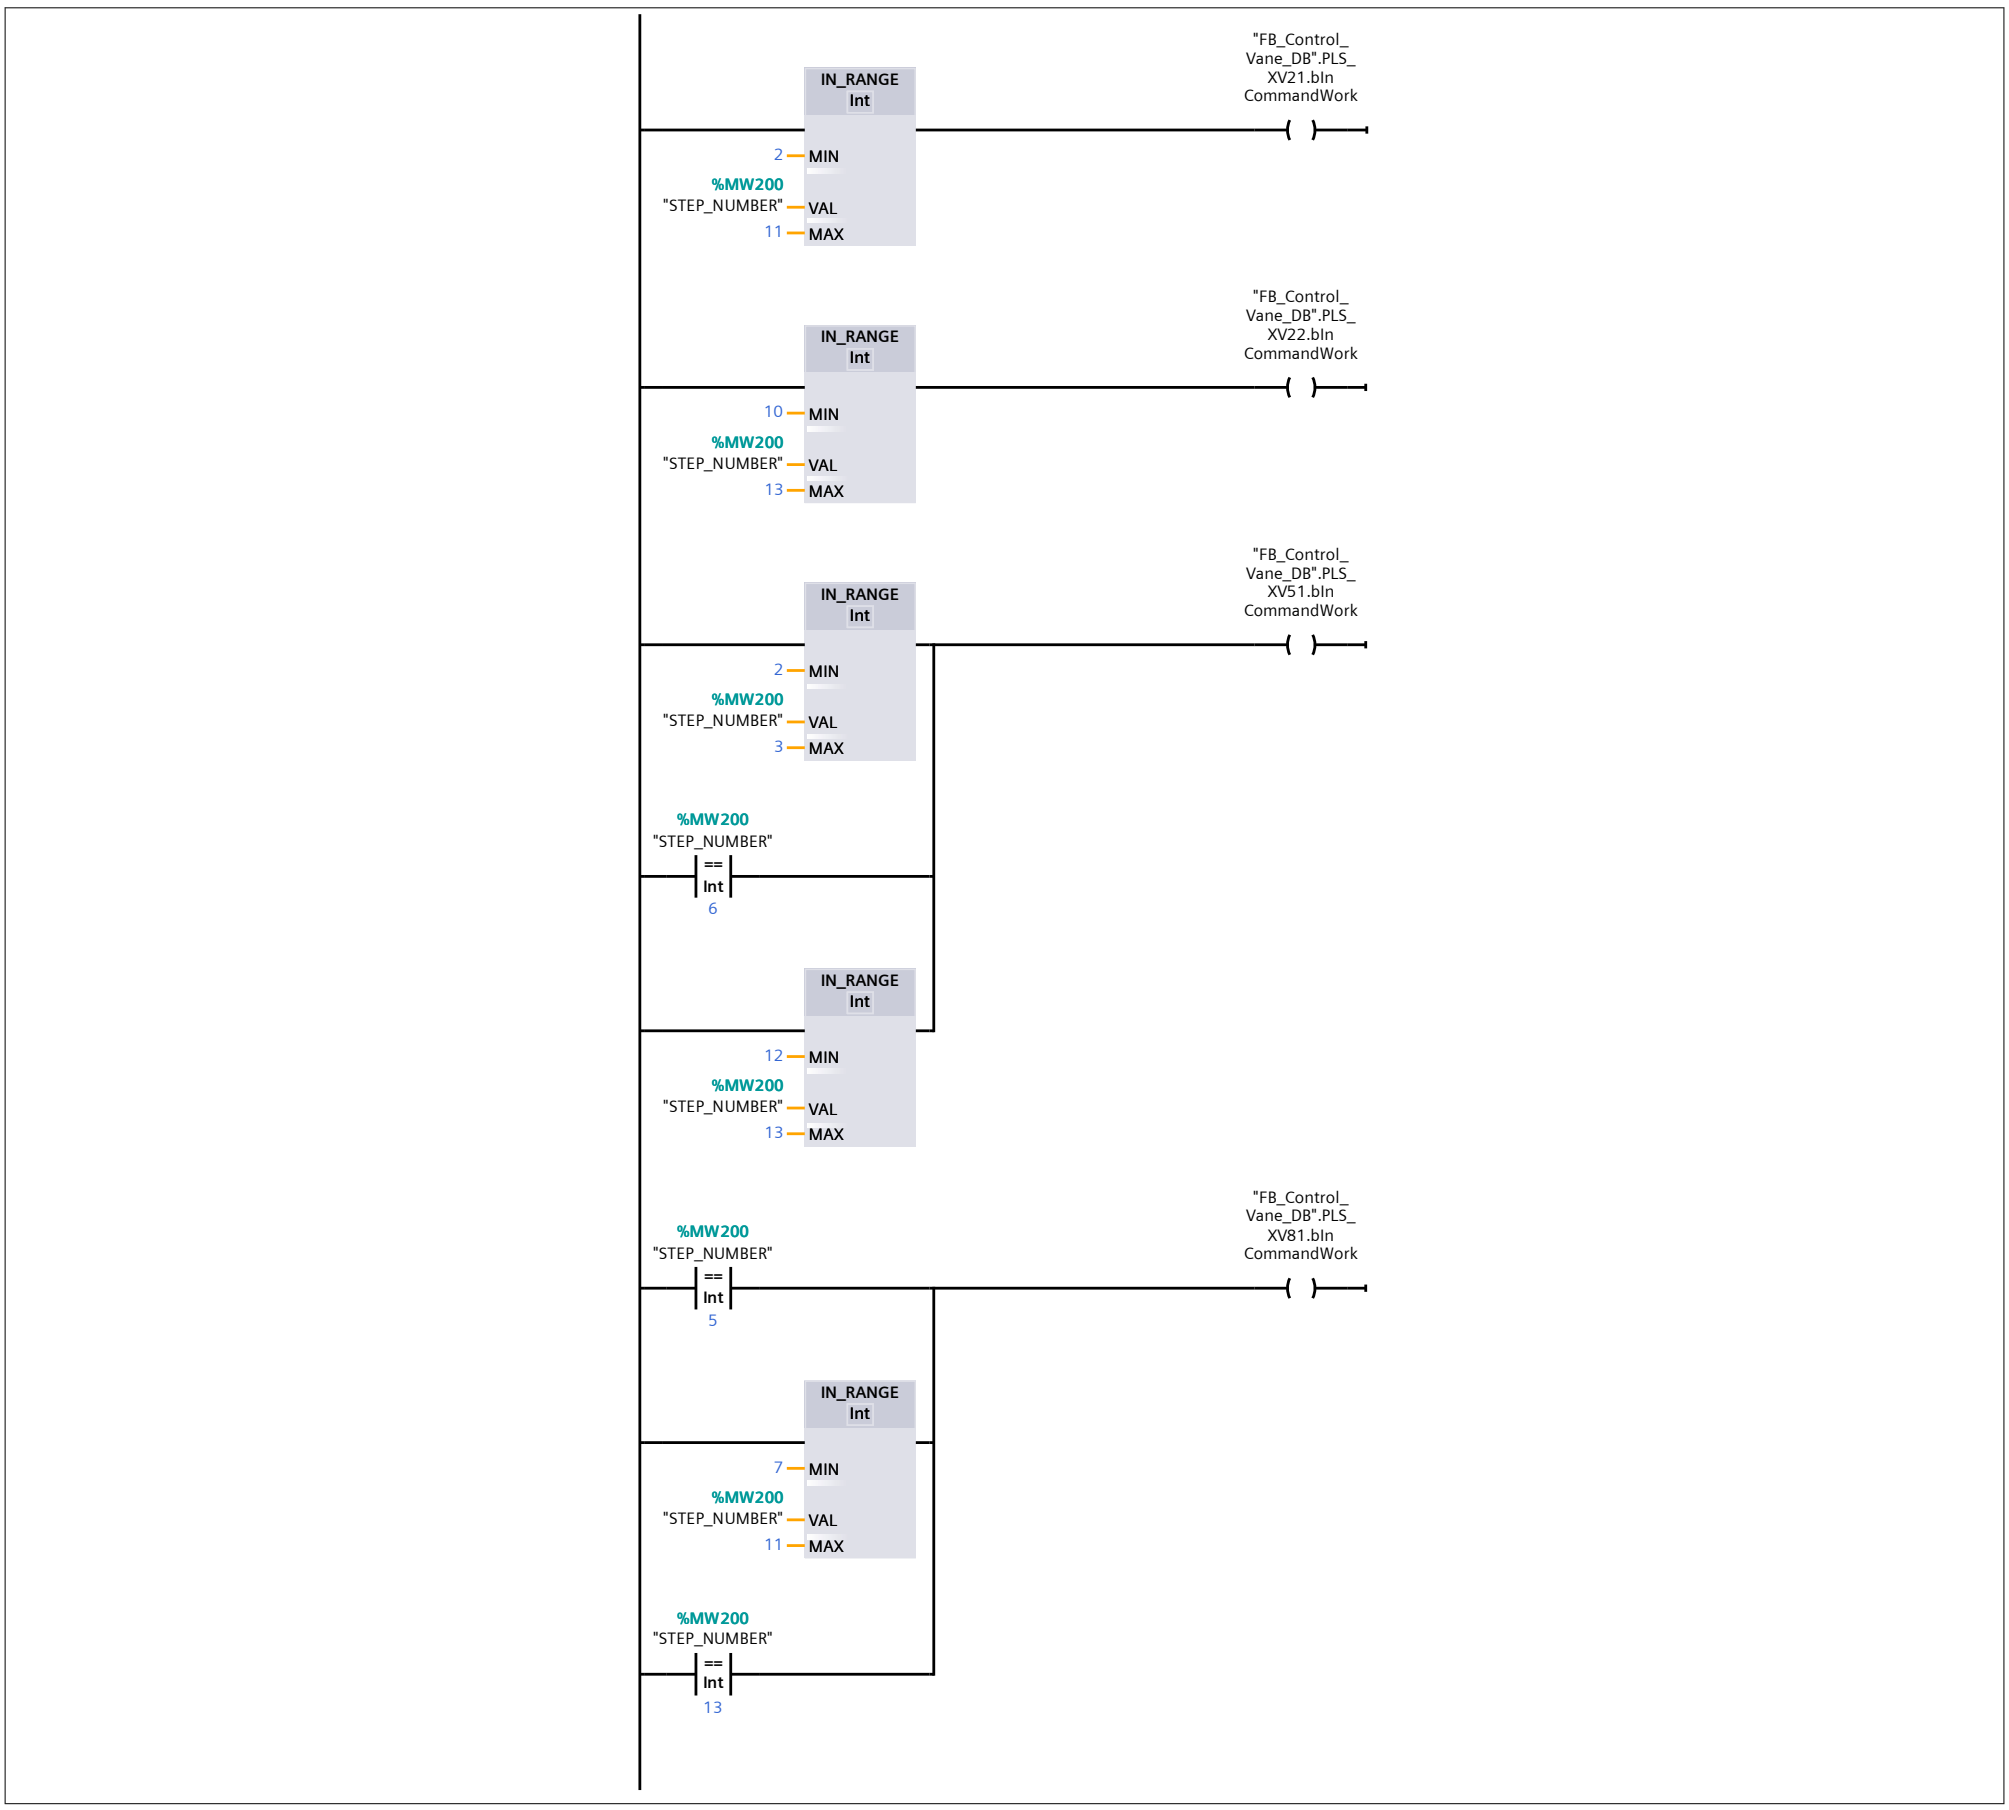

Network 47: Conditii pornire VANE PRS

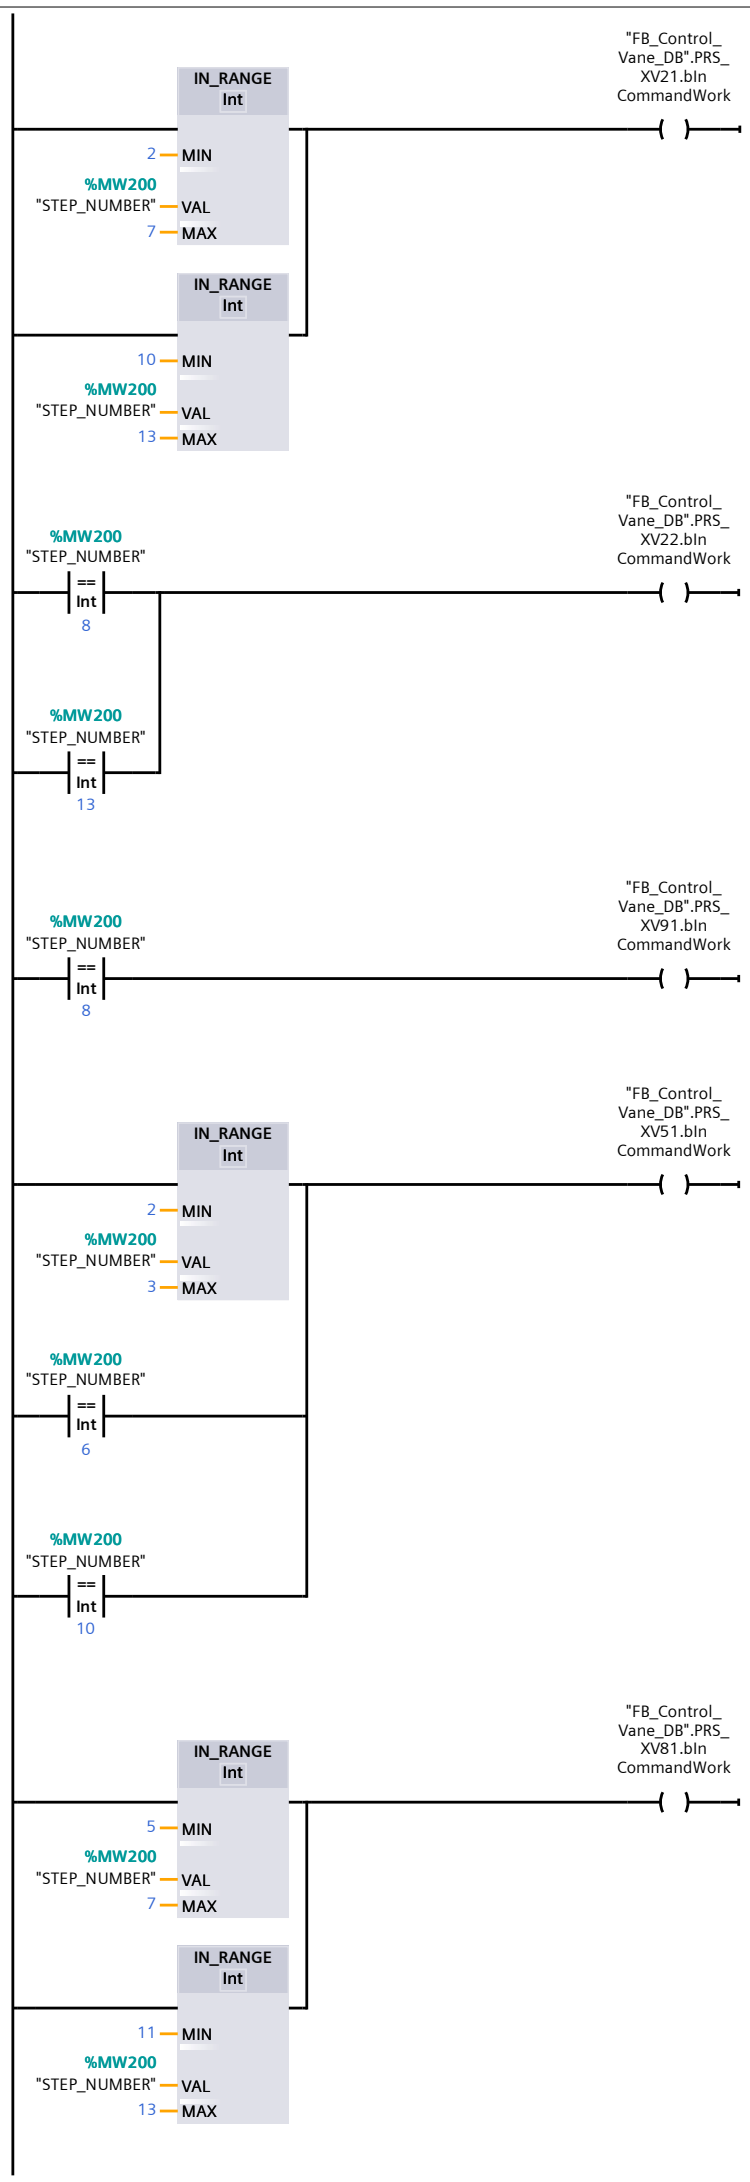


Network 48: Control Vane

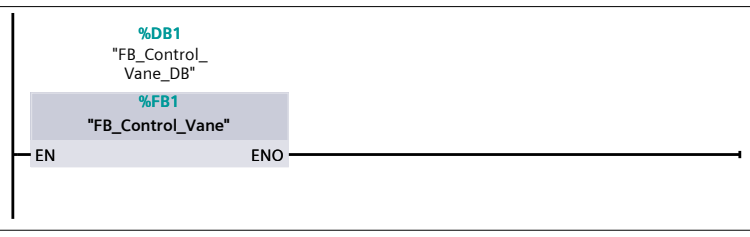


Network 49: |---------- PENTRU SIMULARE

Network 50: Simulare vane IN si OUT


bInCommandWork = cererea ca vana să meargă în poziția Work.
bOutCommandWork = comanda efectivă de ieșire dată de FB după ce verifică starea și erorile.
În simulare folosim bInCommandWork, pentru că vrem să simulăm direct reacția vanei la cerere:

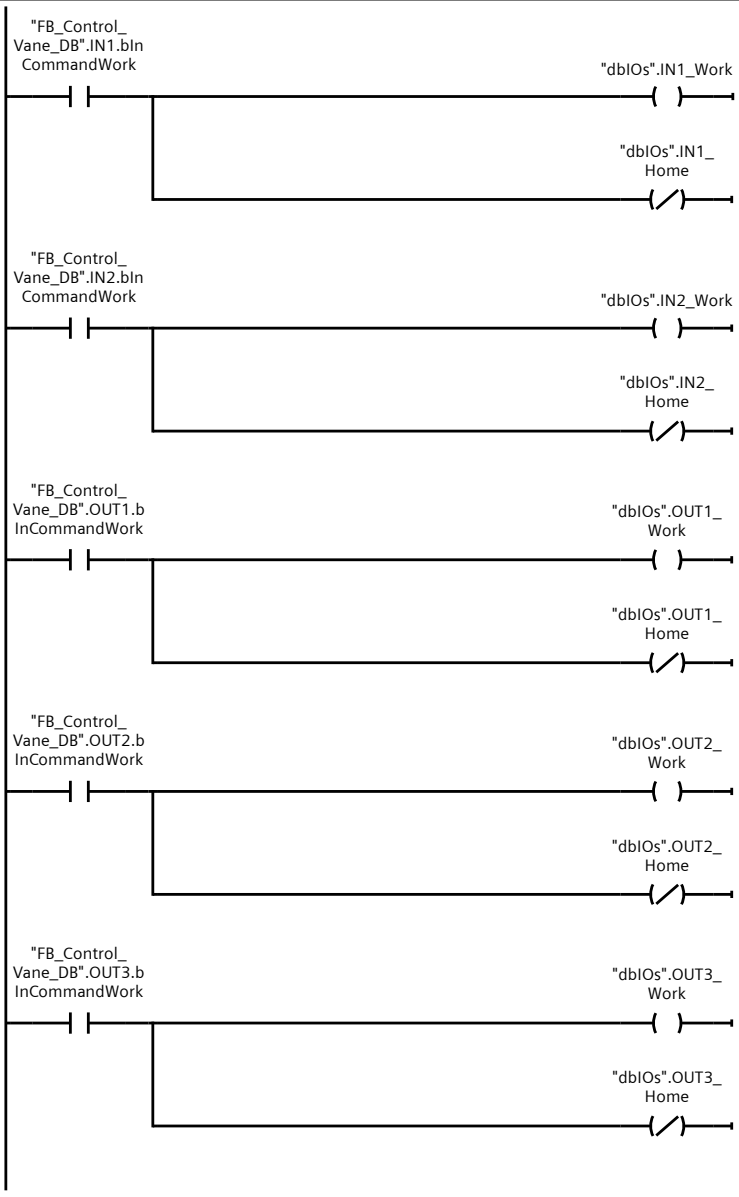

Network 51: Simulare vane PLS

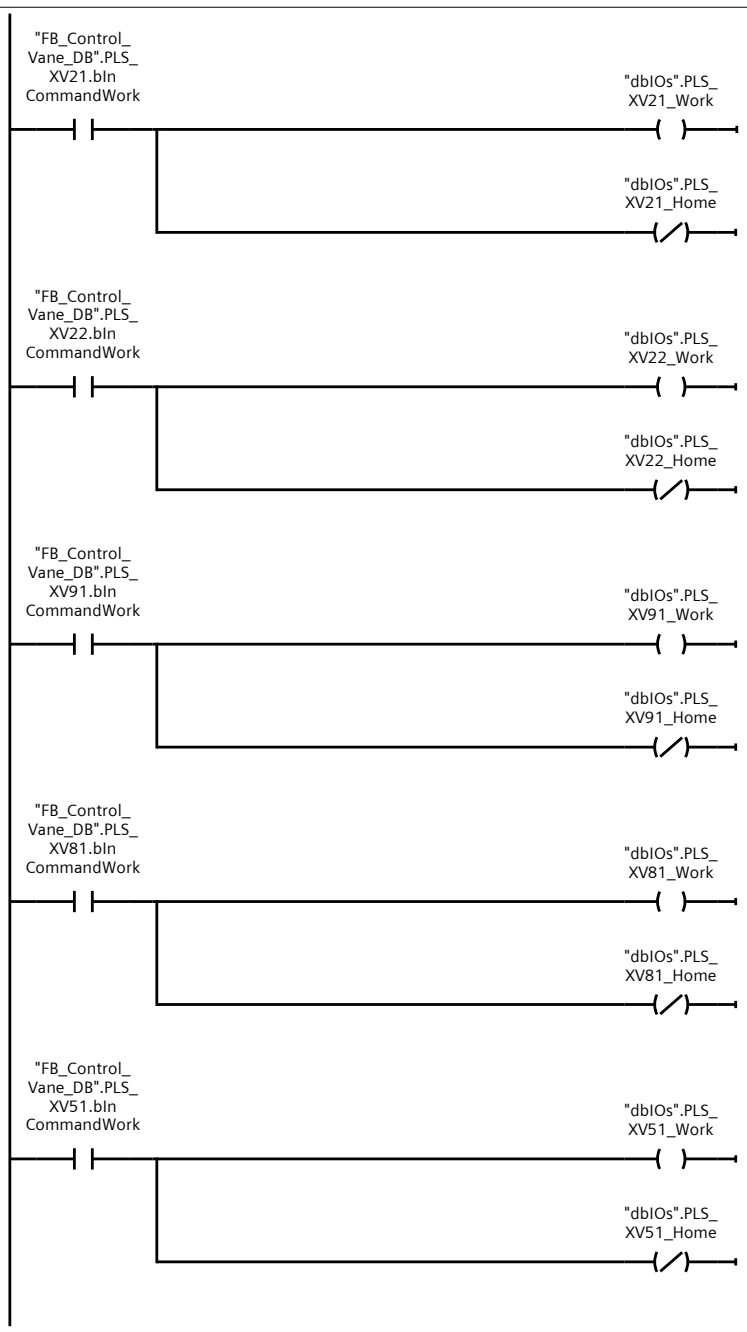


Network 52: Simulae Vane PRS

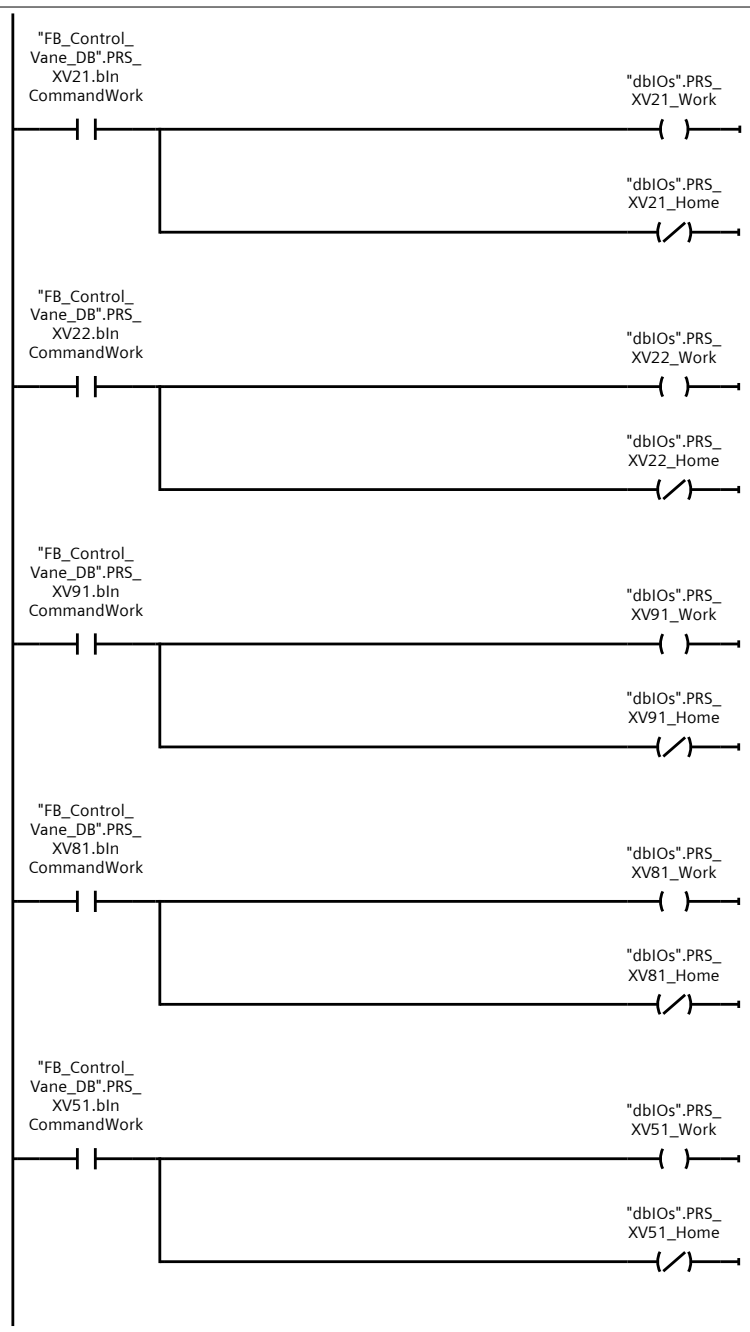


Network 53: Simulare senzori PLS + PRS

Network 53: Simulare senzori PLS + PRS (1.1 / 3.1)

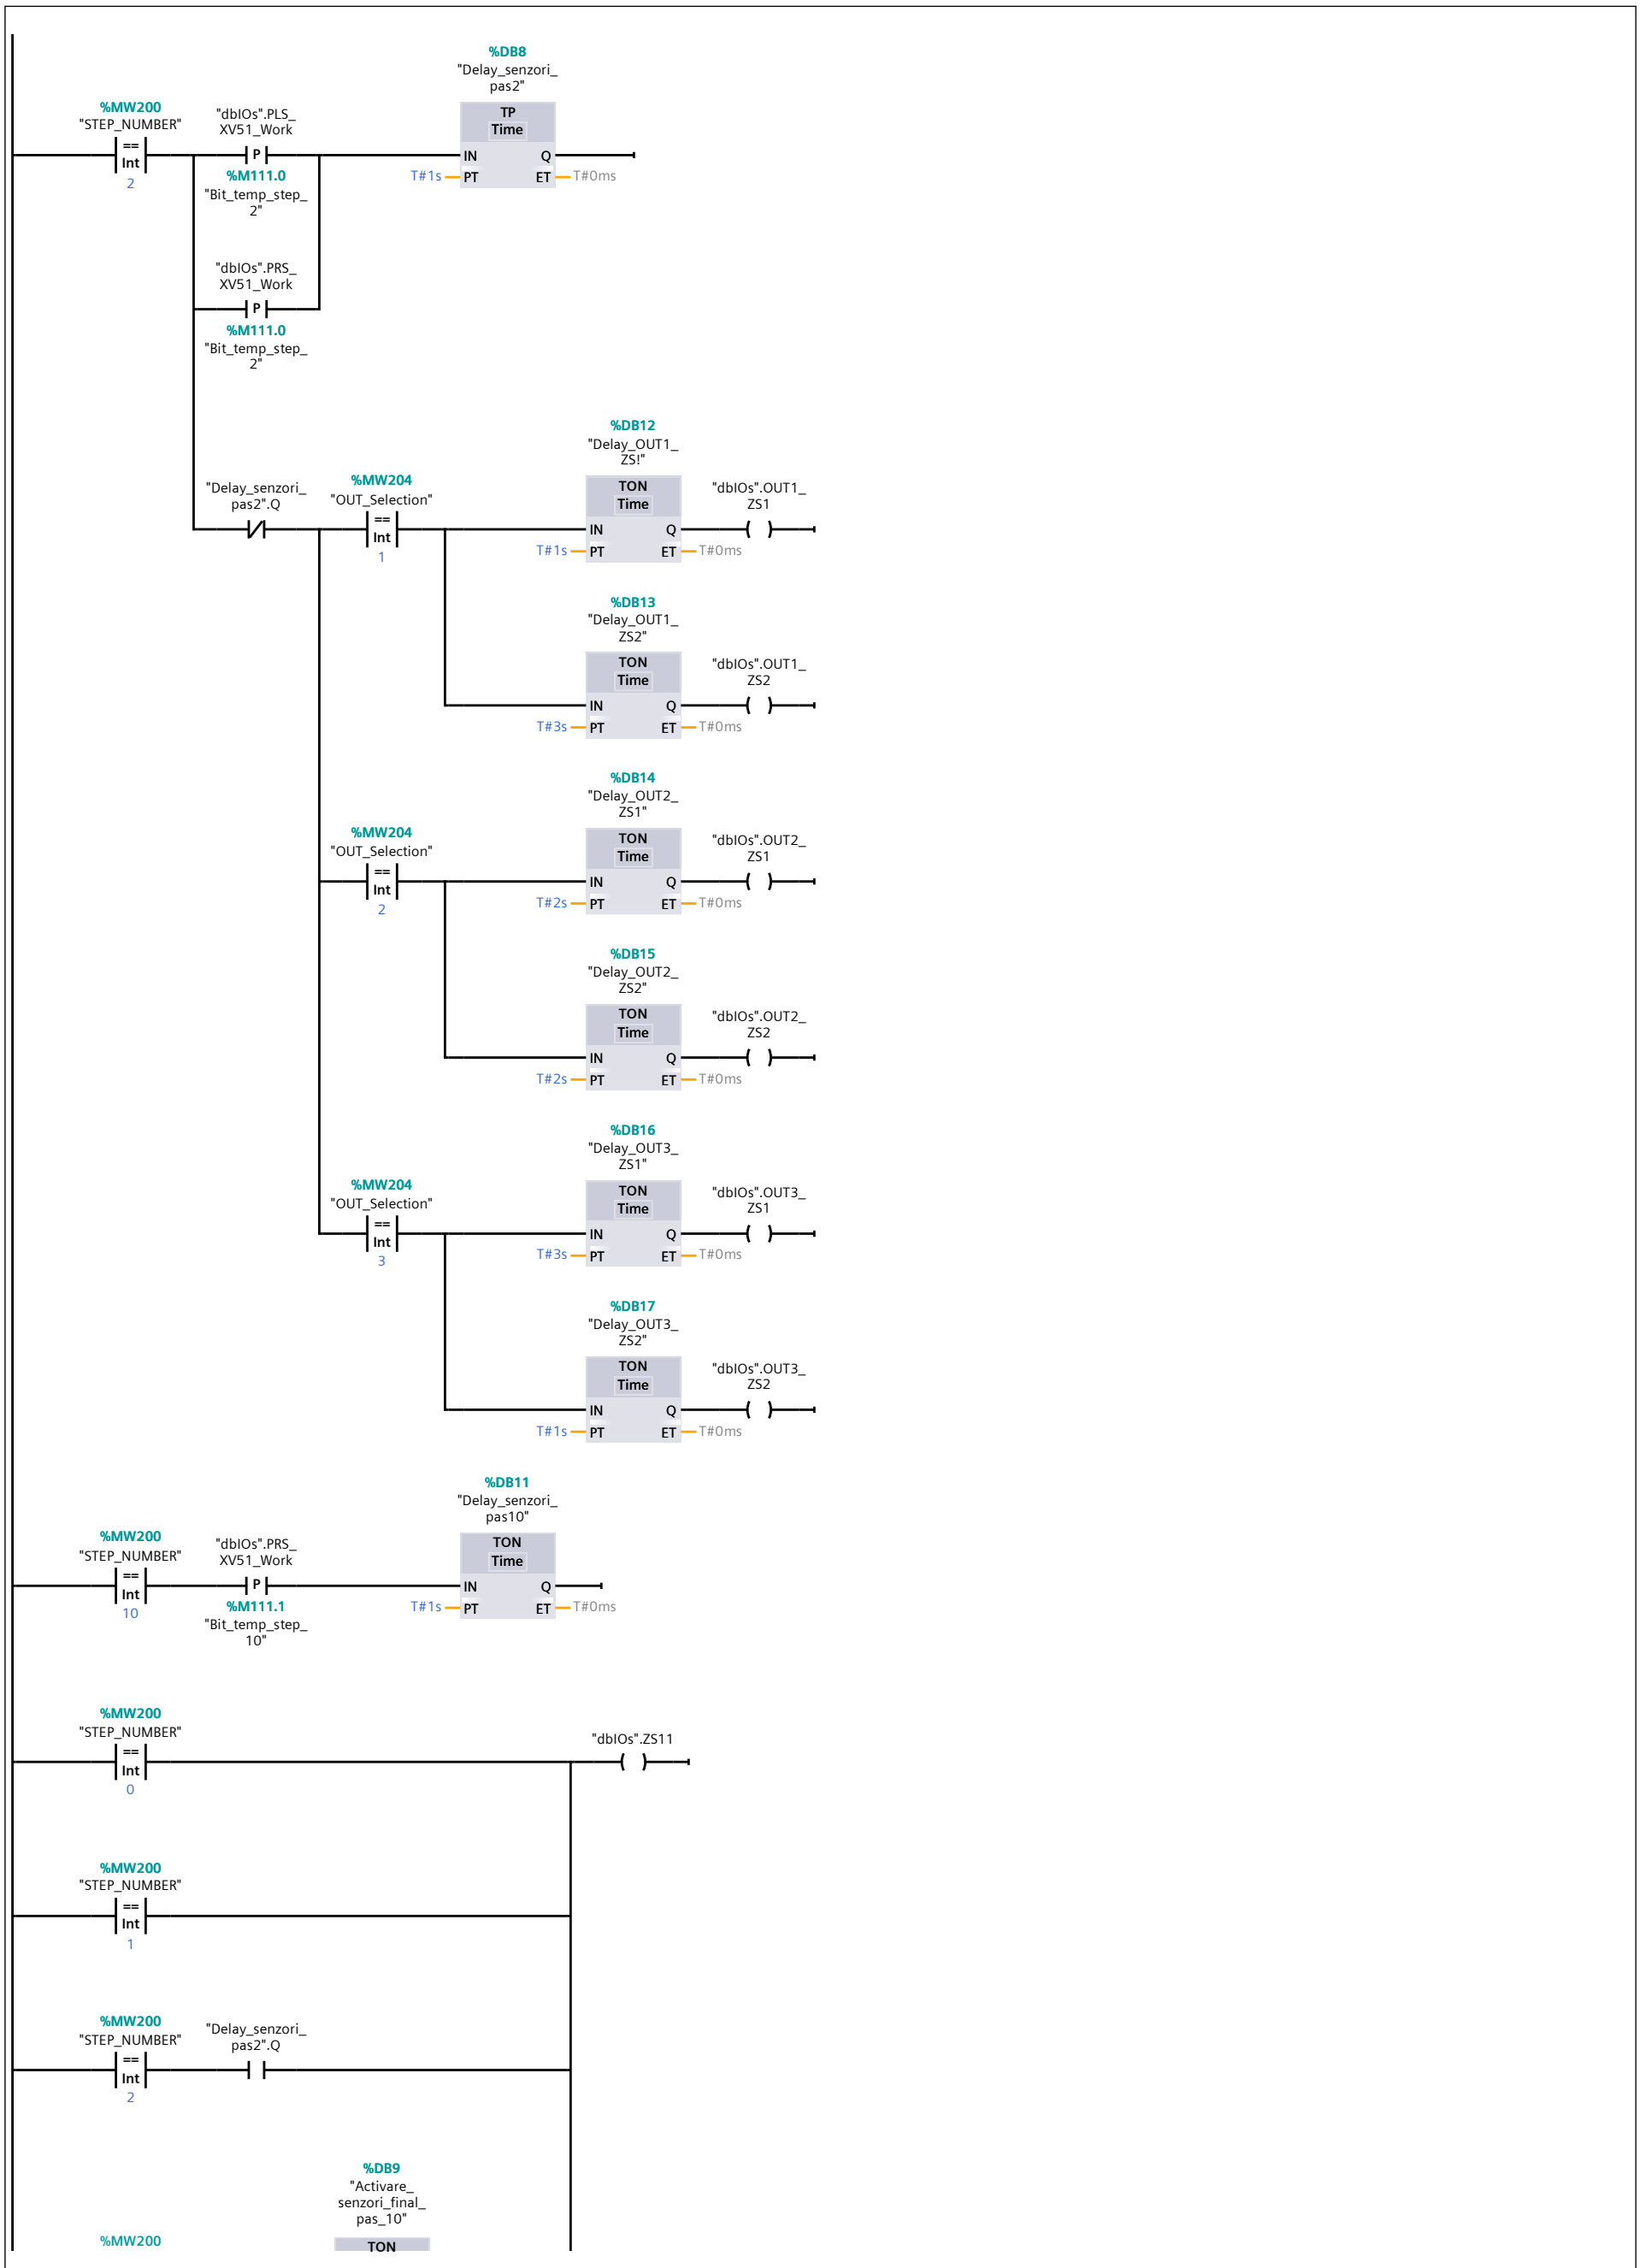

Network 53: Simulare senzori PLS + PRS (2.1 / 3.1)


1.1 (Page4 - 13)

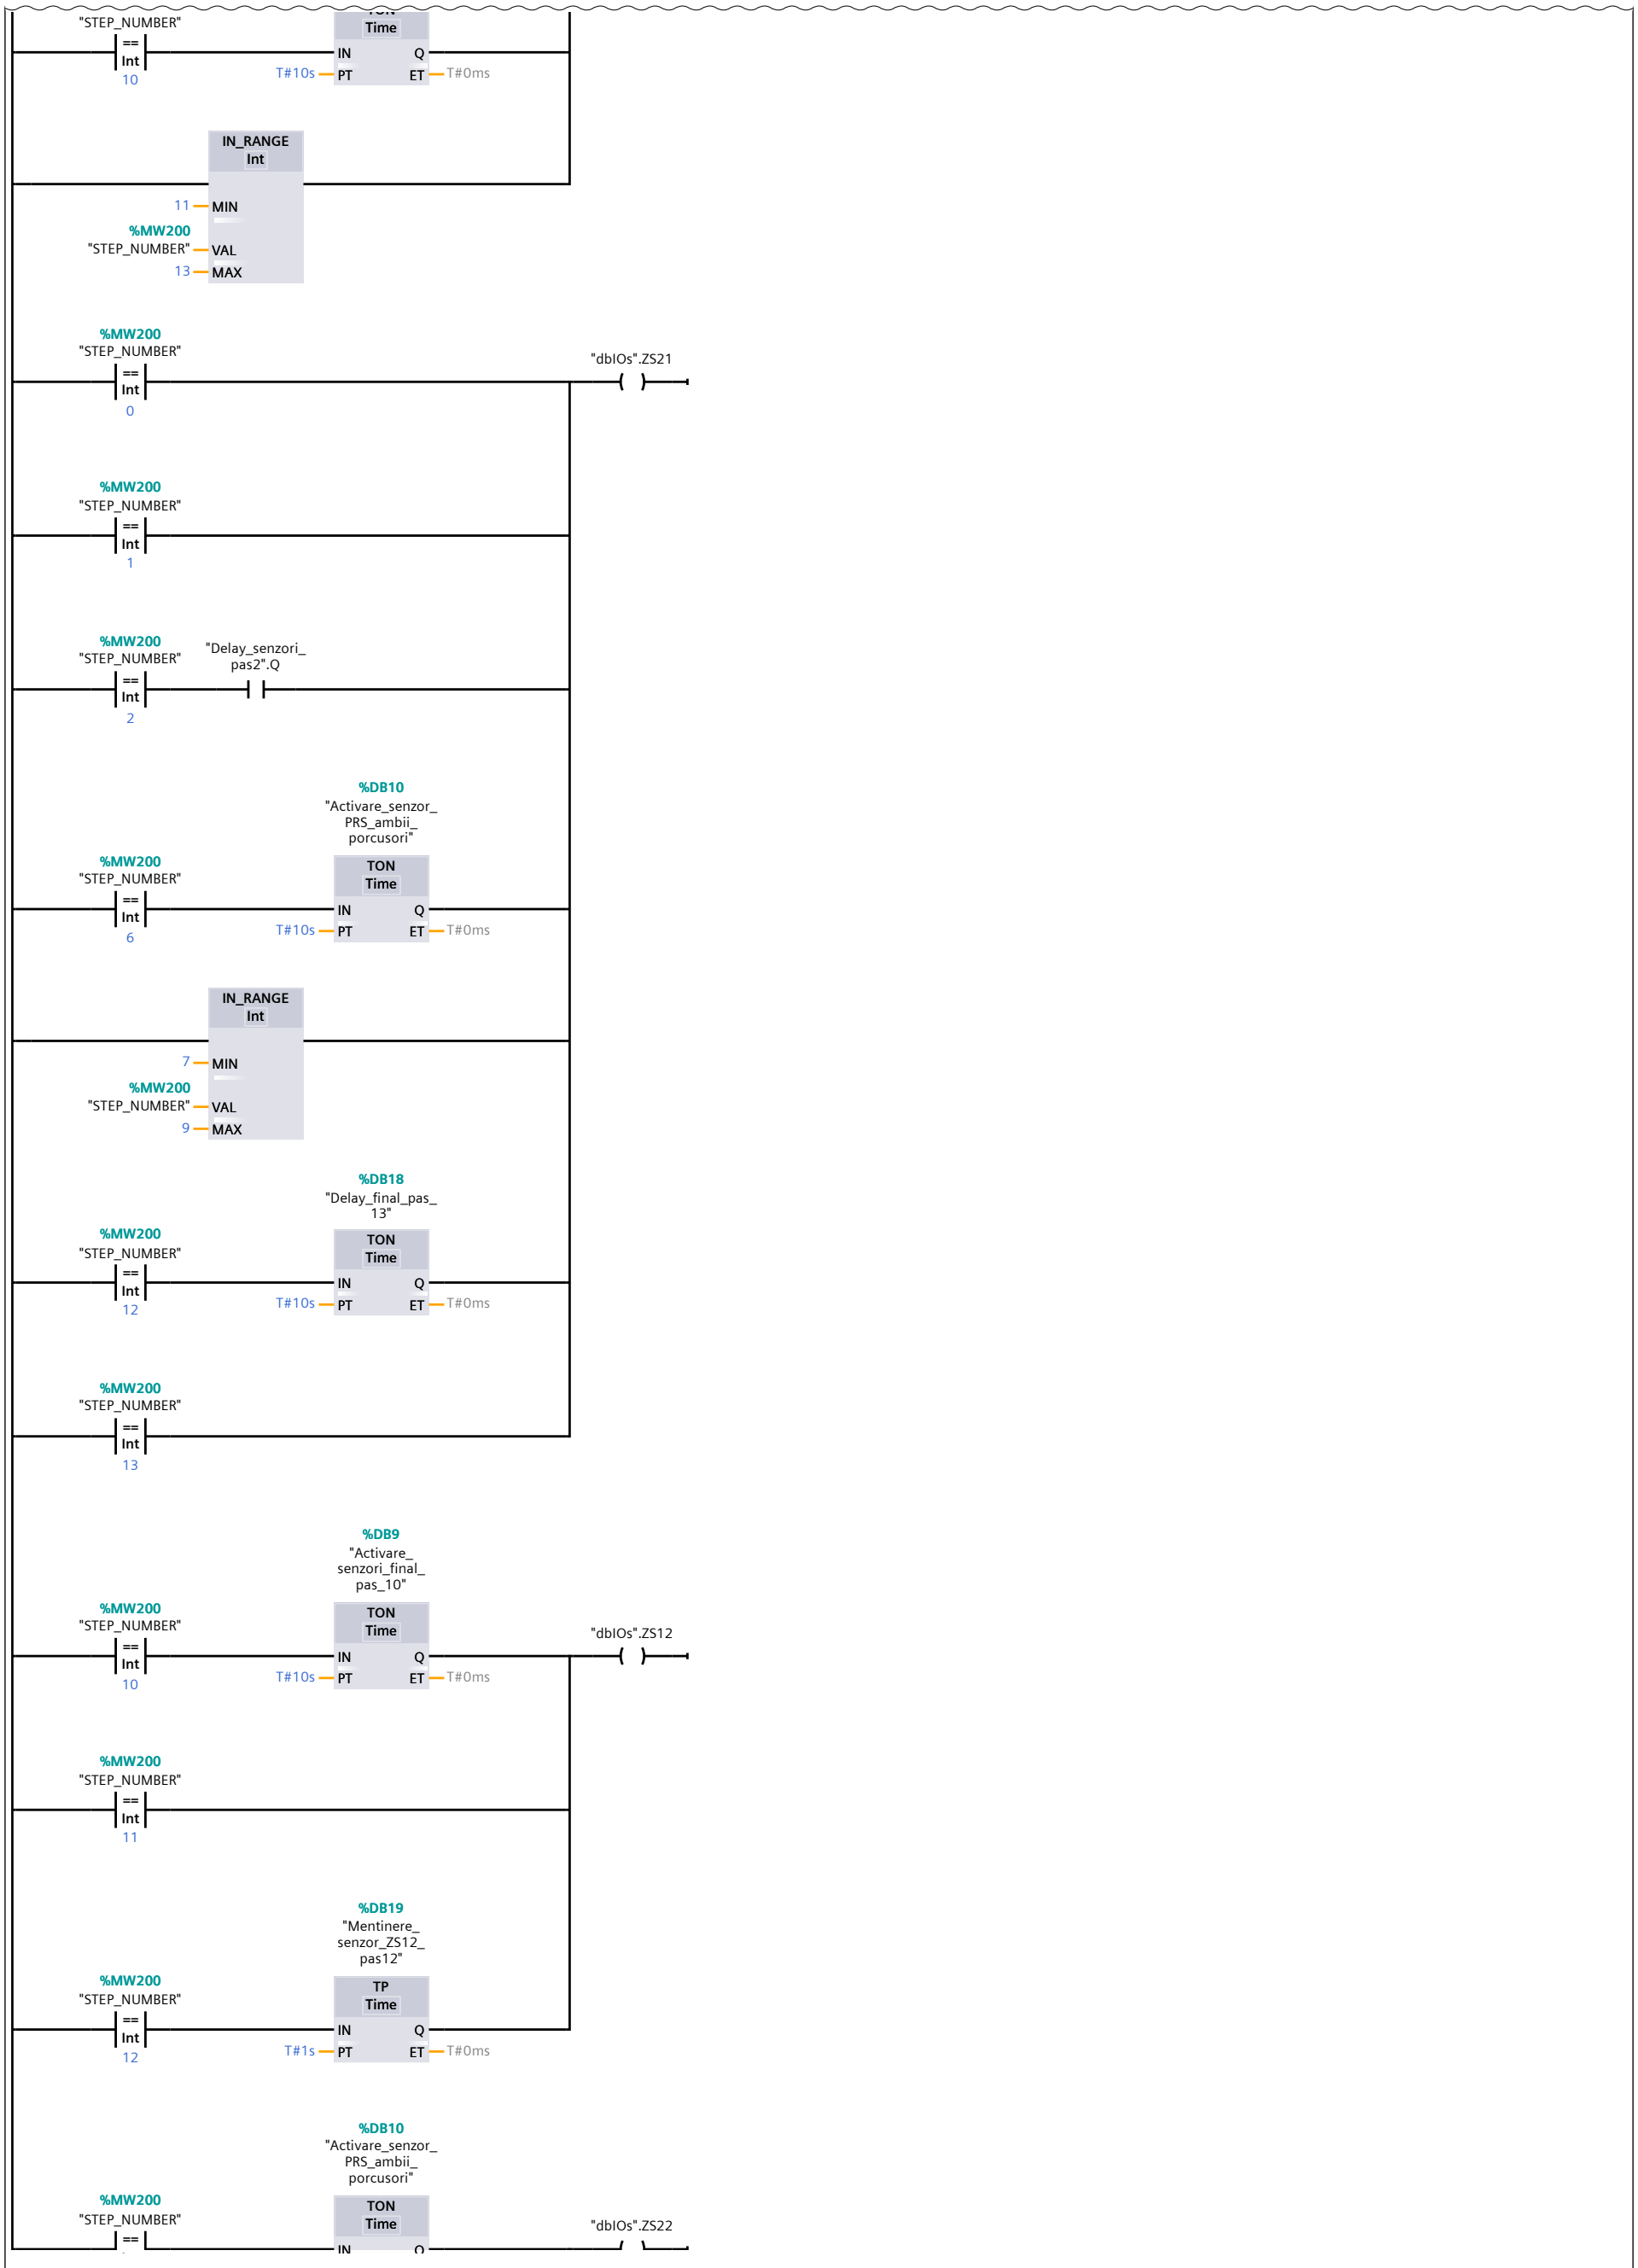

3.1 (Page4 - 15)

Network 53: Simulare senzori PLS + PRS (3.1 / 3.1)


2.1 (Page4 - 14)

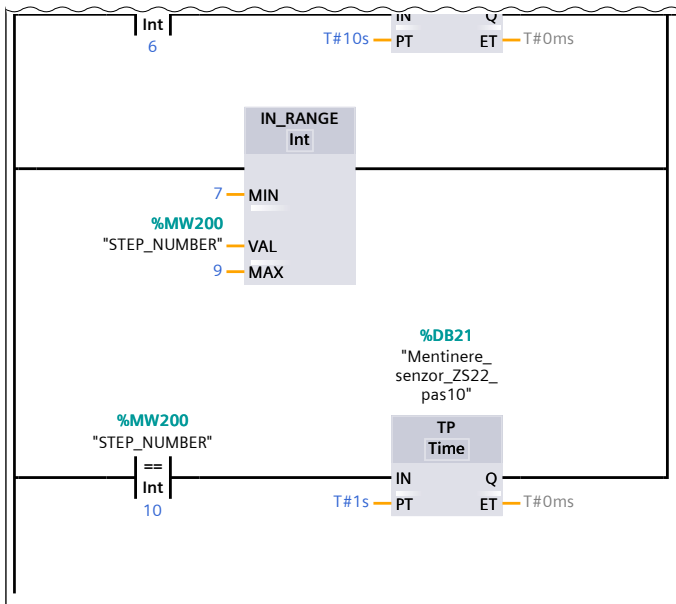


Network 54: Ceas puls 1s




Network 55: Simulare trecere 3-4 si 6-7 si 10-11 si 12-13

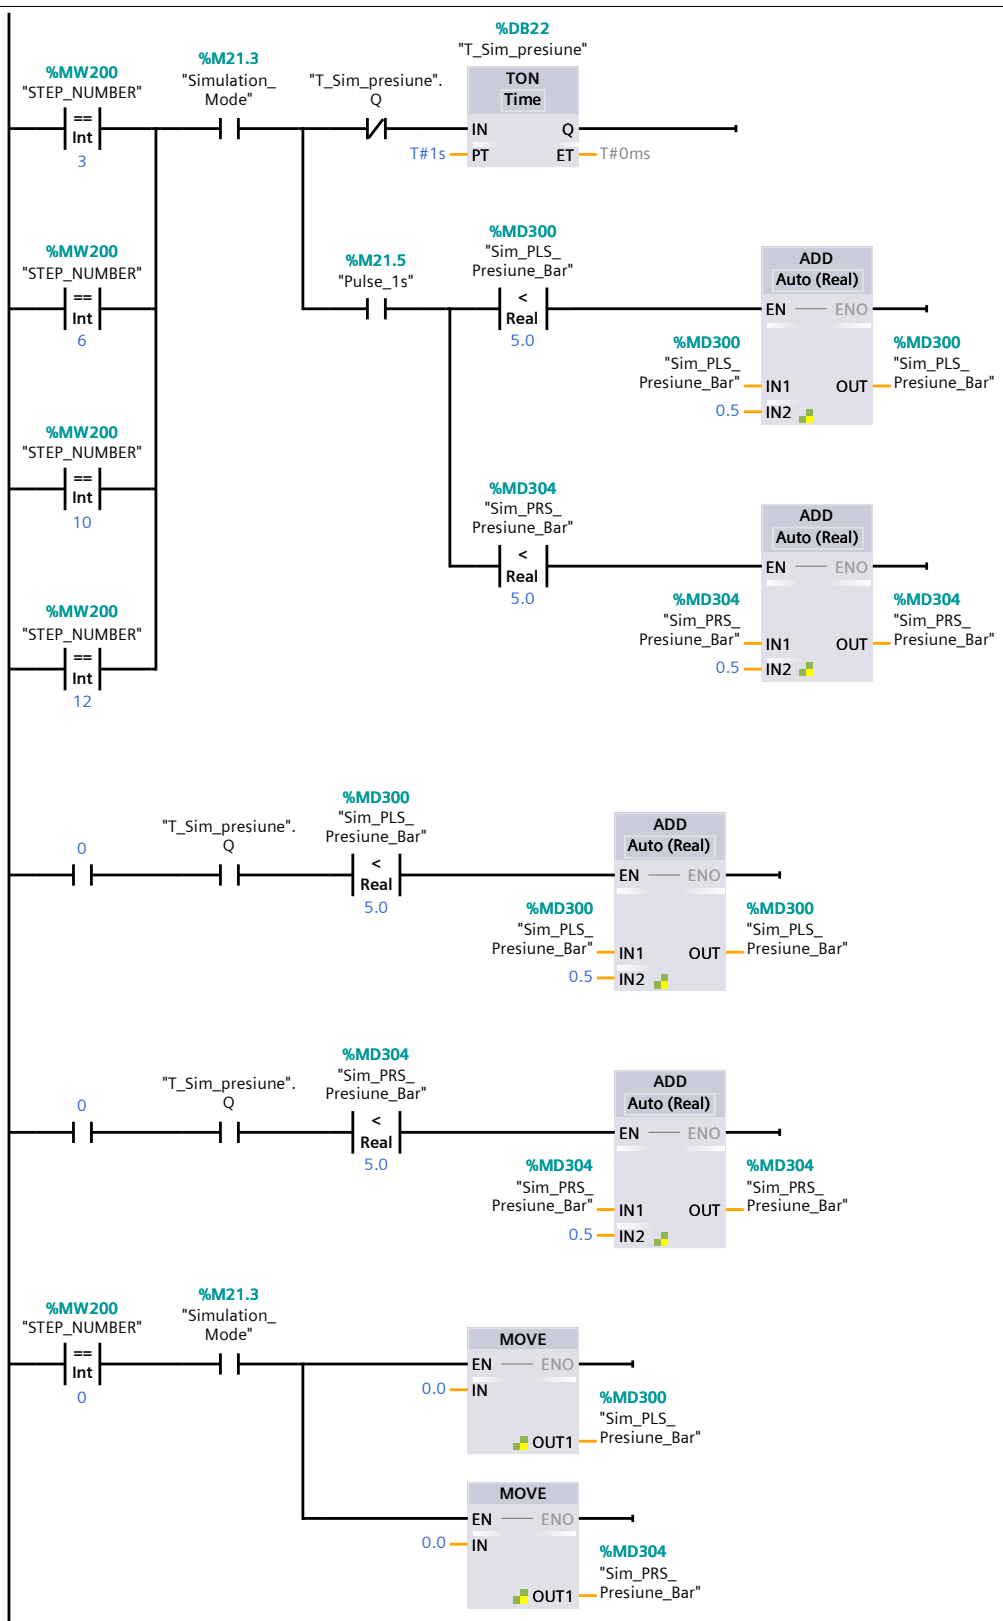

Network 56: Simulare trecere 4-5

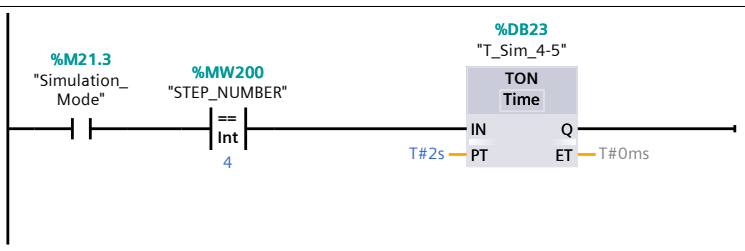

Network 57: Simulare trecere 5-6 si 7-8 si 11-12

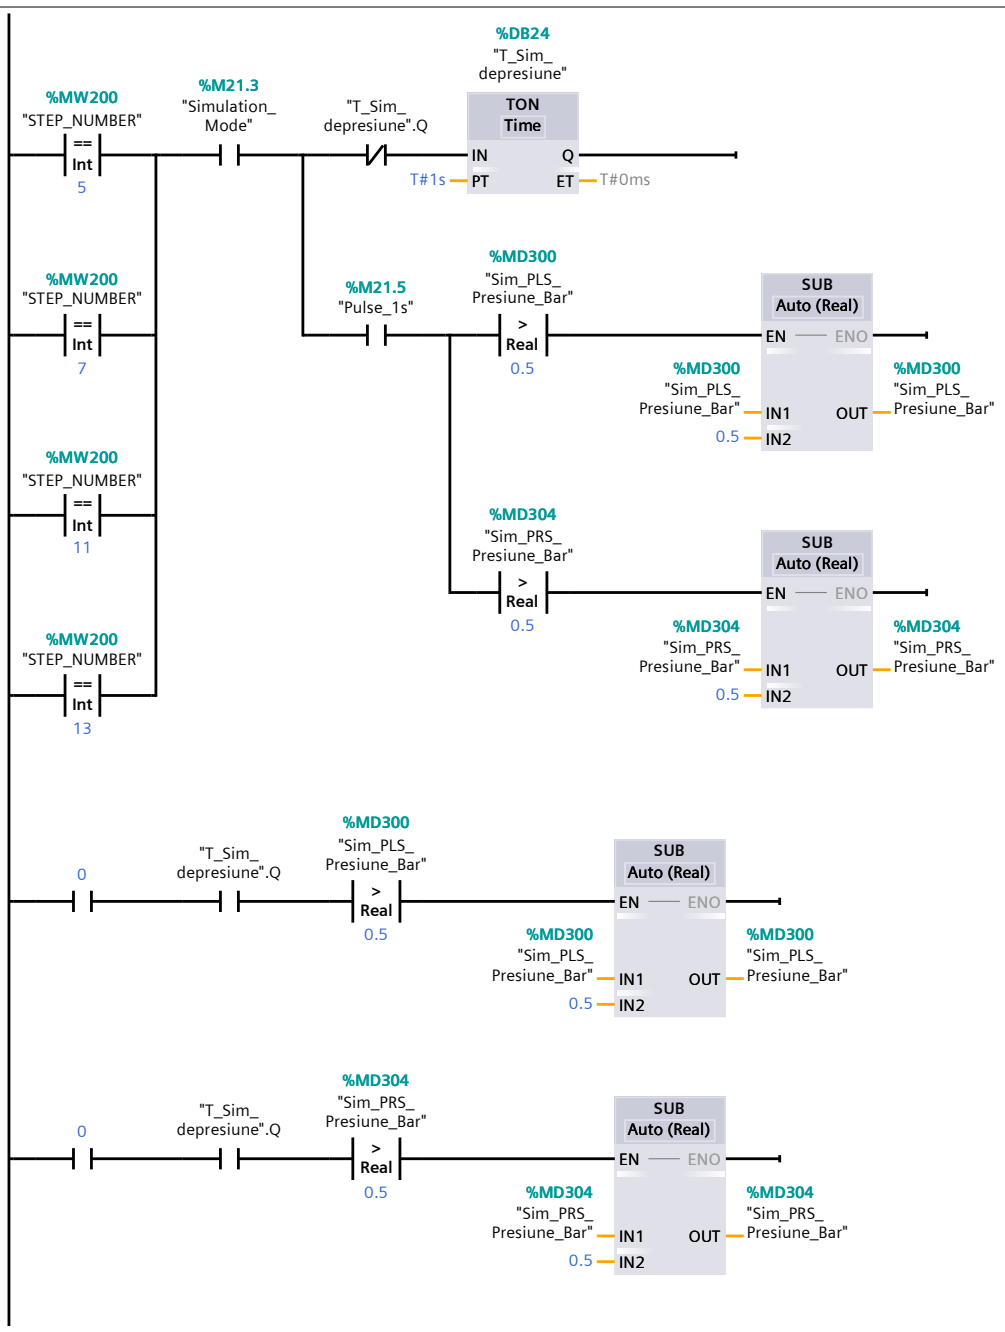
%DB24
"T_Sim_
depresiune"
%MW200
"STEP_NUMBER"
==
Int
5
%M21.3
"Simulation_
Mode"
"T_Sim_
depresiune".Q
TON
Time
IN
Q
T#1s
PT
ET
T#0ms
%MW200
"STEP_NUMBER"
==
Int
7
%M21.5
"Pulse_1s"
%MD300
"Sim_PLS_
Presiune_Bar"
>
Real
0.5
SUB
Auto (Real)
EN
ENO
%MD300
"Sim_PLS_
Presiune_Bar"
IN1
OUT
%MD300
"Sim_PLS_
Presiune_Bar"
0.5
IN2
%MW200
"STEP_NUMBER"
==
Int
11
%MD304
"Sim_PRS_
Presiune_Bar"
>
Real
0.5
SUB
Auto (Real)
EN
ENO
%MD304
"Sim_PRS_
Presiune_Bar"
IN1
OUT
%MD304
"Sim_PRS_
Presiune_Bar"
0.5
IN2
%MW200
"STEP_NUMBER"
==
Int
13
0
"T_Sim_
depresiune".Q
%MD300
"Sim_PLS_
Presiune_Bar"
>
Real
0.5
SUB
Auto (Real)
EN
ENO
%MD300
"Sim_PLS_
Presiune_Bar"
IN1
OUT
%MD300
"Sim_PLS_
Presiune_Bar"
0.5
IN2
0
"T_Sim_
depresiune".Q
%MD304
"Sim_PRS_
Presiune_Bar"
>
Real
0.5
SUB
Auto (Real)
EN
ENO
%MD304
"Sim_PRS_
Presiune_Bar"
IN1
OUT
%MD304
"Sim_PRS_
Presiune_Bar"
0.5
IN2

Fabrica / PLC_1 [CPU 1511-1 PN] / Program blocks

DB_Vane_HMI [DB20]

DB_Vane_HMI Properties							
General							
Name	DB_Vane_HMI	**Number**	20	**Type**	DB	**Language**	DB
Numbering	Manual						
Information							
Title		**Author**		**Comment**		**Family**	
Version	0.1	**User-defined ID**					

Name	Data type	Start value	Retain	Accessible from HMI/OPC UA/Web API	Writable from HMI/OPC UA/Web API	Visible in HMI engineering	Setpoint	Supervision	Comment
Static									
PLS_XV21	"udtHMI_Valve-Control"		False	True	True	True	False		
iMode	Int	0	False	True	True	True	False		Current mode
iErrorCode	Int	0	False	True	False	True	False		Error code
iStatus	Int	0	False	True	False	True	False		Status for HMI display
bPB_ResetError	Bool	false	False	True	True	True	False		PB Reset block errors
bPB_Home	Bool	false	False	True	True	True	False		PB Move to home in manual mode
bPB_Work	Bool	false	False	True	True	True	False		PB Move to work in manual mode
bPBEN_ResetError	Bool	false	False	True	False	True	False		PB Reset error enabled
bPBEN_Home	Bool	false	False	True	False	True	False		PB Home enabled
bPBEN_Work	Bool	false	False	True	False	True	False		PB Work enabled
bHomeOn	Bool	false	False	True	False	True	False		Home command is on
bWorkOn	Bool	false	False	True	False	True	False		Work command is on
bSignalHome	Bool	false	False	True	False	True	False		Home feedback
bSignalWork	Bool	false	False	True	False	True	False		Work feedback
bError	Bool	false	False	True	False	True	False		Error status
bInterlock	Bool	false	False	True	False	True	False		Valve interlocked
PLS_XV22	"udtHMI_Valve-Control"		False	True	True	True	True		
iMode	Int	0	False	True	True	True	False		Current mode
iErrorCode	Int	0	False	True	False	True	False		Error code
iStatus	Int	0	False	True	False	True	False		Status for HMI display
bPB_ResetError	Bool	false	False	True	True	True	False		PB Reset block errors
bPB_Home	Bool	false	False	True	True	True	False		PB Move to home in manual mode
bPB_Work	Bool	false	False	True	True	True	False		PB Move to work in manual mode
bPBEN_ResetError	Bool	false	False	True	False	True	False		PB Reset error enabled
bPBEN_Home	Bool	false	False	True	False	True	False		PB Home enabled
bPBEN_Work	Bool	false	False	True	False	True	False		PB Work enabled
bHomeOn	Bool	false	False	True	False	True	False		Home command is on
bWorkOn	Bool	false	False	True	False	True	False		Work command is on
bSignalHome	Bool	false	False	True	False	True	False		Home feedback
bSignalWork	Bool	false	False	True	False	True	False		Work feedback
bError	Bool	false	False	True	False	True	False		Error status
bInterlock	Bool	false	False	True	False	True	False		Valve interlocked
PLS_XV91	"udtHMI_Valve-Control"		False	True	True	True	True		
iMode	Int	0	False	True	True	True	False		Current mode
iErrorCode	Int	0	False	True	False	True	False		Error code
iStatus	Int	0	False	True	False	True	False		Status for HMI display
bPB_ResetError	Bool	false	False	True	True	True	False		PB Reset block errors
bPB_Home	Bool	false	False	True	True	True	False		PB Move to home in manual mode
bPB_Work	Bool	false	False	True	True	True	False		PB Move to work in manual mode
bPBEN_ResetError	Bool	false	False	True	False	True	False		PB Reset error enabled
bPBEN_Home	Bool	false	False	True	False	True	False		PB Home enabled
bPBEN_Work	Bool	false	False	True	False	True	False		PB Work enabled
bHomeOn	Bool	false	False	True	False	True	False		Home command is on
bWorkOn	Bool	false	False	True	False	True	False		Work command is on
bSignalHome	Bool	false	False	True	False	True	False		Home feedback
bSignalWork	Bool	false	False	True	False	True	False		Work feedback
bError	Bool	false	False	True	False	True	False		Error status
bInterlock	Bool	false	False	True	False	True	False		Valve interlocked
PLS_XV51	"udtHMI_Valve-Control"		False	True	True	True	True		
iMode	Int	0	False	True	True	True	False		Current mode
iErrorCode	Int	0	False	True	False	True	False		Error code
iStatus	Int	0	False	True	False	True	False		Status for HMI display
bPB_ResetError	Bool	false	False	True	True	True	False		PB Reset block errors
bPB_Home	Bool	false	False	True	True	True	False		PB Move to home in manual mode
bPB_Work	Bool	false	False	True	True	True	False		PB Move to work in manual mode
bPBEN_ResetError	Bool	false	False	True	False	True	False		PB Reset error enabled
bPBEN_Home	Bool	false	False	True	False	True	False		PB Home enabled

Name	Data type	Start value	Retain	Accessible from HMI/OPC UA/Web API	Writable from HMI/OPC UA/Web API	Visible in HMI engineering	Setpoint	Supervision	Comment
bPBEN_Work	Bool	false	False	True	False	True	False		PB Work enabled
bHomeOn	Bool	false	False	True	False	True	False		Home command is on
bWorkOn	Bool	false	False	True	False	True	False		Work command is on
bSignalHome	Bool	false	False	True	False	True	False		Home feedback
bSignalWork	Bool	false	False	True	False	True	False		Work feedback
bError	Bool	false	False	True	False	True	False		Error status
bInterlock	Bool	false	False	True	False	True	False		Valve interlocked
▼ PLS_PCV51	"udtHMI_AnalogValveControl"		False	True	True	True	True		
iMode	Int	0	False	True	True	True	False		Current mode
iErrorCode	Int	0	False	True	False	True	False		Error code
iStatus	Int	0	False	True	False	True	False		Color status for HMI
rManualSP	Real	0.0	False	True	True	True	True		Set point for manual mode
rAutoSP	Real	0.0	False	True	False	True	False		Set point for automatic mode
rEstopSP	Real	0.0	False	True	True	True	True		Set point for an e-stop condition, if selected
rActual	Real	0.0	False	True	False	True	False		Actual value
bPB_ResetError	Bool	false	False	True	True	True	False		PB Reset errors
bPBEN_ResetError	Bool	false	False	True	False	True	False		PB reset errors enable
bError	Bool	false	False	True	False	True	False		Overall error
bInterlock	Bool	false	False	True	False	True	False		Valve Interlocked
iEstopFunction	Int	0	False	True	True	True	True		Enum of E-Stop repsonse (Estop.xxx)
▼ PLS_XV81	"udtHMI_Valve-Control"		False	True	True	True	True		
iMode	Int	0	False	True	True	True	False		Current mode
iErrorCode	Int	0	False	True	False	True	False		Error code
iStatus	Int	0	False	True	False	True	False		Status for HMI display
bPB_ResetError	Bool	false	False	True	True	True	False		PB Reset block errors
bPB_Home	Bool	false	False	True	True	True	False		PB Move to home in manual mode
bPB_Work	Bool	false	False	True	True	True	False		PB Move to work in manual mode
bPBEN_ResetError	Bool	false	False	True	False	True	False		PB Reset error enabled
bPBEN_Home	Bool	false	False	True	False	True	False		PB Home enabled
bPBEN_Work	Bool	false	False	True	False	True	False		PB Work enabled
bHomeOn	Bool	false	False	True	False	True	False		Home command is on
bWorkOn	Bool	false	False	True	False	True	False		Work command is on
bSignalHome	Bool	false	False	True	False	True	False		Home feedback
bSignalWork	Bool	false	False	True	False	True	False		Work feedback
bError	Bool	false	False	True	False	True	False		Error status
bInterlock	Bool	false	False	True	False	True	False		Valve interlocked
▼ PRS_XV21	"udtHMI_Valve-Control"		False	True	True	True	True		
iMode	Int	0	False	True	True	True	False		Current mode
iErrorCode	Int	0	False	True	False	True	False		Error code
iStatus	Int	0	False	True	False	True	False		Status for HMI display
bPB_ResetError	Bool	false	False	True	True	True	False		PB Reset block errors
bPB_Home	Bool	false	False	True	True	True	False		PB Move to home in manual mode
bPB_Work	Bool	false	False	True	True	True	False		PB Move to work in manual mode
bPBEN_ResetError	Bool	false	False	True	False	True	False		PB Reset error enabled
bPBEN_Home	Bool	false	False	True	False	True	False		PB Home enabled
bPBEN_Work	Bool	false	False	True	False	True	False		PB Work enabled
bHomeOn	Bool	false	False	True	False	True	False		Home command is on
bWorkOn	Bool	false	False	True	False	True	False		Work command is on
bSignalHome	Bool	false	False	True	False	True	False		Home feedback
bSignalWork	Bool	false	False	True	False	True	False		Work feedback
bError	Bool	false	False	True	False	True	False		Error status
bInterlock	Bool	false	False	True	False	True	False		Valve interlocked
▼ PRS_XV22	"udtHMI_Valve-Control"		False	True	True	True	True		
iMode	Int	0	False	True	True	True	False		Current mode
iErrorCode	Int	0	False	True	False	True	False		Error code
iStatus	Int	0	False	True	False	True	False		Status for HMI display
bPB_ResetError	Bool	false	False	True	True	True	False		PB Reset block errors
bPB_Home	Bool	false	False	True	True	True	False		PB Move to home in manual mode
bPB_Work	Bool	false	False	True	True	True	False		PB Move to work in manual mode
bPBEN_ResetError	Bool	false	False	True	False	True	False		PB Reset error enabled
bPBEN_Home	Bool	false	False	True	False	True	False		PB Home enabled
bPBEN_Work	Bool	false	False	True	False	True	False		PB Work enabled
bHomeOn	Bool	false	False	True	False	True	False		Home command is on
bWorkOn	Bool	false	False	True	False	True	False		Work command is on
bSignalHome	Bool	false	False	True	False	True	False		Home feedback
bSignalWork	Bool	false	False	True	False	True	False		Work feedback
bError	Bool	false	False	True	False	True	False		Error status
bInterlock	Bool	false	False	True	False	True	False		Valve interlocked
▼ PRS_XV91	"udtHMI_Valve-Control"		False	True	True	True	True		

Name	Data type	Start value	Retain	Accessible from HMI/OPC UA/Web API	Writable from HMI/OPC UA/Web API	Visible in HMI engineering	Setpoint	Supervision	Comment
iMode	Int	0	False	True	True	True	False		Current mode
iErrorCode	Int	0	False	True	False	True	False		Error code
iStatus	Int	0	False	True	False	True	False		Status for HMI display
bPB_ResetError	Bool	false	False	True	True	True	False		PB Reset block errors
bPB_Home	Bool	false	False	True	True	True	False		PB Move to home in manual mode
bPB_Work	Bool	false	False	True	True	True	False		PB Move to work in manual mode
bPBEN_ResetError	Bool	false	False	True	False	True	False		PB Reset error enabled
bPBEN_Home	Bool	false	False	True	False	True	False		PB Home enabled
bPBEN_Work	Bool	false	False	True	False	True	False		PB Work enabled
bHomeOn	Bool	false	False	True	False	True	False		Home command is on
bWorkOn	Bool	false	False	True	False	True	False		Work command is on
bSignalHome	Bool	false	False	True	False	True	False		Home feedback
bSignalWork	Bool	false	False	True	False	True	False		Work feedback
bError	Bool	false	False	True	False	True	False		Error status
bInterlock	Bool	false	False	True	False	True	False		Valve interlocked
▼ PRS_XV51	"udtHMI_Valve-Control"		False	True	True	True	True		
iMode	Int	0	False	True	True	True	False		Current mode
iErrorCode	Int	0	False	True	False	True	False		Error code
iStatus	Int	0	False	True	False	True	False		Status for HMI display
bPB_ResetError	Bool	false	False	True	True	True	False		PB Reset block errors
bPB_Home	Bool	false	False	True	True	True	False		PB Move to home in manual mode
bPB_Work	Bool	false	False	True	True	True	False		PB Move to work in manual mode
bPBEN_ResetError	Bool	false	False	True	False	True	False		PB Reset error enabled
bPBEN_Home	Bool	false	False	True	False	True	False		PB Home enabled
bPBEN_Work	Bool	false	False	True	False	True	False		PB Work enabled
bHomeOn	Bool	false	False	True	False	True	False		Home command is on
bWorkOn	Bool	false	False	True	False	True	False		Work command is on
bSignalHome	Bool	false	False	True	False	True	False		Home feedback
bSignalWork	Bool	false	False	True	False	True	False		Work feedback
bError	Bool	false	False	True	False	True	False		Error status
bInterlock	Bool	false	False	True	False	True	False		Valve interlocked
▼ PRS_PCV51	"udtHMI_Ana-logValveControl"		False	True	True	True	True		
iMode	Int	0	False	True	True	True	False		Current mode
iErrorCode	Int	0	False	True	False	True	False		Error code
iStatus	Int	0	False	True	False	True	False		Color status for HMI
rManualSP	Real	0.0	False	True	True	True	True		Set point for manual mode
rAutoSP	Real	0.0	False	True	False	True	False		Set point for automatic mode
rEstopSP	Real	0.0	False	True	True	True	True		Set point for an e-stop condition, if selected
rActual	Real	0.0	False	True	False	True	False		Actual value
bPB_ResetError	Bool	false	False	True	True	True	False		PB Reset errors
bPBEN_ResetError	Bool	false	False	True	False	True	False		PB reset errors enable
bError	Bool	false	False	True	False	True	False		Overall error
bInterlock	Bool	false	False	True	False	True	False		Valve Interlocked
iEstopFunction	Int	0	False	True	True	True	True		Enum of E-Stop repsonse (Estop.xxx)
▼ PRS_XV81	"udtHMI_Valve-Control"		False	True	True	True	True		
iMode	Int	0	False	True	True	True	False		Current mode
iErrorCode	Int	0	False	True	False	True	False		Error code
iStatus	Int	0	False	True	False	True	False		Status for HMI display
bPB_ResetError	Bool	false	False	True	True	True	False		PB Reset block errors
bPB_Home	Bool	false	False	True	True	True	False		PB Move to home in manual mode
bPB_Work	Bool	false	False	True	True	True	False		PB Move to work in manual mode
bPBEN_ResetError	Bool	false	False	True	False	True	False		PB Reset error enabled
bPBEN_Home	Bool	false	False	True	False	True	False		PB Home enabled
bPBEN_Work	Bool	false	False	True	False	True	False		PB Work enabled
bHomeOn	Bool	false	False	True	False	True	False		Home command is on
bWorkOn	Bool	false	False	True	False	True	False		Work command is on
bSignalHome	Bool	false	False	True	False	True	False		Home feedback
bSignalWork	Bool	false	False	True	False	True	False		Work feedback
bError	Bool	false	False	True	False	True	False		Error status
bInterlock	Bool	false	False	True	False	True	False		Valve interlocked
▼ IN1	"udtHMI_Valve-Control"		False	True	True	True	True		
iMode	Int	0	False	True	True	True	False		Current mode
iErrorCode	Int	0	False	True	False	True	False		Error code
iStatus	Int	0	False	True	False	True	False		Status for HMI display
bPB_ResetError	Bool	false	False	True	True	True	False		PB Reset block errors
bPB_Home	Bool	false	False	True	True	True	False		PB Move to home in manual mode
bPB_Work	Bool	false	False	True	True	True	False		PB Move to work in manual mode
bPBEN_ResetError	Bool	false	False	True	False	True	False		PB Reset error enabled
bPBEN_Home	Bool	false	False	True	False	True	False		PB Home enabled

Name	Data type	Start value	Retain	Accessible from HMI/OPC UA/Web API	Writable from HMI/OPC UA/Web API	Visible in HMI engineering	Setpoint	Supervision	Comment
bPBEN_Work	Bool	false	False	True	False	True	False		PB Work enabled
bHomeOn	Bool	false	False	True	False	True	False		Home command is on
bWorkOn	Bool	false	False	True	False	True	False		Work command is on
bSignalHome	Bool	false	False	True	False	True	False		Home feedback
bSignalWork	Bool	false	False	True	False	True	False		Work feedback
bError	Bool	false	False	True	False	True	False		Error status
bInterlock	Bool	false	False	True	False	True	False		Valve interlocked
▼ IN2	"udtHMI_Valve-Control"		False	True	True	True	True		
iMode	Int	0	False	True	True	True	False		Current mode
iErrorCode	Int	0	False	True	False	True	False		Error code
iStatus	Int	0	False	True	False	True	False		Status for HMI display
bPB_ResetError	Bool	false	False	True	True	True	False		PB Reset block errors
bPB_Home	Bool	false	False	True	True	True	False		PB Move to home in manual mode
bPB_Work	Bool	false	False	True	True	True	False		PB Move to work in manual mode
bPBEN_ResetError	Bool	false	False	True	False	True	False		PB Reset error enabled
bPBEN_Home	Bool	false	False	True	False	True	False		PB Home enabled
bPBEN_Work	Bool	false	False	True	False	True	False		PB Work enabled
bHomeOn	Bool	false	False	True	False	True	False		Home command is on
bWorkOn	Bool	false	False	True	False	True	False		Work command is on
bSignalHome	Bool	false	False	True	False	True	False		Home feedback
bSignalWork	Bool	false	False	True	False	True	False		Work feedback
bError	Bool	false	False	True	False	True	False		Error status
bInterlock	Bool	false	False	True	False	True	False		Valve interlocked
▼ OUT1	"udtHMI_Valve-Control"		False	True	True	True	True		
iMode	Int	0	False	True	True	True	False		Current mode
iErrorCode	Int	0	False	True	False	True	False		Error code
iStatus	Int	0	False	True	False	True	False		Status for HMI display
bPB_ResetError	Bool	false	False	True	True	True	False		PB Reset block errors
bPB_Home	Bool	false	False	True	True	True	False		PB Move to home in manual mode
bPB_Work	Bool	false	False	True	True	True	False		PB Move to work in manual mode
bPBEN_ResetError	Bool	false	False	True	False	True	False		PB Reset error enabled
bPBEN_Home	Bool	false	False	True	False	True	False		PB Home enabled
bPBEN_Work	Bool	false	False	True	False	True	False		PB Work enabled
bHomeOn	Bool	false	False	True	False	True	False		Home command is on
bWorkOn	Bool	false	False	True	False	True	False		Work command is on
bSignalHome	Bool	false	False	True	False	True	False		Home feedback
bSignalWork	Bool	false	False	True	False	True	False		Work feedback
bError	Bool	false	False	True	False	True	False		Error status
bInterlock	Bool	false	False	True	False	True	False		Valve interlocked
▼ OUT2	"udtHMI_Valve-Control"		False	True	True	True	True		
iMode	Int	0	False	True	True	True	False		Current mode
iErrorCode	Int	0	False	True	False	True	False		Error code
iStatus	Int	0	False	True	False	True	False		Status for HMI display
bPB_ResetError	Bool	false	False	True	True	True	False		PB Reset block errors
bPB_Home	Bool	false	False	True	True	True	False		PB Move to home in manual mode
bPB_Work	Bool	false	False	True	True	True	False		PB Move to work in manual mode
bPBEN_ResetError	Bool	false	False	True	False	True	False		PB Reset error enabled
bPBEN_Home	Bool	false	False	True	False	True	False		PB Home enabled
bPBEN_Work	Bool	false	False	True	False	True	False		PB Work enabled
bHomeOn	Bool	false	False	True	False	True	False		Home command is on
bWorkOn	Bool	false	False	True	False	True	False		Work command is on
bSignalHome	Bool	false	False	True	False	True	False		Home feedback
bSignalWork	Bool	false	False	True	False	True	False		Work feedback
bError	Bool	false	False	True	False	True	False		Error status
bInterlock	Bool	false	False	True	False	True	False		Valve interlocked
▼ OUT3	"udtHMI_Valve-Control"		False	True	True	True	True		
iMode	Int	0	False	True	True	True	False		Current mode
iErrorCode	Int	0	False	True	False	True	False		Error code
iStatus	Int	0	False	True	False	True	False		Status for HMI display
bPB_ResetError	Bool	false	False	True	True	True	False		PB Reset block errors
bPB_Home	Bool	false	False	True	True	True	False		PB Move to home in manual mode
bPB_Work	Bool	false	False	True	True	True	False		PB Move to work in manual mode
bPBEN_ResetError	Bool	false	False	True	False	True	False		PB Reset error enabled
bPBEN_Home	Bool	false	False	True	False	True	False		PB Home enabled
bPBEN_Work	Bool	false	False	True	False	True	False		PB Work enabled
bHomeOn	Bool	false	False	True	False	True	False		Home command is on
bWorkOn	Bool	false	False	True	False	True	False		Work command is on
bSignalHome	Bool	false	False	True	False	True	False		Home feedback
bSignalWork	Bool	false	False	True	False	True	False		Work feedback
bError	Bool	false	False	True	False	True	False		Error status

Name	Data type	Start value	Retain	Accessible from HMI/OPC UA/Web API	Writable from HMI/OPC UA/Web API	Visible in HMI engineering	Setpoint	Supervision	Comment
bInterlock	Bool	false	False	True	False	True	False		Valve interlocked

Fabrica / PLC_1 [CPU 1511-1 PN] / Program blocks

FB_Control_Vane [FB1]

FB_Control_Vane Properties							
General							
Name	FB_Control_Vane	**Number**	1	**Type**	FB	**Language**	LAD
Numbering	Automatic						
Information							
Title		**Author**		**Comment**		**Family**	
Version	0.1	**User-defined ID**					

Name	Data type	Default value	Retain	Accessible from HMI/OPC UA/Web API	Writable from HMI/OPC UA/Web API	Visible in HMI engineering	Setpoint	Supervision	Comment
Input									
Output									
InOut									
Static									
PLS_XV21	"fbValve_Solenoid"			True	True	True	True		
Input									
tInTimeout	Time	T#0ms	Non-retain	False	False	False	False		Timeout time for an actuator's feedback to activate before giving a fault
iInMode	Int	0	Non-retain	False	False	False	False		Mode Selection
bInEstop	Bool	false	Non-retain	False	False	False	False		Estop
bInSignalHome	Bool	false	Non-retain	False	False	False	False		Home position feedback
bInSignalWork	Bool	false	Non-retain	False	False	False	False		Work position feedback
bInEnable	Bool	false	Non-retain	False	False	False	False		Home and Work Enabled
bInCommandWork	Bool	false	Non-retain	False	False	False	False		Move to work position in automatic mode
bInResetError	Bool	false	Non-retain	False	False	False	False		Reset Error
bInSimulate	Bool	false	Non-retain	False	False	False	False		Activate device simulation
Output									
bOutCommandHome	Bool	false	Non-retain	False	False	False	False		Home position command
bOutCommandWork	Bool	false	Non-retain	False	False	False	False		Work position command
bOutActiveHome	Bool	false	Non-retain	False	False	False	False		Valve is in home position
bOutActiveWork	Bool	false	Non-retain	False	False	False	False		Valve is in work position
bOutAuto	Bool	false	Non-retain	False	False	False	False		Block in auto mode
bOutError	Bool	false	Non-retain	False	False	False	False		Error exists
ERROR_Valve	"udtError_Valve"		Non-retain	False	False	False	False		Valve error structure
NoHomeFeedback	Bool	false	Non-retain	False	False	False	False		Home position feedback not active
NoWorkFeedback	Bool	false	Non-retain	False	False	False	False		Work position feedback not active
HomeFeedbackStillActive	Bool	false	Non-retain	False	False	False	False		Home position feedback still active
WorkFeedbackStillActive	Bool	false	Non-retain	False	False	False	False		Work position feedback still active
InOut									
HMI_ValveControl	"udtHMI_ValveControl"			False	False	False	False		HMI valve control
Static									
ErrorScroller	"fbErrorScroller"			False	False	False	True		Sub-block to handle error scroller
Input									
bInError01	Bool	false	Set in IDB	False	False	False	False		Error 1 In Error Array
bInError02	Bool	false	Set in IDB	False	False	False	False		Error 2 In Error Array
bInError03	Bool	false	Set in IDB	False	False	False	False		Error 3 In Error Array
bInError04	Bool	false	Set in IDB	False	False	False	False		Error 4 In Error Array
bInError05	Bool	false	Set in IDB	False	False	False	False		Error 5 In Error Array
bInError06	Bool	false	Set in IDB	False	False	False	False		Error 6 In Error Array
bInError07	Bool	false	Set in IDB	False	False	False	False		Error 7 In Error Array
bInError08	Bool	false	Set in IDB	False	False	False	False		Error 8 In Error Array
bInError09	Bool	false	Set in IDB	False	False	False	False		Error 9 In Error Array
bInError10	Bool	false	Set in IDB	False	False	False	False		Error 10 In Error Array
bInError11	Bool	false	Set in IDB	False	False	False	False		Error 11 In Error Array
bInError12	Bool	false	Set in IDB	False	False	False	False		Error 12 In Error Array
bInError13	Bool	false	Set in IDB	False	False	False	False		Error 13 In Error Array
bInError14	Bool	false	Set in IDB	False	False	False	False		Error 14 In Error Array
bInError15	Bool	false	Set in IDB	False	False	False	False		Error 15 In Error Array
bInError16	Bool	false	Set in IDB	False	False	False	False		Error 16 In Error Array
bInError17	Bool	false	Set in IDB	False	False	False	False		Error 17 In Error Array
bInError18	Bool	false	Set in IDB	False	False	False	False		Error 18 In Error Array
bInError19	Bool	false	Set in IDB	False	False	False	False		Error 19 In Error Array
bInError20	Bool	false	Set in IDB	False	False	False	False		Error 20 In Error Array

Name	Data type	Default value	Retain	Accessible from HMI/OPC UA/Web API	Writable from HMI/OPC UA/Web API	Visible in HMI engineering	Setpoint	Supervision	Comment
bInError21	Bool	false	Set in IDB	False	False	False	False		Error 21 In Error Array
bInError22	Bool	false	Set in IDB	False	False	False	False		Error 22 In Error Array
bInError23	Bool	false	Set in IDB	False	False	False	False		Error 23 In Error Array
bInError24	Bool	false	Set in IDB	False	False	False	False		Error 24 In Error Array
bInError25	Bool	false	Set in IDB	False	False	False	False		Error 25 In Error Array
bInError26	Bool	false	Set in IDB	False	False	False	False		Error 26 In Error Array
bInError27	Bool	false	Set in IDB	False	False	False	False		Error 27 In Error Array
bInError28	Bool	false	Set in IDB	False	False	False	False		Error 28 In Error Array
bInError29	Bool	false	Set in IDB	False	False	False	False		Error 29 In Error Array
bInError30	Bool	false	Set in IDB	False	False	False	False		Error 30 In Error Array
▼ Output									
bOutErrorExists	Bool	false	Set in IDB	False	False	False	False		An Error Exists
iOutScrollingErrorNumber	Int	0	Set in IDB	False	False	False	False		Current Index when scrolling through errors
InOut									
▼ Static									
▼ TON_ErrorDelay	TON_TIME		Non-retain	False	False	False	True		Delay between each scroll for a new error
PT	Time	T#0ms	Non-retain	False	False	False	False		
ET	Time	T#0ms	Non-retain	False	False	False	False		
IN	Bool	false	Non-retain	False	False	False	False		
Q	Bool	false	Non-retain	False	False	False	False		
▼ abErrors	Array[1..30] of Bool		Set in IDB	False	False	False	False		
abErrors[1]	Bool	false	Set in IDB	False	False	False	False		
abErrors[2]	Bool	false	Set in IDB	False	False	False	False		
abErrors[3]	Bool	false	Set in IDB	False	False	False	False		
abErrors[4]	Bool	false	Set in IDB	False	False	False	False		
abErrors[5]	Bool	false	Set in IDB	False	False	False	False		
abErrors[6]	Bool	false	Set in IDB	False	False	False	False		
abErrors[7]	Bool	false	Set in IDB	False	False	False	False		
abErrors[8]	Bool	false	Set in IDB	False	False	False	False		
abErrors[9]	Bool	false	Set in IDB	False	False	False	False		
abErrors[10]	Bool	false	Set in IDB	False	False	False	False		
abErrors[11]	Bool	false	Set in IDB	False	False	False	False		
abErrors[12]	Bool	false	Set in IDB	False	False	False	False		
abErrors[13]	Bool	false	Set in IDB	False	False	False	False		
abErrors[14]	Bool	false	Set in IDB	False	False	False	False		
abErrors[15]	Bool	false	Set in IDB	False	False	False	False		
abErrors[16]	Bool	false	Set in IDB	False	False	False	False		
abErrors[17]	Bool	false	Set in IDB	False	False	False	False		
abErrors[18]	Bool	false	Set in IDB	False	False	False	False		
abErrors[19]	Bool	false	Set in IDB	False	False	False	False		
abErrors[20]	Bool	false	Set in IDB	False	False	False	False		
abErrors[21]	Bool	false	Set in IDB	False	False	False	False		
abErrors[22]	Bool	false	Set in IDB	False	False	False	False		
abErrors[23]	Bool	false	Set in IDB	False	False	False	False		
abErrors[24]	Bool	false	Set in IDB	False	False	False	False		
abErrors[25]	Bool	false	Set in IDB	False	False	False	False		
abErrors[26]	Bool	false	Set in IDB	False	False	False	False		
abErrors[27]	Bool	false	Set in IDB	False	False	False	False		
abErrors[28]	Bool	false	Set in IDB	False	False	False	False		
abErrors[29]	Bool	false	Set in IDB	False	False	False	False		
abErrors[30]	Bool	false	Set in IDB	False	False	False	False		
iNextScrollNum	Int	1	Non-retain	False	False	False	False		Index of next error position
iErrorsScrollNum	Int	1	Non-retain	False	False	False	False		Index of current error position
bScrolling	Bool	false	Non-retain	False	False	False	False		Indicates we are scrolling
bTON_ErrorDelay	Bool	false	Non-retain	False	False	False	False		
▼ TON_TimeOut	TON_TIME		Non-retain	False	False	False	True		Timer for Error Timeout
PT	Time	T#0ms	Non-retain	False	False	False	False		
ET	Time	T#0ms	Non-retain	False	False	False	False		
IN	Bool	false	Non-retain	False	False	False	False		
Q	Bool	false	Non-retain	False	False	False	False		
iLastMode	Int	0	Non-retain	False	False	False	False		Last mode code
bNewMode	Bool	false	Non-retain	False	False	False	False		New mode selected
bEnableHome	Bool	false	Non-retain	False	False	False	False		Home position enabled
bEnableWork	Bool	false	Non-retain	False	False	False	False		Work position enabled
bAutoMode	Bool	false	Non-retain	False	False	False	False		Auto Mode is active
bManualMode	Bool	false	Non-retain	False	False	False	False		Manual Mode is active
bReset	Bool	false	Non-retain	False	False	False	False		
bTON_TimeOut	Bool	false	Non-retain	False	False	False	False		
bPB_Home	Bool	false	Non-retain	False	False	False	False		

Name	Data type	Default value	Retain	Accessible from HMI/OPC UA/Web API	Writable from HMI/OPC UA/Web API	Visible in HMI engineering	Setpoint	Supervision	Comment
bPB_Work	Bool	false	Non-retain	False	False	False	False		
bPB_ResetError	Bool	false	Non-retain	False	False	False	False		
▼ PLS_XV22	"fbValve_Solenoid"			True	True	True	True		
▼ Input									
tInTimeout	Time	T#0ms	Non-retain	False	False	False	False		Timeout time for an actuator's feedback to activate before giving a fault
iInMode	Int	0	Non-retain	False	False	False	False		Mode Selection
bInEstop	Bool	false	Non-retain	False	False	False	False		Estop
bInSignalHome	Bool	false	Non-retain	False	False	False	False		Home position feedback
bInSignalWork	Bool	false	Non-retain	False	False	False	False		Work position feedback
bInEnable	Bool	false	Non-retain	False	False	False	False		Home and Work Enabled
bInCommandWork	Bool	false	Non-retain	False	False	False	False		Move to work position in automatic mode
bInResetError	Bool	false	Non-retain	False	False	False	False		Reset Error
bInSimulate	Bool	false	Non-retain	False	False	False	False		Activate device simulation
▼ Output									
bOutCommandHome	Bool	false	Non-retain	False	False	False	False		Home position command
bOutCommandWork	Bool	false	Non-retain	False	False	False	False		Work position command
bOutActiveHome	Bool	false	Non-retain	False	False	False	False		Valve is in home position
bOutActiveWork	Bool	false	Non-retain	False	False	False	False		Valve is in work position
bOutAuto	Bool	false	Non-retain	False	False	False	False		Block in auto mode
bOutError	Bool	false	Non-retain	False	False	False	False		Error exists
▼ ERROR_Valve	"udtError_Valve"		Non-retain	False	False	False	False		Valve error structure
NoHomeFeedback	Bool	false	Non-retain	False	False	False	False		Home position feedback not active
NoWorkFeedback	Bool	false	Non-retain	False	False	False	False		Work position feedback not active
HomeFeedbackStillActive	Bool	false	Non-retain	False	False	False	False		Home position feedback still active
WorkFeedbackStillActive	Bool	false	Non-retain	False	False	False	False		Work position feedback still active
▼ InOut									
HMI_ValveControl	"udtHMI_ValveControl"			False	False	False	False		HMI valve control
▼ Static									
▼ ErrorScroller	"fbErrorScroller"			False	False	False	True		Sub-block to handle error scroller
▼ Input									
bInError01	Bool	false	Set in IDB	False	False	False	False		Error 1 In Error Array
bInError02	Bool	false	Set in IDB	False	False	False	False		Error 2 In Error Array
bInError03	Bool	false	Set in IDB	False	False	False	False		Error 3 In Error Array
bInError04	Bool	false	Set in IDB	False	False	False	False		Error 4 In Error Array
bInError05	Bool	false	Set in IDB	False	False	False	False		Error 5 In Error Array
bInError06	Bool	false	Set in IDB	False	False	False	False		Error 6 In Error Array
bInError07	Bool	false	Set in IDB	False	False	False	False		Error 7 In Error Array
bInError08	Bool	false	Set in IDB	False	False	False	False		Error 8 In Error Array
bInError09	Bool	false	Set in IDB	False	False	False	False		Error 9 In Error Array
bInError10	Bool	false	Set in IDB	False	False	False	False		Error 10 In Error Array
bInError11	Bool	false	Set in IDB	False	False	False	False		Error 11 In Error Array
bInError12	Bool	false	Set in IDB	False	False	False	False		Error 12 In Error Array
bInError13	Bool	false	Set in IDB	False	False	False	False		Error 13 In Error Array
bInError14	Bool	false	Set in IDB	False	False	False	False		Error 14 In Error Array
bInError15	Bool	false	Set in IDB	False	False	False	False		Error 15 In Error Array
bInError16	Bool	false	Set in IDB	False	False	False	False		Error 16 In Error Array
bInError17	Bool	false	Set in IDB	False	False	False	False		Error 17 In Error Array
bInError18	Bool	false	Set in IDB	False	False	False	False		Error 18 In Error Array
bInError19	Bool	false	Set in IDB	False	False	False	False		Error 19 In Error Array
bInError20	Bool	false	Set in IDB	False	False	False	False		Error 20 In Error Array
bInError21	Bool	false	Set in IDB	False	False	False	False		Error 21 In Error Array
bInError22	Bool	false	Set in IDB	False	False	False	False		Error 22 In Error Array
bInError23	Bool	false	Set in IDB	False	False	False	False		Error 23 In Error Array
bInError24	Bool	false	Set in IDB	False	False	False	False		Error 24 In Error Array
bInError25	Bool	false	Set in IDB	False	False	False	False		Error 25 In Error Array
bInError26	Bool	false	Set in IDB	False	False	False	False		Error 26 In Error Array
bInError27	Bool	false	Set in IDB	False	False	False	False		Error 27 In Error Array
bInError28	Bool	false	Set in IDB	False	False	False	False		Error 28 In Error Array
bInError29	Bool	false	Set in IDB	False	False	False	False		Error 29 In Error Array
bInError30	Bool	false	Set in IDB	False	False	False	False		Error 30 In Error Array
▼ Output									
bOutErrorExists	Bool	false	Set in IDB	False	False	False	False		An Error Exists
iOutScrollingErrorNumber	Int	0	Set in IDB	False	False	False	False		Current Index when scrolling through errors

Name	Data type	Default value	Retain	Accessible from HMI/OPC UA/Web API	Writable from HMI/OPC UA/Web API	Visible in HMI engineering	Setpoint	Supervision	Comment
InOut									
▼ Static									
▼ TON_ErrorDelay	TON_TIME		Non-retain	False	False	False	True		Delay between each scroll for a new error
PT	Time	T#0ms	Non-retain	False	False	False	False		
ET	Time	T#0ms	Non-retain	False	False	False	False		
IN	Bool	false	Non-retain	False	False	False	False		
Q	Bool	false	Non-retain	False	False	False	False		
▼ abErrors	Array[1..30] of Bool		Set in IDB	False	False	False	False		
abErrors[1]	Bool	false	Set in IDB	False	False	False	False		
abErrors[2]	Bool	false	Set in IDB	False	False	False	False		
abErrors[3]	Bool	false	Set in IDB	False	False	False	False		
abErrors[4]	Bool	false	Set in IDB	False	False	False	False		
abErrors[5]	Bool	false	Set in IDB	False	False	False	False		
abErrors[6]	Bool	false	Set in IDB	False	False	False	False		
abErrors[7]	Bool	false	Set in IDB	False	False	False	False		
abErrors[8]	Bool	false	Set in IDB	False	False	False	False		
abErrors[9]	Bool	false	Set in IDB	False	False	False	False		
abErrors[10]	Bool	false	Set in IDB	False	False	False	False		
abErrors[11]	Bool	false	Set in IDB	False	False	False	False		
abErrors[12]	Bool	false	Set in IDB	False	False	False	False		
abErrors[13]	Bool	false	Set in IDB	False	False	False	False		
abErrors[14]	Bool	false	Set in IDB	False	False	False	False		
abErrors[15]	Bool	false	Set in IDB	False	False	False	False		
abErrors[16]	Bool	false	Set in IDB	False	False	False	False		
abErrors[17]	Bool	false	Set in IDB	False	False	False	False		
abErrors[18]	Bool	false	Set in IDB	False	False	False	False		
abErrors[19]	Bool	false	Set in IDB	False	False	False	False		
abErrors[20]	Bool	false	Set in IDB	False	False	False	False		
abErrors[21]	Bool	false	Set in IDB	False	False	False	False		
abErrors[22]	Bool	false	Set in IDB	False	False	False	False		
abErrors[23]	Bool	false	Set in IDB	False	False	False	False		
abErrors[24]	Bool	false	Set in IDB	False	False	False	False		
abErrors[25]	Bool	false	Set in IDB	False	False	False	False		
abErrors[26]	Bool	false	Set in IDB	False	False	False	False		
abErrors[27]	Bool	false	Set in IDB	False	False	False	False		
abErrors[28]	Bool	false	Set in IDB	False	False	False	False		
abErrors[29]	Bool	false	Set in IDB	False	False	False	False		
abErrors[30]	Bool	false	Set in IDB	False	False	False	False		
iNextScrollNum	Int	1	Non-retain	False	False	False	False		Index of next error position
iErrorsScrollNum	Int	1	Non-retain	False	False	False	False		Index of current error position
bScrolling	Bool	false	Non-retain	False	False	False	False		Indicates we are scrolling
bTON_ErrorDelay	Bool	false	Non-retain	False	False	False	False		
▼ TON_TimeOut	TON_TIME		Non-retain	False	False	False	True		Timer for Error Timeout
PT	Time	T#0ms	Non-retain	False	False	False	False		
ET	Time	T#0ms	Non-retain	False	False	False	False		
IN	Bool	false	Non-retain	False	False	False	False		
Q	Bool	false	Non-retain	False	False	False	False		
iLastMode	Int	0	Non-retain	False	False	False	False		Last mode code
bNewMode	Bool	false	Non-retain	False	False	False	False		New mode selected
bEnableHome	Bool	false	Non-retain	False	False	False	False		Home position enabled
bEnableWork	Bool	false	Non-retain	False	False	False	False		Work position enabled
bAutoMode	Bool	false	Non-retain	False	False	False	False		Auto Mode is active
bManualMode	Bool	false	Non-retain	False	False	False	False		Manual Mode is active
bReset	Bool	false	Non-retain	False	False	False	False		
bTON_TimeOut	Bool	false	Non-retain	False	False	False	False		
bPB_Home	Bool	false	Non-retain	False	False	False	False		
bPB_Work	Bool	false	Non-retain	False	False	False	False		
bPB_ResetError	Bool	false	Non-retain	False	False	False	False		
▼ PLS_XV91	"fbValve_Solenoid"			True	True	True	True		
▼ Input									
tInTimeout	Time	T#0ms	Non-retain	False	False	False	False		Timeout time for an actuator's feedback to activate before giving a fault
iInMode	Int	0	Non-retain	False	False	False	False		Mode Selection
bInEstop	Bool	false	Non-retain	False	False	False	False		Estop
bInSignalHome	Bool	false	Non-retain	False	False	False	False		Home position feedback
bInSignalWork	Bool	false	Non-retain	False	False	False	False		Work position feedback
bInEnable	Bool	false	Non-retain	False	False	False	False		Home and Work Enabled
bInCommandWork	Bool	false	Non-retain	False	False	False	False		Move to work position in automatic mode

Name	Data type	Default value	Retain	Accessible from HMI/OPC UA/Web API	Writable from HMI/OPC UA/Web API	Visible in HMI engineering	Setpoint	Supervision	Comment
bInResetError	Bool	false	Non-retain	False	False	False	False		Reset Error
bInSimulate	Bool	false	Non-retain	False	False	False	False		Activate device simulation
Output									
bOutCommandHome	Bool	false	Non-retain	False	False	False	False		Home position command
bOutCommandWork	Bool	false	Non-retain	False	False	False	False		Work position command
bOutActiveHome	Bool	false	Non-retain	False	False	False	False		Valve is in home position
bOutActiveWork	Bool	false	Non-retain	False	False	False	False		Valve is in work position
bOutAuto	Bool	false	Non-retain	False	False	False	False		Block in auto mode
bOutError	Bool	false	Non-retain	False	False	False	False		Error exists
ERROR_Valve	"udtError_Valve"		Non-retain	False	False	False	False		Valve error structure
NoHomeFeedback	Bool	false	Non-retain	False	False	False	False		Home position feedback not active
NoWorkFeedback	Bool	false	Non-retain	False	False	False	False		Work position feedback not active
HomeFeedbackStillActive	Bool	false	Non-retain	False	False	False	False		Home position feedback still active
WorkFeedbackStillActive	Bool	false	Non-retain	False	False	False	False		Work position feedback still active
InOut									
HMI_ValveControl	"udtHMI_ValveControl"			False	False	False	False		HMI valve control
Static									
ErrorScroller	"fbErrorScroller"			False	False	False	True		Sub-block to handle error scroller
Input									
bInError01	Bool	false	Set in IDB	False	False	False	False		Error 1 In Error Array
bInError02	Bool	false	Set in IDB	False	False	False	False		Error 2 In Error Array
bInError03	Bool	false	Set in IDB	False	False	False	False		Error 3 In Error Array
bInError04	Bool	false	Set in IDB	False	False	False	False		Error 4 In Error Array
bInError05	Bool	false	Set in IDB	False	False	False	False		Error 5 In Error Array
bInError06	Bool	false	Set in IDB	False	False	False	False		Error 6 In Error Array
bInError07	Bool	false	Set in IDB	False	False	False	False		Error 7 In Error Array
bInError08	Bool	false	Set in IDB	False	False	False	False		Error 8 In Error Array
bInError09	Bool	false	Set in IDB	False	False	False	False		Error 9 In Error Array
bInError10	Bool	false	Set in IDB	False	False	False	False		Error 10 In Error Array
bInError11	Bool	false	Set in IDB	False	False	False	False		Error 11 In Error Array
bInError12	Bool	false	Set in IDB	False	False	False	False		Error 12 In Error Array
bInError13	Bool	false	Set in IDB	False	False	False	False		Error 13 In Error Array
bInError14	Bool	false	Set in IDB	False	False	False	False		Error 14 In Error Array
bInError15	Bool	false	Set in IDB	False	False	False	False		Error 15 In Error Array
bInError16	Bool	false	Set in IDB	False	False	False	False		Error 16 In Error Array
bInError17	Bool	false	Set in IDB	False	False	False	False		Error 17 In Error Array
bInError18	Bool	false	Set in IDB	False	False	False	False		Error 18 In Error Array
bInError19	Bool	false	Set in IDB	False	False	False	False		Error 19 In Error Array
bInError20	Bool	false	Set in IDB	False	False	False	False		Error 20 In Error Array
bInError21	Bool	false	Set in IDB	False	False	False	False		Error 21 In Error Array
bInError22	Bool	false	Set in IDB	False	False	False	False		Error 22 In Error Array
bInError23	Bool	false	Set in IDB	False	False	False	False		Error 23 In Error Array
bInError24	Bool	false	Set in IDB	False	False	False	False		Error 24 In Error Array
bInError25	Bool	false	Set in IDB	False	False	False	False		Error 25 In Error Array
bInError26	Bool	false	Set in IDB	False	False	False	False		Error 26 In Error Array
bInError27	Bool	false	Set in IDB	False	False	False	False		Error 27 In Error Array
bInError28	Bool	false	Set in IDB	False	False	False	False		Error 28 In Error Array
bInError29	Bool	false	Set in IDB	False	False	False	False		Error 29 In Error Array
bInError30	Bool	false	Set in IDB	False	False	False	False		Error 30 In Error Array
Output									
bOutErrorExists	Bool	false	Set in IDB	False	False	False	False		An Error Exists
iOutScrollingErrorNumber	Int	0	Set in IDB	False	False	False	False		Current Index when scrolling through errors
InOut									
Static									
TON_ErrorDelay	TON_TIME		Non-retain	False	False	False	True		Delay between each scroll for a new error
PT	Time	T#0ms	Non-retain	False	False	False	False		
ET	Time	T#0ms	Non-retain	False	False	False	False		
IN	Bool	false	Non-retain	False	False	False	False		
Q	Bool	false	Non-retain	False	False	False	False		
abErrors	Array[1..30] of Bool		Set in IDB	False	False	False	False		
abErrors[1]	Bool	false	Set in IDB	False	False	False	False		
abErrors[2]	Bool	false	Set in IDB	False	False	False	False		
abErrors[3]	Bool	false	Set in IDB	False	False	False	False		
abErrors[4]	Bool	false	Set in IDB	False	False	False	False		

Name	Data type	Default value	Retain	Accessible from HMI/OPC UA/Web API	Writable from HMI/OPC UA/Web API	Visible in HMI engineering	Setpoint	Supervision	Comment
abErrors[5]	Bool	false	Set in IDB	False	False	False	False		
abErrors[6]	Bool	false	Set in IDB	False	False	False	False		
abErrors[7]	Bool	false	Set in IDB	False	False	False	False		
abErrors[8]	Bool	false	Set in IDB	False	False	False	False		
abErrors[9]	Bool	false	Set in IDB	False	False	False	False		
abErrors[10]	Bool	false	Set in IDB	False	False	False	False		
abErrors[11]	Bool	false	Set in IDB	False	False	False	False		
abErrors[12]	Bool	false	Set in IDB	False	False	False	False		
abErrors[13]	Bool	false	Set in IDB	False	False	False	False		
abErrors[14]	Bool	false	Set in IDB	False	False	False	False		
abErrors[15]	Bool	false	Set in IDB	False	False	False	False		
abErrors[16]	Bool	false	Set in IDB	False	False	False	False		
abErrors[17]	Bool	false	Set in IDB	False	False	False	False		
abErrors[18]	Bool	false	Set in IDB	False	False	False	False		
abErrors[19]	Bool	false	Set in IDB	False	False	False	False		
abErrors[20]	Bool	false	Set in IDB	False	False	False	False		
abErrors[21]	Bool	false	Set in IDB	False	False	False	False		
abErrors[22]	Bool	false	Set in IDB	False	False	False	False		
abErrors[23]	Bool	false	Set in IDB	False	False	False	False		
abErrors[24]	Bool	false	Set in IDB	False	False	False	False		
abErrors[25]	Bool	false	Set in IDB	False	False	False	False		
abErrors[26]	Bool	false	Set in IDB	False	False	False	False		
abErrors[27]	Bool	false	Set in IDB	False	False	False	False		
abErrors[28]	Bool	false	Set in IDB	False	False	False	False		
abErrors[29]	Bool	false	Set in IDB	False	False	False	False		
abErrors[30]	Bool	false	Set in IDB	False	False	False	False		
iNextScrollNum	Int	1	Non-retain	False	False	False	False		Index of next error position
iErrorsScrollNum	Int	1	Non-retain	False	False	False	False		Index of current error position
bScrolling	Bool	false	Non-retain	False	False	False	False		Indicates we are scrolling
bTON_ErrorDelay	Bool	false	Non-retain	False	False	False	False		
▼ TON_TimeOut	TON_TIME		Non-retain	False	False	False	True		Timer for Error Timeout
PT	Time	T#0ms	Non-retain	False	False	False	False		
ET	Time	T#0ms	Non-retain	False	False	False	False		
IN	Bool	false	Non-retain	False	False	False	False		
Q	Bool	false	Non-retain	False	False	False	False		
iLastMode	Int	0	Non-retain	False	False	False	False		Last mode code
bNewMode	Bool	false	Non-retain	False	False	False	False		New mode selected
bEnableHome	Bool	false	Non-retain	False	False	False	False		Home position enabled
bEnableWork	Bool	false	Non-retain	False	False	False	False		Work position enabled
bAutoMode	Bool	false	Non-retain	False	False	False	False		Auto Mode is active
bManualMode	Bool	false	Non-retain	False	False	False	False		Manual Mode is active
bReset	Bool	false	Non-retain	False	False	False	False		
bTON_TimeOut	Bool	false	Non-retain	False	False	False	False		
bPB_Home	Bool	false	Non-retain	False	False	False	False		
bPB_Work	Bool	false	Non-retain	False	False	False	False		
bPB_ResetError	Bool	false	Non-retain	False	False	False	False		
▼ PLS_XV51	"fbValve_Solenoid"			True	True	True	True		
▼ Input									
tInTimeout	Time	T#0ms	Non-retain	False	False	False	False		Timeout time for an actuator's feedback to activate before giving a fault
iInMode	Int	0	Non-retain	False	False	False	False		Mode Selection
bInEstop	Bool	false	Non-retain	False	False	False	False		Estop
bInSignalHome	Bool	false	Non-retain	False	False	False	False		Home position feedback
bInSignalWork	Bool	false	Non-retain	False	False	False	False		Work position feedback
bInEnable	Bool	false	Non-retain	False	False	False	False		Home and Work Enabled
bInCommandWork	Bool	false	Non-retain	False	False	False	False		Move to work position in automatic mode
bInResetError	Bool	false	Non-retain	False	False	False	False		Reset Error
bInSimulate	Bool	false	Non-retain	False	False	False	False		Activate device simulation
▼ Output									
bOutCommandHome	Bool	false	Non-retain	False	False	False	False		Home position command
bOutCommandWork	Bool	false	Non-retain	False	False	False	False		Work position command
bOutActiveHome	Bool	false	Non-retain	False	False	False	False		Valve is in home position
bOutActiveWork	Bool	false	Non-retain	False	False	False	False		Valve is in work position
bOutAuto	Bool	false	Non-retain	False	False	False	False		Block in auto mode
bOutError	Bool	false	Non-retain	False	False	False	False		Error exists
▼ ERROR_Valve	"udtError_Valve"		Non-retain	False	False	False	False		Valve error structure
NoHomeFeedback	Bool	false	Non-retain	False	False	False	False		Home position feedback not active
NoWorkFeedback	Bool	false	Non-retain	False	False	False	False		Work position feedback not active

Name	Data type	Default value	Retain	Accessible from HMI/OPC UA/Web API	Writable from HMI/OPC UA/Web API	Visible in HMI engineering	Setpoint	Supervision	Comment
HomeFeedbackStillActive	Bool	false	Non-retain	False	False	False	False		Home position feedback still active
WorkFeedbackStillActive	Bool	false	Non-retain	False	False	False	False		Work position feedback still active
▼ InOut									
HMI_ValveControl	"udtHMI_ValveControl"			False	False	False	False		HMI valve control
▼ Static									
▼ ErrorScroller	"fbErrorScroller"			False	False	False	True		Sub-block to handle error scroller
▼ Input									
bInError01	Bool	false	Set in IDB	False	False	False	False		Error 1 In Error Array
bInError02	Bool	false	Set in IDB	False	False	False	False		Error 2 In Error Array
bInError03	Bool	false	Set in IDB	False	False	False	False		Error 3 In Error Array
bInError04	Bool	false	Set in IDB	False	False	False	False		Error 4 In Error Array
bInError05	Bool	false	Set in IDB	False	False	False	False		Error 5 In Error Array
bInError06	Bool	false	Set in IDB	False	False	False	False		Error 6 In Error Array
bInError07	Bool	false	Set in IDB	False	False	False	False		Error 7 In Error Array
bInError08	Bool	false	Set in IDB	False	False	False	False		Error 8 In Error Array
bInError09	Bool	false	Set in IDB	False	False	False	False		Error 9 In Error Array
bInError10	Bool	false	Set in IDB	False	False	False	False		Error 10 In Error Array
bInError11	Bool	false	Set in IDB	False	False	False	False		Error 11 In Error Array
bInError12	Bool	false	Set in IDB	False	False	False	False		Error 12 In Error Array
bInError13	Bool	false	Set in IDB	False	False	False	False		Error 13 In Error Array
bInError14	Bool	false	Set in IDB	False	False	False	False		Error 14 In Error Array
bInError15	Bool	false	Set in IDB	False	False	False	False		Error 15 In Error Array
bInError16	Bool	false	Set in IDB	False	False	False	False		Error 16 In Error Array
bInError17	Bool	false	Set in IDB	False	False	False	False		Error 17 In Error Array
bInError18	Bool	false	Set in IDB	False	False	False	False		Error 18 In Error Array
bInError19	Bool	false	Set in IDB	False	False	False	False		Error 19 In Error Array
bInError20	Bool	false	Set in IDB	False	False	False	False		Error 20 In Error Array
bInError21	Bool	false	Set in IDB	False	False	False	False		Error 21 In Error Array
bInError22	Bool	false	Set in IDB	False	False	False	False		Error 22 In Error Array
bInError23	Bool	false	Set in IDB	False	False	False	False		Error 23 In Error Array
bInError24	Bool	false	Set in IDB	False	False	False	False		Error 24 In Error Array
bInError25	Bool	false	Set in IDB	False	False	False	False		Error 25 In Error Array
bInError26	Bool	false	Set in IDB	False	False	False	False		Error 26 In Error Array
bInError27	Bool	false	Set in IDB	False	False	False	False		Error 27 In Error Array
bInError28	Bool	false	Set in IDB	False	False	False	False		Error 28 In Error Array
bInError29	Bool	false	Set in IDB	False	False	False	False		Error 29 In Error Array
bInError30	Bool	false	Set in IDB	False	False	False	False		Error 30 In Error Array
▼ Output									
bOutErrorExists	Bool	false	Set in IDB	False	False	False	False		An Error Exists
iOutScrollingErrorNumber	Int	0	Set in IDB	False	False	False	False		Current Index when scrolling through errors
InOut									
▼ Static									
▼ TON_ErrorDelay	TON_TIME		Non-retain	False	False	False	True		Delay between each scroll for a new error
PT	Time	T#0ms	Non-retain	False	False	False	False		
ET	Time	T#0ms	Non-retain	False	False	False	False		
IN	Bool	false	Non-retain	False	False	False	False		
Q	Bool	false	Non-retain	False	False	False	False		
▼ abErrors	Array[1..30] of Bool		Set in IDB	False	False	False	False		
abErrors[1]	Bool	false	Set in IDB	False	False	False	False		
abErrors[2]	Bool	false	Set in IDB	False	False	False	False		
abErrors[3]	Bool	false	Set in IDB	False	False	False	False		
abErrors[4]	Bool	false	Set in IDB	False	False	False	False		
abErrors[5]	Bool	false	Set in IDB	False	False	False	False		
abErrors[6]	Bool	false	Set in IDB	False	False	False	False		
abErrors[7]	Bool	false	Set in IDB	False	False	False	False		
abErrors[8]	Bool	false	Set in IDB	False	False	False	False		
abErrors[9]	Bool	false	Set in IDB	False	False	False	False		
abErrors[10]	Bool	false	Set in IDB	False	False	False	False		
abErrors[11]	Bool	false	Set in IDB	False	False	False	False		
abErrors[12]	Bool	false	Set in IDB	False	False	False	False		
abErrors[13]	Bool	false	Set in IDB	False	False	False	False		
abErrors[14]	Bool	false	Set in IDB	False	False	False	False		
abErrors[15]	Bool	false	Set in IDB	False	False	False	False		
abErrors[16]	Bool	false	Set in IDB	False	False	False	False		
abErrors[17]	Bool	false	Set in IDB	False	False	False	False		
abErrors[18]	Bool	false	Set in IDB	False	False	False	False		

Name	Data type	Default value	Retain	Accessible from HMI/OPC UA/Web API	Writable from HMI/OPC UA/Web API	Visible in HMI engineering	Setpoint	Supervision	Comment
abErrors[19]	Bool	false	Set in IDB	False	False	False	False		
abErrors[20]	Bool	false	Set in IDB	False	False	False	False		
abErrors[21]	Bool	false	Set in IDB	False	False	False	False		
abErrors[22]	Bool	false	Set in IDB	False	False	False	False		
abErrors[23]	Bool	false	Set in IDB	False	False	False	False		
abErrors[24]	Bool	false	Set in IDB	False	False	False	False		
abErrors[25]	Bool	false	Set in IDB	False	False	False	False		
abErrors[26]	Bool	false	Set in IDB	False	False	False	False		
abErrors[27]	Bool	false	Set in IDB	False	False	False	False		
abErrors[28]	Bool	false	Set in IDB	False	False	False	False		
abErrors[29]	Bool	false	Set in IDB	False	False	False	False		
abErrors[30]	Bool	false	Set in IDB	False	False	False	False		
iNextScrollNum	Int	1	Non-retain	False	False	False	False		Index of next error position
iErrorsScrollNum	Int	1	Non-retain	False	False	False	False		Index of current error position
bScrolling	Bool	false	Non-retain	False	False	False	False		Indicates we are scrolling
bTON_ErrorDelay	Bool	false	Non-retain	False	False	False	False		
▼ TON_TimeOut	TON_TIME		Non-retain	False	False	False	True		Timer for Error Timeout
PT	Time	T#0ms	Non-retain	False	False	False	False		
ET	Time	T#0ms	Non-retain	False	False	False	False		
IN	Bool	false	Non-retain	False	False	False	False		
Q	Bool	false	Non-retain	False	False	False	False		
iLastMode	Int	0	Non-retain	False	False	False	False		Last mode code
bNewMode	Bool	false	Non-retain	False	False	False	False		New mode selected
bEnableHome	Bool	false	Non-retain	False	False	False	False		Home position enabled
bEnableWork	Bool	false	Non-retain	False	False	False	False		Work position enabled
bAutoMode	Bool	false	Non-retain	False	False	False	False		Auto Mode is active
bManualMode	Bool	false	Non-retain	False	False	False	False		Manual Mode is active
bReset	Bool	false	Non-retain	False	False	False	False		
bTON_TimeOut	Bool	false	Non-retain	False	False	False	False		
bPB_Home	Bool	false	Non-retain	False	False	False	False		
bPB_Work	Bool	false	Non-retain	False	False	False	False		
bPB_ResetError	Bool	false	Non-retain	False	False	False	False		
▼ PLS_PCV51	"fbValve_Analog"			True	True	False	True		
▼ Input									
tInTimeout	Time	t#10s	Non-retain	False	False	False	False		Feedback error timeout
iInMode	Int	0	Non-retain	False	False	False	False		Mode Selection
iInEstopFunction	Int	0	Non-retain	False	False	False	False		Enum of E-Stop repsonse (Estop.xxx)
bInEstop	Bool	false	Non-retain	False	False	False	False		Estop
bInEnable	Bool	false	Non-retain	False	False	False	False		Valve is Enabled to Operate
rInSignalCommand	Real	-1.0	Non-retain	False	False	False	False		Actual % open from valve (-1 to disable)
rInAutoCommand	Real	0.0	Non-retain	False	False	False	False		Auto Mode command
bInResetError	Bool	false	Non-retain	False	False	False	False		Reset errors
bInSimulate	Bool	false	Non-retain	False	False	False	False		Activate device simulation
▼ Output									
wOutCommand	Word	16#0	Non-retain	False	False	False	False		Output value for analog write
rOutCommand	Real	0.0	Non-retain	False	False	False	False		Output value
bOutAuto	Bool	false	Non-retain	False	False	False	False		Block in auto Mode
bOutError	Bool	false	Non-retain	False	False	False	False		Error exists
▼ ERROR_AnalogValve	"udtError_AnalogValve"		Non-retain	False	False	False	False		Error structure for analog valve
InvalidFeedback	Bool	false	Non-retain	False	False	False	False		Valve feedback is not within command tolerance
▼ InOut									
HMI_AnalogValveControl	"udtHMI_AnalogValveControl"			False	False	False	False		HMI control structure for analog valve
▼ Static									
▼ TON_Timeout	TON_TIME		Non-retain	False	False	False	True		
PT	Time	T#0ms	Non-retain	False	False	False	False		
ET	Time	T#0ms	Non-retain	False	False	False	False		
IN	Bool	false	Non-retain	False	False	False	False		
Q	Bool	false	Non-retain	False	False	False	False		
▼ ErrorScroller	"fbErrorScroller"			False	False	False	True		
▼ Input									
bInError01	Bool	false	Set in IDB	False	False	False	False		Error 1 In Error Array
bInError02	Bool	false	Set in IDB	False	False	False	False		Error 2 In Error Array
bInError03	Bool	false	Set in IDB	False	False	False	False		Error 3 In Error Array
bInError04	Bool	false	Set in IDB	False	False	False	False		Error 4 In Error Array

Name	Data type	Default value	Retain	Accessible from HMI/OPC UA/Web API	Writable from HMI/OPC UA/Web API	Visible in HMI engineering	Setpoint	Supervision	Comment
bInError05	Bool	false	Set in IDB	False	False	False	False		Error 5 In Error Array
bInError06	Bool	false	Set in IDB	False	False	False	False		Error 6 In Error Array
bInError07	Bool	false	Set in IDB	False	False	False	False		Error 7 In Error Array
bInError08	Bool	false	Set in IDB	False	False	False	False		Error 8 In Error Array
bInError09	Bool	false	Set in IDB	False	False	False	False		Error 9 In Error Array
bInError10	Bool	false	Set in IDB	False	False	False	False		Error 10 In Error Array
bInError11	Bool	false	Set in IDB	False	False	False	False		Error 11 In Error Array
bInError12	Bool	false	Set in IDB	False	False	False	False		Error 12 In Error Array
bInError13	Bool	false	Set in IDB	False	False	False	False		Error 13 In Error Array
bInError14	Bool	false	Set in IDB	False	False	False	False		Error 14 In Error Array
bInError15	Bool	false	Set in IDB	False	False	False	False		Error 15 In Error Array
bInError16	Bool	false	Set in IDB	False	False	False	False		Error 16 In Error Array
bInError17	Bool	false	Set in IDB	False	False	False	False		Error 17 In Error Array
bInError18	Bool	false	Set in IDB	False	False	False	False		Error 18 In Error Array
bInError19	Bool	false	Set in IDB	False	False	False	False		Error 19 In Error Array
bInError20	Bool	false	Set in IDB	False	False	False	False		Error 20 In Error Array
bInError21	Bool	false	Set in IDB	False	False	False	False		Error 21 In Error Array
bInError22	Bool	false	Set in IDB	False	False	False	False		Error 22 In Error Array
bInError23	Bool	false	Set in IDB	False	False	False	False		Error 23 In Error Array
bInError24	Bool	false	Set in IDB	False	False	False	False		Error 24 In Error Array
bInError25	Bool	false	Set in IDB	False	False	False	False		Error 25 In Error Array
bInError26	Bool	false	Set in IDB	False	False	False	False		Error 26 In Error Array
bInError27	Bool	false	Set in IDB	False	False	False	False		Error 27 In Error Array
bInError28	Bool	false	Set in IDB	False	False	False	False		Error 28 In Error Array
bInError29	Bool	false	Set in IDB	False	False	False	False		Error 29 In Error Array
bInError30	Bool	false	Set in IDB	False	False	False	False		Error 30 In Error Array
▼ Output									
bOutErrorExists	Bool	false	Set in IDB	False	False	False	False		An Error Exists
iOutScrollingError-Number	Int	0	Set in IDB	False	False	False	False		Current Index when scrolling through errors
InOut									
▼ Static									
▼ TON_ErrorDelay	TON_TIME		Non-retain	False	False	False	True		Delay between each scroll for a new error
PT	Time	T#0ms	Non-retain	False	False	False	False		
ET	Time	T#0ms	Non-retain	False	False	False	False		
IN	Bool	false	Non-retain	False	False	False	False		
Q	Bool	false	Non-retain	False	False	False	False		
▼ abErrors	Array[1..30] of Bool		Set in IDB	False	False	False	False		
abErrors[1]	Bool	false	Set in IDB	False	False	False	False		
abErrors[2]	Bool	false	Set in IDB	False	False	False	False		
abErrors[3]	Bool	false	Set in IDB	False	False	False	False		
abErrors[4]	Bool	false	Set in IDB	False	False	False	False		
abErrors[5]	Bool	false	Set in IDB	False	False	False	False		
abErrors[6]	Bool	false	Set in IDB	False	False	False	False		
abErrors[7]	Bool	false	Set in IDB	False	False	False	False		
abErrors[8]	Bool	false	Set in IDB	False	False	False	False		
abErrors[9]	Bool	false	Set in IDB	False	False	False	False		
abErrors[10]	Bool	false	Set in IDB	False	False	False	False		
abErrors[11]	Bool	false	Set in IDB	False	False	False	False		
abErrors[12]	Bool	false	Set in IDB	False	False	False	False		
abErrors[13]	Bool	false	Set in IDB	False	False	False	False		
abErrors[14]	Bool	false	Set in IDB	False	False	False	False		
abErrors[15]	Bool	false	Set in IDB	False	False	False	False		
abErrors[16]	Bool	false	Set in IDB	False	False	False	False		
abErrors[17]	Bool	false	Set in IDB	False	False	False	False		
abErrors[18]	Bool	false	Set in IDB	False	False	False	False		
abErrors[19]	Bool	false	Set in IDB	False	False	False	False		
abErrors[20]	Bool	false	Set in IDB	False	False	False	False		
abErrors[21]	Bool	false	Set in IDB	False	False	False	False		
abErrors[22]	Bool	false	Set in IDB	False	False	False	False		
abErrors[23]	Bool	false	Set in IDB	False	False	False	False		
abErrors[24]	Bool	false	Set in IDB	False	False	False	False		
abErrors[25]	Bool	false	Set in IDB	False	False	False	False		
abErrors[26]	Bool	false	Set in IDB	False	False	False	False		
abErrors[27]	Bool	false	Set in IDB	False	False	False	False		
abErrors[28]	Bool	false	Set in IDB	False	False	False	False		
abErrors[29]	Bool	false	Set in IDB	False	False	False	False		
abErrors[30]	Bool	false	Set in IDB	False	False	False	False		
iNextScrollNum	Int	1	Non-retain	False	False	False	False		Index of next error position
iErrorsScrollNum	Int	1	Non-retain	False	False	False	False		Index of current error position

Name	Data type	Default value	Retain	Accessible from HMI/OPC UA/Web API	Writable from HMI/OPC UA/Web API	Visible in HMI engineering	Setpoint	Supervision	Comment
bScrolling	Bool	false	Non-retain	False	False	False	False		Indicates we are scrolling
bTON_ErrorDelay	Bool	false	Non-retain	False	False	False	False		
rValue	Real	0.0	Non-retain	False	False	False	False		
bSignalOutOfTolerance	Bool	false	Non-retain	False	False	False	False		
bReset	Bool	false	Non-retain	False	False	False	False		
bTON_Timeout	Bool	false	Non-retain	False	False	False	False		
bPB_ResetError	Bool	false	Non-retain	False	False	False	False		
▼ PLS_XV81	"fbValve_Solenoid"			True	True	True	True		
▼ Input									
tInTimeout	Time	T#0ms	Non-retain	False	False	False	False		Timeout time for an actuator's feedback to activate before giving a fault
iInMode	Int	0	Non-retain	False	False	False	False		Mode Selection
bInEstop	Bool	false	Non-retain	False	False	False	False		Estop
bInSignalHome	Bool	false	Non-retain	False	False	False	False		Home position feedback
bInSignalWork	Bool	false	Non-retain	False	False	False	False		Work position feedback
bInEnable	Bool	false	Non-retain	False	False	False	False		Home and Work Enabled
bInCommandWork	Bool	false	Non-retain	False	False	False	False		Move to work position in automatic mode
bInResetError	Bool	false	Non-retain	False	False	False	False		Reset Error
bInSimulate	Bool	false	Non-retain	False	False	False	False		Activate device simulation
▼ Output									
bOutCommandHome	Bool	false	Non-retain	False	False	False	False		Home position command
bOutCommandWork	Bool	false	Non-retain	False	False	False	False		Work position command
bOutActiveHome	Bool	false	Non-retain	False	False	False	False		Valve is in home position
bOutActiveWork	Bool	false	Non-retain	False	False	False	False		Valve is in work position
bOutAuto	Bool	false	Non-retain	False	False	False	False		Block in auto mode
bOutError	Bool	false	Non-retain	False	False	False	False		Error exists
▼ ERROR_Valve	"udtError_Valve"		Non-retain	False	False	False	False		Valve error structure
NoHomeFeedback	Bool	false	Non-retain	False	False	False	False		Home position feedback not active
NoWorkFeedback	Bool	false	Non-retain	False	False	False	False		Work position feedback not active
HomeFeedbackStillActive	Bool	false	Non-retain	False	False	False	False		Home position feedback still active
WorkFeedbackStillActive	Bool	false	Non-retain	False	False	False	False		Work position feedback still active
▼ InOut									
HMI_ValveControl	"udtHMI_ValveControl"			False	False	False	False		HMI valve control
▼ Static									
▼ ErrorScroller	"fbErrorScroller"			False	False	False	True		Sub-block to handle error scroller
▼ Input									
bInError01	Bool	false	Set in IDB	False	False	False	False		Error 1 In Error Array
bInError02	Bool	false	Set in IDB	False	False	False	False		Error 2 In Error Array
bInError03	Bool	false	Set in IDB	False	False	False	False		Error 3 In Error Array
bInError04	Bool	false	Set in IDB	False	False	False	False		Error 4 In Error Array
bInError05	Bool	false	Set in IDB	False	False	False	False		Error 5 In Error Array
bInError06	Bool	false	Set in IDB	False	False	False	False		Error 6 In Error Array
bInError07	Bool	false	Set in IDB	False	False	False	False		Error 7 In Error Array
bInError08	Bool	false	Set in IDB	False	False	False	False		Error 8 In Error Array
bInError09	Bool	false	Set in IDB	False	False	False	False		Error 9 In Error Array
bInError10	Bool	false	Set in IDB	False	False	False	False		Error 10 In Error Array
bInError11	Bool	false	Set in IDB	False	False	False	False		Error 11 In Error Array
bInError12	Bool	false	Set in IDB	False	False	False	False		Error 12 In Error Array
bInError13	Bool	false	Set in IDB	False	False	False	False		Error 13 In Error Array
bInError14	Bool	false	Set in IDB	False	False	False	False		Error 14 In Error Array
bInError15	Bool	false	Set in IDB	False	False	False	False		Error 15 In Error Array
bInError16	Bool	false	Set in IDB	False	False	False	False		Error 16 In Error Array
bInError17	Bool	false	Set in IDB	False	False	False	False		Error 17 In Error Array
bInError18	Bool	false	Set in IDB	False	False	False	False		Error 18 In Error Array
bInError19	Bool	false	Set in IDB	False	False	False	False		Error 19 In Error Array
bInError20	Bool	false	Set in IDB	False	False	False	False		Error 20 In Error Array
bInError21	Bool	false	Set in IDB	False	False	False	False		Error 21 In Error Array
bInError22	Bool	false	Set in IDB	False	False	False	False		Error 22 In Error Array
bInError23	Bool	false	Set in IDB	False	False	False	False		Error 23 In Error Array
bInError24	Bool	false	Set in IDB	False	False	False	False		Error 24 In Error Array
bInError25	Bool	false	Set in IDB	False	False	False	False		Error 25 In Error Array
bInError26	Bool	false	Set in IDB	False	False	False	False		Error 26 In Error Array
bInError27	Bool	false	Set in IDB	False	False	False	False		Error 27 In Error Array
bInError28	Bool	false	Set in IDB	False	False	False	False		Error 28 In Error Array
bInError29	Bool	false	Set in IDB	False	False	False	False		Error 29 In Error Array

Name	Data type	Default value	Retain	Accessible from HMI/OPC UA/Web API	Writable from HMI/OPC UA/Web API	Visible in HMI engineering	Setpoint	Supervision	Comment
bInError30	Bool	false	Set in IDB	False	False	False	False		Error 30 In Error Array
▼ Output									
bOutErrorExists	Bool	false	Set in IDB	False	False	False	False		An Error Exists
iOutScrollingErrorNumber	Int	0	Set in IDB	False	False	False	False		Current Index when scrolling through errors
InOut									
▼ Static									
▼ TON_ErrorDelay	TON_TIME		Non-retain	False	False	False	True		Delay between each scroll for a new error
PT	Time	T#0ms	Non-retain	False	False	False	False		
ET	Time	T#0ms	Non-retain	False	False	False	False		
IN	Bool	false	Non-retain	False	False	False	False		
Q	Bool	false	Non-retain	False	False	False	False		
▼ abErrors	Array[1..30] of Bool		Set in IDB	False	False	False	False		
abErrors[1]	Bool	false	Set in IDB	False	False	False	False		
abErrors[2]	Bool	false	Set in IDB	False	False	False	False		
abErrors[3]	Bool	false	Set in IDB	False	False	False	False		
abErrors[4]	Bool	false	Set in IDB	False	False	False	False		
abErrors[5]	Bool	false	Set in IDB	False	False	False	False		
abErrors[6]	Bool	false	Set in IDB	False	False	False	False		
abErrors[7]	Bool	false	Set in IDB	False	False	False	False		
abErrors[8]	Bool	false	Set in IDB	False	False	False	False		
abErrors[9]	Bool	false	Set in IDB	False	False	False	False		
abErrors[10]	Bool	false	Set in IDB	False	False	False	False		
abErrors[11]	Bool	false	Set in IDB	False	False	False	False		
abErrors[12]	Bool	false	Set in IDB	False	False	False	False		
abErrors[13]	Bool	false	Set in IDB	False	False	False	False		
abErrors[14]	Bool	false	Set in IDB	False	False	False	False		
abErrors[15]	Bool	false	Set in IDB	False	False	False	False		
abErrors[16]	Bool	false	Set in IDB	False	False	False	False		
abErrors[17]	Bool	false	Set in IDB	False	False	False	False		
abErrors[18]	Bool	false	Set in IDB	False	False	False	False		
abErrors[19]	Bool	false	Set in IDB	False	False	False	False		
abErrors[20]	Bool	false	Set in IDB	False	False	False	False		
abErrors[21]	Bool	false	Set in IDB	False	False	False	False		
abErrors[22]	Bool	false	Set in IDB	False	False	False	False		
abErrors[23]	Bool	false	Set in IDB	False	False	False	False		
abErrors[24]	Bool	false	Set in IDB	False	False	False	False		
abErrors[25]	Bool	false	Set in IDB	False	False	False	False		
abErrors[26]	Bool	false	Set in IDB	False	False	False	False		
abErrors[27]	Bool	false	Set in IDB	False	False	False	False		
abErrors[28]	Bool	false	Set in IDB	False	False	False	False		
abErrors[29]	Bool	false	Set in IDB	False	False	False	False		
abErrors[30]	Bool	false	Set in IDB	False	False	False	False		
iNextScrollNum	Int	1	Non-retain	False	False	False	False		Index of next error position
iErrorsScrollNum	Int	1	Non-retain	False	False	False	False		Index of current error position
bScrolling	Bool	false	Non-retain	False	False	False	False		Indicates we are scrolling
bTON_ErrorDelay	Bool	false	Non-retain	False	False	False	False		
▼ TON_TimeOut	TON_TIME		Non-retain	False	False	False	True		Timer for Error Timeout
PT	Time	T#0ms	Non-retain	False	False	False	False		
ET	Time	T#0ms	Non-retain	False	False	False	False		
IN	Bool	false	Non-retain	False	False	False	False		
Q	Bool	false	Non-retain	False	False	False	False		
iLastMode	Int	0	Non-retain	False	False	False	False		Last mode code
bNewMode	Bool	false	Non-retain	False	False	False	False		New mode selected
bEnableHome	Bool	false	Non-retain	False	False	False	False		Home position enabled
bEnableWork	Bool	false	Non-retain	False	False	False	False		Work position enabled
bAutoMode	Bool	false	Non-retain	False	False	False	False		Auto Mode is active
bManualMode	Bool	false	Non-retain	False	False	False	False		Manual Mode is active
bReset	Bool	false	Non-retain	False	False	False	False		
bTON_TimeOut	Bool	false	Non-retain	False	False	False	False		
bPB_Home	Bool	false	Non-retain	False	False	False	False		
bPB_Work	Bool	false	Non-retain	False	False	False	False		
bPB_ResetError	Bool	false	Non-retain	False	False	False	False		
▼ PRS_XV21	"fbValve_Solenoid"			True	True	True	True		
▼ Input									
tInTimeout	Time	T#0ms	Non-retain	False	False	False	False		Timeout time for an actuator's feedback to activate before giving a fault
iInMode	Int	0	Non-retain	False	False	False	False		Mode Selection
bInEstop	Bool	false	Non-retain	False	False	False	False		Estop

Name	Data type	Default value	Retain	Accessible from HMI/OPC UA/Web API	Writable from HMI/OPC UA/Web API	Visible in HMI engineering	Setpoint	Supervision	Comment
bInSignalHome	Bool	false	Non-retain	False	False	False	False		Home position feedback
bInSignalWork	Bool	false	Non-retain	False	False	False	False		Work position feedback
bInEnable	Bool	false	Non-retain	False	False	False	False		Home and Work Enabled
bInCommandWork	Bool	false	Non-retain	False	False	False	False		Move to work position in automatic mode
bInResetError	Bool	false	Non-retain	False	False	False	False		Reset Error
bInSimulate	Bool	false	Non-retain	False	False	False	False		Activate device simulation
▼ Output									
bOutCommandHome	Bool	false	Non-retain	False	False	False	False		Home position command
bOutCommandWork	Bool	false	Non-retain	False	False	False	False		Work position command
bOutActiveHome	Bool	false	Non-retain	False	False	False	False		Valve is in home position
bOutActiveWork	Bool	false	Non-retain	False	False	False	False		Valve is in work position
bOutAuto	Bool	false	Non-retain	False	False	False	False		Block in auto mode
bOutError	Bool	false	Non-retain	False	False	False	False		Error exists
▼ ERROR_Valve	"udtError_Valve"		Non-retain	False	False	False	False		Valve error structure
NoHomeFeedback	Bool	false	Non-retain	False	False	False	False		Home position feedback not active
NoWorkFeedback	Bool	false	Non-retain	False	False	False	False		Work position feedback not active
HomeFeedbackStillActive	Bool	false	Non-retain	False	False	False	False		Home position feedback still active
WorkFeedbackStillActive	Bool	false	Non-retain	False	False	False	False		Work position feedback still active
▼ InOut									
HMI_ValveControl	"udtHMI_ValveControl"			False	False	False	False		HMI valve control
▼ Static									
▼ ErrorScroller	"fbErrorScroller"			False	False	False	True		Sub-block to handle error scroller
▼ Input									
bInError01	Bool	false	Set in IDB	False	False	False	False		Error 1 In Error Array
bInError02	Bool	false	Set in IDB	False	False	False	False		Error 2 In Error Array
bInError03	Bool	false	Set in IDB	False	False	False	False		Error 3 In Error Array
bInError04	Bool	false	Set in IDB	False	False	False	False		Error 4 In Error Array
bInError05	Bool	false	Set in IDB	False	False	False	False		Error 5 In Error Array
bInError06	Bool	false	Set in IDB	False	False	False	False		Error 6 In Error Array
bInError07	Bool	false	Set in IDB	False	False	False	False		Error 7 In Error Array
bInError08	Bool	false	Set in IDB	False	False	False	False		Error 8 In Error Array
bInError09	Bool	false	Set in IDB	False	False	False	False		Error 9 In Error Array
bInError10	Bool	false	Set in IDB	False	False	False	False		Error 10 In Error Array
bInError11	Bool	false	Set in IDB	False	False	False	False		Error 11 In Error Array
bInError12	Bool	false	Set in IDB	False	False	False	False		Error 12 In Error Array
bInError13	Bool	false	Set in IDB	False	False	False	False		Error 13 In Error Array
bInError14	Bool	false	Set in IDB	False	False	False	False		Error 14 In Error Array
bInError15	Bool	false	Set in IDB	False	False	False	False		Error 15 In Error Array
bInError16	Bool	false	Set in IDB	False	False	False	False		Error 16 In Error Array
bInError17	Bool	false	Set in IDB	False	False	False	False		Error 17 In Error Array
bInError18	Bool	false	Set in IDB	False	False	False	False		Error 18 In Error Array
bInError19	Bool	false	Set in IDB	False	False	False	False		Error 19 In Error Array
bInError20	Bool	false	Set in IDB	False	False	False	False		Error 20 In Error Array
bInError21	Bool	false	Set in IDB	False	False	False	False		Error 21 In Error Array
bInError22	Bool	false	Set in IDB	False	False	False	False		Error 22 In Error Array
bInError23	Bool	false	Set in IDB	False	False	False	False		Error 23 In Error Array
bInError24	Bool	false	Set in IDB	False	False	False	False		Error 24 In Error Array
bInError25	Bool	false	Set in IDB	False	False	False	False		Error 25 In Error Array
bInError26	Bool	false	Set in IDB	False	False	False	False		Error 26 In Error Array
bInError27	Bool	false	Set in IDB	False	False	False	False		Error 27 In Error Array
bInError28	Bool	false	Set in IDB	False	False	False	False		Error 28 In Error Array
bInError29	Bool	false	Set in IDB	False	False	False	False		Error 29 In Error Array
bInError30	Bool	false	Set in IDB	False	False	False	False		Error 30 In Error Array
▼ Output									
bOutErrorExists	Bool	false	Set in IDB	False	False	False	False		An Error Exists
iOutScrollingErrorNumber	Int	0	Set in IDB	False	False	False	False		Current Index when scrolling through errors
InOut									
▼ Static									
▼ TON_ErrorDelay	TON_TIME		Non-retain	False	False	False	True		Delay between each scroll for a new error
PT	Time	T#0ms	Non-retain	False	False	False	False		
ET	Time	T#0ms	Non-retain	False	False	False	False		
IN	Bool	false	Non-retain	False	False	False	False		
Q	Bool	false	Non-retain	False	False	False	False		
▼ abErrors	Array[1..30] of Bool		Set in IDB	False	False	False	False		

Name	Data type	Default value	Retain	Accessible from HMI/OPC UA/Web API	Writable from HMI/OPC UA/Web API	Visible in HMI engineering	Setpoint	Supervision	Comment
abErrors[1]	Bool	false	Set in IDB	False	False	False	False		
abErrors[2]	Bool	false	Set in IDB	False	False	False	False		
abErrors[3]	Bool	false	Set in IDB	False	False	False	False		
abErrors[4]	Bool	false	Set in IDB	False	False	False	False		
abErrors[5]	Bool	false	Set in IDB	False	False	False	False		
abErrors[6]	Bool	false	Set in IDB	False	False	False	False		
abErrors[7]	Bool	false	Set in IDB	False	False	False	False		
abErrors[8]	Bool	false	Set in IDB	False	False	False	False		
abErrors[9]	Bool	false	Set in IDB	False	False	False	False		
abErrors[10]	Bool	false	Set in IDB	False	False	False	False		
abErrors[11]	Bool	false	Set in IDB	False	False	False	False		
abErrors[12]	Bool	false	Set in IDB	False	False	False	False		
abErrors[13]	Bool	false	Set in IDB	False	False	False	False		
abErrors[14]	Bool	false	Set in IDB	False	False	False	False		
abErrors[15]	Bool	false	Set in IDB	False	False	False	False		
abErrors[16]	Bool	false	Set in IDB	False	False	False	False		
abErrors[17]	Bool	false	Set in IDB	False	False	False	False		
abErrors[18]	Bool	false	Set in IDB	False	False	False	False		
abErrors[19]	Bool	false	Set in IDB	False	False	False	False		
abErrors[20]	Bool	false	Set in IDB	False	False	False	False		
abErrors[21]	Bool	false	Set in IDB	False	False	False	False		
abErrors[22]	Bool	false	Set in IDB	False	False	False	False		
abErrors[23]	Bool	false	Set in IDB	False	False	False	False		
abErrors[24]	Bool	false	Set in IDB	False	False	False	False		
abErrors[25]	Bool	false	Set in IDB	False	False	False	False		
abErrors[26]	Bool	false	Set in IDB	False	False	False	False		
abErrors[27]	Bool	false	Set in IDB	False	False	False	False		
abErrors[28]	Bool	false	Set in IDB	False	False	False	False		
abErrors[29]	Bool	false	Set in IDB	False	False	False	False		
abErrors[30]	Bool	false	Set in IDB	False	False	False	False		
iNextScrollNum	Int	1	Non-retain	False	False	False	False		Index of next error position
iErrorsScrollNum	Int	1	Non-retain	False	False	False	False		Index of current error position
bScrolling	Bool	false	Non-retain	False	False	False	False		Indicates we are scrolling
bTON_ErrorDelay	Bool	false	Non-retain	False	False	False	False		
▼ TON_TimeOut	TON_TIME		Non-retain	False	False	False	True		Timer for Error Timeout
PT	Time	T#0ms	Non-retain	False	False	False	False		
ET	Time	T#0ms	Non-retain	False	False	False	False		
IN	Bool	false	Non-retain	False	False	False	False		
Q	Bool	false	Non-retain	False	False	False	False		
iLastMode	Int	0	Non-retain	False	False	False	False		Last mode code
bNewMode	Bool	false	Non-retain	False	False	False	False		New mode selected
bEnableHome	Bool	false	Non-retain	False	False	False	False		Home position enabled
bEnableWork	Bool	false	Non-retain	False	False	False	False		Work position enabled
bAutoMode	Bool	false	Non-retain	False	False	False	False		Auto Mode is active
bManualMode	Bool	false	Non-retain	False	False	False	False		Manual Mode is active
bReset	Bool	false	Non-retain	False	False	False	False		
bTON_TimeOut	Bool	false	Non-retain	False	False	False	False		
bPB_Home	Bool	false	Non-retain	False	False	False	False		
bPB_Work	Bool	false	Non-retain	False	False	False	False		
bPB_ResetError	Bool	false	Non-retain	False	False	False	False		
▼ PRS_XV22	"fbValve_Solenoid"			True	True	True	True		
▼ Input									
tInTimeout	Time	T#0ms	Non-retain	False	False	False	False		Timeout time for an actuator's feedback to activate before giving a fault
iInMode	Int	0	Non-retain	False	False	False	False		Mode Selection
bInEstop	Bool	false	Non-retain	False	False	False	False		Estop
bInSignalHome	Bool	false	Non-retain	False	False	False	False		Home position feedback
bInSignalWork	Bool	false	Non-retain	False	False	False	False		Work position feedback
bInEnable	Bool	false	Non-retain	False	False	False	False		Home and Work Enabled
bInCommandWork	Bool	false	Non-retain	False	False	False	False		Move to work position in automatic mode
bInResetError	Bool	false	Non-retain	False	False	False	False		Reset Error
bInSimulate	Bool	false	Non-retain	False	False	False	False		Activate device simulation
▼ Output									
bOutCommandHome	Bool	false	Non-retain	False	False	False	False		Home position command
bOutCommandWork	Bool	false	Non-retain	False	False	False	False		Work position command
bOutActiveHome	Bool	false	Non-retain	False	False	False	False		Valve is in home position
bOutActiveWork	Bool	false	Non-retain	False	False	False	False		Valve is in work position
bOutAuto	Bool	false	Non-retain	False	False	False	False		Block in auto mode
bOutError	Bool	false	Non-retain	False	False	False	False		Error exists

Name	Data type	Default value	Retain	Accessible from HMI/OPC UA/Web API	Writable from HMI/OPC UA/Web API	Visible in HMI engineering	Setpoint	Supervision	Comment
ERROR_Valve	"udtError_Valve"		Non-retain	False	False	False	False		Valve error structure
NoHomeFeedback	Bool	false	Non-retain	False	False	False	False		Home position feedback not active
NoWorkFeedback	Bool	false	Non-retain	False	False	False	False		Work position feedback not active
HomeFeedbackStillActive	Bool	false	Non-retain	False	False	False	False		Home position feedback still active
WorkFeedbackStillActive	Bool	false	Non-retain	False	False	False	False		Work position feedback still active
InOut									
HMI_ValveControl	"udtHMI_ValveControl"			False	False	False	False		HMI valve control
Static									
ErrorScroller	"fbErrorScroller"			False	False	False	True		Sub-block to handle error scroller
Input									
bInError01	Bool	false	Set in IDB	False	False	False	False		Error 1 In Error Array
bInError02	Bool	false	Set in IDB	False	False	False	False		Error 2 In Error Array
bInError03	Bool	false	Set in IDB	False	False	False	False		Error 3 In Error Array
bInError04	Bool	false	Set in IDB	False	False	False	False		Error 4 In Error Array
bInError05	Bool	false	Set in IDB	False	False	False	False		Error 5 In Error Array
bInError06	Bool	false	Set in IDB	False	False	False	False		Error 6 In Error Array
bInError07	Bool	false	Set in IDB	False	False	False	False		Error 7 In Error Array
bInError08	Bool	false	Set in IDB	False	False	False	False		Error 8 In Error Array
bInError09	Bool	false	Set in IDB	False	False	False	False		Error 9 In Error Array
bInError10	Bool	false	Set in IDB	False	False	False	False		Error 10 In Error Array
bInError11	Bool	false	Set in IDB	False	False	False	False		Error 11 In Error Array
bInError12	Bool	false	Set in IDB	False	False	False	False		Error 12 In Error Array
bInError13	Bool	false	Set in IDB	False	False	False	False		Error 13 In Error Array
bInError14	Bool	false	Set in IDB	False	False	False	False		Error 14 In Error Array
bInError15	Bool	false	Set in IDB	False	False	False	False		Error 15 In Error Array
bInError16	Bool	false	Set in IDB	False	False	False	False		Error 16 In Error Array
bInError17	Bool	false	Set in IDB	False	False	False	False		Error 17 In Error Array
bInError18	Bool	false	Set in IDB	False	False	False	False		Error 18 In Error Array
bInError19	Bool	false	Set in IDB	False	False	False	False		Error 19 In Error Array
bInError20	Bool	false	Set in IDB	False	False	False	False		Error 20 In Error Array
bInError21	Bool	false	Set in IDB	False	False	False	False		Error 21 In Error Array
bInError22	Bool	false	Set in IDB	False	False	False	False		Error 22 In Error Array
bInError23	Bool	false	Set in IDB	False	False	False	False		Error 23 In Error Array
bInError24	Bool	false	Set in IDB	False	False	False	False		Error 24 In Error Array
bInError25	Bool	false	Set in IDB	False	False	False	False		Error 25 In Error Array
bInError26	Bool	false	Set in IDB	False	False	False	False		Error 26 In Error Array
bInError27	Bool	false	Set in IDB	False	False	False	False		Error 27 In Error Array
bInError28	Bool	false	Set in IDB	False	False	False	False		Error 28 In Error Array
bInError29	Bool	false	Set in IDB	False	False	False	False		Error 29 In Error Array
bInError30	Bool	false	Set in IDB	False	False	False	False		Error 30 In Error Array
Output									
bOutErrorExists	Bool	false	Set in IDB	False	False	False	False		An Error Exists
iOutScrollingErrorNumber	Int	0	Set in IDB	False	False	False	False		Current Index when scrolling through errors
InOut									
Static									
TON_ErrorDelay	TON_TIME		Non-retain	False	False	False	True		Delay between each scroll for a new error
PT	Time	T#0ms	Non-retain	False	False	False	False		
ET	Time	T#0ms	Non-retain	False	False	False	False		
IN	Bool	false	Non-retain	False	False	False	False		
Q	Bool	false	Non-retain	False	False	False	False		
abErrors	Array[1..30] of Bool		Set in IDB	False	False	False	False		
abErrors[1]	Bool	false	Set in IDB	False	False	False	False		
abErrors[2]	Bool	false	Set in IDB	False	False	False	False		
abErrors[3]	Bool	false	Set in IDB	False	False	False	False		
abErrors[4]	Bool	false	Set in IDB	False	False	False	False		
abErrors[5]	Bool	false	Set in IDB	False	False	False	False		
abErrors[6]	Bool	false	Set in IDB	False	False	False	False		
abErrors[7]	Bool	false	Set in IDB	False	False	False	False		
abErrors[8]	Bool	false	Set in IDB	False	False	False	False		
abErrors[9]	Bool	false	Set in IDB	False	False	False	False		
abErrors[10]	Bool	false	Set in IDB	False	False	False	False		
abErrors[11]	Bool	false	Set in IDB	False	False	False	False		
abErrors[12]	Bool	false	Set in IDB	False	False	False	False		
abErrors[13]	Bool	false	Set in IDB	False	False	False	False		
abErrors[14]	Bool	false	Set in IDB	False	False	False	False		

Name	Data type	Default value	Retain	Accessible from HMI/OPC UA/Web API	Writable from HMI/OPC UA/Web API	Visible in HMI engineering	Setpoint	Supervision	Comment
abErrors[15]	Bool	false	Set in IDB	False	False	False	False		
abErrors[16]	Bool	false	Set in IDB	False	False	False	False		
abErrors[17]	Bool	false	Set in IDB	False	False	False	False		
abErrors[18]	Bool	false	Set in IDB	False	False	False	False		
abErrors[19]	Bool	false	Set in IDB	False	False	False	False		
abErrors[20]	Bool	false	Set in IDB	False	False	False	False		
abErrors[21]	Bool	false	Set in IDB	False	False	False	False		
abErrors[22]	Bool	false	Set in IDB	False	False	False	False		
abErrors[23]	Bool	false	Set in IDB	False	False	False	False		
abErrors[24]	Bool	false	Set in IDB	False	False	False	False		
abErrors[25]	Bool	false	Set in IDB	False	False	False	False		
abErrors[26]	Bool	false	Set in IDB	False	False	False	False		
abErrors[27]	Bool	false	Set in IDB	False	False	False	False		
abErrors[28]	Bool	false	Set in IDB	False	False	False	False		
abErrors[29]	Bool	false	Set in IDB	False	False	False	False		
abErrors[30]	Bool	false	Set in IDB	False	False	False	False		
iNextScrollNum	Int	1	Non-retain	False	False	False	False		Index of next error position
iErrorsScrollNum	Int	1	Non-retain	False	False	False	False		Index of current error position
bScrolling	Bool	false	Non-retain	False	False	False	False		Indicates we are scrolling
bTON_ErrorDelay	Bool	false	Non-retain	False	False	False	False		
▼ TON_TimeOut	TON_TIME		Non-retain	False	False	False	True		Timer for Error Timeout
PT	Time	T#0ms	Non-retain	False	False	False	False		
ET	Time	T#0ms	Non-retain	False	False	False	False		
IN	Bool	false	Non-retain	False	False	False	False		
Q	Bool	false	Non-retain	False	False	False	False		
iLastMode	Int	0	Non-retain	False	False	False	False		Last mode code
bNewMode	Bool	false	Non-retain	False	False	False	False		New mode selected
bEnableHome	Bool	false	Non-retain	False	False	False	False		Home position enabled
bEnableWork	Bool	false	Non-retain	False	False	False	False		Work position enabled
bAutoMode	Bool	false	Non-retain	False	False	False	False		Auto Mode is active
bManualMode	Bool	false	Non-retain	False	False	False	False		Manual Mode is active
bReset	Bool	false	Non-retain	False	False	False	False		
bTON_TimeOut	Bool	false	Non-retain	False	False	False	False		
bPB_Home	Bool	false	Non-retain	False	False	False	False		
bPB_Work	Bool	false	Non-retain	False	False	False	False		
bPB_ResetError	Bool	false	Non-retain	False	False	False	False		
▼ PRS_XV91	"fbValve_Solenoid"			True	True	True	True		
▼ Input									
tInTimeout	Time	T#0ms	Non-retain	False	False	False	False		Timeout time for an actuator's feedback to activate before giving a fault
iInMode	Int	0	Non-retain	False	False	False	False		Mode Selection
bInEstop	Bool	false	Non-retain	False	False	False	False		Estop
bInSignalHome	Bool	false	Non-retain	False	False	False	False		Home position feedback
bInSignalWork	Bool	false	Non-retain	False	False	False	False		Work position feedback
bInEnable	Bool	false	Non-retain	False	False	False	False		Home and Work Enabled
bInCommandWork	Bool	false	Non-retain	False	False	False	False		Move to work position in automatic mode
bInResetError	Bool	false	Non-retain	False	False	False	False		Reset Error
bInSimulate	Bool	false	Non-retain	False	False	False	False		Activate device simulation
▼ Output									
bOutCommandHome	Bool	false	Non-retain	False	False	False	False		Home position command
bOutCommandWork	Bool	false	Non-retain	False	False	False	False		Work position command
bOutActiveHome	Bool	false	Non-retain	False	False	False	False		Valve is in home position
bOutActiveWork	Bool	false	Non-retain	False	False	False	False		Valve is in work position
bOutAuto	Bool	false	Non-retain	False	False	False	False		Block in auto mode
bOutError	Bool	false	Non-retain	False	False	False	False		Error exists
▼ ERROR_Valve	"udtError_Valve"		Non-retain	False	False	False	False		Valve error structure
NoHomeFeedback	Bool	false	Non-retain	False	False	False	False		Home position feedback not active
NoWorkFeedback	Bool	false	Non-retain	False	False	False	False		Work position feedback not active
HomeFeedbackStillActive	Bool	false	Non-retain	False	False	False	False		Home position feedback still active
WorkFeedbackStillActive	Bool	false	Non-retain	False	False	False	False		Work position feedback still active
▼ InOut									
HMI_ValveControl	"udtHMI_ValveControl"			False	False	False	False		HMI valve control
▼ Static									
▼ ErrorScroller	"fbErrorScroller"			False	False	False	True		Sub-block to handle error scroller

Name	Data type	Default value	Retain	Accessible from HMI/OPC UA/Web API	Writable from HMI/OPC UA/Web API	Visible in HMI engineering	Setpoint	Supervision	Comment
▼ Input									
bInError01	Bool	false	Set in IDB	False	False	False	False		Error 1 In Error Array
bInError02	Bool	false	Set in IDB	False	False	False	False		Error 2 In Error Array
bInError03	Bool	false	Set in IDB	False	False	False	False		Error 3 In Error Array
bInError04	Bool	false	Set in IDB	False	False	False	False		Error 4 In Error Array
bInError05	Bool	false	Set in IDB	False	False	False	False		Error 5 In Error Array
bInError06	Bool	false	Set in IDB	False	False	False	False		Error 6 In Error Array
bInError07	Bool	false	Set in IDB	False	False	False	False		Error 7 In Error Array
bInError08	Bool	false	Set in IDB	False	False	False	False		Error 8 In Error Array
bInError09	Bool	false	Set in IDB	False	False	False	False		Error 9 In Error Array
bInError10	Bool	false	Set in IDB	False	False	False	False		Error 10 In Error Array
bInError11	Bool	false	Set in IDB	False	False	False	False		Error 11 In Error Array
bInError12	Bool	false	Set in IDB	False	False	False	False		Error 12 In Error Array
bInError13	Bool	false	Set in IDB	False	False	False	False		Error 13 In Error Array
bInError14	Bool	false	Set in IDB	False	False	False	False		Error 14 In Error Array
bInError15	Bool	false	Set in IDB	False	False	False	False		Error 15 In Error Array
bInError16	Bool	false	Set in IDB	False	False	False	False		Error 16 In Error Array
bInError17	Bool	false	Set in IDB	False	False	False	False		Error 17 In Error Array
bInError18	Bool	false	Set in IDB	False	False	False	False		Error 18 In Error Array
bInError19	Bool	false	Set in IDB	False	False	False	False		Error 19 In Error Array
bInError20	Bool	false	Set in IDB	False	False	False	False		Error 20 In Error Array
bInError21	Bool	false	Set in IDB	False	False	False	False		Error 21 In Error Array
bInError22	Bool	false	Set in IDB	False	False	False	False		Error 22 In Error Array
bInError23	Bool	false	Set in IDB	False	False	False	False		Error 23 In Error Array
bInError24	Bool	false	Set in IDB	False	False	False	False		Error 24 In Error Array
bInError25	Bool	false	Set in IDB	False	False	False	False		Error 25 In Error Array
bInError26	Bool	false	Set in IDB	False	False	False	False		Error 26 In Error Array
bInError27	Bool	false	Set in IDB	False	False	False	False		Error 27 In Error Array
bInError28	Bool	false	Set in IDB	False	False	False	False		Error 28 In Error Array
bInError29	Bool	false	Set in IDB	False	False	False	False		Error 29 In Error Array
bInError30	Bool	false	Set in IDB	False	False	False	False		Error 30 In Error Array
▼ Output									
bOutErrorExists	Bool	false	Set in IDB	False	False	False	False		An Error Exists
iOutScrollingError-Number	Int	0	Set in IDB	False	False	False	False		Current Index when scrolling through errors
InOut									
▼ Static									
▼ TON_ErrorDelay	TON_TIME		Non-retain	False	False	False	True		Delay between each scroll for a new error
PT	Time	T#0ms	Non-retain	False	False	False	False		
ET	Time	T#0ms	Non-retain	False	False	False	False		
IN	Bool	false	Non-retain	False	False	False	False		
Q	Bool	false	Non-retain	False	False	False	False		
▼ abErrors	Array[1..30] of Bool		Set in IDB	False	False	False	False		
abErrors[1]	Bool	false	Set in IDB	False	False	False	False		
abErrors[2]	Bool	false	Set in IDB	False	False	False	False		
abErrors[3]	Bool	false	Set in IDB	False	False	False	False		
abErrors[4]	Bool	false	Set in IDB	False	False	False	False		
abErrors[5]	Bool	false	Set in IDB	False	False	False	False		
abErrors[6]	Bool	false	Set in IDB	False	False	False	False		
abErrors[7]	Bool	false	Set in IDB	False	False	False	False		
abErrors[8]	Bool	false	Set in IDB	False	False	False	False		
abErrors[9]	Bool	false	Set in IDB	False	False	False	False		
abErrors[10]	Bool	false	Set in IDB	False	False	False	False		
abErrors[11]	Bool	false	Set in IDB	False	False	False	False		
abErrors[12]	Bool	false	Set in IDB	False	False	False	False		
abErrors[13]	Bool	false	Set in IDB	False	False	False	False		
abErrors[14]	Bool	false	Set in IDB	False	False	False	False		
abErrors[15]	Bool	false	Set in IDB	False	False	False	False		
abErrors[16]	Bool	false	Set in IDB	False	False	False	False		
abErrors[17]	Bool	false	Set in IDB	False	False	False	False		
abErrors[18]	Bool	false	Set in IDB	False	False	False	False		
abErrors[19]	Bool	false	Set in IDB	False	False	False	False		
abErrors[20]	Bool	false	Set in IDB	False	False	False	False		
abErrors[21]	Bool	false	Set in IDB	False	False	False	False		
abErrors[22]	Bool	false	Set in IDB	False	False	False	False		
abErrors[23]	Bool	false	Set in IDB	False	False	False	False		
abErrors[24]	Bool	false	Set in IDB	False	False	False	False		
abErrors[25]	Bool	false	Set in IDB	False	False	False	False		
abErrors[26]	Bool	false	Set in IDB	False	False	False	False		
abErrors[27]	Bool	false	Set in IDB	False	False	False	False		
abErrors[28]	Bool	false	Set in IDB	False	False	False	False		

Name	Data type	Default value	Retain	Accessible from HMI/OPC UA/Web API	Writable from HMI/OPC UA/Web API	Visible in HMI engineering	Setpoint	Supervision	Comment
abErrors[29]	Bool	false	Set in IDB	False	False	False	False		
abErrors[30]	Bool	false	Set in IDB	False	False	False	False		
iNextScrollNum	Int	1	Non-retain	False	False	False	False		Index of next error position
iErrorsScrollNum	Int	1	Non-retain	False	False	False	False		Index of current error position
bScrolling	Bool	false	Non-retain	False	False	False	False		Indicates we are scrolling
bTON_ErrorDelay	Bool	false	Non-retain	False	False	False	False		
▼ TON_TimeOut	TON_TIME		Non-retain	False	False	False	True		Timer for Error Timeout
PT	Time	T#0ms	Non-retain	False	False	False	False		
ET	Time	T#0ms	Non-retain	False	False	False	False		
IN	Bool	false	Non-retain	False	False	False	False		
Q	Bool	false	Non-retain	False	False	False	False		
iLastMode	Int	0	Non-retain	False	False	False	False		Last mode code
bNewMode	Bool	false	Non-retain	False	False	False	False		New mode selected
bEnableHome	Bool	false	Non-retain	False	False	False	False		Home position enabled
bEnableWork	Bool	false	Non-retain	False	False	False	False		Work position enabled
bAutoMode	Bool	false	Non-retain	False	False	False	False		Auto Mode is active
bManualMode	Bool	false	Non-retain	False	False	False	False		Manual Mode is active
bReset	Bool	false	Non-retain	False	False	False	False		
bTON_TimeOut	Bool	false	Non-retain	False	False	False	False		
bPB_Home	Bool	false	Non-retain	False	False	False	False		
bPB_Work	Bool	false	Non-retain	False	False	False	False		
bPB_ResetError	Bool	false	Non-retain	False	False	False	False		
▼ PRS_XV51	"fbValve_Solenoid"			True	True	True	True		
▼ Input									
tInTimeout	Time	T#0ms	Non-retain	False	False	False	False		Timeout time for an actuator's feedback to activate before giving a fault
iInMode	Int	0	Non-retain	False	False	False	False		Mode Selection
bInEstop	Bool	false	Non-retain	False	False	False	False		Estop
bInSignalHome	Bool	false	Non-retain	False	False	False	False		Home position feedback
bInSignalWork	Bool	false	Non-retain	False	False	False	False		Work position feedback
bInEnable	Bool	false	Non-retain	False	False	False	False		Home and Work Enabled
bInCommandWork	Bool	false	Non-retain	False	False	False	False		Move to work position in automatic mode
bInResetError	Bool	false	Non-retain	False	False	False	False		Reset Error
bInSimulate	Bool	false	Non-retain	False	False	False	False		Activate device simulation
▼ Output									
bOutCommandHome	Bool	false	Non-retain	False	False	False	False		Home position command
bOutCommandWork	Bool	false	Non-retain	False	False	False	False		Work position command
bOutActiveHome	Bool	false	Non-retain	False	False	False	False		Valve is in home position
bOutActiveWork	Bool	false	Non-retain	False	False	False	False		Valve is in work position
bOutAuto	Bool	false	Non-retain	False	False	False	False		Block in auto mode
bOutError	Bool	false	Non-retain	False	False	False	False		Error exists
▼ ERROR_Valve	"udtError_Valve"		Non-retain	False	False	False	False		Valve error structure
NoHomeFeedback	Bool	false	Non-retain	False	False	False	False		Home position feedback not active
NoWorkFeedback	Bool	false	Non-retain	False	False	False	False		Work position feedback not active
HomeFeedbackStillActive	Bool	false	Non-retain	False	False	False	False		Home position feedback still active
WorkFeedbackStillActive	Bool	false	Non-retain	False	False	False	False		Work position feedback still active
▼ InOut									
HMI_ValveControl	"udtHMI_ValveControl"			False	False	False	False		HMI valve control
▼ Static									
▼ ErrorScroller	"fbErrorScroller"			False	False	False	True		Sub-block to handle error scroller
▼ Input									
bInError01	Bool	false	Set in IDB	False	False	False	False		Error 1 In Error Array
bInError02	Bool	false	Set in IDB	False	False	False	False		Error 2 In Error Array
bInError03	Bool	false	Set in IDB	False	False	False	False		Error 3 In Error Array
bInError04	Bool	false	Set in IDB	False	False	False	False		Error 4 In Error Array
bInError05	Bool	false	Set in IDB	False	False	False	False		Error 5 In Error Array
bInError06	Bool	false	Set in IDB	False	False	False	False		Error 6 In Error Array
bInError07	Bool	false	Set in IDB	False	False	False	False		Error 7 In Error Array
bInError08	Bool	false	Set in IDB	False	False	False	False		Error 8 In Error Array
bInError09	Bool	false	Set in IDB	False	False	False	False		Error 9 In Error Array
bInError10	Bool	false	Set in IDB	False	False	False	False		Error 10 In Error Array
bInError11	Bool	false	Set in IDB	False	False	False	False		Error 11 In Error Array
bInError12	Bool	false	Set in IDB	False	False	False	False		Error 12 In Error Array
bInError13	Bool	false	Set in IDB	False	False	False	False		Error 13 In Error Array

Name	Data type	Default value	Retain	Accessible from HMI/OPC UA/Web API	Writable from HMI/OPC UA/Web API	Visible in HMI engineering	Setpoint	Supervision	Comment
bInError14	Bool	false	Set in IDB	False	False	False	False		Error 14 In Error Array
bInError15	Bool	false	Set in IDB	False	False	False	False		Error 15 In Error Array
bInError16	Bool	false	Set in IDB	False	False	False	False		Error 16 In Error Array
bInError17	Bool	false	Set in IDB	False	False	False	False		Error 17 In Error Array
bInError18	Bool	false	Set in IDB	False	False	False	False		Error 18 In Error Array
bInError19	Bool	false	Set in IDB	False	False	False	False		Error 19 In Error Array
bInError20	Bool	false	Set in IDB	False	False	False	False		Error 20 In Error Array
bInError21	Bool	false	Set in IDB	False	False	False	False		Error 21 In Error Array
bInError22	Bool	false	Set in IDB	False	False	False	False		Error 22 In Error Array
bInError23	Bool	false	Set in IDB	False	False	False	False		Error 23 In Error Array
bInError24	Bool	false	Set in IDB	False	False	False	False		Error 24 In Error Array
bInError25	Bool	false	Set in IDB	False	False	False	False		Error 25 In Error Array
bInError26	Bool	false	Set in IDB	False	False	False	False		Error 26 In Error Array
bInError27	Bool	false	Set in IDB	False	False	False	False		Error 27 In Error Array
bInError28	Bool	false	Set in IDB	False	False	False	False		Error 28 In Error Array
bInError29	Bool	false	Set in IDB	False	False	False	False		Error 29 In Error Array
bInError30	Bool	false	Set in IDB	False	False	False	False		Error 30 In Error Array
▼ Output									
bOutErrorExists	Bool	false	Set in IDB	False	False	False	False		An Error Exists
iOutScrollingErrorNumber	Int	0	Set in IDB	False	False	False	False		Current Index when scrolling through errors
InOut									
▼ Static									
▼ TON_ErrorDelay	TON_TIME		Non-retain	False	False	False	True		Delay between each scroll for a new error
PT	Time	T#0ms	Non-retain	False	False	False	False		
ET	Time	T#0ms	Non-retain	False	False	False	False		
IN	Bool	false	Non-retain	False	False	False	False		
Q	Bool	false	Non-retain	False	False	False	False		
▼ abErrors	Array[1..30] of Bool		Set in IDB	False	False	False	False		
abErrors[1]	Bool	false	Set in IDB	False	False	False	False		
abErrors[2]	Bool	false	Set in IDB	False	False	False	False		
abErrors[3]	Bool	false	Set in IDB	False	False	False	False		
abErrors[4]	Bool	false	Set in IDB	False	False	False	False		
abErrors[5]	Bool	false	Set in IDB	False	False	False	False		
abErrors[6]	Bool	false	Set in IDB	False	False	False	False		
abErrors[7]	Bool	false	Set in IDB	False	False	False	False		
abErrors[8]	Bool	false	Set in IDB	False	False	False	False		
abErrors[9]	Bool	false	Set in IDB	False	False	False	False		
abErrors[10]	Bool	false	Set in IDB	False	False	False	False		
abErrors[11]	Bool	false	Set in IDB	False	False	False	False		
abErrors[12]	Bool	false	Set in IDB	False	False	False	False		
abErrors[13]	Bool	false	Set in IDB	False	False	False	False		
abErrors[14]	Bool	false	Set in IDB	False	False	False	False		
abErrors[15]	Bool	false	Set in IDB	False	False	False	False		
abErrors[16]	Bool	false	Set in IDB	False	False	False	False		
abErrors[17]	Bool	false	Set in IDB	False	False	False	False		
abErrors[18]	Bool	false	Set in IDB	False	False	False	False		
abErrors[19]	Bool	false	Set in IDB	False	False	False	False		
abErrors[20]	Bool	false	Set in IDB	False	False	False	False		
abErrors[21]	Bool	false	Set in IDB	False	False	False	False		
abErrors[22]	Bool	false	Set in IDB	False	False	False	False		
abErrors[23]	Bool	false	Set in IDB	False	False	False	False		
abErrors[24]	Bool	false	Set in IDB	False	False	False	False		
abErrors[25]	Bool	false	Set in IDB	False	False	False	False		
abErrors[26]	Bool	false	Set in IDB	False	False	False	False		
abErrors[27]	Bool	false	Set in IDB	False	False	False	False		
abErrors[28]	Bool	false	Set in IDB	False	False	False	False		
abErrors[29]	Bool	false	Set in IDB	False	False	False	False		
abErrors[30]	Bool	false	Set in IDB	False	False	False	False		
iNextScrollNum	Int	1	Non-retain	False	False	False	False		Index of next error position
iErrorsScrollNum	Int	1	Non-retain	False	False	False	False		Index of current error position
bScrolling	Bool	false	Non-retain	False	False	False	False		Indicates we are scrolling
bTON_ErrorDelay	Bool	false	Non-retain	False	False	False	False		
▼ TON_TimeOut	TON_TIME		Non-retain	False	False	False	True		Timer for Error Timeout
PT	Time	T#0ms	Non-retain	False	False	False	False		
ET	Time	T#0ms	Non-retain	False	False	False	False		
IN	Bool	false	Non-retain	False	False	False	False		
Q	Bool	false	Non-retain	False	False	False	False		
iLastMode	Int	0	Non-retain	False	False	False	False		Last mode code
bNewMode	Bool	false	Non-retain	False	False	False	False		New mode selected

Name	Data type	Default value	Retain	Accessible from HMI/OPC UA/Web API	Writable from HMI/OPC UA/Web API	Visible in HMI engineering	Setpoint	Supervision	Comment
bEnableHome	Bool	false	Non-retain	False	False	False	False		Home position enabled
bEnableWork	Bool	false	Non-retain	False	False	False	False		Work position enabled
bAutoMode	Bool	false	Non-retain	False	False	False	False		Auto Mode is active
bManualMode	Bool	false	Non-retain	False	False	False	False		Manual Mode is active
bReset	Bool	false	Non-retain	False	False	False	False		
bTON_TimeOut	Bool	false	Non-retain	False	False	False	False		
bPB_Home	Bool	false	Non-retain	False	False	False	False		
bPB_Work	Bool	false	Non-retain	False	False	False	False		
bPB_ResetError	Bool	false	Non-retain	False	False	False	False		
PRS_PCV51	"fbValve_Analog"			True	True	False	True		
Input									
tInTimeout	Time	t#10s	Non-retain	False	False	False	False		Feedback error timeout
iInMode	Int	0	Non-retain	False	False	False	False		Mode Selection
iInEstopFunction	Int	0	Non-retain	False	False	False	False		Enum of E-Stop repsonse (Estop.xxx)
bInEstop	Bool	false	Non-retain	False	False	False	False		Estop
bInEnable	Bool	false	Non-retain	False	False	False	False		Valve is Enabled to Operate
rInSignalCommand	Real	-1.0	Non-retain	False	False	False	False		Actual % open from valve (-1 to disable)
rInAutoCommand	Real	0.0	Non-retain	False	False	False	False		Auto Mode command
bInResetError	Bool	false	Non-retain	False	False	False	False		Reset errors
bInSimulate	Bool	false	Non-retain	False	False	False	False		Activate device simulation
Output									
wOutCommand	Word	16#0	Non-retain	False	False	False	False		Output value for analog write
rOutCommand	Real	0.0	Non-retain	False	False	False	False		Output value
bOutAuto	Bool	false	Non-retain	False	False	False	False		Block in auto Mode
bOutError	Bool	false	Non-retain	False	False	False	False		Error exists
ERROR_AnalogValve	"udtError_AnalogValve"		Non-retain	False	False	False	False		Error structure for analog valve
InvalidFeedback	Bool	false	Non-retain	False	False	False	False		Valve feedback is not within command tolerance
InOut									
HMI_AnalogValveControl	"udtHMI_AnalogValveControl"			False	False	False	False		HMI control structure for analog valve
Static									
TON_Timeout	TON_TIME		Non-retain	False	False	False	True		
PT	Time	T#0ms	Non-retain	False	False	False	False		
ET	Time	T#0ms	Non-retain	False	False	False	False		
IN	Bool	false	Non-retain	False	False	False	False		
Q	Bool	false	Non-retain	False	False	False	False		
ErrorScroller	"fbErrorScroller"			False	False	False	True		
Input									
bInError01	Bool	false	Set in IDB	False	False	False	False		Error 1 In Error Array
bInError02	Bool	false	Set in IDB	False	False	False	False		Error 2 In Error Array
bInError03	Bool	false	Set in IDB	False	False	False	False		Error 3 In Error Array
bInError04	Bool	false	Set in IDB	False	False	False	False		Error 4 In Error Array
bInError05	Bool	false	Set in IDB	False	False	False	False		Error 5 In Error Array
bInError06	Bool	false	Set in IDB	False	False	False	False		Error 6 In Error Array
bInError07	Bool	false	Set in IDB	False	False	False	False		Error 7 In Error Array
bInError08	Bool	false	Set in IDB	False	False	False	False		Error 8 In Error Array
bInError09	Bool	false	Set in IDB	False	False	False	False		Error 9 In Error Array
bInError10	Bool	false	Set in IDB	False	False	False	False		Error 10 In Error Array
bInError11	Bool	false	Set in IDB	False	False	False	False		Error 11 In Error Array
bInError12	Bool	false	Set in IDB	False	False	False	False		Error 12 In Error Array
bInError13	Bool	false	Set in IDB	False	False	False	False		Error 13 In Error Array
bInError14	Bool	false	Set in IDB	False	False	False	False		Error 14 In Error Array
bInError15	Bool	false	Set in IDB	False	False	False	False		Error 15 In Error Array
bInError16	Bool	false	Set in IDB	False	False	False	False		Error 16 In Error Array
bInError17	Bool	false	Set in IDB	False	False	False	False		Error 17 In Error Array
bInError18	Bool	false	Set in IDB	False	False	False	False		Error 18 In Error Array
bInError19	Bool	false	Set in IDB	False	False	False	False		Error 19 In Error Array
bInError20	Bool	false	Set in IDB	False	False	False	False		Error 20 In Error Array
bInError21	Bool	false	Set in IDB	False	False	False	False		Error 21 In Error Array
bInError22	Bool	false	Set in IDB	False	False	False	False		Error 22 In Error Array
bInError23	Bool	false	Set in IDB	False	False	False	False		Error 23 In Error Array
bInError24	Bool	false	Set in IDB	False	False	False	False		Error 24 In Error Array
bInError25	Bool	false	Set in IDB	False	False	False	False		Error 25 In Error Array
bInError26	Bool	false	Set in IDB	False	False	False	False		Error 26 In Error Array
bInError27	Bool	false	Set in IDB	False	False	False	False		Error 27 In Error Array
bInError28	Bool	false	Set in IDB	False	False	False	False		Error 28 In Error Array

Name	Data type	Default value	Retain	Accessible from HMI/OPC UA/Web API	Writable from HMI/OPC UA/Web API	Visible in HMI engineering	Setpoint	Supervision	Comment
bInError29	Bool	false	Set in IDB	False	False	False	False		Error 29 In Error Array
bInError30	Bool	false	Set in IDB	False	False	False	False		Error 30 In Error Array
▼ Output									
bOutErrorExists	Bool	false	Set in IDB	False	False	False	False		An Error Exists
iOutScrollingErrorNumber	Int	0	Set in IDB	False	False	False	False		Current Index when scrolling through errors
InOut									
▼ Static									
▼ TON_ErrorDelay	TON_TIME		Non-retain	False	False	False	True		Delay between each scroll for a new error
PT	Time	T#0ms	Non-retain	False	False	False	False		
ET	Time	T#0ms	Non-retain	False	False	False	False		
IN	Bool	false	Non-retain	False	False	False	False		
Q	Bool	false	Non-retain	False	False	False	False		
▼ abErrors	Array[1..30] of Bool		Set in IDB	False	False	False	False		
abErrors[1]	Bool	false	Set in IDB	False	False	False	False		
abErrors[2]	Bool	false	Set in IDB	False	False	False	False		
abErrors[3]	Bool	false	Set in IDB	False	False	False	False		
abErrors[4]	Bool	false	Set in IDB	False	False	False	False		
abErrors[5]	Bool	false	Set in IDB	False	False	False	False		
abErrors[6]	Bool	false	Set in IDB	False	False	False	False		
abErrors[7]	Bool	false	Set in IDB	False	False	False	False		
abErrors[8]	Bool	false	Set in IDB	False	False	False	False		
abErrors[9]	Bool	false	Set in IDB	False	False	False	False		
abErrors[10]	Bool	false	Set in IDB	False	False	False	False		
abErrors[11]	Bool	false	Set in IDB	False	False	False	False		
abErrors[12]	Bool	false	Set in IDB	False	False	False	False		
abErrors[13]	Bool	false	Set in IDB	False	False	False	False		
abErrors[14]	Bool	false	Set in IDB	False	False	False	False		
abErrors[15]	Bool	false	Set in IDB	False	False	False	False		
abErrors[16]	Bool	false	Set in IDB	False	False	False	False		
abErrors[17]	Bool	false	Set in IDB	False	False	False	False		
abErrors[18]	Bool	false	Set in IDB	False	False	False	False		
abErrors[19]	Bool	false	Set in IDB	False	False	False	False		
abErrors[20]	Bool	false	Set in IDB	False	False	False	False		
abErrors[21]	Bool	false	Set in IDB	False	False	False	False		
abErrors[22]	Bool	false	Set in IDB	False	False	False	False		
abErrors[23]	Bool	false	Set in IDB	False	False	False	False		
abErrors[24]	Bool	false	Set in IDB	False	False	False	False		
abErrors[25]	Bool	false	Set in IDB	False	False	False	False		
abErrors[26]	Bool	false	Set in IDB	False	False	False	False		
abErrors[27]	Bool	false	Set in IDB	False	False	False	False		
abErrors[28]	Bool	false	Set in IDB	False	False	False	False		
abErrors[29]	Bool	false	Set in IDB	False	False	False	False		
abErrors[30]	Bool	false	Set in IDB	False	False	False	False		
iNextScrollNum	Int	1	Non-retain	False	False	False	False		Index of next error position
iErrorsScrollNum	Int	1	Non-retain	False	False	False	False		Index of current error position
bScrolling	Bool	false	Non-retain	False	False	False	False		Indicates we are scrolling
bTON_ErrorDelay	Bool	false	Non-retain	False	False	False	False		
rValue	Real	0.0	Non-retain	False	False	False	False		
bSignalOutOfTolerance	Bool	false	Non-retain	False	False	False	False		
bReset	Bool	false	Non-retain	False	False	False	False		
bTON_Timeout	Bool	false	Non-retain	False	False	False	False		
bPB_ResetError	Bool	false	Non-retain	False	False	False	False		
▼ PRS_XV81	"fbValve_Solenoid"			True	True	True	True		
▼ Input									
tInTimeout	Time	T#0ms	Non-retain	False	False	False	False		Timeout time for an actuator's feedback to activate before giving a fault
iInMode	Int	0	Non-retain	False	False	False	False		Mode Selection
bInEstop	Bool	false	Non-retain	False	False	False	False		Estop
bInSignalHome	Bool	false	Non-retain	False	False	False	False		Home position feedback
bInSignalWork	Bool	false	Non-retain	False	False	False	False		Work position feedback
bInEnable	Bool	false	Non-retain	False	False	False	False		Home and Work Enabled
bInCommandWork	Bool	false	Non-retain	False	False	False	False		Move to work position in automatic mode
bInResetError	Bool	false	Non-retain	False	False	False	False		Reset Error
bInSimulate	Bool	false	Non-retain	False	False	False	False		Activate device simulation
▼ Output									
bOutCommandHome	Bool	false	Non-retain	False	False	False	False		Home position command
bOutCommandWork	Bool	false	Non-retain	False	False	False	False		Work position command

Name	Data type	Default value	Retain	Accessible from HMI/OPC UA/Web API	Writable from HMI/OPC UA/Web API	Visible in HMI engineering	Setpoint	Supervision	Comment
bOutActiveHome	Bool	false	Non-retain	False	False	False	False		Valve is in home position
bOutActiveWork	Bool	false	Non-retain	False	False	False	False		Valve is in work position
bOutAuto	Bool	false	Non-retain	False	False	False	False		Block in auto mode
bOutError	Bool	false	Non-retain	False	False	False	False		Error exists
ERROR_Valve	"udtError_Valve"		Non-retain	False	False	False	False		Valve error structure
NoHomeFeedback	Bool	false	Non-retain	False	False	False	False		Home position feedback not active
NoWorkFeedback	Bool	false	Non-retain	False	False	False	False		Work position feedback not active
HomeFeedbackStillActive	Bool	false	Non-retain	False	False	False	False		Home position feedback still active
WorkFeedbackStillActive	Bool	false	Non-retain	False	False	False	False		Work position feedback still active
InOut									
HMI_ValveControl	"udtHMI_ValveControl"			False	False	False	False		HMI valve control
Static									
ErrorScroller	"fbErrorScroller"			False	False	False	True		Sub-block to handle error scroller
Input									
bInError01	Bool	false	Set in IDB	False	False	False	False		Error 1 In Error Array
bInError02	Bool	false	Set in IDB	False	False	False	False		Error 2 In Error Array
bInError03	Bool	false	Set in IDB	False	False	False	False		Error 3 In Error Array
bInError04	Bool	false	Set in IDB	False	False	False	False		Error 4 In Error Array
bInError05	Bool	false	Set in IDB	False	False	False	False		Error 5 In Error Array
bInError06	Bool	false	Set in IDB	False	False	False	False		Error 6 In Error Array
bInError07	Bool	false	Set in IDB	False	False	False	False		Error 7 In Error Array
bInError08	Bool	false	Set in IDB	False	False	False	False		Error 8 In Error Array
bInError09	Bool	false	Set in IDB	False	False	False	False		Error 9 In Error Array
bInError10	Bool	false	Set in IDB	False	False	False	False		Error 10 In Error Array
bInError11	Bool	false	Set in IDB	False	False	False	False		Error 11 In Error Array
bInError12	Bool	false	Set in IDB	False	False	False	False		Error 12 In Error Array
bInError13	Bool	false	Set in IDB	False	False	False	False		Error 13 In Error Array
bInError14	Bool	false	Set in IDB	False	False	False	False		Error 14 In Error Array
bInError15	Bool	false	Set in IDB	False	False	False	False		Error 15 In Error Array
bInError16	Bool	false	Set in IDB	False	False	False	False		Error 16 In Error Array
bInError17	Bool	false	Set in IDB	False	False	False	False		Error 17 In Error Array
bInError18	Bool	false	Set in IDB	False	False	False	False		Error 18 In Error Array
bInError19	Bool	false	Set in IDB	False	False	False	False		Error 19 In Error Array
bInError20	Bool	false	Set in IDB	False	False	False	False		Error 20 In Error Array
bInError21	Bool	false	Set in IDB	False	False	False	False		Error 21 In Error Array
bInError22	Bool	false	Set in IDB	False	False	False	False		Error 22 In Error Array
bInError23	Bool	false	Set in IDB	False	False	False	False		Error 23 In Error Array
bInError24	Bool	false	Set in IDB	False	False	False	False		Error 24 In Error Array
bInError25	Bool	false	Set in IDB	False	False	False	False		Error 25 In Error Array
bInError26	Bool	false	Set in IDB	False	False	False	False		Error 26 In Error Array
bInError27	Bool	false	Set in IDB	False	False	False	False		Error 27 In Error Array
bInError28	Bool	false	Set in IDB	False	False	False	False		Error 28 In Error Array
bInError29	Bool	false	Set in IDB	False	False	False	False		Error 29 In Error Array
bInError30	Bool	false	Set in IDB	False	False	False	False		Error 30 In Error Array
Output									
bOutErrorExists	Bool	false	Set in IDB	False	False	False	False		An Error Exists
iOutScrollingErrorNumber	Int	0	Set in IDB	False	False	False	False		Current Index when scrolling through errors
InOut									
Static									
TON_ErrorDelay	TON_TIME		Non-retain	False	False	False	True		Delay between each scroll for a new error
PT	Time	T#0ms	Non-retain	False	False	False	False		
ET	Time	T#0ms	Non-retain	False	False	False	False		
IN	Bool	false	Non-retain	False	False	False	False		
Q	Bool	false	Non-retain	False	False	False	False		
abErrors	Array[1..30] of Bool		Set in IDB	False	False	False	False		
abErrors[1]	Bool	false	Set in IDB	False	False	False	False		
abErrors[2]	Bool	false	Set in IDB	False	False	False	False		
abErrors[3]	Bool	false	Set in IDB	False	False	False	False		
abErrors[4]	Bool	false	Set in IDB	False	False	False	False		
abErrors[5]	Bool	false	Set in IDB	False	False	False	False		
abErrors[6]	Bool	false	Set in IDB	False	False	False	False		
abErrors[7]	Bool	false	Set in IDB	False	False	False	False		
abErrors[8]	Bool	false	Set in IDB	False	False	False	False		
abErrors[9]	Bool	false	Set in IDB	False	False	False	False		
abErrors[10]	Bool	false	Set in IDB	False	False	False	False		

Name	Data type	Default value	Retain	Accessible from HMI/OPC UA/Web API	Writable from HMI/OPC UA/Web API	Visible in HMI engineering	Setpoint	Supervision	Comment
abErrors[11]	Bool	false	Set in IDB	False	False	False	False		
abErrors[12]	Bool	false	Set in IDB	False	False	False	False		
abErrors[13]	Bool	false	Set in IDB	False	False	False	False		
abErrors[14]	Bool	false	Set in IDB	False	False	False	False		
abErrors[15]	Bool	false	Set in IDB	False	False	False	False		
abErrors[16]	Bool	false	Set in IDB	False	False	False	False		
abErrors[17]	Bool	false	Set in IDB	False	False	False	False		
abErrors[18]	Bool	false	Set in IDB	False	False	False	False		
abErrors[19]	Bool	false	Set in IDB	False	False	False	False		
abErrors[20]	Bool	false	Set in IDB	False	False	False	False		
abErrors[21]	Bool	false	Set in IDB	False	False	False	False		
abErrors[22]	Bool	false	Set in IDB	False	False	False	False		
abErrors[23]	Bool	false	Set in IDB	False	False	False	False		
abErrors[24]	Bool	false	Set in IDB	False	False	False	False		
abErrors[25]	Bool	false	Set in IDB	False	False	False	False		
abErrors[26]	Bool	false	Set in IDB	False	False	False	False		
abErrors[27]	Bool	false	Set in IDB	False	False	False	False		
abErrors[28]	Bool	false	Set in IDB	False	False	False	False		
abErrors[29]	Bool	false	Set in IDB	False	False	False	False		
abErrors[30]	Bool	false	Set in IDB	False	False	False	False		
iNextScrollNum	Int	1	Non-retain	False	False	False	False		Index of next error position
iErrorsScrollNum	Int	1	Non-retain	False	False	False	False		Index of current error position
bScrolling	Bool	false	Non-retain	False	False	False	False		Indicates we are scrolling
bTON_ErrorDelay	Bool	false	Non-retain	False	False	False	False		
▼ TON_TimeOut	TON_TIME		Non-retain	False	False	False	True		Timer for Error Timeout
PT	Time	T#0ms	Non-retain	False	False	False	False		
ET	Time	T#0ms	Non-retain	False	False	False	False		
IN	Bool	false	Non-retain	False	False	False	False		
Q	Bool	false	Non-retain	False	False	False	False		
iLastMode	Int	0	Non-retain	False	False	False	False		Last mode code
bNewMode	Bool	false	Non-retain	False	False	False	False		New mode selected
bEnableHome	Bool	false	Non-retain	False	False	False	False		Home position enabled
bEnableWork	Bool	false	Non-retain	False	False	False	False		Work position enabled
bAutoMode	Bool	false	Non-retain	False	False	False	False		Auto Mode is active
bManualMode	Bool	false	Non-retain	False	False	False	False		Manual Mode is active
bReset	Bool	false	Non-retain	False	False	False	False		
bTON_TimeOut	Bool	false	Non-retain	False	False	False	False		
bPB_Home	Bool	false	Non-retain	False	False	False	False		
bPB_Work	Bool	false	Non-retain	False	False	False	False		
bPB_ResetError	Bool	false	Non-retain	False	False	False	False		
▼ IN1	"fbValve_Solenoid"			True	True	True	True		
▼ Input									
tInTimeout	Time	T#0ms	Non-retain	False	False	False	False		Timeout time for an actuator's feedback to activate before giving a fault
iInMode	Int	0	Non-retain	False	False	False	False		Mode Selection
bInEstop	Bool	false	Non-retain	False	False	False	False		Estop
bInSignalHome	Bool	false	Non-retain	False	False	False	False		Home position feedback
bInSignalWork	Bool	false	Non-retain	False	False	False	False		Work position feedback
bInEnable	Bool	false	Non-retain	False	False	False	False		Home and Work Enabled
bInCommandWork	Bool	false	Non-retain	False	False	False	False		Move to work position in automatic mode
bInResetError	Bool	false	Non-retain	False	False	False	False		Reset Error
bInSimulate	Bool	false	Non-retain	False	False	False	False		Activate device simulation
▼ Output									
bOutCommandHome	Bool	false	Non-retain	False	False	False	False		Home position command
bOutCommandWork	Bool	false	Non-retain	False	False	False	False		Work position command
bOutActiveHome	Bool	false	Non-retain	False	False	False	False		Valve is in home position
bOutActiveWork	Bool	false	Non-retain	False	False	False	False		Valve is in work position
bOutAuto	Bool	false	Non-retain	False	False	False	False		Block in auto mode
bOutError	Bool	false	Non-retain	False	False	False	False		Error exists
▼ ERROR_Valve	"udtError_Valve"		Non-retain	False	False	False	False		Valve error structure
NoHomeFeedback	Bool	false	Non-retain	False	False	False	False		Home position feedback not active
NoWorkFeedback	Bool	false	Non-retain	False	False	False	False		Work position feedback not active
HomeFeedbackStillActive	Bool	false	Non-retain	False	False	False	False		Home position feedback still active
WorkFeedbackStillActive	Bool	false	Non-retain	False	False	False	False		Work position feedback still active
▼ InOut									

Name	Data type	Default value	Retain	Accessible from HMI/OPC UA/Web API	Writable from HMI/OPC UA/Web API	Visible in HMI engineering	Setpoint	Supervision	Comment
HMI_ValveControl	"udtHMI_ValveControl"			False	False	False	False		HMI valve control
▼ Static									
▼ ErrorScroller	"fbErrorScroller"			False	False	False	True		Sub-block to handle error scroller
▼ Input									
bInError01	Bool	false	Set in IDB	False	False	False	False		Error 1 In Error Array
bInError02	Bool	false	Set in IDB	False	False	False	False		Error 2 In Error Array
bInError03	Bool	false	Set in IDB	False	False	False	False		Error 3 In Error Array
bInError04	Bool	false	Set in IDB	False	False	False	False		Error 4 In Error Array
bInError05	Bool	false	Set in IDB	False	False	False	False		Error 5 In Error Array
bInError06	Bool	false	Set in IDB	False	False	False	False		Error 6 In Error Array
bInError07	Bool	false	Set in IDB	False	False	False	False		Error 7 In Error Array
bInError08	Bool	false	Set in IDB	False	False	False	False		Error 8 In Error Array
bInError09	Bool	false	Set in IDB	False	False	False	False		Error 9 In Error Array
bInError10	Bool	false	Set in IDB	False	False	False	False		Error 10 In Error Array
bInError11	Bool	false	Set in IDB	False	False	False	False		Error 11 In Error Array
bInError12	Bool	false	Set in IDB	False	False	False	False		Error 12 In Error Array
bInError13	Bool	false	Set in IDB	False	False	False	False		Error 13 In Error Array
bInError14	Bool	false	Set in IDB	False	False	False	False		Error 14 In Error Array
bInError15	Bool	false	Set in IDB	False	False	False	False		Error 15 In Error Array
bInError16	Bool	false	Set in IDB	False	False	False	False		Error 16 In Error Array
bInError17	Bool	false	Set in IDB	False	False	False	False		Error 17 In Error Array
bInError18	Bool	false	Set in IDB	False	False	False	False		Error 18 In Error Array
bInError19	Bool	false	Set in IDB	False	False	False	False		Error 19 In Error Array
bInError20	Bool	false	Set in IDB	False	False	False	False		Error 20 In Error Array
bInError21	Bool	false	Set in IDB	False	False	False	False		Error 21 In Error Array
bInError22	Bool	false	Set in IDB	False	False	False	False		Error 22 In Error Array
bInError23	Bool	false	Set in IDB	False	False	False	False		Error 23 In Error Array
bInError24	Bool	false	Set in IDB	False	False	False	False		Error 24 In Error Array
bInError25	Bool	false	Set in IDB	False	False	False	False		Error 25 In Error Array
bInError26	Bool	false	Set in IDB	False	False	False	False		Error 26 In Error Array
bInError27	Bool	false	Set in IDB	False	False	False	False		Error 27 In Error Array
bInError28	Bool	false	Set in IDB	False	False	False	False		Error 28 In Error Array
bInError29	Bool	false	Set in IDB	False	False	False	False		Error 29 In Error Array
bInError30	Bool	false	Set in IDB	False	False	False	False		Error 30 In Error Array
▼ Output									
bOutErrorExists	Bool	false	Set in IDB	False	False	False	False		An Error Exists
iOutScrollingErrorNumber	Int	0	Set in IDB	False	False	False	False		Current Index when scrolling through errors
InOut									
▼ Static									
▼ TON_ErrorDelay	TON_TIME		Non-retain	False	False	False	True		Delay between each scroll for a new error
PT	Time	T#0ms	Non-retain	False	False	False	False		
ET	Time	T#0ms	Non-retain	False	False	False	False		
IN	Bool	false	Non-retain	False	False	False	False		
Q	Bool	false	Non-retain	False	False	False	False		
▼ abErrors	Array[1..30] of Bool		Set in IDB	False	False	False	False		
abErrors[1]	Bool	false	Set in IDB	False	False	False	False		
abErrors[2]	Bool	false	Set in IDB	False	False	False	False		
abErrors[3]	Bool	false	Set in IDB	False	False	False	False		
abErrors[4]	Bool	false	Set in IDB	False	False	False	False		
abErrors[5]	Bool	false	Set in IDB	False	False	False	False		
abErrors[6]	Bool	false	Set in IDB	False	False	False	False		
abErrors[7]	Bool	false	Set in IDB	False	False	False	False		
abErrors[8]	Bool	false	Set in IDB	False	False	False	False		
abErrors[9]	Bool	false	Set in IDB	False	False	False	False		
abErrors[10]	Bool	false	Set in IDB	False	False	False	False		
abErrors[11]	Bool	false	Set in IDB	False	False	False	False		
abErrors[12]	Bool	false	Set in IDB	False	False	False	False		
abErrors[13]	Bool	false	Set in IDB	False	False	False	False		
abErrors[14]	Bool	false	Set in IDB	False	False	False	False		
abErrors[15]	Bool	false	Set in IDB	False	False	False	False		
abErrors[16]	Bool	false	Set in IDB	False	False	False	False		
abErrors[17]	Bool	false	Set in IDB	False	False	False	False		
abErrors[18]	Bool	false	Set in IDB	False	False	False	False		
abErrors[19]	Bool	false	Set in IDB	False	False	False	False		
abErrors[20]	Bool	false	Set in IDB	False	False	False	False		
abErrors[21]	Bool	false	Set in IDB	False	False	False	False		
abErrors[22]	Bool	false	Set in IDB	False	False	False	False		
abErrors[23]	Bool	false	Set in IDB	False	False	False	False		

Name	Data type	Default value	Retain	Accessible from HMI/OPC UA/Web API	Writable from HMI/OPC UA/Web API	Visible in HMI engineering	Setpoint	Supervision	Comment
abErrors[24]	Bool	false	Set in IDB	False	False	False	False		
abErrors[25]	Bool	false	Set in IDB	False	False	False	False		
abErrors[26]	Bool	false	Set in IDB	False	False	False	False		
abErrors[27]	Bool	false	Set in IDB	False	False	False	False		
abErrors[28]	Bool	false	Set in IDB	False	False	False	False		
abErrors[29]	Bool	false	Set in IDB	False	False	False	False		
abErrors[30]	Bool	false	Set in IDB	False	False	False	False		
iNextScrollNum	Int	1	Non-retain	False	False	False	False		Index of next error position
iErrorsScrollNum	Int	1	Non-retain	False	False	False	False		Index of current error position
bScrolling	Bool	false	Non-retain	False	False	False	False		Indicates we are scrolling
bTON_ErrorDelay	Bool	false	Non-retain	False	False	False	False		
▼ TON_TimeOut	TON_TIME		Non-retain	False	False	False	True		Timer for Error Timeout
PT	Time	T#0ms	Non-retain	False	False	False	False		
ET	Time	T#0ms	Non-retain	False	False	False	False		
IN	Bool	false	Non-retain	False	False	False	False		
Q	Bool	false	Non-retain	False	False	False	False		
iLastMode	Int	0	Non-retain	False	False	False	False		Last mode code
bNewMode	Bool	false	Non-retain	False	False	False	False		New mode selected
bEnableHome	Bool	false	Non-retain	False	False	False	False		Home position enabled
bEnableWork	Bool	false	Non-retain	False	False	False	False		Work position enabled
bAutoMode	Bool	false	Non-retain	False	False	False	False		Auto Mode is active
bManualMode	Bool	false	Non-retain	False	False	False	False		Manual Mode is active
bReset	Bool	false	Non-retain	False	False	False	False		
bTON_TimeOut	Bool	false	Non-retain	False	False	False	False		
bPB_Home	Bool	false	Non-retain	False	False	False	False		
bPB_Work	Bool	false	Non-retain	False	False	False	False		
bPB_ResetError	Bool	false	Non-retain	False	False	False	False		
▼ IN2	"fbValve_Solenoid"			True	True	True	True		
▼ Input									
tInTimeout	Time	T#0ms	Non-retain	False	False	False	False		Timeout time for an actuator's feedback to activate before giving a fault
iInMode	Int	0	Non-retain	False	False	False	False		Mode Selection
bInEstop	Bool	false	Non-retain	False	False	False	False		Estop
bInSignalHome	Bool	false	Non-retain	False	False	False	False		Home position feedback
bInSignalWork	Bool	false	Non-retain	False	False	False	False		Work position feedback
bInEnable	Bool	false	Non-retain	False	False	False	False		Home and Work Enabled
bInCommandWork	Bool	false	Non-retain	False	False	False	False		Move to work position in automatic mode
bInResetError	Bool	false	Non-retain	False	False	False	False		Reset Error
bInSimulate	Bool	false	Non-retain	False	False	False	False		Activate device simulation
▼ Output									
bOutCommandHome	Bool	false	Non-retain	False	False	False	False		Home position command
bOutCommandWork	Bool	false	Non-retain	False	False	False	False		Work position command
bOutActiveHome	Bool	false	Non-retain	False	False	False	False		Valve is in home position
bOutActiveWork	Bool	false	Non-retain	False	False	False	False		Valve is in work position
bOutAuto	Bool	false	Non-retain	False	False	False	False		Block in auto mode
bOutError	Bool	false	Non-retain	False	False	False	False		Error exists
▼ ERROR_Valve	"udtError_Valve"		Non-retain	False	False	False	False		Valve error structure
NoHomeFeedback	Bool	false	Non-retain	False	False	False	False		Home position feedback not active
NoWorkFeedback	Bool	false	Non-retain	False	False	False	False		Work position feedback not active
HomeFeedbackStillActive	Bool	false	Non-retain	False	False	False	False		Home position feedback still active
WorkFeedbackStillActive	Bool	false	Non-retain	False	False	False	False		Work position feedback still active
▼ InOut									
HMI_ValveControl	"udtHMI_ValveControl"			False	False	False	False		HMI valve control
▼ Static									
▼ ErrorScroller	"fbErrorScroller"			False	False	False	True		Sub-block to handle error scroller
▼ Input									
bInError01	Bool	false	Set in IDB	False	False	False	False		Error 1 In Error Array
bInError02	Bool	false	Set in IDB	False	False	False	False		Error 2 In Error Array
bInError03	Bool	false	Set in IDB	False	False	False	False		Error 3 In Error Array
bInError04	Bool	false	Set in IDB	False	False	False	False		Error 4 In Error Array
bInError05	Bool	false	Set in IDB	False	False	False	False		Error 5 In Error Array
bInError06	Bool	false	Set in IDB	False	False	False	False		Error 6 In Error Array
bInError07	Bool	false	Set in IDB	False	False	False	False		Error 7 In Error Array
bInError08	Bool	false	Set in IDB	False	False	False	False		Error 8 In Error Array

Name	Data type	Default value	Retain	Accessible from HMI/OPC UA/Web API	Writable from HMI/OPC UA/Web API	Visible in HMI engineering	Setpoint	Supervision	Comment
bInError09	Bool	false	Set in IDB	False	False	False	False		Error 9 In Error Array
bInError10	Bool	false	Set in IDB	False	False	False	False		Error 10 In Error Array
bInError11	Bool	false	Set in IDB	False	False	False	False		Error 11 In Error Array
bInError12	Bool	false	Set in IDB	False	False	False	False		Error 12 In Error Array
bInError13	Bool	false	Set in IDB	False	False	False	False		Error 13 In Error Array
bInError14	Bool	false	Set in IDB	False	False	False	False		Error 14 In Error Array
bInError15	Bool	false	Set in IDB	False	False	False	False		Error 15 In Error Array
bInError16	Bool	false	Set in IDB	False	False	False	False		Error 16 In Error Array
bInError17	Bool	false	Set in IDB	False	False	False	False		Error 17 In Error Array
bInError18	Bool	false	Set in IDB	False	False	False	False		Error 18 In Error Array
bInError19	Bool	false	Set in IDB	False	False	False	False		Error 19 In Error Array
bInError20	Bool	false	Set in IDB	False	False	False	False		Error 20 In Error Array
bInError21	Bool	false	Set in IDB	False	False	False	False		Error 21 In Error Array
bInError22	Bool	false	Set in IDB	False	False	False	False		Error 22 In Error Array
bInError23	Bool	false	Set in IDB	False	False	False	False		Error 23 In Error Array
bInError24	Bool	false	Set in IDB	False	False	False	False		Error 24 In Error Array
bInError25	Bool	false	Set in IDB	False	False	False	False		Error 25 In Error Array
bInError26	Bool	false	Set in IDB	False	False	False	False		Error 26 In Error Array
bInError27	Bool	false	Set in IDB	False	False	False	False		Error 27 In Error Array
bInError28	Bool	false	Set in IDB	False	False	False	False		Error 28 In Error Array
bInError29	Bool	false	Set in IDB	False	False	False	False		Error 29 In Error Array
bInError30	Bool	false	Set in IDB	False	False	False	False		Error 30 In Error Array
▼ Output									
bOutErrorExists	Bool	false	Set in IDB	False	False	False	False		An Error Exists
iOutScrollingError-Number	Int	0	Set in IDB	False	False	False	False		Current Index when scrolling through errors
InOut									
▼ Static									
▼ TON_ErrorDelay	TON_TIME		Non-retain	False	False	False	True		Delay between each scroll for a new error
PT	Time	T#0ms	Non-retain	False	False	False	False		
ET	Time	T#0ms	Non-retain	False	False	False	False		
IN	Bool	false	Non-retain	False	False	False	False		
Q	Bool	false	Non-retain	False	False	False	False		
▼ abErrors	Array[1..30] of Bool		Set in IDB	False	False	False	False		
abErrors[1]	Bool	false	Set in IDB	False	False	False	False		
abErrors[2]	Bool	false	Set in IDB	False	False	False	False		
abErrors[3]	Bool	false	Set in IDB	False	False	False	False		
abErrors[4]	Bool	false	Set in IDB	False	False	False	False		
abErrors[5]	Bool	false	Set in IDB	False	False	False	False		
abErrors[6]	Bool	false	Set in IDB	False	False	False	False		
abErrors[7]	Bool	false	Set in IDB	False	False	False	False		
abErrors[8]	Bool	false	Set in IDB	False	False	False	False		
abErrors[9]	Bool	false	Set in IDB	False	False	False	False		
abErrors[10]	Bool	false	Set in IDB	False	False	False	False		
abErrors[11]	Bool	false	Set in IDB	False	False	False	False		
abErrors[12]	Bool	false	Set in IDB	False	False	False	False		
abErrors[13]	Bool	false	Set in IDB	False	False	False	False		
abErrors[14]	Bool	false	Set in IDB	False	False	False	False		
abErrors[15]	Bool	false	Set in IDB	False	False	False	False		
abErrors[16]	Bool	false	Set in IDB	False	False	False	False		
abErrors[17]	Bool	false	Set in IDB	False	False	False	False		
abErrors[18]	Bool	false	Set in IDB	False	False	False	False		
abErrors[19]	Bool	false	Set in IDB	False	False	False	False		
abErrors[20]	Bool	false	Set in IDB	False	False	False	False		
abErrors[21]	Bool	false	Set in IDB	False	False	False	False		
abErrors[22]	Bool	false	Set in IDB	False	False	False	False		
abErrors[23]	Bool	false	Set in IDB	False	False	False	False		
abErrors[24]	Bool	false	Set in IDB	False	False	False	False		
abErrors[25]	Bool	false	Set in IDB	False	False	False	False		
abErrors[26]	Bool	false	Set in IDB	False	False	False	False		
abErrors[27]	Bool	false	Set in IDB	False	False	False	False		
abErrors[28]	Bool	false	Set in IDB	False	False	False	False		
abErrors[29]	Bool	false	Set in IDB	False	False	False	False		
abErrors[30]	Bool	false	Set in IDB	False	False	False	False		
iNextScrollNum	Int	1	Non-retain	False	False	False	False		Index of next error position
iErrorsScrollNum	Int	1	Non-retain	False	False	False	False		Index of current error position
bScrolling	Bool	false	Non-retain	False	False	False	False		Indicates we are scrolling
bTON_ErrorDelay	Bool	false	Non-retain	False	False	False	False		
▼ TON_TimeOut	TON_TIME		Non-retain	False	False	False	True		Timer for Error Timeout
PT	Time	T#0ms	Non-retain	False	False	False	False		

Name	Data type	Default value	Retain	Accessible from HMI/OPC UA/Web API	Writable from HMI/OPC UA/Web API	Visible in HMI engineering	Setpoint	Supervision	Comment
ET	Time	T#0ms	Non-retain	False	False	False	False		
IN	Bool	false	Non-retain	False	False	False	False		
Q	Bool	false	Non-retain	False	False	False	False		
iLastMode	Int	0	Non-retain	False	False	False	False		Last mode code
bNewMode	Bool	false	Non-retain	False	False	False	False		New mode selected
bEnableHome	Bool	false	Non-retain	False	False	False	False		Home position enabled
bEnableWork	Bool	false	Non-retain	False	False	False	False		Work position enabled
bAutoMode	Bool	false	Non-retain	False	False	False	False		Auto Mode is active
bManualMode	Bool	false	Non-retain	False	False	False	False		Manual Mode is active
bReset	Bool	false	Non-retain	False	False	False	False		
bTON_TimeOut	Bool	false	Non-retain	False	False	False	False		
bPB_Home	Bool	false	Non-retain	False	False	False	False		
bPB_Work	Bool	false	Non-retain	False	False	False	False		
bPB_ResetError	Bool	false	Non-retain	False	False	False	False		
▼ OUT1	"fbValve_Solenoid"			True	True	True	True		
▼ Input									
tInTimeout	Time	T#0ms	Non-retain	False	False	False	False		Timeout time for an actuator's feedback to activate before giving a fault
iInMode	Int	0	Non-retain	False	False	False	False		Mode Selection
bInEstop	Bool	false	Non-retain	False	False	False	False		Estop
bInSignalHome	Bool	false	Non-retain	False	False	False	False		Home position feedback
bInSignalWork	Bool	false	Non-retain	False	False	False	False		Work position feedback
bInEnable	Bool	false	Non-retain	False	False	False	False		Home and Work Enabled
bInCommandWork	Bool	false	Non-retain	False	False	False	False		Move to work position in automatic mode
bInResetError	Bool	false	Non-retain	False	False	False	False		Reset Error
bInSimulate	Bool	false	Non-retain	False	False	False	False		Activate device simulation
▼ Output									
bOutCommandHome	Bool	false	Non-retain	False	False	False	False		Home position command
bOutCommandWork	Bool	false	Non-retain	False	False	False	False		Work position command
bOutActiveHome	Bool	false	Non-retain	False	False	False	False		Valve is in home position
bOutActiveWork	Bool	false	Non-retain	False	False	False	False		Valve is in work position
bOutAuto	Bool	false	Non-retain	False	False	False	False		Block in auto mode
bOutError	Bool	false	Non-retain	False	False	False	False		Error exists
▼ ERROR_Valve	"udtError_Valve"		Non-retain	False	False	False	False		Valve error structure
NoHomeFeedback	Bool	false	Non-retain	False	False	False	False		Home position feedback not active
NoWorkFeedback	Bool	false	Non-retain	False	False	False	False		Work position feedback not active
HomeFeedbackStillActive	Bool	false	Non-retain	False	False	False	False		Home position feedback still active
WorkFeedbackStillActive	Bool	false	Non-retain	False	False	False	False		Work position feedback still active
▼ InOut									
HMI_ValveControl	"udtHMI_ValveControl"			False	False	False	False		HMI valve control
▼ Static									
▼ ErrorScroller	"fbErrorScroller"			False	False	False	True		Sub-block to handle error scroller
▼ Input									
bInError01	Bool	false	Set in IDB	False	False	False	False		Error 1 In Error Array
bInError02	Bool	false	Set in IDB	False	False	False	False		Error 2 In Error Array
bInError03	Bool	false	Set in IDB	False	False	False	False		Error 3 In Error Array
bInError04	Bool	false	Set in IDB	False	False	False	False		Error 4 In Error Array
bInError05	Bool	false	Set in IDB	False	False	False	False		Error 5 In Error Array
bInError06	Bool	false	Set in IDB	False	False	False	False		Error 6 In Error Array
bInError07	Bool	false	Set in IDB	False	False	False	False		Error 7 In Error Array
bInError08	Bool	false	Set in IDB	False	False	False	False		Error 8 In Error Array
bInError09	Bool	false	Set in IDB	False	False	False	False		Error 9 In Error Array
bInError10	Bool	false	Set in IDB	False	False	False	False		Error 10 In Error Array
bInError11	Bool	false	Set in IDB	False	False	False	False		Error 11 In Error Array
bInError12	Bool	false	Set in IDB	False	False	False	False		Error 12 In Error Array
bInError13	Bool	false	Set in IDB	False	False	False	False		Error 13 In Error Array
bInError14	Bool	false	Set in IDB	False	False	False	False		Error 14 In Error Array
bInError15	Bool	false	Set in IDB	False	False	False	False		Error 15 In Error Array
bInError16	Bool	false	Set in IDB	False	False	False	False		Error 16 In Error Array
bInError17	Bool	false	Set in IDB	False	False	False	False		Error 17 In Error Array
bInError18	Bool	false	Set in IDB	False	False	False	False		Error 18 In Error Array
bInError19	Bool	false	Set in IDB	False	False	False	False		Error 19 In Error Array
bInError20	Bool	false	Set in IDB	False	False	False	False		Error 20 In Error Array
bInError21	Bool	false	Set in IDB	False	False	False	False		Error 21 In Error Array
bInError22	Bool	false	Set in IDB	False	False	False	False		Error 22 In Error Array

Name	Data type	Default value	Retain	Accessible from HMI/OPC UA/Web API	Writable from HMI/OPC UA/Web API	Visible in HMI engineering	Setpoint	Supervision	Comment
bInError23	Bool	false	Set in IDB	False	False	False	False		Error 23 In Error Array
bInError24	Bool	false	Set in IDB	False	False	False	False		Error 24 In Error Array
bInError25	Bool	false	Set in IDB	False	False	False	False		Error 25 In Error Array
bInError26	Bool	false	Set in IDB	False	False	False	False		Error 26 In Error Array
bInError27	Bool	false	Set in IDB	False	False	False	False		Error 27 In Error Array
bInError28	Bool	false	Set in IDB	False	False	False	False		Error 28 In Error Array
bInError29	Bool	false	Set in IDB	False	False	False	False		Error 29 In Error Array
bInError30	Bool	false	Set in IDB	False	False	False	False		Error 30 In Error Array
▼ Output									
bOutErrorExists	Bool	false	Set in IDB	False	False	False	False		An Error Exists
iOutScrollingError-Number	Int	0	Set in IDB	False	False	False	False		Current Index when scrolling through errors
InOut									
▼ Static									
▼ TON_ErrorDelay	TON_TIME		Non-retain	False	False	False	True		Delay between each scroll for a new error
PT	Time	T#0ms	Non-retain	False	False	False	False		
ET	Time	T#0ms	Non-retain	False	False	False	False		
IN	Bool	false	Non-retain	False	False	False	False		
Q	Bool	false	Non-retain	False	False	False	False		
▼ abErrors	Array[1..30] of Bool		Set in IDB	False	False	False	False		
abErrors[1]	Bool	false	Set in IDB	False	False	False	False		
abErrors[2]	Bool	false	Set in IDB	False	False	False	False		
abErrors[3]	Bool	false	Set in IDB	False	False	False	False		
abErrors[4]	Bool	false	Set in IDB	False	False	False	False		
abErrors[5]	Bool	false	Set in IDB	False	False	False	False		
abErrors[6]	Bool	false	Set in IDB	False	False	False	False		
abErrors[7]	Bool	false	Set in IDB	False	False	False	False		
abErrors[8]	Bool	false	Set in IDB	False	False	False	False		
abErrors[9]	Bool	false	Set in IDB	False	False	False	False		
abErrors[10]	Bool	false	Set in IDB	False	False	False	False		
abErrors[11]	Bool	false	Set in IDB	False	False	False	False		
abErrors[12]	Bool	false	Set in IDB	False	False	False	False		
abErrors[13]	Bool	false	Set in IDB	False	False	False	False		
abErrors[14]	Bool	false	Set in IDB	False	False	False	False		
abErrors[15]	Bool	false	Set in IDB	False	False	False	False		
abErrors[16]	Bool	false	Set in IDB	False	False	False	False		
abErrors[17]	Bool	false	Set in IDB	False	False	False	False		
abErrors[18]	Bool	false	Set in IDB	False	False	False	False		
abErrors[19]	Bool	false	Set in IDB	False	False	False	False		
abErrors[20]	Bool	false	Set in IDB	False	False	False	False		
abErrors[21]	Bool	false	Set in IDB	False	False	False	False		
abErrors[22]	Bool	false	Set in IDB	False	False	False	False		
abErrors[23]	Bool	false	Set in IDB	False	False	False	False		
abErrors[24]	Bool	false	Set in IDB	False	False	False	False		
abErrors[25]	Bool	false	Set in IDB	False	False	False	False		
abErrors[26]	Bool	false	Set in IDB	False	False	False	False		
abErrors[27]	Bool	false	Set in IDB	False	False	False	False		
abErrors[28]	Bool	false	Set in IDB	False	False	False	False		
abErrors[29]	Bool	false	Set in IDB	False	False	False	False		
abErrors[30]	Bool	false	Set in IDB	False	False	False	False		
iNextScrollNum	Int	1	Non-retain	False	False	False	False		Index of next error position
iErrorsScrollNum	Int	1	Non-retain	False	False	False	False		Index of current error position
bScrolling	Bool	false	Non-retain	False	False	False	False		Indicates we are scrolling
bTON_ErrorDelay	Bool	false	Non-retain	False	False	False	False		
▼ TON_TimeOut	TON_TIME		Non-retain	False	False	False	True		Timer for Error Timeout
PT	Time	T#0ms	Non-retain	False	False	False	False		
ET	Time	T#0ms	Non-retain	False	False	False	False		
IN	Bool	false	Non-retain	False	False	False	False		
Q	Bool	false	Non-retain	False	False	False	False		
iLastMode	Int	0	Non-retain	False	False	False	False		Last mode code
bNewMode	Bool	false	Non-retain	False	False	False	False		New mode selected
bEnableHome	Bool	false	Non-retain	False	False	False	False		Home position enabled
bEnableWork	Bool	false	Non-retain	False	False	False	False		Work position enabled
bAutoMode	Bool	false	Non-retain	False	False	False	False		Auto Mode is active
bManualMode	Bool	false	Non-retain	False	False	False	False		Manual Mode is active
bReset	Bool	false	Non-retain	False	False	False	False		
bTON_TimeOut	Bool	false	Non-retain	False	False	False	False		
bPB_Home	Bool	false	Non-retain	False	False	False	False		
bPB_Work	Bool	false	Non-retain	False	False	False	False		
bPB_ResetError	Bool	false	Non-retain	False	False	False	False		


Name	Data type	Default value	Retain	Accessible from HMI/OPC UA/Web API	Writable from HMI/OPC UA/Web API	Visible in HMI engineering	Setpoint	Supervision	Comment
OUT2	"fbValve_Solenoid"			True	True	True	True		
Input									
tInTimeout	Time	T#0ms	Non-retain	False	False	False	False		Timeout time for an actuator's feedback to activate before giving a fault
iInMode	Int	0	Non-retain	False	False	False	False		Mode Selection
bInEstop	Bool	false	Non-retain	False	False	False	False		Estop
bInSignalHome	Bool	false	Non-retain	False	False	False	False		Home position feedback
bInSignalWork	Bool	false	Non-retain	False	False	False	False		Work position feedback
bInEnable	Bool	false	Non-retain	False	False	False	False		Home and Work Enabled
bInCommandWork	Bool	false	Non-retain	False	False	False	False		Move to work position in automatic mode
bInResetError	Bool	false	Non-retain	False	False	False	False		Reset Error
bInSimulate	Bool	false	Non-retain	False	False	False	False		Activate device simulation
Output									
bOutCommandHome	Bool	false	Non-retain	False	False	False	False		Home position command
bOutCommandWork	Bool	false	Non-retain	False	False	False	False		Work position command
bOutActiveHome	Bool	false	Non-retain	False	False	False	False		Valve is in home position
bOutActiveWork	Bool	false	Non-retain	False	False	False	False		Valve is in work position
bOutAuto	Bool	false	Non-retain	False	False	False	False		Block in auto mode
bOutError	Bool	false	Non-retain	False	False	False	False		Error exists
ERROR_Valve	"udtError_Valve"		Non-retain	False	False	False	False		Valve error structure
NoHomeFeedback	Bool	false	Non-retain	False	False	False	False		Home position feedback not active
NoWorkFeedback	Bool	false	Non-retain	False	False	False	False		Work position feedback not active
HomeFeedbackStillActive	Bool	false	Non-retain	False	False	False	False		Home position feedback still active
WorkFeedbackStillActive	Bool	false	Non-retain	False	False	False	False		Work position feedback still active
InOut									
HMI_ValveControl	"udtHMI_ValveControl"			False	False	False	False		HMI valve control
Static									
ErrorScroller	"fbErrorScroller"			False	False	False	True		Sub-block to handle error scroller
Input									
bInError01	Bool	false	Set in IDB	False	False	False	False		Error 1 In Error Array
bInError02	Bool	false	Set in IDB	False	False	False	False		Error 2 In Error Array
bInError03	Bool	false	Set in IDB	False	False	False	False		Error 3 In Error Array
bInError04	Bool	false	Set in IDB	False	False	False	False		Error 4 In Error Array
bInError05	Bool	false	Set in IDB	False	False	False	False		Error 5 In Error Array
bInError06	Bool	false	Set in IDB	False	False	False	False		Error 6 In Error Array
bInError07	Bool	false	Set in IDB	False	False	False	False		Error 7 In Error Array
bInError08	Bool	false	Set in IDB	False	False	False	False		Error 8 In Error Array
bInError09	Bool	false	Set in IDB	False	False	False	False		Error 9 In Error Array
bInError10	Bool	false	Set in IDB	False	False	False	False		Error 10 In Error Array
bInError11	Bool	false	Set in IDB	False	False	False	False		Error 11 In Error Array
bInError12	Bool	false	Set in IDB	False	False	False	False		Error 12 In Error Array
bInError13	Bool	false	Set in IDB	False	False	False	False		Error 13 In Error Array
bInError14	Bool	false	Set in IDB	False	False	False	False		Error 14 In Error Array
bInError15	Bool	false	Set in IDB	False	False	False	False		Error 15 In Error Array
bInError16	Bool	false	Set in IDB	False	False	False	False		Error 16 In Error Array
bInError17	Bool	false	Set in IDB	False	False	False	False		Error 17 In Error Array
bInError18	Bool	false	Set in IDB	False	False	False	False		Error 18 In Error Array
bInError19	Bool	false	Set in IDB	False	False	False	False		Error 19 In Error Array
bInError20	Bool	false	Set in IDB	False	False	False	False		Error 20 In Error Array
bInError21	Bool	false	Set in IDB	False	False	False	False		Error 21 In Error Array
bInError22	Bool	false	Set in IDB	False	False	False	False		Error 22 In Error Array
bInError23	Bool	false	Set in IDB	False	False	False	False		Error 23 In Error Array
bInError24	Bool	false	Set in IDB	False	False	False	False		Error 24 In Error Array
bInError25	Bool	false	Set in IDB	False	False	False	False		Error 25 In Error Array
bInError26	Bool	false	Set in IDB	False	False	False	False		Error 26 In Error Array
bInError27	Bool	false	Set in IDB	False	False	False	False		Error 27 In Error Array
bInError28	Bool	false	Set in IDB	False	False	False	False		Error 28 In Error Array
bInError29	Bool	false	Set in IDB	False	False	False	False		Error 29 In Error Array
bInError30	Bool	false	Set in IDB	False	False	False	False		Error 30 In Error Array
Output									
bOutErrorExists	Bool	false	Set in IDB	False	False	False	False		An Error Exists
iOutScrollingErrorNumber	Int	0	Set in IDB	False	False	False	False		Current Index when scrolling through errors
InOut									
Static									

Name	Data type	Default value	Retain	Accessible from HMI/OPC UA/Web API	Writable from HMI/OPC UA/Web API	Visible in HMI engineering	Setpoint	Supervision	Comment
▼ TON_ErrorDelay	TON_TIME		Non-retain	False	False	False	True		Delay between each scroll for a new error
PT	Time	T#0ms	Non-retain	False	False	False	False		
ET	Time	T#0ms	Non-retain	False	False	False	False		
IN	Bool	false	Non-retain	False	False	False	False		
Q	Bool	false	Non-retain	False	False	False	False		
▼ abErrors	Array[1..30] of Bool		Set in IDB	False	False	False	False		
abErrors[1]	Bool	false	Set in IDB	False	False	False	False		
abErrors[2]	Bool	false	Set in IDB	False	False	False	False		
abErrors[3]	Bool	false	Set in IDB	False	False	False	False		
abErrors[4]	Bool	false	Set in IDB	False	False	False	False		
abErrors[5]	Bool	false	Set in IDB	False	False	False	False		
abErrors[6]	Bool	false	Set in IDB	False	False	False	False		
abErrors[7]	Bool	false	Set in IDB	False	False	False	False		
abErrors[8]	Bool	false	Set in IDB	False	False	False	False		
abErrors[9]	Bool	false	Set in IDB	False	False	False	False		
abErrors[10]	Bool	false	Set in IDB	False	False	False	False		
abErrors[11]	Bool	false	Set in IDB	False	False	False	False		
abErrors[12]	Bool	false	Set in IDB	False	False	False	False		
abErrors[13]	Bool	false	Set in IDB	False	False	False	False		
abErrors[14]	Bool	false	Set in IDB	False	False	False	False		
abErrors[15]	Bool	false	Set in IDB	False	False	False	False		
abErrors[16]	Bool	false	Set in IDB	False	False	False	False		
abErrors[17]	Bool	false	Set in IDB	False	False	False	False		
abErrors[18]	Bool	false	Set in IDB	False	False	False	False		
abErrors[19]	Bool	false	Set in IDB	False	False	False	False		
abErrors[20]	Bool	false	Set in IDB	False	False	False	False		
abErrors[21]	Bool	false	Set in IDB	False	False	False	False		
abErrors[22]	Bool	false	Set in IDB	False	False	False	False		
abErrors[23]	Bool	false	Set in IDB	False	False	False	False		
abErrors[24]	Bool	false	Set in IDB	False	False	False	False		
abErrors[25]	Bool	false	Set in IDB	False	False	False	False		
abErrors[26]	Bool	false	Set in IDB	False	False	False	False		
abErrors[27]	Bool	false	Set in IDB	False	False	False	False		
abErrors[28]	Bool	false	Set in IDB	False	False	False	False		
abErrors[29]	Bool	false	Set in IDB	False	False	False	False		
abErrors[30]	Bool	false	Set in IDB	False	False	False	False		
iNextScrollNum	Int	1	Non-retain	False	False	False	False		Index of next error position
iErrorsScrollNum	Int	1	Non-retain	False	False	False	False		Index of current error position
bScrolling	Bool	false	Non-retain	False	False	False	False		Indicates we are scrolling
bTON_ErrorDelay	Bool	false	Non-retain	False	False	False	False		
▼ TON_TimeOut	TON_TIME		Non-retain	False	False	False	True		Timer for Error Timeout
PT	Time	T#0ms	Non-retain	False	False	False	False		
ET	Time	T#0ms	Non-retain	False	False	False	False		
IN	Bool	false	Non-retain	False	False	False	False		
Q	Bool	false	Non-retain	False	False	False	False		
iLastMode	Int	0	Non-retain	False	False	False	False		Last mode code
bNewMode	Bool	false	Non-retain	False	False	False	False		New mode selected
bEnableHome	Bool	false	Non-retain	False	False	False	False		Home position enabled
bEnableWork	Bool	false	Non-retain	False	False	False	False		Work position enabled
bAutoMode	Bool	false	Non-retain	False	False	False	False		Auto Mode is active
bManualMode	Bool	false	Non-retain	False	False	False	False		Manual Mode is active
bReset	Bool	false	Non-retain	False	False	False	False		
bTON_TimeOut	Bool	false	Non-retain	False	False	False	False		
bPB_Home	Bool	false	Non-retain	False	False	False	False		
bPB_Work	Bool	false	Non-retain	False	False	False	False		
bPB_ResetError	Bool	false	Non-retain	False	False	False	False		
▼ OUT3	"fbValve_Solenoid"			True	True	True	True		
▼ Input									
tInTimeout	Time	T#0ms	Non-retain	False	False	False	False		Timeout time for an actuator's feedback to activate before giving a fault
iInMode	Int	0	Non-retain	False	False	False	False		Mode Selection
bInEstop	Bool	false	Non-retain	False	False	False	False		Estop
bInSignalHome	Bool	false	Non-retain	False	False	False	False		Home position feedback
bInSignalWork	Bool	false	Non-retain	False	False	False	False		Work position feedback
bInEnable	Bool	false	Non-retain	False	False	False	False		Home and Work Enabled
bInCommandWork	Bool	false	Non-retain	False	False	False	False		Move to work position in automatic mode
bInResetError	Bool	false	Non-retain	False	False	False	False		Reset Error
bInSimulate	Bool	false	Non-retain	False	False	False	False		Activate device simulation


Name	Data type	Default value	Retain	Accessible from HMI/OPC UA/Web API	Writable from HMI/OPC UA/Web API	Visible in HMI engineering	Setpoint	Supervision	Comment
Output									
bOutCommandHome	Bool	false	Non-retain	False	False	False	False		Home position command
bOutCommandWork	Bool	false	Non-retain	False	False	False	False		Work position command
bOutActiveHome	Bool	false	Non-retain	False	False	False	False		Valve is in home position
bOutActiveWork	Bool	false	Non-retain	False	False	False	False		Valve is in work position
bOutAuto	Bool	false	Non-retain	False	False	False	False		Block in auto mode
bOutError	Bool	false	Non-retain	False	False	False	False		Error exists
ERROR_Valve	"udtError_Valve"		Non-retain	False	False	False	False		Valve error structure
NoHomeFeedback	Bool	false	Non-retain	False	False	False	False		Home position feedback not active
NoWorkFeedback	Bool	false	Non-retain	False	False	False	False		Work position feedback not active
HomeFeedbackStillActive	Bool	false	Non-retain	False	False	False	False		Home position feedback still active
WorkFeedbackStillActive	Bool	false	Non-retain	False	False	False	False		Work position feedback still active
InOut									
HMI_ValveControl	"udtHMI_ValveControl"			False	False	False	False		HMI valve control
Static									
ErrorScroller	"fbErrorScroller"			False	False	False	True		Sub-block to handle error scroller
Input									
bInError01	Bool	false	Set in IDB	False	False	False	False		Error 1 In Error Array
bInError02	Bool	false	Set in IDB	False	False	False	False		Error 2 In Error Array
bInError03	Bool	false	Set in IDB	False	False	False	False		Error 3 In Error Array
bInError04	Bool	false	Set in IDB	False	False	False	False		Error 4 In Error Array
bInError05	Bool	false	Set in IDB	False	False	False	False		Error 5 In Error Array
bInError06	Bool	false	Set in IDB	False	False	False	False		Error 6 In Error Array
bInError07	Bool	false	Set in IDB	False	False	False	False		Error 7 In Error Array
bInError08	Bool	false	Set in IDB	False	False	False	False		Error 8 In Error Array
bInError09	Bool	false	Set in IDB	False	False	False	False		Error 9 In Error Array
bInError10	Bool	false	Set in IDB	False	False	False	False		Error 10 In Error Array
bInError11	Bool	false	Set in IDB	False	False	False	False		Error 11 In Error Array
bInError12	Bool	false	Set in IDB	False	False	False	False		Error 12 In Error Array
bInError13	Bool	false	Set in IDB	False	False	False	False		Error 13 In Error Array
bInError14	Bool	false	Set in IDB	False	False	False	False		Error 14 In Error Array
bInError15	Bool	false	Set in IDB	False	False	False	False		Error 15 In Error Array
bInError16	Bool	false	Set in IDB	False	False	False	False		Error 16 In Error Array
bInError17	Bool	false	Set in IDB	False	False	False	False		Error 17 In Error Array
bInError18	Bool	false	Set in IDB	False	False	False	False		Error 18 In Error Array
bInError19	Bool	false	Set in IDB	False	False	False	False		Error 19 In Error Array
bInError20	Bool	false	Set in IDB	False	False	False	False		Error 20 In Error Array
bInError21	Bool	false	Set in IDB	False	False	False	False		Error 21 In Error Array
bInError22	Bool	false	Set in IDB	False	False	False	False		Error 22 In Error Array
bInError23	Bool	false	Set in IDB	False	False	False	False		Error 23 In Error Array
bInError24	Bool	false	Set in IDB	False	False	False	False		Error 24 In Error Array
bInError25	Bool	false	Set in IDB	False	False	False	False		Error 25 In Error Array
bInError26	Bool	false	Set in IDB	False	False	False	False		Error 26 In Error Array
bInError27	Bool	false	Set in IDB	False	False	False	False		Error 27 In Error Array
bInError28	Bool	false	Set in IDB	False	False	False	False		Error 28 In Error Array
bInError29	Bool	false	Set in IDB	False	False	False	False		Error 29 In Error Array
bInError30	Bool	false	Set in IDB	False	False	False	False		Error 30 In Error Array
Output									
bOutErrorExists	Bool	false	Set in IDB	False	False	False	False		An Error Exists
iOutScrollingErrorNumber	Int	0	Set in IDB	False	False	False	False		Current Index when scrolling through errors
InOut									
Static									
TON_ErrorDelay	TON_TIME		Non-retain	False	False	False	True		Delay between each scroll for a new error
PT	Time	T#0ms	Non-retain	False	False	False	False		
ET	Time	T#0ms	Non-retain	False	False	False	False		
IN	Bool	false	Non-retain	False	False	False	False		
Q	Bool	false	Non-retain	False	False	False	False		
abErrors	Array[1..30] of Bool		Set in IDB	False	False	False	False		
abErrors[1]	Bool	false	Set in IDB	False	False	False	False		
abErrors[2]	Bool	false	Set in IDB	False	False	False	False		
abErrors[3]	Bool	false	Set in IDB	False	False	False	False		
abErrors[4]	Bool	false	Set in IDB	False	False	False	False		
abErrors[5]	Bool	false	Set in IDB	False	False	False	False		
abErrors[6]	Bool	false	Set in IDB	False	False	False	False		

Name	Data type	Default value	Retain	Accessible from HMI/OPC UA/Web API	Writ-able from HMI/ OPC UA/ Web API	Visible in HMI engi-neering	Setpoint	Supervi-sion	Comment
abErrors[7]	Bool	false	Set in IDB	False	False	False	False		
abErrors[8]	Bool	false	Set in IDB	False	False	False	False		
abErrors[9]	Bool	false	Set in IDB	False	False	False	False		
abErrors[10]	Bool	false	Set in IDB	False	False	False	False		
abErrors[11]	Bool	false	Set in IDB	False	False	False	False		
abErrors[12]	Bool	false	Set in IDB	False	False	False	False		
abErrors[13]	Bool	false	Set in IDB	False	False	False	False		
abErrors[14]	Bool	false	Set in IDB	False	False	False	False		
abErrors[15]	Bool	false	Set in IDB	False	False	False	False		
abErrors[16]	Bool	false	Set in IDB	False	False	False	False		
abErrors[17]	Bool	false	Set in IDB	False	False	False	False		
abErrors[18]	Bool	false	Set in IDB	False	False	False	False		
abErrors[19]	Bool	false	Set in IDB	False	False	False	False		
abErrors[20]	Bool	false	Set in IDB	False	False	False	False		
abErrors[21]	Bool	false	Set in IDB	False	False	False	False		
abErrors[22]	Bool	false	Set in IDB	False	False	False	False		
abErrors[23]	Bool	false	Set in IDB	False	False	False	False		
abErrors[24]	Bool	false	Set in IDB	False	False	False	False		
abErrors[25]	Bool	false	Set in IDB	False	False	False	False		
abErrors[26]	Bool	false	Set in IDB	False	False	False	False		
abErrors[27]	Bool	false	Set in IDB	False	False	False	False		
abErrors[28]	Bool	false	Set in IDB	False	False	False	False		
abErrors[29]	Bool	false	Set in IDB	False	False	False	False		
abErrors[30]	Bool	false	Set in IDB	False	False	False	False		
iNextScrollNum	Int	1	Non-retain	False	False	False	False		Index of next error position
iErrorsScrollNum	Int	1	Non-retain	False	False	False	False		Index of current error posi-tion
bScrolling	Bool	false	Non-retain	False	False	False	False		Indicates we are scrolling
bTON_ErrorDelay	Bool	false	Non-retain	False	False	False	False		
TON_TimeOut	TON_TIME		Non-retain	False	False	False	True		Timer for Error Timeout
PT	Time	T#0ms	Non-retain	False	False	False	False		
ET	Time	T#0ms	Non-retain	False	False	False	False		
IN	Bool	false	Non-retain	False	False	False	False		
Q	Bool	false	Non-retain	False	False	False	False		
iLastMode	Int	0	Non-retain	False	False	False	False		Last mode code
bNewMode	Bool	false	Non-retain	False	False	False	False		New mode selected
bEnableHome	Bool	false	Non-retain	False	False	False	False		Home position enabled
bEnableWork	Bool	false	Non-retain	False	False	False	False		Work position enabled
bAutoMode	Bool	false	Non-retain	False	False	False	False		Auto Mode is active
bManualMode	Bool	false	Non-retain	False	False	False	False		Manual Mode is active
bReset	Bool	false	Non-retain	False	False	False	False		
bTON_TimeOut	Bool	false	Non-retain	False	False	False	False		
bPB_Home	Bool	false	Non-retain	False	False	False	False		
bPB_Work	Bool	false	Non-retain	False	False	False	False		
bPB_ResetError	Bool	false	Non-retain	False	False	False	False		
Temp									
Constant									


Network 1: IN + OUT

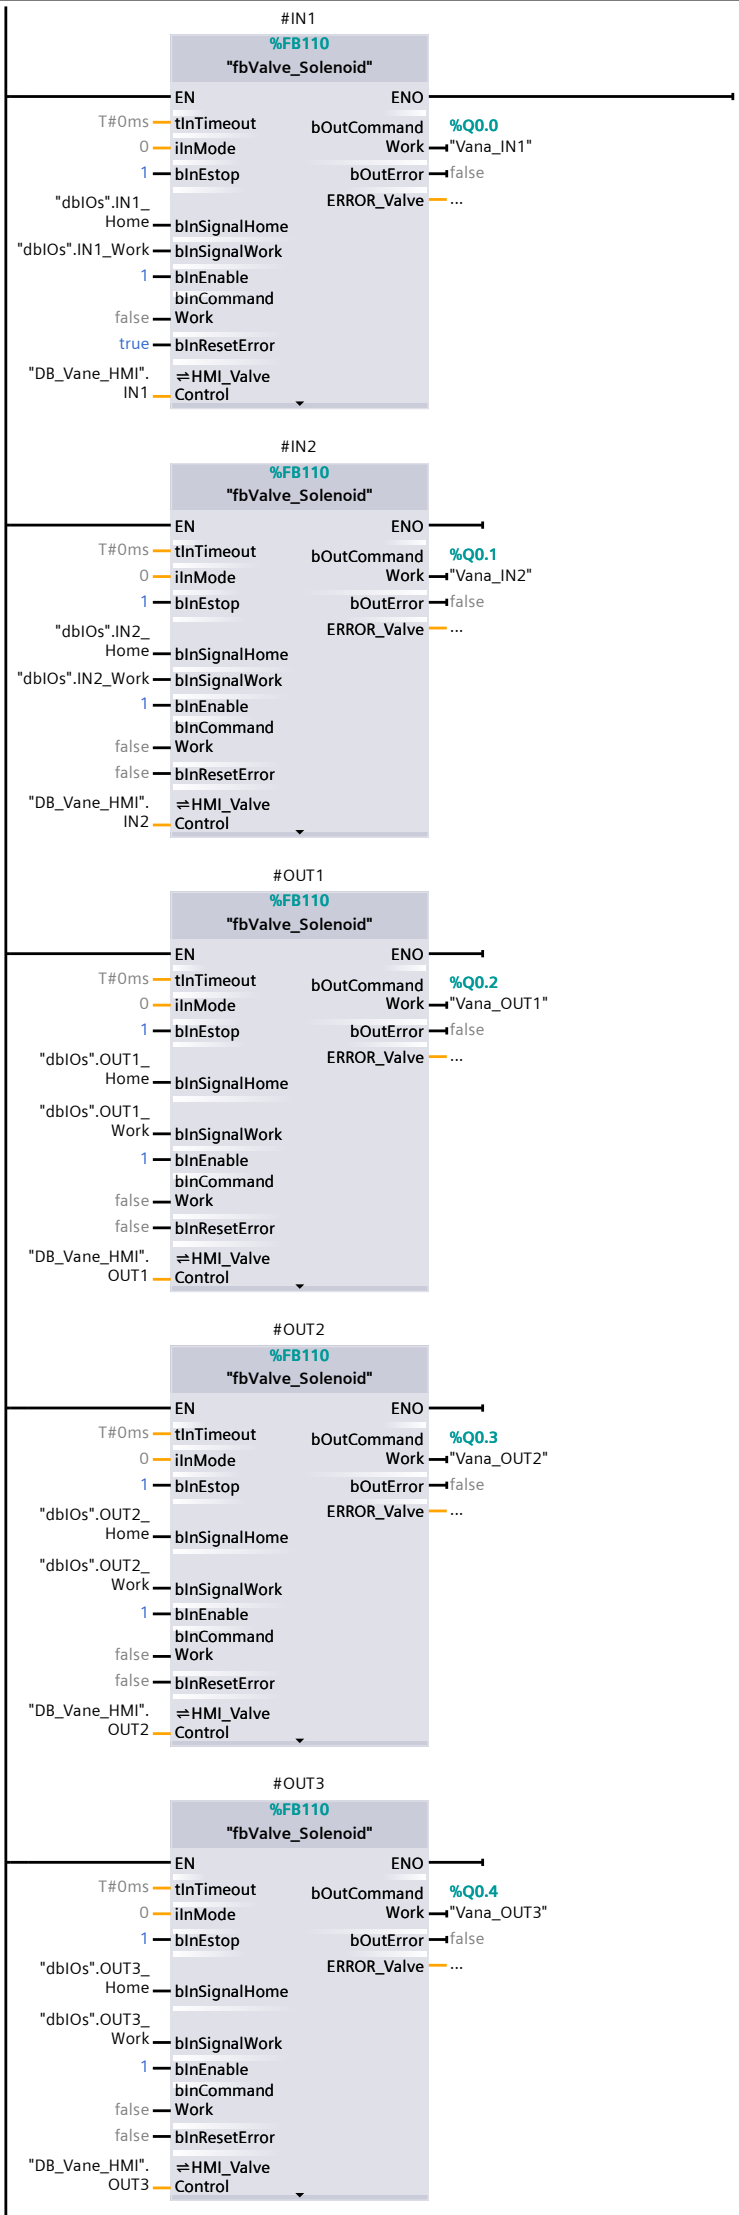


Network 2: PLS

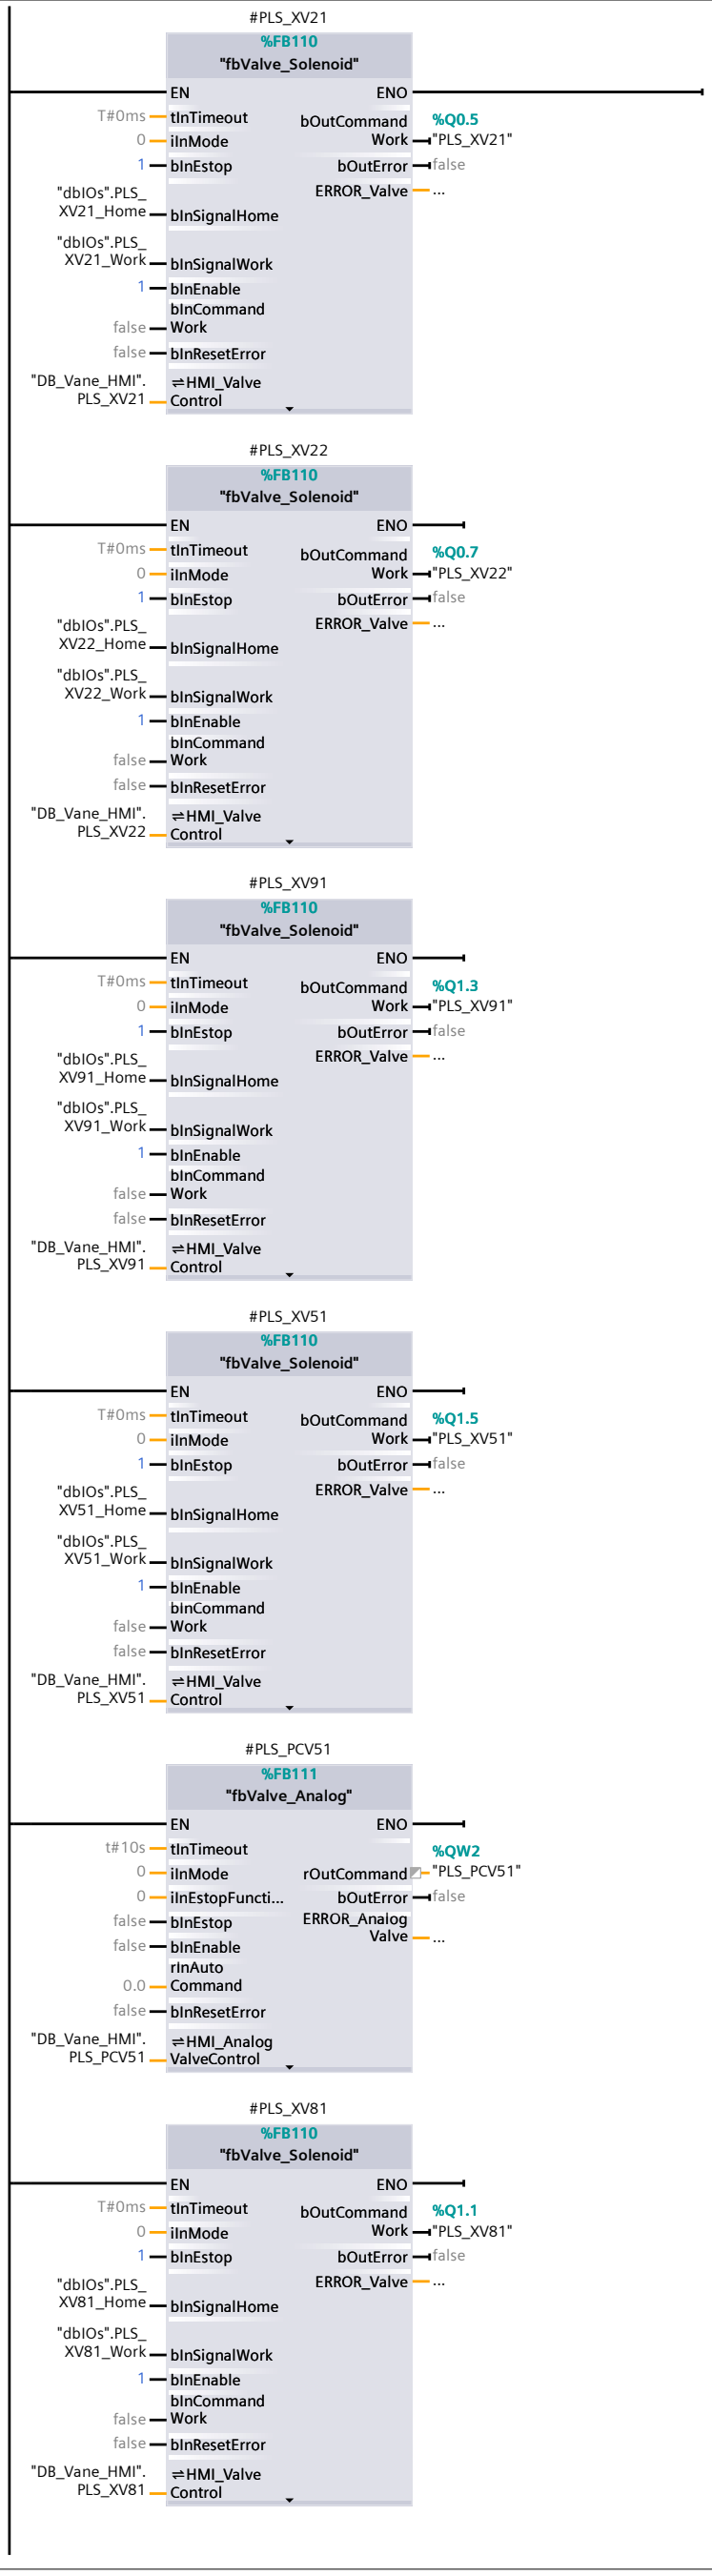

Network 3: PRS

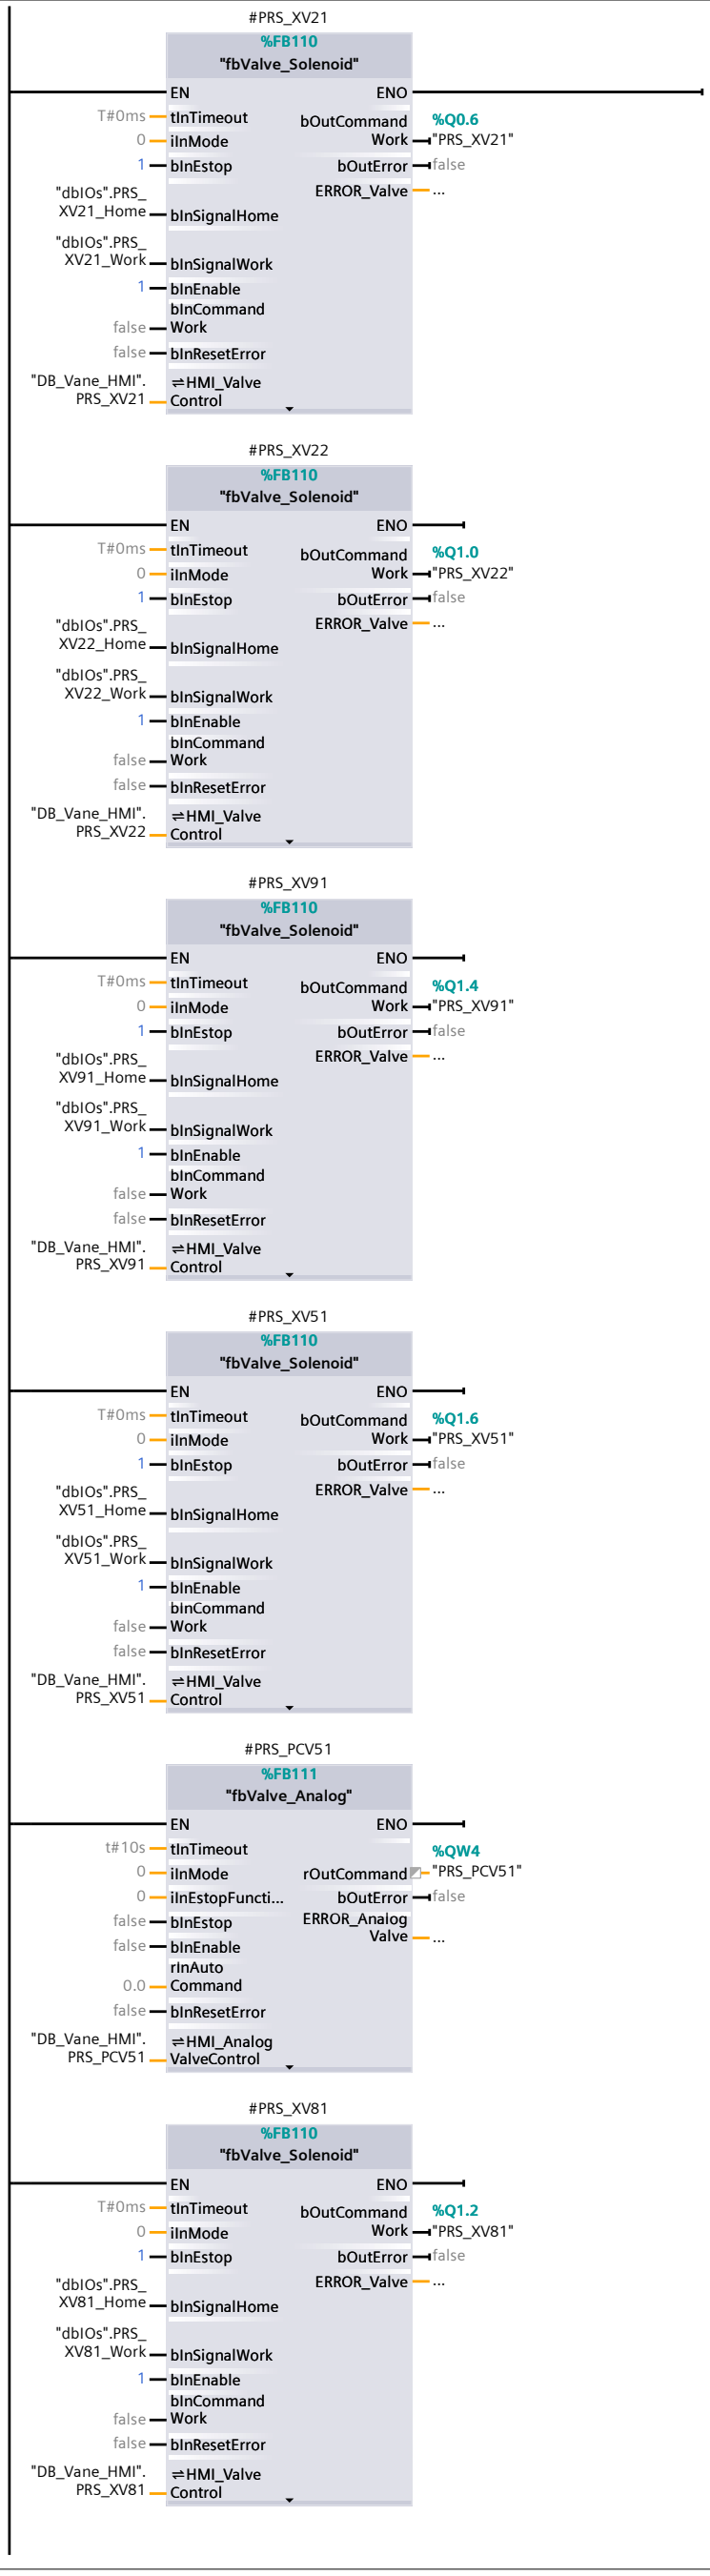
#PRS_XV21
%FB110
"fbValve_Solenoid"
EN
ENO
T#0ms tInTimeout
0 iInMode
1 bInEstop
"dbIOs".PRS_XV21_Home bInSignalHome
"dbIOs".PRS_XV21_Work bInSignalWork
1 bInEnable
false bInCommand Work
false bInResetError
"DB_Vane_HMI".PRS_XV21 ⇌HMI_Valve Control
bOutCommand Work %Q0.6 "PRS_XV21"
bOutError false
ERROR_Valve ...
#PRS_XV22
%FB110
"fbValve_Solenoid"
EN
ENO
T#0ms tInTimeout
0 iInMode
1 bInEstop
"dbIOs".PRS_XV22_Home bInSignalHome
"dbIOs".PRS_XV22_Work bInSignalWork
1 bInEnable
false bInCommand Work
false bInResetError
"DB_Vane_HMI".PRS_XV22 ⇌HMI_Valve Control
bOutCommand Work %Q1.0 "PRS_XV22"
bOutError false
ERROR_Valve ...
#PRS_XV91
%FB110
"fbValve_Solenoid"
EN
ENO
T#0ms tInTimeout
0 iInMode
1 bInEstop
"dbIOs".PRS_XV91_Home bInSignalHome
"dbIOs".PRS_XV91_Work bInSignalWork
1 bInEnable
false bInCommand Work
false bInResetError
"DB_Vane_HMI".PRS_XV91 ⇌HMI_Valve Control
bOutCommand Work %Q1.4 "PRS_XV91"
bOutError false
ERROR_Valve ...
#PRS_XV51
%FB110
"fbValve_Solenoid"
EN
ENO
T#0ms tInTimeout
0 iInMode
1 bInEstop
"dbIOs".PRS_XV51_Home bInSignalHome
"dbIOs".PRS_XV51_Work bInSignalWork
1 bInEnable
false bInCommand Work
false bInResetError
"DB_Vane_HMI".PRS_XV51 ⇌HMI_Valve Control
bOutCommand Work %Q1.6 "PRS_XV51"
bOutError false
ERROR_Valve ...
#PRS_PCV51
%FB111
"fbValve_Analog"
EN
ENO
t#10s tInTimeout
0 iInMode
0 iInEstopFuncti...
false bInEstop
false bInEnable
0.0 rInAuto Command
false bInResetError
"DB_Vane_HMI".PRS_PCV51 ⇌HMI_Analog ValveControl
rOutCommand %QW4 "PRS_PCV51"
bOutError false
ERROR_Analog Valve ...
#PRS_XV81
%FB110
"fbValve_Solenoid"
EN
ENO
T#0ms tInTimeout
0 iInMode
1 bInEstop
"dbIOs".PRS_XV81_Home bInSignalHome
"dbIOs".PRS_XV81_Work bInSignalWork
1 bInEnable
false bInCommand Work
false bInResetError
"DB_Vane_HMI".PRS_XV81 ⇌HMI_Valve Control
bOutCommand Work %Q1.2 "PRS_XV81"
bOutError false
ERROR_Valve ...

Network 4:



Fabrica / PLC_1 [CPU 1511-1 PN] / Program blocks

FB_Control_Vane_DB [DB1]

FB_Control_Vane_DB Properties							
General							
Name	FB_Control_Vane_DB	**Number**	1	**Type**	DB	**Language**	DB
Numbering	Automatic						
Information							
Title		**Author**		**Comment**		**Family**	
Version	0.1	**User-defined ID**					

Name	Data type	Start value	Retain	Accessible from HMI/OPC UA/Web API	Writable from HMI/OPC UA/Web API	Visible in HMI engineering	Setpoint	Supervision	Comment
Input									
Output									
InOut									
▼ Static									
▼ PLS_XV21	"fbValve_Solenoid"		False	True	True	True	True		
▼ Input									
tInTimeout	Time	T#0ms	False	False	False	False	False		Timeout time for an actuator's feedback to activate before giving a fault
iInMode	Int	0	False	False	False	False	False		Mode Selection
bInEstop	Bool	false	False	False	False	False	False		Estop
bInSignalHome	Bool	false	False	False	False	False	False		Home position feedback
bInSignalWork	Bool	false	False	False	False	False	False		Work position feedback
bInEnable	Bool	false	False	False	False	False	False		Home and Work Enabled
bInCommandWork	Bool	false	False	False	False	False	False		Move to work position in automatic mode
bInResetError	Bool	false	False	False	False	False	False		Reset Error
bInSimulate	Bool	false	False	False	False	False	False		Activate device simulation
▼ Output									
bOutCommandHome	Bool	false	False	False	False	False	False		Home position command
bOutCommandWork	Bool	false	False	False	False	False	False		Work position command
bOutActiveHome	Bool	false	False	False	False	False	False		Valve is in home position
bOutActiveWork	Bool	false	False	False	False	False	False		Valve is in work position
bOutAuto	Bool	false	False	False	False	False	False		Block in auto mode
bOutError	Bool	false	False	False	False	False	False		Error exists
▼ ERROR_Valve	"udtError_Valve"		False	False	False	False	False		Valve error structure
NoHomeFeedback	Bool	false	False	False	False	False	False		Home position feedback not active
NoWorkFeedback	Bool	false	False	False	False	False	False		Work position feedback not active
HomeFeedbackStillActive	Bool	false	False	False	False	False	False		Home position feedback still active
WorkFeedbackStillActive	Bool	false	False	False	False	False	False		Work position feedback still active
▼ InOut									
HMI_ValveControl	"udtHMI_ValveControl"		False	False	False	False	False		HMI valve control
▼ Static									
▼ ErrorScroller	"fbErrorScroller"		False	False	False	False	True		Sub-block to handle error scroller
▼ Input									
bInError01	Bool	false	False	False	False	False	False		Error 1 In Error Array
bInError02	Bool	false	False	False	False	False	False		Error 2 In Error Array
bInError03	Bool	false	False	False	False	False	False		Error 3 In Error Array
bInError04	Bool	false	False	False	False	False	False		Error 4 In Error Array
bInError05	Bool	false	False	False	False	False	False		Error 5 In Error Array
bInError06	Bool	false	False	False	False	False	False		Error 6 In Error Array
bInError07	Bool	false	False	False	False	False	False		Error 7 In Error Array
bInError08	Bool	false	False	False	False	False	False		Error 8 In Error Array
bInError09	Bool	false	False	False	False	False	False		Error 9 In Error Array
bInError10	Bool	false	False	False	False	False	False		Error 10 In Error Array
bInError11	Bool	false	False	False	False	False	False		Error 11 In Error Array
bInError12	Bool	false	False	False	False	False	False		Error 12 In Error Array
bInError13	Bool	false	False	False	False	False	False		Error 13 In Error Array
bInError14	Bool	false	False	False	False	False	False		Error 14 In Error Array
bInError15	Bool	false	False	False	False	False	False		Error 15 In Error Array
bInError16	Bool	false	False	False	False	False	False		Error 16 In Error Array
bInError17	Bool	false	False	False	False	False	False		Error 17 In Error Array
bInError18	Bool	false	False	False	False	False	False		Error 18 In Error Array
bInError19	Bool	false	False	False	False	False	False		Error 19 In Error Array
bInError20	Bool	false	False	False	False	False	False		Error 20 In Error Array
bInError21	Bool	false	False	False	False	False	False		Error 21 In Error Array
bInError22	Bool	false	False	False	False	False	False		Error 22 In Error Array

Name	Data type	Start value	Retain	Accessible from HMI/OPC UA/Web API	Writable from HMI/OPC UA/Web API	Visible in HMI engineering	Setpoint	Supervision	Comment
bInError23	Bool	false	False	False	False	False	False		Error 23 In Error Array
bInError24	Bool	false	False	False	False	False	False		Error 24 In Error Array
bInError25	Bool	false	False	False	False	False	False		Error 25 In Error Array
bInError26	Bool	false	False	False	False	False	False		Error 26 In Error Array
bInError27	Bool	false	False	False	False	False	False		Error 27 In Error Array
bInError28	Bool	false	False	False	False	False	False		Error 28 In Error Array
bInError29	Bool	false	False	False	False	False	False		Error 29 In Error Array
bInError30	Bool	false	False	False	False	False	False		Error 30 In Error Array
▼ Output									
bOutErrorExists	Bool	false	False	False	False	False	False		An Error Exists
iOutScrollingError-Number	Int	0	False	False	False	False	False		Current Index when scrolling through errors
InOut									
▼ Static									
▼ TON_ErrorDelay	TON_TIME		False	False	False	False	True		Delay between each scroll for a new error
PT	Time	T#0ms	False	False	False	False	False		
ET	Time	T#0ms	False	False	False	False	False		
IN	Bool	false	False	False	False	False	False		
Q	Bool	false	False	False	False	False	False		
▼ abErrors	Array[1..30] of Bool		False	False	False	False	False		
abErrors[1]	Bool	false	False	False	False	False	False		
abErrors[2]	Bool	false	False	False	False	False	False		
abErrors[3]	Bool	false	False	False	False	False	False		
abErrors[4]	Bool	false	False	False	False	False	False		
abErrors[5]	Bool	false	False	False	False	False	False		
abErrors[6]	Bool	false	False	False	False	False	False		
abErrors[7]	Bool	false	False	False	False	False	False		
abErrors[8]	Bool	false	False	False	False	False	False		
abErrors[9]	Bool	false	False	False	False	False	False		
abErrors[10]	Bool	false	False	False	False	False	False		
abErrors[11]	Bool	false	False	False	False	False	False		
abErrors[12]	Bool	false	False	False	False	False	False		
abErrors[13]	Bool	false	False	False	False	False	False		
abErrors[14]	Bool	false	False	False	False	False	False		
abErrors[15]	Bool	false	False	False	False	False	False		
abErrors[16]	Bool	false	False	False	False	False	False		
abErrors[17]	Bool	false	False	False	False	False	False		
abErrors[18]	Bool	false	False	False	False	False	False		
abErrors[19]	Bool	false	False	False	False	False	False		
abErrors[20]	Bool	false	False	False	False	False	False		
abErrors[21]	Bool	false	False	False	False	False	False		
abErrors[22]	Bool	false	False	False	False	False	False		
abErrors[23]	Bool	false	False	False	False	False	False		
abErrors[24]	Bool	false	False	False	False	False	False		
abErrors[25]	Bool	false	False	False	False	False	False		
abErrors[26]	Bool	false	False	False	False	False	False		
abErrors[27]	Bool	false	False	False	False	False	False		
abErrors[28]	Bool	false	False	False	False	False	False		
abErrors[29]	Bool	false	False	False	False	False	False		
abErrors[30]	Bool	false	False	False	False	False	False		
iNextScrollNum	Int	1	False	False	False	False	False		Index of next error position
iErrorsScrollNum	Int	1	False	False	False	False	False		Index of current error position
bScrolling	Bool	false	False	False	False	False	False		Indicates we are scrolling
bTON_ErrorDelay	Bool	false	False	False	False	False	False		
▼ TON_TimeOut	TON_TIME		False	False	False	False	True		Timer for Error Timeout
PT	Time	T#0ms	False	False	False	False	False		
ET	Time	T#0ms	False	False	False	False	False		
IN	Bool	false	False	False	False	False	False		
Q	Bool	false	False	False	False	False	False		
iLastMode	Int	0	False	False	False	False	False		Last mode code
bNewMode	Bool	false	False	False	False	False	False		New mode selected
bEnableHome	Bool	false	False	False	False	False	False		Home position enabled
bEnableWork	Bool	false	False	False	False	False	False		Work position enabled
bAutoMode	Bool	false	False	False	False	False	False		Auto Mode is active
bManualMode	Bool	false	False	False	False	False	False		Manual Mode is active
bReset	Bool	false	False	False	False	False	False		
bTON_TimeOut	Bool	false	False	False	False	False	False		
bPB_Home	Bool	false	False	False	False	False	False		
bPB_Work	Bool	false	False	False	False	False	False		
bPB_ResetError	Bool	false	False	False	False	False	False		

Name	Data type	Start value	Retain	Accessible from HMI/OPC UA/Web API	Writable from HMI/OPC UA/Web API	Visible in HMI engineering	Setpoint	Supervision	Comment
PLS_XV22	"fbValve_Solenoid"		False	True	True	True	True		
Input									
tInTimeout	Time	T#0ms	False	False	False	False	False		Timeout time for an actuator's feedback to activate before giving a fault
iInMode	Int	0	False	False	False	False	False		Mode Selection
bInEstop	Bool	false	False	False	False	False	False		Estop
bInSignalHome	Bool	false	False	False	False	False	False		Home position feedback
bInSignalWork	Bool	false	False	False	False	False	False		Work position feedback
bInEnable	Bool	false	False	False	False	False	False		Home and Work Enabled
bInCommandWork	Bool	false	False	False	False	False	False		Move to work position in automatic mode
bInResetError	Bool	false	False	False	False	False	False		Reset Error
bInSimulate	Bool	false	False	False	False	False	False		Activate device simulation
Output									
bOutCommandHome	Bool	false	False	False	False	False	False		Home position command
bOutCommandWork	Bool	false	False	False	False	False	False		Work position command
bOutActiveHome	Bool	false	False	False	False	False	False		Valve is in home position
bOutActiveWork	Bool	false	False	False	False	False	False		Valve is in work position
bOutAuto	Bool	false	False	False	False	False	False		Block in auto mode
bOutError	Bool	false	False	False	False	False	False		Error exists
ERROR_Valve	"udtError_Valve"		False	False	False	False	False		Valve error structure
NoHomeFeedback	Bool	false	False	False	False	False	False		Home position feedback not active
NoWorkFeedback	Bool	false	False	False	False	False	False		Work position feedback not active
HomeFeedbackStillActive	Bool	false	False	False	False	False	False		Home position feedback still active
WorkFeedbackStillActive	Bool	false	False	False	False	False	False		Work position feedback still active
InOut									
HMI_ValveControl	"udtHMI_ValveControl"		False	False	False	False	False		HMI valve control
Static									
ErrorScroller	"fbErrorScroller"		False	False	False	False	True		Sub-block to handle error scroller
Input									
bInError01	Bool	false	False	False	False	False	False		Error 1 In Error Array
bInError02	Bool	false	False	False	False	False	False		Error 2 In Error Array
bInError03	Bool	false	False	False	False	False	False		Error 3 In Error Array
bInError04	Bool	false	False	False	False	False	False		Error 4 In Error Array
bInError05	Bool	false	False	False	False	False	False		Error 5 In Error Array
bInError06	Bool	false	False	False	False	False	False		Error 6 In Error Array
bInError07	Bool	false	False	False	False	False	False		Error 7 In Error Array
bInError08	Bool	false	False	False	False	False	False		Error 8 In Error Array
bInError09	Bool	false	False	False	False	False	False		Error 9 In Error Array
bInError10	Bool	false	False	False	False	False	False		Error 10 In Error Array
bInError11	Bool	false	False	False	False	False	False		Error 11 In Error Array
bInError12	Bool	false	False	False	False	False	False		Error 12 In Error Array
bInError13	Bool	false	False	False	False	False	False		Error 13 In Error Array
bInError14	Bool	false	False	False	False	False	False		Error 14 In Error Array
bInError15	Bool	false	False	False	False	False	False		Error 15 In Error Array
bInError16	Bool	false	False	False	False	False	False		Error 16 In Error Array
bInError17	Bool	false	False	False	False	False	False		Error 17 In Error Array
bInError18	Bool	false	False	False	False	False	False		Error 18 In Error Array
bInError19	Bool	false	False	False	False	False	False		Error 19 In Error Array
bInError20	Bool	false	False	False	False	False	False		Error 20 In Error Array
bInError21	Bool	false	False	False	False	False	False		Error 21 In Error Array
bInError22	Bool	false	False	False	False	False	False		Error 22 In Error Array
bInError23	Bool	false	False	False	False	False	False		Error 23 In Error Array
bInError24	Bool	false	False	False	False	False	False		Error 24 In Error Array
bInError25	Bool	false	False	False	False	False	False		Error 25 In Error Array
bInError26	Bool	false	False	False	False	False	False		Error 26 In Error Array
bInError27	Bool	false	False	False	False	False	False		Error 27 In Error Array
bInError28	Bool	false	False	False	False	False	False		Error 28 In Error Array
bInError29	Bool	false	False	False	False	False	False		Error 29 In Error Array
bInError30	Bool	false	False	False	False	False	False		Error 30 In Error Array
Output									
bOutErrorExists	Bool	false	False	False	False	False	False		An Error Exists
iOutScrollingErrorNumber	Int	0	False	False	False	False	False		Current Index when scrolling through errors
InOut									
Static									
TON_ErrorDelay	TON_TIME		False	False	False	False	True		Delay between each scroll for a new error
PT	Time	T#0ms	False	False	False	False	False		

Name	Data type	Start value	Retain	Accessible from HMI/OPC UA/Web API	Writable from HMI/OPC UA/Web API	Visible in HMI engineering	Setpoint	Supervision	Comment
ET	Time	T#0ms	False	False	False	False	False		
IN	Bool	false	False	False	False	False	False		
Q	Bool	false	False	False	False	False	False		
▼ abErrors	Array[1..30] of Bool		False	False	False	False	False		
abErrors[1]	Bool	false	False	False	False	False	False		
abErrors[2]	Bool	false	False	False	False	False	False		
abErrors[3]	Bool	false	False	False	False	False	False		
abErrors[4]	Bool	false	False	False	False	False	False		
abErrors[5]	Bool	false	False	False	False	False	False		
abErrors[6]	Bool	false	False	False	False	False	False		
abErrors[7]	Bool	false	False	False	False	False	False		
abErrors[8]	Bool	false	False	False	False	False	False		
abErrors[9]	Bool	false	False	False	False	False	False		
abErrors[10]	Bool	false	False	False	False	False	False		
abErrors[11]	Bool	false	False	False	False	False	False		
abErrors[12]	Bool	false	False	False	False	False	False		
abErrors[13]	Bool	false	False	False	False	False	False		
abErrors[14]	Bool	false	False	False	False	False	False		
abErrors[15]	Bool	false	False	False	False	False	False		
abErrors[16]	Bool	false	False	False	False	False	False		
abErrors[17]	Bool	false	False	False	False	False	False		
abErrors[18]	Bool	false	False	False	False	False	False		
abErrors[19]	Bool	false	False	False	False	False	False		
abErrors[20]	Bool	false	False	False	False	False	False		
abErrors[21]	Bool	false	False	False	False	False	False		
abErrors[22]	Bool	false	False	False	False	False	False		
abErrors[23]	Bool	false	False	False	False	False	False		
abErrors[24]	Bool	false	False	False	False	False	False		
abErrors[25]	Bool	false	False	False	False	False	False		
abErrors[26]	Bool	false	False	False	False	False	False		
abErrors[27]	Bool	false	False	False	False	False	False		
abErrors[28]	Bool	false	False	False	False	False	False		
abErrors[29]	Bool	false	False	False	False	False	False		
abErrors[30]	Bool	false	False	False	False	False	False		
iNextScrollNum	Int	1	False	False	False	False	False		Index of next error position
iErrorsScrollNum	Int	1	False	False	False	False	False		Index of current error position
bScrolling	Bool	false	False	False	False	False	False		Indicates we are scrolling
bTON_ErrorDelay	Bool	false	False	False	False	False	False		
▼ TON_TimeOut	TON_TIME		False	False	False	False	True		Timer for Error Timeout
PT	Time	T#0ms	False	False	False	False	False		
ET	Time	T#0ms	False	False	False	False	False		
IN	Bool	false	False	False	False	False	False		
Q	Bool	false	False	False	False	False	False		
iLastMode	Int	0	False	False	False	False	False		Last mode code
bNewMode	Bool	false	False	False	False	False	False		New mode selected
bEnableHome	Bool	false	False	False	False	False	False		Home position enabled
bEnableWork	Bool	false	False	False	False	False	False		Work position enabled
bAutoMode	Bool	false	False	False	False	False	False		Auto Mode is active
bManualMode	Bool	false	False	False	False	False	False		Manual Mode is active
bReset	Bool	false	False	False	False	False	False		
bTON_TimeOut	Bool	false	False	False	False	False	False		
bPB_Home	Bool	false	False	False	False	False	False		
bPB_Work	Bool	false	False	False	False	False	False		
bPB_ResetError	Bool	false	False	False	False	False	False		
▼ PLS_XV91	"fbValve_Solenoid"		False	True	True	True	True		
▼ Input									
tInTimeout	Time	T#0ms	False	False	False	False	False		Timeout time for an actuator's feedback to activate before giving a fault
iInMode	Int	0	False	False	False	False	False		Mode Selection
bInEstop	Bool	false	False	False	False	False	False		Estop
bInSignalHome	Bool	false	False	False	False	False	False		Home position feedback
bInSignalWork	Bool	false	False	False	False	False	False		Work position feedback
bInEnable	Bool	false	False	False	False	False	False		Home and Work Enabled
bInCommandWork	Bool	false	False	False	False	False	False		Move to work position in automatic mode
bInResetError	Bool	false	False	False	False	False	False		Reset Error
bInSimulate	Bool	false	False	False	False	False	False		Activate device simulation
▼ Output									
bOutCommandHome	Bool	false	False	False	False	False	False		Home position command
bOutCommandWork	Bool	false	False	False	False	False	False		Work position command
bOutActiveHome	Bool	false	False	False	False	False	False		Valve is in home position

Name	Data type	Start value	Retain	Accessible from HMI/OPC UA/Web API	Writable from HMI/OPC UA/Web API	Visible in HMI engineering	Setpoint	Supervision	Comment
bOutActiveWork	Bool	false	False	False	False	False	False		Valve is in work position
bOutAuto	Bool	false	False	False	False	False	False		Block in auto mode
bOutError	Bool	false	False	False	False	False	False		Error exists
ERROR_Valve	"udtError_Valve"		False	False	False	False	False		Valve error structure
NoHomeFeedback	Bool	false	False	False	False	False	False		Home position feedback not active
NoWorkFeedback	Bool	false	False	False	False	False	False		Work position feedback not active
HomeFeedbackStillActive	Bool	false	False	False	False	False	False		Home position feedback still active
WorkFeedbackStillActive	Bool	false	False	False	False	False	False		Work position feedback still active
InOut									
HMI_ValveControl	"udtHMI_ValveControl"		False	False	False	False	False		HMI valve control
Static									
ErrorScroller	"fbErrorScroller"		False	False	False	False	True		Sub-block to handle error scroller
Input									
bInError01	Bool	false	False	False	False	False	False		Error 1 In Error Array
bInError02	Bool	false	False	False	False	False	False		Error 2 In Error Array
bInError03	Bool	false	False	False	False	False	False		Error 3 In Error Array
bInError04	Bool	false	False	False	False	False	False		Error 4 In Error Array
bInError05	Bool	false	False	False	False	False	False		Error 5 In Error Array
bInError06	Bool	false	False	False	False	False	False		Error 6 In Error Array
bInError07	Bool	false	False	False	False	False	False		Error 7 In Error Array
bInError08	Bool	false	False	False	False	False	False		Error 8 In Error Array
bInError09	Bool	false	False	False	False	False	False		Error 9 In Error Array
bInError10	Bool	false	False	False	False	False	False		Error 10 In Error Array
bInError11	Bool	false	False	False	False	False	False		Error 11 In Error Array
bInError12	Bool	false	False	False	False	False	False		Error 12 In Error Array
bInError13	Bool	false	False	False	False	False	False		Error 13 In Error Array
bInError14	Bool	false	False	False	False	False	False		Error 14 In Error Array
bInError15	Bool	false	False	False	False	False	False		Error 15 In Error Array
bInError16	Bool	false	False	False	False	False	False		Error 16 In Error Array
bInError17	Bool	false	False	False	False	False	False		Error 17 In Error Array
bInError18	Bool	false	False	False	False	False	False		Error 18 In Error Array
bInError19	Bool	false	False	False	False	False	False		Error 19 In Error Array
bInError20	Bool	false	False	False	False	False	False		Error 20 In Error Array
bInError21	Bool	false	False	False	False	False	False		Error 21 In Error Array
bInError22	Bool	false	False	False	False	False	False		Error 22 In Error Array
bInError23	Bool	false	False	False	False	False	False		Error 23 In Error Array
bInError24	Bool	false	False	False	False	False	False		Error 24 In Error Array
bInError25	Bool	false	False	False	False	False	False		Error 25 In Error Array
bInError26	Bool	false	False	False	False	False	False		Error 26 In Error Array
bInError27	Bool	false	False	False	False	False	False		Error 27 In Error Array
bInError28	Bool	false	False	False	False	False	False		Error 28 In Error Array
bInError29	Bool	false	False	False	False	False	False		Error 29 In Error Array
bInError30	Bool	false	False	False	False	False	False		Error 30 In Error Array
Output									
bOutErrorExists	Bool	false	False	False	False	False	False		An Error Exists
iOutScrollingErrorNumber	Int	0	False	False	False	False	False		Current Index when scrolling through errors
InOut									
Static									
TON_ErrorDelay	TON_TIME		False	False	False	False	True		Delay between each scroll for a new error
PT	Time	T#0ms	False	False	False	False	False		
ET	Time	T#0ms	False	False	False	False	False		
IN	Bool	false	False	False	False	False	False		
Q	Bool	false	False	False	False	False	False		
abErrors	Array[1..30] of Bool		False	False	False	False	False		
abErrors[1]	Bool	false	False	False	False	False	False		
abErrors[2]	Bool	false	False	False	False	False	False		
abErrors[3]	Bool	false	False	False	False	False	False		
abErrors[4]	Bool	false	False	False	False	False	False		
abErrors[5]	Bool	false	False	False	False	False	False		
abErrors[6]	Bool	false	False	False	False	False	False		
abErrors[7]	Bool	false	False	False	False	False	False		
abErrors[8]	Bool	false	False	False	False	False	False		
abErrors[9]	Bool	false	False	False	False	False	False		
abErrors[10]	Bool	false	False	False	False	False	False		
abErrors[11]	Bool	false	False	False	False	False	False		
abErrors[12]	Bool	false	False	False	False	False	False		
abErrors[13]	Bool	false	False	False	False	False	False		

Name	Data type	Start value	Retain	Accessible from HMI/OPC UA/Web API	Writable from HMI/OPC UA/Web API	Visible in HMI engineering	Setpoint	Supervision	Comment
abErrors[14]	Bool	false	False	False	False	False	False		
abErrors[15]	Bool	false	False	False	False	False	False		
abErrors[16]	Bool	false	False	False	False	False	False		
abErrors[17]	Bool	false	False	False	False	False	False		
abErrors[18]	Bool	false	False	False	False	False	False		
abErrors[19]	Bool	false	False	False	False	False	False		
abErrors[20]	Bool	false	False	False	False	False	False		
abErrors[21]	Bool	false	False	False	False	False	False		
abErrors[22]	Bool	false	False	False	False	False	False		
abErrors[23]	Bool	false	False	False	False	False	False		
abErrors[24]	Bool	false	False	False	False	False	False		
abErrors[25]	Bool	false	False	False	False	False	False		
abErrors[26]	Bool	false	False	False	False	False	False		
abErrors[27]	Bool	false	False	False	False	False	False		
abErrors[28]	Bool	false	False	False	False	False	False		
abErrors[29]	Bool	false	False	False	False	False	False		
abErrors[30]	Bool	false	False	False	False	False	False		
iNextScrollNum	Int	1	False	False	False	False	False		Index of next error position
iErrorsScrollNum	Int	1	False	False	False	False	False		Index of current error position
bScrolling	Bool	false	False	False	False	False	False		Indicates we are scrolling
bTON_ErrorDelay	Bool	false	False	False	False	False	False		
▼ TON_TimeOut	TON_TIME		False	False	False	False	True		Timer for Error Timeout
PT	Time	T#0ms	False	False	False	False	False		
ET	Time	T#0ms	False	False	False	False	False		
IN	Bool	false	False	False	False	False	False		
Q	Bool	false	False	False	False	False	False		
iLastMode	Int	0	False	False	False	False	False		Last mode code
bNewMode	Bool	false	False	False	False	False	False		New mode selected
bEnableHome	Bool	false	False	False	False	False	False		Home position enabled
bEnableWork	Bool	false	False	False	False	False	False		Work position enabled
bAutoMode	Bool	false	False	False	False	False	False		Auto Mode is active
bManualMode	Bool	false	False	False	False	False	False		Manual Mode is active
bReset	Bool	false	False	False	False	False	False		
bTON_TimeOut	Bool	false	False	False	False	False	False		
bPB_Home	Bool	false	False	False	False	False	False		
bPB_Work	Bool	false	False	False	False	False	False		
bPB_ResetError	Bool	false	False	False	False	False	False		
▼ PLS_XV51	"fbValve_Solenoid"		False	True	True	True	True		
▼ Input									
tInTimeout	Time	T#0ms	False	False	False	False	False		Timeout time for an actuator's feedback to activate before giving a fault
iInMode	Int	0	False	False	False	False	False		Mode Selection
bInEstop	Bool	false	False	False	False	False	False		Estop
bInSignalHome	Bool	false	False	False	False	False	False		Home position feedback
bInSignalWork	Bool	false	False	False	False	False	False		Work position feedback
bInEnable	Bool	false	False	False	False	False	False		Home and Work Enabled
bInCommandWork	Bool	false	False	False	False	False	False		Move to work position in automatic mode
bInResetError	Bool	false	False	False	False	False	False		Reset Error
bInSimulate	Bool	false	False	False	False	False	False		Activate device simulation
▼ Output									
bOutCommandHome	Bool	false	False	False	False	False	False		Home position command
bOutCommandWork	Bool	false	False	False	False	False	False		Work position command
bOutActiveHome	Bool	false	False	False	False	False	False		Valve is in home position
bOutActiveWork	Bool	false	False	False	False	False	False		Valve is in work position
bOutAuto	Bool	false	False	False	False	False	False		Block in auto mode
bOutError	Bool	false	False	False	False	False	False		Error exists
▼ ERROR_Valve	"udtError_Valve"		False	False	False	False	False		Valve error structure
NoHomeFeedback	Bool	false	False	False	False	False	False		Home position feedback not active
NoWorkFeedback	Bool	false	False	False	False	False	False		Work position feedback not active
HomeFeedbackStillActive	Bool	false	False	False	False	False	False		Home position feedback still active
WorkFeedbackStillActive	Bool	false	False	False	False	False	False		Work position feedback still active
▼ InOut									
HMI_ValveControl	"udtHMI_ValveControl"		False	False	False	False	False		HMI valve control
▼ Static									
▼ ErrorScroller	"fbErrorScroller"		False	False	False	False	True		Sub-block to handle error scroller
▼ Input									
bInError01	Bool	false	False	False	False	False	False		Error 1 In Error Array

Name	Data type	Start value	Retain	Accessible from HMI/OPC UA/Web API	Writable from HMI/OPC UA/Web API	Visible in HMI engineering	Setpoint	Supervision	Comment
bInError02	Bool	false	False	False	False	False	False		Error 2 In Error Array
bInError03	Bool	false	False	False	False	False	False		Error 3 In Error Array
bInError04	Bool	false	False	False	False	False	False		Error 4 In Error Array
bInError05	Bool	false	False	False	False	False	False		Error 5 In Error Array
bInError06	Bool	false	False	False	False	False	False		Error 6 In Error Array
bInError07	Bool	false	False	False	False	False	False		Error 7 In Error Array
bInError08	Bool	false	False	False	False	False	False		Error 8 In Error Array
bInError09	Bool	false	False	False	False	False	False		Error 9 In Error Array
bInError10	Bool	false	False	False	False	False	False		Error 10 In Error Array
bInError11	Bool	false	False	False	False	False	False		Error 11 In Error Array
bInError12	Bool	false	False	False	False	False	False		Error 12 In Error Array
bInError13	Bool	false	False	False	False	False	False		Error 13 In Error Array
bInError14	Bool	false	False	False	False	False	False		Error 14 In Error Array
bInError15	Bool	false	False	False	False	False	False		Error 15 In Error Array
bInError16	Bool	false	False	False	False	False	False		Error 16 In Error Array
bInError17	Bool	false	False	False	False	False	False		Error 17 In Error Array
bInError18	Bool	false	False	False	False	False	False		Error 18 In Error Array
bInError19	Bool	false	False	False	False	False	False		Error 19 In Error Array
bInError20	Bool	false	False	False	False	False	False		Error 20 In Error Array
bInError21	Bool	false	False	False	False	False	False		Error 21 In Error Array
bInError22	Bool	false	False	False	False	False	False		Error 22 In Error Array
bInError23	Bool	false	False	False	False	False	False		Error 23 In Error Array
bInError24	Bool	false	False	False	False	False	False		Error 24 In Error Array
bInError25	Bool	false	False	False	False	False	False		Error 25 In Error Array
bInError26	Bool	false	False	False	False	False	False		Error 26 In Error Array
bInError27	Bool	false	False	False	False	False	False		Error 27 In Error Array
bInError28	Bool	false	False	False	False	False	False		Error 28 In Error Array
bInError29	Bool	false	False	False	False	False	False		Error 29 In Error Array
bInError30	Bool	false	False	False	False	False	False		Error 30 In Error Array
▼ Output									
bOutErrorExists	Bool	false	False	False	False	False	False		An Error Exists
iOutScrollingError-Number	Int	0	False	False	False	False	False		Current Index when scrolling through errors
InOut									
▼ Static									
▼ TON_ErrorDelay	TON_TIME		False	False	False	False	True		Delay between each scroll for a new error
PT	Time	T#0ms	False	False	False	False	False		
ET	Time	T#0ms	False	False	False	False	False		
IN	Bool	false	False	False	False	False	False		
Q	Bool	false	False	False	False	False	False		
▼ abErrors	Array[1..30] of Bool		False	False	False	False	False		
abErrors[1]	Bool	false	False	False	False	False	False		
abErrors[2]	Bool	false	False	False	False	False	False		
abErrors[3]	Bool	false	False	False	False	False	False		
abErrors[4]	Bool	false	False	False	False	False	False		
abErrors[5]	Bool	false	False	False	False	False	False		
abErrors[6]	Bool	false	False	False	False	False	False		
abErrors[7]	Bool	false	False	False	False	False	False		
abErrors[8]	Bool	false	False	False	False	False	False		
abErrors[9]	Bool	false	False	False	False	False	False		
abErrors[10]	Bool	false	False	False	False	False	False		
abErrors[11]	Bool	false	False	False	False	False	False		
abErrors[12]	Bool	false	False	False	False	False	False		
abErrors[13]	Bool	false	False	False	False	False	False		
abErrors[14]	Bool	false	False	False	False	False	False		
abErrors[15]	Bool	false	False	False	False	False	False		
abErrors[16]	Bool	false	False	False	False	False	False		
abErrors[17]	Bool	false	False	False	False	False	False		
abErrors[18]	Bool	false	False	False	False	False	False		
abErrors[19]	Bool	false	False	False	False	False	False		
abErrors[20]	Bool	false	False	False	False	False	False		
abErrors[21]	Bool	false	False	False	False	False	False		
abErrors[22]	Bool	false	False	False	False	False	False		
abErrors[23]	Bool	false	False	False	False	False	False		
abErrors[24]	Bool	false	False	False	False	False	False		
abErrors[25]	Bool	false	False	False	False	False	False		
abErrors[26]	Bool	false	False	False	False	False	False		
abErrors[27]	Bool	false	False	False	False	False	False		
abErrors[28]	Bool	false	False	False	False	False	False		
abErrors[29]	Bool	false	False	False	False	False	False		
abErrors[30]	Bool	false	False	False	False	False	False		

Name	Data type	Start value	Retain	Accessible from HMI/OPC UA/Web API	Writable from HMI/OPC UA/Web API	Visible in HMI engineering	Setpoint	Supervision	Comment
iNextScrollNum	Int	1	False	False	False	False	False		Index of next error position
iErrorsScrollNum	Int	1	False	False	False	False	False		Index of current error position
bScrolling	Bool	false	False	False	False	False	False		Indicates we are scrolling
bTON_ErrorDelay	Bool	false	False	False	False	False	False		
▼ TON_TimeOut	TON_TIME		False	False	False	False	True		Timer for Error Timeout
PT	Time	T#0ms	False	False	False	False	False		
ET	Time	T#0ms	False	False	False	False	False		
IN	Bool	false	False	False	False	False	False		
Q	Bool	false	False	False	False	False	False		
iLastMode	Int	0	False	False	False	False	False		Last mode code
bNewMode	Bool	false	False	False	False	False	False		New mode selected
bEnableHome	Bool	false	False	False	False	False	False		Home position enabled
bEnableWork	Bool	false	False	False	False	False	False		Work position enabled
bAutoMode	Bool	false	False	False	False	False	False		Auto Mode is active
bManualMode	Bool	false	False	False	False	False	False		Manual Mode is active
bReset	Bool	false	False	False	False	False	False		
bTON_TimeOut	Bool	false	False	False	False	False	False		
bPB_Home	Bool	false	False	False	False	False	False		
bPB_Work	Bool	false	False	False	False	False	False		
bPB_ResetError	Bool	false	False	False	False	False	False		
▼ PLS_PCV51	"fbValve_Analog"		False	True	True	False	True		
▼ Input									
tInTimeout	Time	t#10s	False	False	False	False	False		Feedback error timeout
iInMode	Int	0	False	False	False	False	False		Mode Selection
iInEstopFunction	Int	0	False	False	False	False	False		Enum of E-Stop repsonse (Estop.xxx)
bInEstop	Bool	false	False	False	False	False	False		Estop
bInEnable	Bool	false	False	False	False	False	False		Valve is Enabled to Operate
rInSignalCommand	Real	-1.0	False	False	False	False	False		Actual % open from valve (-1 to disable)
rInAutoCommand	Real	0.0	False	False	False	False	False		Auto Mode command
bInResetError	Bool	false	False	False	False	False	False		Reset errors
bInSimulate	Bool	false	False	False	False	False	False		Activate device simulation
▼ Output									
wOutCommand	Word	16#0	False	False	False	False	False		Output value for analog write
rOutCommand	Real	0.0	False	False	False	False	False		Output value
bOutAuto	Bool	false	False	False	False	False	False		Block in auto Mode
bOutError	Bool	false	False	False	False	False	False		Error exists
▼ ERROR_AnalogValve	"udtError_AnalogValve"		False	False	False	False	False		Error structure for analog valve
InvalidFeedback	Bool	false	False	False	False	False	False		Valve feedback is not within command tolerance
▼ InOut									
HMI_AnalogValveControl	"udtHMI_AnalogValveControl"		False	False	False	False	False		HMI control structure for analog valve
▼ Static									
▼ TON_Timeout	TON_TIME		False	False	False	False	True		
PT	Time	T#0ms	False	False	False	False	False		
ET	Time	T#0ms	False	False	False	False	False		
IN	Bool	false	False	False	False	False	False		
Q	Bool	false	False	False	False	False	False		
▼ ErrorScroller	"fbErrorScroller"		False	False	False	False	True		
▼ Input									
bInError01	Bool	false	False	False	False	False	False		Error 1 In Error Array
bInError02	Bool	false	False	False	False	False	False		Error 2 In Error Array
bInError03	Bool	false	False	False	False	False	False		Error 3 In Error Array
bInError04	Bool	false	False	False	False	False	False		Error 4 In Error Array
bInError05	Bool	false	False	False	False	False	False		Error 5 In Error Array
bInError06	Bool	false	False	False	False	False	False		Error 6 In Error Array
bInError07	Bool	false	False	False	False	False	False		Error 7 In Error Array
bInError08	Bool	false	False	False	False	False	False		Error 8 In Error Array
bInError09	Bool	false	False	False	False	False	False		Error 9 In Error Array
bInError10	Bool	false	False	False	False	False	False		Error 10 In Error Array
bInError11	Bool	false	False	False	False	False	False		Error 11 In Error Array
bInError12	Bool	false	False	False	False	False	False		Error 12 In Error Array
bInError13	Bool	false	False	False	False	False	False		Error 13 In Error Array
bInError14	Bool	false	False	False	False	False	False		Error 14 In Error Array
bInError15	Bool	false	False	False	False	False	False		Error 15 In Error Array
bInError16	Bool	false	False	False	False	False	False		Error 16 In Error Array
bInError17	Bool	false	False	False	False	False	False		Error 17 In Error Array
bInError18	Bool	false	False	False	False	False	False		Error 18 In Error Array
bInError19	Bool	false	False	False	False	False	False		Error 19 In Error Array

Name	Data type	Start value	Retain	Accessible from HMI/OPC UA/Web API	Writable from HMI/OPC UA/Web API	Visible in HMI engineering	Setpoint	Supervision	Comment
bInError20	Bool	false	False	False	False	False	False		Error 20 In Error Array
bInError21	Bool	false	False	False	False	False	False		Error 21 In Error Array
bInError22	Bool	false	False	False	False	False	False		Error 22 In Error Array
bInError23	Bool	false	False	False	False	False	False		Error 23 In Error Array
bInError24	Bool	false	False	False	False	False	False		Error 24 In Error Array
bInError25	Bool	false	False	False	False	False	False		Error 25 In Error Array
bInError26	Bool	false	False	False	False	False	False		Error 26 In Error Array
bInError27	Bool	false	False	False	False	False	False		Error 27 In Error Array
bInError28	Bool	false	False	False	False	False	False		Error 28 In Error Array
bInError29	Bool	false	False	False	False	False	False		Error 29 In Error Array
bInError30	Bool	false	False	False	False	False	False		Error 30 In Error Array
▼ Output									
bOutErrorExists	Bool	false	False	False	False	False	False		An Error Exists
iOutScrollingError-Number	Int	0	False	False	False	False	False		Current Index when scrolling through errors
InOut									
▼ Static									
▼ TON_ErrorDelay	TON_TIME		False	False	False	False	True		Delay between each scroll for a new error
PT	Time	T#0ms	False	False	False	False	False		
ET	Time	T#0ms	False	False	False	False	False		
IN	Bool	false	False	False	False	False	False		
Q	Bool	false	False	False	False	False	False		
▼ abErrors	Array[1..30] of Bool		False	False	False	False	False		
abErrors[1]	Bool	false	False	False	False	False	False		
abErrors[2]	Bool	false	False	False	False	False	False		
abErrors[3]	Bool	false	False	False	False	False	False		
abErrors[4]	Bool	false	False	False	False	False	False		
abErrors[5]	Bool	false	False	False	False	False	False		
abErrors[6]	Bool	false	False	False	False	False	False		
abErrors[7]	Bool	false	False	False	False	False	False		
abErrors[8]	Bool	false	False	False	False	False	False		
abErrors[9]	Bool	false	False	False	False	False	False		
abErrors[10]	Bool	false	False	False	False	False	False		
abErrors[11]	Bool	false	False	False	False	False	False		
abErrors[12]	Bool	false	False	False	False	False	False		
abErrors[13]	Bool	false	False	False	False	False	False		
abErrors[14]	Bool	false	False	False	False	False	False		
abErrors[15]	Bool	false	False	False	False	False	False		
abErrors[16]	Bool	false	False	False	False	False	False		
abErrors[17]	Bool	false	False	False	False	False	False		
abErrors[18]	Bool	false	False	False	False	False	False		
abErrors[19]	Bool	false	False	False	False	False	False		
abErrors[20]	Bool	false	False	False	False	False	False		
abErrors[21]	Bool	false	False	False	False	False	False		
abErrors[22]	Bool	false	False	False	False	False	False		
abErrors[23]	Bool	false	False	False	False	False	False		
abErrors[24]	Bool	false	False	False	False	False	False		
abErrors[25]	Bool	false	False	False	False	False	False		
abErrors[26]	Bool	false	False	False	False	False	False		
abErrors[27]	Bool	false	False	False	False	False	False		
abErrors[28]	Bool	false	False	False	False	False	False		
abErrors[29]	Bool	false	False	False	False	False	False		
abErrors[30]	Bool	false	False	False	False	False	False		
iNextScrollNum	Int	1	False	False	False	False	False		Index of next error position
iErrorsScrollNum	Int	1	False	False	False	False	False		Index of current error position
bScrolling	Bool	false	False	False	False	False	False		Indicates we are scrolling
bTON_ErrorDelay	Bool	false	False	False	False	False	False		
rValue	Real	0.0	False	False	False	False	False		
bSignalOutOfTolerance	Bool	false	False	False	False	False	False		
bReset	Bool	false	False	False	False	False	False		
bTON_Timeout	Bool	false	False	False	False	False	False		
bPB_ResetError	Bool	false	False	False	False	False	False		
▼ PLS_XV81	"fbValve_Sole-noid"		False	True	True	True	True		
▼ Input									
tInTimeout	Time	T#0ms	False	False	False	False	False		Timeout time for an actuator's feed-back to activate before giving a fault
iInMode	Int	0	False	False	False	False	False		Mode Selection
bInEstop	Bool	false	False	False	False	False	False		Estop
bInSignalHome	Bool	false	False	False	False	False	False		Home position feedback
bInSignalWork	Bool	false	False	False	False	False	False		Work position feedback

Name	Data type	Start value	Retain	Accessible from HMI/OPC UA/Web API	Writable from HMI/OPC UA/Web API	Visible in HMI engineering	Setpoint	Supervision	Comment
bInEnable	Bool	false	False	False	False	False	False		Home and Work Enabled
bInCommandWork	Bool	false	False	False	False	False	False		Move to work position in automatic mode
bInResetError	Bool	false	False	False	False	False	False		Reset Error
bInSimulate	Bool	false	False	False	False	False	False		Activate device simulation
▼ Output									
bOutCommandHome	Bool	false	False	False	False	False	False		Home position command
bOutCommandWork	Bool	false	False	False	False	False	False		Work position command
bOutActiveHome	Bool	false	False	False	False	False	False		Valve is in home position
bOutActiveWork	Bool	false	False	False	False	False	False		Valve is in work position
bOutAuto	Bool	false	False	False	False	False	False		Block in auto mode
bOutError	Bool	false	False	False	False	False	False		Error exists
▼ ERROR_Valve	"udtError_Valve"		False	False	False	False	False		Valve error structure
NoHomeFeedback	Bool	false	False	False	False	False	False		Home position feedback not active
NoWorkFeedback	Bool	false	False	False	False	False	False		Work position feedback not active
HomeFeedbackStillActive	Bool	false	False	False	False	False	False		Home position feedback still active
WorkFeedbackStillActive	Bool	false	False	False	False	False	False		Work position feedback still active
▼ InOut									
HMI_ValveControl	"udtHMI_ValveControl"		False	False	False	False	False		HMI valve control
▼ Static									
▼ ErrorScroller	"fbErrorScroller"		False	False	False	False	True		Sub-block to handle error scroller
▼ Input									
bInError01	Bool	false	False	False	False	False	False		Error 1 In Error Array
bInError02	Bool	false	False	False	False	False	False		Error 2 In Error Array
bInError03	Bool	false	False	False	False	False	False		Error 3 In Error Array
bInError04	Bool	false	False	False	False	False	False		Error 4 In Error Array
bInError05	Bool	false	False	False	False	False	False		Error 5 In Error Array
bInError06	Bool	false	False	False	False	False	False		Error 6 In Error Array
bInError07	Bool	false	False	False	False	False	False		Error 7 In Error Array
bInError08	Bool	false	False	False	False	False	False		Error 8 In Error Array
bInError09	Bool	false	False	False	False	False	False		Error 9 In Error Array
bInError10	Bool	false	False	False	False	False	False		Error 10 In Error Array
bInError11	Bool	false	False	False	False	False	False		Error 11 In Error Array
bInError12	Bool	false	False	False	False	False	False		Error 12 In Error Array
bInError13	Bool	false	False	False	False	False	False		Error 13 In Error Array
bInError14	Bool	false	False	False	False	False	False		Error 14 In Error Array
bInError15	Bool	false	False	False	False	False	False		Error 15 In Error Array
bInError16	Bool	false	False	False	False	False	False		Error 16 In Error Array
bInError17	Bool	false	False	False	False	False	False		Error 17 In Error Array
bInError18	Bool	false	False	False	False	False	False		Error 18 In Error Array
bInError19	Bool	false	False	False	False	False	False		Error 19 In Error Array
bInError20	Bool	false	False	False	False	False	False		Error 20 In Error Array
bInError21	Bool	false	False	False	False	False	False		Error 21 In Error Array
bInError22	Bool	false	False	False	False	False	False		Error 22 In Error Array
bInError23	Bool	false	False	False	False	False	False		Error 23 In Error Array
bInError24	Bool	false	False	False	False	False	False		Error 24 In Error Array
bInError25	Bool	false	False	False	False	False	False		Error 25 In Error Array
bInError26	Bool	false	False	False	False	False	False		Error 26 In Error Array
bInError27	Bool	false	False	False	False	False	False		Error 27 In Error Array
bInError28	Bool	false	False	False	False	False	False		Error 28 In Error Array
bInError29	Bool	false	False	False	False	False	False		Error 29 In Error Array
bInError30	Bool	false	False	False	False	False	False		Error 30 In Error Array
▼ Output									
bOutErrorExists	Bool	false	False	False	False	False	False		An Error Exists
iOutScrollingErrorNumber	Int	0	False	False	False	False	False		Current Index when scrolling through errors
InOut									
▼ Static									
▼ TON_ErrorDelay	TON_TIME		False	False	False	False	True		Delay between each scroll for a new error
PT	Time	T#0ms	False	False	False	False	False		
ET	Time	T#0ms	False	False	False	False	False		
IN	Bool	false	False	False	False	False	False		
Q	Bool	false	False	False	False	False	False		
▼ abErrors	Array[1..30] of Bool		False	False	False	False	False		
abErrors[1]	Bool	false	False	False	False	False	False		
abErrors[2]	Bool	false	False	False	False	False	False		
abErrors[3]	Bool	false	False	False	False	False	False		
abErrors[4]	Bool	false	False	False	False	False	False		

Name	Data type	Start value	Retain	Accessible from HMI/OPC UA/Web API	Writable from HMI/OPC UA/Web API	Visible in HMI engineering	Setpoint	Supervision	Comment
abErrors[5]	Bool	false	False	False	False	False	False		
abErrors[6]	Bool	false	False	False	False	False	False		
abErrors[7]	Bool	false	False	False	False	False	False		
abErrors[8]	Bool	false	False	False	False	False	False		
abErrors[9]	Bool	false	False	False	False	False	False		
abErrors[10]	Bool	false	False	False	False	False	False		
abErrors[11]	Bool	false	False	False	False	False	False		
abErrors[12]	Bool	false	False	False	False	False	False		
abErrors[13]	Bool	false	False	False	False	False	False		
abErrors[14]	Bool	false	False	False	False	False	False		
abErrors[15]	Bool	false	False	False	False	False	False		
abErrors[16]	Bool	false	False	False	False	False	False		
abErrors[17]	Bool	false	False	False	False	False	False		
abErrors[18]	Bool	false	False	False	False	False	False		
abErrors[19]	Bool	false	False	False	False	False	False		
abErrors[20]	Bool	false	False	False	False	False	False		
abErrors[21]	Bool	false	False	False	False	False	False		
abErrors[22]	Bool	false	False	False	False	False	False		
abErrors[23]	Bool	false	False	False	False	False	False		
abErrors[24]	Bool	false	False	False	False	False	False		
abErrors[25]	Bool	false	False	False	False	False	False		
abErrors[26]	Bool	false	False	False	False	False	False		
abErrors[27]	Bool	false	False	False	False	False	False		
abErrors[28]	Bool	false	False	False	False	False	False		
abErrors[29]	Bool	false	False	False	False	False	False		
abErrors[30]	Bool	false	False	False	False	False	False		
iNextScrollNum	Int	1	False	False	False	False	False		Index of next error position
iErrorsScrollNum	Int	1	False	False	False	False	False		Index of current error position
bScrolling	Bool	false	False	False	False	False	False		Indicates we are scrolling
bTON_ErrorDelay	Bool	false	False	False	False	False	False		
▼ TON_TimeOut	TON_TIME		False	False	False	False	True		Timer for Error Timeout
PT	Time	T#0ms	False	False	False	False	False		
ET	Time	T#0ms	False	False	False	False	False		
IN	Bool	false	False	False	False	False	False		
Q	Bool	false	False	False	False	False	False		
iLastMode	Int	0	False	False	False	False	False		Last mode code
bNewMode	Bool	false	False	False	False	False	False		New mode selected
bEnableHome	Bool	false	False	False	False	False	False		Home position enabled
bEnableWork	Bool	false	False	False	False	False	False		Work position enabled
bAutoMode	Bool	false	False	False	False	False	False		Auto Mode is active
bManualMode	Bool	false	False	False	False	False	False		Manual Mode is active
bReset	Bool	false	False	False	False	False	False		
bTON_TimeOut	Bool	false	False	False	False	False	False		
bPB_Home	Bool	false	False	False	False	False	False		
bPB_Work	Bool	false	False	False	False	False	False		
bPB_ResetError	Bool	false	False	False	False	False	False		
▼ PRS_XV21	"fbValve_Solenoid"		False	True	True	True	True		
▼ Input									
tInTimeout	Time	T#0ms	False	False	False	False	False		Timeout time for an actuator's feedback to activate before giving a fault
iInMode	Int	0	False	False	False	False	False		Mode Selection
bInEstop	Bool	false	False	False	False	False	False		Estop
bInSignalHome	Bool	false	False	False	False	False	False		Home position feedback
bInSignalWork	Bool	false	False	False	False	False	False		Work position feedback
bInEnable	Bool	false	False	False	False	False	False		Home and Work Enabled
bInCommandWork	Bool	false	False	False	False	False	False		Move to work position in automatic mode
bInResetError	Bool	false	False	False	False	False	False		Reset Error
bInSimulate	Bool	false	False	False	False	False	False		Activate device simulation
▼ Output									
bOutCommandHome	Bool	false	False	False	False	False	False		Home position command
bOutCommandWork	Bool	false	False	False	False	False	False		Work position command
bOutActiveHome	Bool	false	False	False	False	False	False		Valve is in home position
bOutActiveWork	Bool	false	False	False	False	False	False		Valve is in work position
bOutAuto	Bool	false	False	False	False	False	False		Block in auto mode
bOutError	Bool	false	False	False	False	False	False		Error exists
▼ ERROR_Valve	"udtError_Valve"		False	False	False	False	False		Valve error structure
NoHomeFeedback	Bool	false	False	False	False	False	False		Home position feedback not active
NoWorkFeedback	Bool	false	False	False	False	False	False		Work position feedback not active
HomeFeedbackStillActive	Bool	false	False	False	False	False	False		Home position feedback still active

Name	Data type	Start value	Retain	Accessible from HMI/OPC UA/Web API	Writable from HMI/OPC UA/Web API	Visible in HMI engineering	Setpoint	Supervision	Comment
WorkFeedbackStillActive	Bool	false	False	False	False	False	False		Work position feedback still active
▼ InOut									
HMI_ValveControl	"udtHMI_ValveControl"		False	False	False	False	False		HMI valve control
▼ Static									
▼ ErrorScroller	"fbErrorScroller"		False	False	False	False	True		Sub-block to handle error scroller
▼ Input									
bInError01	Bool	false	False	False	False	False	False		Error 1 In Error Array
bInError02	Bool	false	False	False	False	False	False		Error 2 In Error Array
bInError03	Bool	false	False	False	False	False	False		Error 3 In Error Array
bInError04	Bool	false	False	False	False	False	False		Error 4 In Error Array
bInError05	Bool	false	False	False	False	False	False		Error 5 In Error Array
bInError06	Bool	false	False	False	False	False	False		Error 6 In Error Array
bInError07	Bool	false	False	False	False	False	False		Error 7 In Error Array
bInError08	Bool	false	False	False	False	False	False		Error 8 In Error Array
bInError09	Bool	false	False	False	False	False	False		Error 9 In Error Array
bInError10	Bool	false	False	False	False	False	False		Error 10 In Error Array
bInError11	Bool	false	False	False	False	False	False		Error 11 In Error Array
bInError12	Bool	false	False	False	False	False	False		Error 12 In Error Array
bInError13	Bool	false	False	False	False	False	False		Error 13 In Error Array
bInError14	Bool	false	False	False	False	False	False		Error 14 In Error Array
bInError15	Bool	false	False	False	False	False	False		Error 15 In Error Array
bInError16	Bool	false	False	False	False	False	False		Error 16 In Error Array
bInError17	Bool	false	False	False	False	False	False		Error 17 In Error Array
bInError18	Bool	false	False	False	False	False	False		Error 18 In Error Array
bInError19	Bool	false	False	False	False	False	False		Error 19 In Error Array
bInError20	Bool	false	False	False	False	False	False		Error 20 In Error Array
bInError21	Bool	false	False	False	False	False	False		Error 21 In Error Array
bInError22	Bool	false	False	False	False	False	False		Error 22 In Error Array
bInError23	Bool	false	False	False	False	False	False		Error 23 In Error Array
bInError24	Bool	false	False	False	False	False	False		Error 24 In Error Array
bInError25	Bool	false	False	False	False	False	False		Error 25 In Error Array
bInError26	Bool	false	False	False	False	False	False		Error 26 In Error Array
bInError27	Bool	false	False	False	False	False	False		Error 27 In Error Array
bInError28	Bool	false	False	False	False	False	False		Error 28 In Error Array
bInError29	Bool	false	False	False	False	False	False		Error 29 In Error Array
bInError30	Bool	false	False	False	False	False	False		Error 30 In Error Array
▼ Output									
bOutErrorExists	Bool	false	False	False	False	False	False		An Error Exists
iOutScrollingErrorNumber	Int	0	False	False	False	False	False		Current Index when scrolling through errors
InOut									
▼ Static									
▼ TON_ErrorDelay	TON_TIME		False	False	False	False	True		Delay between each scroll for a new error
PT	Time	T#0ms	False	False	False	False	False		
ET	Time	T#0ms	False	False	False	False	False		
IN	Bool	false	False	False	False	False	False		
Q	Bool	false	False	False	False	False	False		
▼ abErrors	Array[1..30] of Bool		False	False	False	False	False		
abErrors[1]	Bool	false	False	False	False	False	False		
abErrors[2]	Bool	false	False	False	False	False	False		
abErrors[3]	Bool	false	False	False	False	False	False		
abErrors[4]	Bool	false	False	False	False	False	False		
abErrors[5]	Bool	false	False	False	False	False	False		
abErrors[6]	Bool	false	False	False	False	False	False		
abErrors[7]	Bool	false	False	False	False	False	False		
abErrors[8]	Bool	false	False	False	False	False	False		
abErrors[9]	Bool	false	False	False	False	False	False		
abErrors[10]	Bool	false	False	False	False	False	False		
abErrors[11]	Bool	false	False	False	False	False	False		
abErrors[12]	Bool	false	False	False	False	False	False		
abErrors[13]	Bool	false	False	False	False	False	False		
abErrors[14]	Bool	false	False	False	False	False	False		
abErrors[15]	Bool	false	False	False	False	False	False		
abErrors[16]	Bool	false	False	False	False	False	False		
abErrors[17]	Bool	false	False	False	False	False	False		
abErrors[18]	Bool	false	False	False	False	False	False		
abErrors[19]	Bool	false	False	False	False	False	False		
abErrors[20]	Bool	false	False	False	False	False	False		
abErrors[21]	Bool	false	False	False	False	False	False		

Name	Data type	Start value	Retain	Accessible from HMI/OPC UA/Web API	Writable from HMI/OPC UA/Web API	Visible in HMI engineering	Setpoint	Supervision	Comment
abErrors[22]	Bool	false	False	False	False	False	False		
abErrors[23]	Bool	false	False	False	False	False	False		
abErrors[24]	Bool	false	False	False	False	False	False		
abErrors[25]	Bool	false	False	False	False	False	False		
abErrors[26]	Bool	false	False	False	False	False	False		
abErrors[27]	Bool	false	False	False	False	False	False		
abErrors[28]	Bool	false	False	False	False	False	False		
abErrors[29]	Bool	false	False	False	False	False	False		
abErrors[30]	Bool	false	False	False	False	False	False		
iNextScrollNum	Int	1	False	False	False	False	False		Index of next error position
iErrorsScrollNum	Int	1	False	False	False	False	False		Index of current error position
bScrolling	Bool	false	False	False	False	False	False		Indicates we are scrolling
bTON_ErrorDelay	Bool	false	False	False	False	False	False		
▼ TON_TimeOut	TON_TIME		False	False	False	False	True		Timer for Error Timeout
PT	Time	T#0ms	False	False	False	False	False		
ET	Time	T#0ms	False	False	False	False	False		
IN	Bool	false	False	False	False	False	False		
Q	Bool	false	False	False	False	False	False		
iLastMode	Int	0	False	False	False	False	False		Last mode code
bNewMode	Bool	false	False	False	False	False	False		New mode selected
bEnableHome	Bool	false	False	False	False	False	False		Home position enabled
bEnableWork	Bool	false	False	False	False	False	False		Work position enabled
bAutoMode	Bool	false	False	False	False	False	False		Auto Mode is active
bManualMode	Bool	false	False	False	False	False	False		Manual Mode is active
bReset	Bool	false	False	False	False	False	False		
bTON_TimeOut	Bool	false	False	False	False	False	False		
bPB_Home	Bool	false	False	False	False	False	False		
bPB_Work	Bool	false	False	False	False	False	False		
bPB_ResetError	Bool	false	False	False	False	False	False		
▼ PRS_XV22	"fbValve_Solenoid"		False	True	True	True	True		
▼ Input									
tInTimeout	Time	T#0ms	False	False	False	False	False		Timeout time for an actuator's feedback to activate before giving a fault
iInMode	Int	0	False	False	False	False	False		Mode Selection
bInEstop	Bool	false	False	False	False	False	False		Estop
bInSignalHome	Bool	false	False	False	False	False	False		Home position feedback
bInSignalWork	Bool	false	False	False	False	False	False		Work position feedback
bInEnable	Bool	false	False	False	False	False	False		Home and Work Enabled
bInCommandWork	Bool	false	False	False	False	False	False		Move to work position in automatic mode
bInResetError	Bool	false	False	False	False	False	False		Reset Error
bInSimulate	Bool	false	False	False	False	False	False		Activate device simulation
▼ Output									
bOutCommandHome	Bool	false	False	False	False	False	False		Home position command
bOutCommandWork	Bool	false	False	False	False	False	False		Work position command
bOutActiveHome	Bool	false	False	False	False	False	False		Valve is in home position
bOutActiveWork	Bool	false	False	False	False	False	False		Valve is in work position
bOutAuto	Bool	false	False	False	False	False	False		Block in auto mode
bOutError	Bool	false	False	False	False	False	False		Error exists
▼ ERROR_Valve	"udtError_Valve"		False	False	False	False	False		Valve error structure
NoHomeFeedback	Bool	false	False	False	False	False	False		Home position feedback not active
NoWorkFeedback	Bool	false	False	False	False	False	False		Work position feedback not active
HomeFeedbackStillActive	Bool	false	False	False	False	False	False		Home position feedback still active
WorkFeedbackStillActive	Bool	false	False	False	False	False	False		Work position feedback still active
▼ InOut									
HMI_ValveControl	"udtHMI_ValveControl"		False	False	False	False	False		HMI valve control
▼ Static									
▼ ErrorScroller	"fbErrorScroller"		False	False	False	False	True		Sub-block to handle error scroller
▼ Input									
bInError01	Bool	false	False	False	False	False	False		Error 1 In Error Array
bInError02	Bool	false	False	False	False	False	False		Error 2 In Error Array
bInError03	Bool	false	False	False	False	False	False		Error 3 In Error Array
bInError04	Bool	false	False	False	False	False	False		Error 4 In Error Array
bInError05	Bool	false	False	False	False	False	False		Error 5 In Error Array
bInError06	Bool	false	False	False	False	False	False		Error 6 In Error Array
bInError07	Bool	false	False	False	False	False	False		Error 7 In Error Array
bInError08	Bool	false	False	False	False	False	False		Error 8 In Error Array
bInError09	Bool	false	False	False	False	False	False		Error 9 In Error Array

Name	Data type	Start value	Retain	Accessible from HMI/OPC UA/Web API	Writable from HMI/OPC UA/Web API	Visible in HMI engineering	Setpoint	Supervision	Comment
bInError10	Bool	false	False	False	False	False	False		Error 10 In Error Array
bInError11	Bool	false	False	False	False	False	False		Error 11 In Error Array
bInError12	Bool	false	False	False	False	False	False		Error 12 In Error Array
bInError13	Bool	false	False	False	False	False	False		Error 13 In Error Array
bInError14	Bool	false	False	False	False	False	False		Error 14 In Error Array
bInError15	Bool	false	False	False	False	False	False		Error 15 In Error Array
bInError16	Bool	false	False	False	False	False	False		Error 16 In Error Array
bInError17	Bool	false	False	False	False	False	False		Error 17 In Error Array
bInError18	Bool	false	False	False	False	False	False		Error 18 In Error Array
bInError19	Bool	false	False	False	False	False	False		Error 19 In Error Array
bInError20	Bool	false	False	False	False	False	False		Error 20 In Error Array
bInError21	Bool	false	False	False	False	False	False		Error 21 In Error Array
bInError22	Bool	false	False	False	False	False	False		Error 22 In Error Array
bInError23	Bool	false	False	False	False	False	False		Error 23 In Error Array
bInError24	Bool	false	False	False	False	False	False		Error 24 In Error Array
bInError25	Bool	false	False	False	False	False	False		Error 25 In Error Array
bInError26	Bool	false	False	False	False	False	False		Error 26 In Error Array
bInError27	Bool	false	False	False	False	False	False		Error 27 In Error Array
bInError28	Bool	false	False	False	False	False	False		Error 28 In Error Array
bInError29	Bool	false	False	False	False	False	False		Error 29 In Error Array
bInError30	Bool	false	False	False	False	False	False		Error 30 In Error Array
▼ Output									
bOutErrorExists	Bool	false	False	False	False	False	False		An Error Exists
iOutScrollingError-Number	Int	0	False	False	False	False	False		Current Index when scrolling through errors
InOut									
▼ Static									
▼ TON_ErrorDelay	TON_TIME		False	False	False	False	True		Delay between each scroll for a new error
PT	Time	T#0ms	False	False	False	False	False		
ET	Time	T#0ms	False	False	False	False	False		
IN	Bool	false	False	False	False	False	False		
Q	Bool	false	False	False	False	False	False		
▼ abErrors	Array[1..30] of Bool		False	False	False	False	False		
abErrors[1]	Bool	false	False	False	False	False	False		
abErrors[2]	Bool	false	False	False	False	False	False		
abErrors[3]	Bool	false	False	False	False	False	False		
abErrors[4]	Bool	false	False	False	False	False	False		
abErrors[5]	Bool	false	False	False	False	False	False		
abErrors[6]	Bool	false	False	False	False	False	False		
abErrors[7]	Bool	false	False	False	False	False	False		
abErrors[8]	Bool	false	False	False	False	False	False		
abErrors[9]	Bool	false	False	False	False	False	False		
abErrors[10]	Bool	false	False	False	False	False	False		
abErrors[11]	Bool	false	False	False	False	False	False		
abErrors[12]	Bool	false	False	False	False	False	False		
abErrors[13]	Bool	false	False	False	False	False	False		
abErrors[14]	Bool	false	False	False	False	False	False		
abErrors[15]	Bool	false	False	False	False	False	False		
abErrors[16]	Bool	false	False	False	False	False	False		
abErrors[17]	Bool	false	False	False	False	False	False		
abErrors[18]	Bool	false	False	False	False	False	False		
abErrors[19]	Bool	false	False	False	False	False	False		
abErrors[20]	Bool	false	False	False	False	False	False		
abErrors[21]	Bool	false	False	False	False	False	False		
abErrors[22]	Bool	false	False	False	False	False	False		
abErrors[23]	Bool	false	False	False	False	False	False		
abErrors[24]	Bool	false	False	False	False	False	False		
abErrors[25]	Bool	false	False	False	False	False	False		
abErrors[26]	Bool	false	False	False	False	False	False		
abErrors[27]	Bool	false	False	False	False	False	False		
abErrors[28]	Bool	false	False	False	False	False	False		
abErrors[29]	Bool	false	False	False	False	False	False		
abErrors[30]	Bool	false	False	False	False	False	False		
iNextScrollNum	Int	1	False	False	False	False	False		Index of next error position
iErrorsScrollNum	Int	1	False	False	False	False	False		Index of current error position
bScrolling	Bool	false	False	False	False	False	False		Indicates we are scrolling
bTON_ErrorDelay	Bool	false	False	False	False	False	False		
▼ TON_TimeOut	TON_TIME		False	False	False	False	True		Timer for Error Timeout
PT	Time	T#0ms	False	False	False	False	False		
ET	Time	T#0ms	False	False	False	False	False		
IN	Bool	false	False	False	False	False	False		

Name	Data type	Start value	Retain	Accessible from HMI/OPC UA/Web API	Writable from HMI/OPC UA/Web API	Visible in HMI engineering	Setpoint	Supervision	Comment
Q	Bool	false	False	False	False	False	False		
iLastMode	Int	0	False	False	False	False	False		Last mode code
bNewMode	Bool	false	False	False	False	False	False		New mode selected
bEnableHome	Bool	false	False	False	False	False	False		Home position enabled
bEnableWork	Bool	false	False	False	False	False	False		Work position enabled
bAutoMode	Bool	false	False	False	False	False	False		Auto Mode is active
bManualMode	Bool	false	False	False	False	False	False		Manual Mode is active
bReset	Bool	false	False	False	False	False	False		
bTON_TimeOut	Bool	false	False	False	False	False	False		
bPB_Home	Bool	false	False	False	False	False	False		
bPB_Work	Bool	false	False	False	False	False	False		
bPB_ResetError	Bool	false	False	False	False	False	False		
▼ PRS_XV91	"fbValve_Solenoid"		False	True	True	True	True		
▼ Input									
tInTimeout	Time	T#0ms	False	False	False	False	False		Timeout time for an actuator's feedback to activate before giving a fault
iInMode	Int	0	False	False	False	False	False		Mode Selection
bInEstop	Bool	false	False	False	False	False	False		Estop
bInSignalHome	Bool	false	False	False	False	False	False		Home position feedback
bInSignalWork	Bool	false	False	False	False	False	False		Work position feedback
bInEnable	Bool	false	False	False	False	False	False		Home and Work Enabled
bInCommandWork	Bool	false	False	False	False	False	False		Move to work position in automatic mode
bInResetError	Bool	false	False	False	False	False	False		Reset Error
bInSimulate	Bool	false	False	False	False	False	False		Activate device simulation
▼ Output									
bOutCommandHome	Bool	false	False	False	False	False	False		Home position command
bOutCommandWork	Bool	false	False	False	False	False	False		Work position command
bOutActiveHome	Bool	false	False	False	False	False	False		Valve is in home position
bOutActiveWork	Bool	false	False	False	False	False	False		Valve is in work position
bOutAuto	Bool	false	False	False	False	False	False		Block in auto mode
bOutError	Bool	false	False	False	False	False	False		Error exists
▼ ERROR_Valve	"udtError_Valve"		False	False	False	False	False		Valve error structure
NoHomeFeedback	Bool	false	False	False	False	False	False		Home position feedback not active
NoWorkFeedback	Bool	false	False	False	False	False	False		Work position feedback not active
HomeFeedbackStillActive	Bool	false	False	False	False	False	False		Home position feedback still active
WorkFeedbackStillActive	Bool	false	False	False	False	False	False		Work position feedback still active
▼ InOut									
HMI_ValveControl	"udtHMI_ValveControl"		False	False	False	False	False		HMI valve control
▼ Static									
▼ ErrorScroller	"fbErrorScroller"		False	False	False	False	True		Sub-block to handle error scroller
▼ Input									
bInError01	Bool	false	False	False	False	False	False		Error 1 In Error Array
bInError02	Bool	false	False	False	False	False	False		Error 2 In Error Array
bInError03	Bool	false	False	False	False	False	False		Error 3 In Error Array
bInError04	Bool	false	False	False	False	False	False		Error 4 In Error Array
bInError05	Bool	false	False	False	False	False	False		Error 5 In Error Array
bInError06	Bool	false	False	False	False	False	False		Error 6 In Error Array
bInError07	Bool	false	False	False	False	False	False		Error 7 In Error Array
bInError08	Bool	false	False	False	False	False	False		Error 8 In Error Array
bInError09	Bool	false	False	False	False	False	False		Error 9 In Error Array
bInError10	Bool	false	False	False	False	False	False		Error 10 In Error Array
bInError11	Bool	false	False	False	False	False	False		Error 11 In Error Array
bInError12	Bool	false	False	False	False	False	False		Error 12 In Error Array
bInError13	Bool	false	False	False	False	False	False		Error 13 In Error Array
bInError14	Bool	false	False	False	False	False	False		Error 14 In Error Array
bInError15	Bool	false	False	False	False	False	False		Error 15 In Error Array
bInError16	Bool	false	False	False	False	False	False		Error 16 In Error Array
bInError17	Bool	false	False	False	False	False	False		Error 17 In Error Array
bInError18	Bool	false	False	False	False	False	False		Error 18 In Error Array
bInError19	Bool	false	False	False	False	False	False		Error 19 In Error Array
bInError20	Bool	false	False	False	False	False	False		Error 20 In Error Array
bInError21	Bool	false	False	False	False	False	False		Error 21 In Error Array
bInError22	Bool	false	False	False	False	False	False		Error 22 In Error Array
bInError23	Bool	false	False	False	False	False	False		Error 23 In Error Array
bInError24	Bool	false	False	False	False	False	False		Error 24 In Error Array
bInError25	Bool	false	False	False	False	False	False		Error 25 In Error Array
bInError26	Bool	false	False	False	False	False	False		Error 26 In Error Array
bInError27	Bool	false	False	False	False	False	False		Error 27 In Error Array

Name	Data type	Start value	Retain	Accessible from HMI/OPC UA/Web API	Writable from HMI/OPC UA/Web API	Visible in HMI engineering	Setpoint	Supervision	Comment
bInError28	Bool	false	False	False	False	False	False		Error 28 In Error Array
bInError29	Bool	false	False	False	False	False	False		Error 29 In Error Array
bInError30	Bool	false	False	False	False	False	False		Error 30 In Error Array
▼ Output									
bOutErrorExists	Bool	false	False	False	False	False	False		An Error Exists
iOutScrollingError-Number	Int	0	False	False	False	False	False		Current Index when scrolling through errors
InOut									
▼ Static									
▼ TON_ErrorDelay	TON_TIME		False	False	False	False	True		Delay between each scroll for a new error
PT	Time	T#0ms	False	False	False	False	False		
ET	Time	T#0ms	False	False	False	False	False		
IN	Bool	false	False	False	False	False	False		
Q	Bool	false	False	False	False	False	False		
▼ abErrors	Array[1..30] of Bool		False	False	False	False	False		
abErrors[1]	Bool	false	False	False	False	False	False		
abErrors[2]	Bool	false	False	False	False	False	False		
abErrors[3]	Bool	false	False	False	False	False	False		
abErrors[4]	Bool	false	False	False	False	False	False		
abErrors[5]	Bool	false	False	False	False	False	False		
abErrors[6]	Bool	false	False	False	False	False	False		
abErrors[7]	Bool	false	False	False	False	False	False		
abErrors[8]	Bool	false	False	False	False	False	False		
abErrors[9]	Bool	false	False	False	False	False	False		
abErrors[10]	Bool	false	False	False	False	False	False		
abErrors[11]	Bool	false	False	False	False	False	False		
abErrors[12]	Bool	false	False	False	False	False	False		
abErrors[13]	Bool	false	False	False	False	False	False		
abErrors[14]	Bool	false	False	False	False	False	False		
abErrors[15]	Bool	false	False	False	False	False	False		
abErrors[16]	Bool	false	False	False	False	False	False		
abErrors[17]	Bool	false	False	False	False	False	False		
abErrors[18]	Bool	false	False	False	False	False	False		
abErrors[19]	Bool	false	False	False	False	False	False		
abErrors[20]	Bool	false	False	False	False	False	False		
abErrors[21]	Bool	false	False	False	False	False	False		
abErrors[22]	Bool	false	False	False	False	False	False		
abErrors[23]	Bool	false	False	False	False	False	False		
abErrors[24]	Bool	false	False	False	False	False	False		
abErrors[25]	Bool	false	False	False	False	False	False		
abErrors[26]	Bool	false	False	False	False	False	False		
abErrors[27]	Bool	false	False	False	False	False	False		
abErrors[28]	Bool	false	False	False	False	False	False		
abErrors[29]	Bool	false	False	False	False	False	False		
abErrors[30]	Bool	false	False	False	False	False	False		
iNextScrollNum	Int	1	False	False	False	False	False		Index of next error position
iErrorsScrollNum	Int	1	False	False	False	False	False		Index of current error position
bScrolling	Bool	false	False	False	False	False	False		Indicates we are scrolling
bTON_ErrorDelay	Bool	false	False	False	False	False	False		
▼ TON_TimeOut	TON_TIME		False	False	False	False	True		Timer for Error Timeout
PT	Time	T#0ms	False	False	False	False	False		
ET	Time	T#0ms	False	False	False	False	False		
IN	Bool	false	False	False	False	False	False		
Q	Bool	false	False	False	False	False	False		
iLastMode	Int	0	False	False	False	False	False		Last mode code
bNewMode	Bool	false	False	False	False	False	False		New mode selected
bEnableHome	Bool	false	False	False	False	False	False		Home position enabled
bEnableWork	Bool	false	False	False	False	False	False		Work position enabled
bAutoMode	Bool	false	False	False	False	False	False		Auto Mode is active
bManualMode	Bool	false	False	False	False	False	False		Manual Mode is active
bReset	Bool	false	False	False	False	False	False		
bTON_TimeOut	Bool	false	False	False	False	False	False		
bPB_Home	Bool	false	False	False	False	False	False		
bPB_Work	Bool	false	False	False	False	False	False		
bPB_ResetError	Bool	false	False	False	False	False	False		
▼ PRS_XV51	"fbValve_Sole-noid"		False	True	True	True	True		
▼ Input									
tInTimeout	Time	T#0ms	False	False	False	False	False		Timeout time for an actuator's feed-back to activate before giving a fault
iInMode	Int	0	False	False	False	False	False		Mode Selection

Name	Data type	Start value	Retain	Accessible from HMI/OPC UA/Web API	Writable from HMI/OPC UA/Web API	Visible in HMI engineering	Setpoint	Supervision	Comment
bInEstop	Bool	false	False	False	False	False	False		Estop
bInSignalHome	Bool	false	False	False	False	False	False		Home position feedback
bInSignalWork	Bool	false	False	False	False	False	False		Work position feedback
bInEnable	Bool	false	False	False	False	False	False		Home and Work Enabled
bInCommandWork	Bool	false	False	False	False	False	False		Move to work position in automatic mode
bInResetError	Bool	false	False	False	False	False	False		Reset Error
bInSimulate	Bool	false	False	False	False	False	False		Activate device simulation
▼ Output									
bOutCommandHome	Bool	false	False	False	False	False	False		Home position command
bOutCommandWork	Bool	false	False	False	False	False	False		Work position command
bOutActiveHome	Bool	false	False	False	False	False	False		Valve is in home position
bOutActiveWork	Bool	false	False	False	False	False	False		Valve is in work position
bOutAuto	Bool	false	False	False	False	False	False		Block in auto mode
bOutError	Bool	false	False	False	False	False	False		Error exists
▼ ERROR_Valve	"udtError_Valve"		False	False	False	False	False		Valve error structure
NoHomeFeedback	Bool	false	False	False	False	False	False		Home position feedback not active
NoWorkFeedback	Bool	false	False	False	False	False	False		Work position feedback not active
HomeFeedbackStillActive	Bool	false	False	False	False	False	False		Home position feedback still active
WorkFeedbackStillActive	Bool	false	False	False	False	False	False		Work position feedback still active
▼ InOut									
HMI_ValveControl	"udtHMI_ValveControl"		False	False	False	False	False		HMI valve control
▼ Static									
▼ ErrorScroller	"fbErrorScroller"		False	False	False	False	True		Sub-block to handle error scroller
▼ Input									
bInError01	Bool	false	False	False	False	False	False		Error 1 In Error Array
bInError02	Bool	false	False	False	False	False	False		Error 2 In Error Array
bInError03	Bool	false	False	False	False	False	False		Error 3 In Error Array
bInError04	Bool	false	False	False	False	False	False		Error 4 In Error Array
bInError05	Bool	false	False	False	False	False	False		Error 5 In Error Array
bInError06	Bool	false	False	False	False	False	False		Error 6 In Error Array
bInError07	Bool	false	False	False	False	False	False		Error 7 In Error Array
bInError08	Bool	false	False	False	False	False	False		Error 8 In Error Array
bInError09	Bool	false	False	False	False	False	False		Error 9 In Error Array
bInError10	Bool	false	False	False	False	False	False		Error 10 In Error Array
bInError11	Bool	false	False	False	False	False	False		Error 11 In Error Array
bInError12	Bool	false	False	False	False	False	False		Error 12 In Error Array
bInError13	Bool	false	False	False	False	False	False		Error 13 In Error Array
bInError14	Bool	false	False	False	False	False	False		Error 14 In Error Array
bInError15	Bool	false	False	False	False	False	False		Error 15 In Error Array
bInError16	Bool	false	False	False	False	False	False		Error 16 In Error Array
bInError17	Bool	false	False	False	False	False	False		Error 17 In Error Array
bInError18	Bool	false	False	False	False	False	False		Error 18 In Error Array
bInError19	Bool	false	False	False	False	False	False		Error 19 In Error Array
bInError20	Bool	false	False	False	False	False	False		Error 20 In Error Array
bInError21	Bool	false	False	False	False	False	False		Error 21 In Error Array
bInError22	Bool	false	False	False	False	False	False		Error 22 In Error Array
bInError23	Bool	false	False	False	False	False	False		Error 23 In Error Array
bInError24	Bool	false	False	False	False	False	False		Error 24 In Error Array
bInError25	Bool	false	False	False	False	False	False		Error 25 In Error Array
bInError26	Bool	false	False	False	False	False	False		Error 26 In Error Array
bInError27	Bool	false	False	False	False	False	False		Error 27 In Error Array
bInError28	Bool	false	False	False	False	False	False		Error 28 In Error Array
bInError29	Bool	false	False	False	False	False	False		Error 29 In Error Array
bInError30	Bool	false	False	False	False	False	False		Error 30 In Error Array
▼ Output									
bOutErrorExists	Bool	false	False	False	False	False	False		An Error Exists
iOutScrollingErrorNumber	Int	0	False	False	False	False	False		Current Index when scrolling through errors
InOut									
▼ Static									
▼ TON_ErrorDelay	TON_TIME		False	False	False	False	True		Delay between each scroll for a new error
PT	Time	T#0ms	False	False	False	False	False		
ET	Time	T#0ms	False	False	False	False	False		
IN	Bool	false	False	False	False	False	False		
Q	Bool	false	False	False	False	False	False		
▼ abErrors	Array[1..30] of Bool		False	False	False	False	False		
abErrors[1]	Bool	false	False	False	False	False	False		

Name	Data type	Start value	Retain	Accessible from HMI/OPC UA/Web API	Writable from HMI/OPC UA/Web API	Visible in HMI engineering	Setpoint	Supervision	Comment
abErrors[2]	Bool	false	False	False	False	False	False		
abErrors[3]	Bool	false	False	False	False	False	False		
abErrors[4]	Bool	false	False	False	False	False	False		
abErrors[5]	Bool	false	False	False	False	False	False		
abErrors[6]	Bool	false	False	False	False	False	False		
abErrors[7]	Bool	false	False	False	False	False	False		
abErrors[8]	Bool	false	False	False	False	False	False		
abErrors[9]	Bool	false	False	False	False	False	False		
abErrors[10]	Bool	false	False	False	False	False	False		
abErrors[11]	Bool	false	False	False	False	False	False		
abErrors[12]	Bool	false	False	False	False	False	False		
abErrors[13]	Bool	false	False	False	False	False	False		
abErrors[14]	Bool	false	False	False	False	False	False		
abErrors[15]	Bool	false	False	False	False	False	False		
abErrors[16]	Bool	false	False	False	False	False	False		
abErrors[17]	Bool	false	False	False	False	False	False		
abErrors[18]	Bool	false	False	False	False	False	False		
abErrors[19]	Bool	false	False	False	False	False	False		
abErrors[20]	Bool	false	False	False	False	False	False		
abErrors[21]	Bool	false	False	False	False	False	False		
abErrors[22]	Bool	false	False	False	False	False	False		
abErrors[23]	Bool	false	False	False	False	False	False		
abErrors[24]	Bool	false	False	False	False	False	False		
abErrors[25]	Bool	false	False	False	False	False	False		
abErrors[26]	Bool	false	False	False	False	False	False		
abErrors[27]	Bool	false	False	False	False	False	False		
abErrors[28]	Bool	false	False	False	False	False	False		
abErrors[29]	Bool	false	False	False	False	False	False		
abErrors[30]	Bool	false	False	False	False	False	False		
iNextScrollNum	Int	1	False	False	False	False	False		Index of next error position
iErrorsScrollNum	Int	1	False	False	False	False	False		Index of current error position
bScrolling	Bool	false	False	False	False	False	False		Indicates we are scrolling
bTON_ErrorDelay	Bool	false	False	False	False	False	False		
▼ TON_TimeOut	TON_TIME		False	False	False	False	True		Timer for Error Timeout
PT	Time	T#0ms	False	False	False	False	False		
ET	Time	T#0ms	False	False	False	False	False		
IN	Bool	false	False	False	False	False	False		
Q	Bool	false	False	False	False	False	False		
iLastMode	Int	0	False	False	False	False	False		Last mode code
bNewMode	Bool	false	False	False	False	False	False		New mode selected
bEnableHome	Bool	false	False	False	False	False	False		Home position enabled
bEnableWork	Bool	false	False	False	False	False	False		Work position enabled
bAutoMode	Bool	false	False	False	False	False	False		Auto Mode is active
bManualMode	Bool	false	False	False	False	False	False		Manual Mode is active
bReset	Bool	false	False	False	False	False	False		
bTON_TimeOut	Bool	false	False	False	False	False	False		
bPB_Home	Bool	false	False	False	False	False	False		
bPB_Work	Bool	false	False	False	False	False	False		
bPB_ResetError	Bool	false	False	False	False	False	False		
▼ PRS_PCV51	"fbValve_Analog"		False	True	True	False	True		
▼ Input									
tInTimeout	Time	t#10s	False	False	False	False	False		Feedback error timeout
iInMode	Int	0	False	False	False	False	False		Mode Selection
iInEstopFunction	Int	0	False	False	False	False	False		Enum of E-Stop repsonse (Estop.xxx)
bInEstop	Bool	false	False	False	False	False	False		Estop
bInEnable	Bool	false	False	False	False	False	False		Valve is Enabled to Operate
rInSignalCommand	Real	-1.0	False	False	False	False	False		Actual % open from valve (-1 to disable)
rInAutoCommand	Real	0.0	False	False	False	False	False		Auto Mode command
bInResetError	Bool	false	False	False	False	False	False		Reset errors
bInSimulate	Bool	false	False	False	False	False	False		Activate device simulation
▼ Output									
wOutCommand	Word	16#0	False	False	False	False	False		Output value for analog write
rOutCommand	Real	0.0	False	False	False	False	False		Output value
bOutAuto	Bool	false	False	False	False	False	False		Block in auto Mode
bOutError	Bool	false	False	False	False	False	False		Error exists
▼ ERROR_AnalogValve	"udtError_AnalogValve"		False	False	False	False	False		Error structure for analog valve
InvalidFeedback	Bool	false	False	False	False	False	False		Valve feedback is not within command tolerance
▼ InOut									

Name	Data type	Start value	Retain	Accessible from HMI/OPC UA/Web API	Writable from HMI/OPC UA/Web API	Visible in HMI engineering	Setpoint	Supervision	Comment
HMI_AnalogValveControl	"udtHMI_AnalogValveControl"		False	False	False	False	False		HMI control structure for analog valve
Static									
TON_Timeout	TON_TIME		False	False	False	False	True		
PT	Time	T#0ms	False	False	False	False	False		
ET	Time	T#0ms	False	False	False	False	False		
IN	Bool	false	False	False	False	False	False		
Q	Bool	false	False	False	False	False	False		
ErrorScroller	"fbErrorScroller"		False	False	False	False	True		
Input									
bInError01	Bool	false	False	False	False	False	False		Error 1 In Error Array
bInError02	Bool	false	False	False	False	False	False		Error 2 In Error Array
bInError03	Bool	false	False	False	False	False	False		Error 3 In Error Array
bInError04	Bool	false	False	False	False	False	False		Error 4 In Error Array
bInError05	Bool	false	False	False	False	False	False		Error 5 In Error Array
bInError06	Bool	false	False	False	False	False	False		Error 6 In Error Array
bInError07	Bool	false	False	False	False	False	False		Error 7 In Error Array
bInError08	Bool	false	False	False	False	False	False		Error 8 In Error Array
bInError09	Bool	false	False	False	False	False	False		Error 9 In Error Array
bInError10	Bool	false	False	False	False	False	False		Error 10 In Error Array
bInError11	Bool	false	False	False	False	False	False		Error 11 In Error Array
bInError12	Bool	false	False	False	False	False	False		Error 12 In Error Array
bInError13	Bool	false	False	False	False	False	False		Error 13 In Error Array
bInError14	Bool	false	False	False	False	False	False		Error 14 In Error Array
bInError15	Bool	false	False	False	False	False	False		Error 15 In Error Array
bInError16	Bool	false	False	False	False	False	False		Error 16 In Error Array
bInError17	Bool	false	False	False	False	False	False		Error 17 In Error Array
bInError18	Bool	false	False	False	False	False	False		Error 18 In Error Array
bInError19	Bool	false	False	False	False	False	False		Error 19 In Error Array
bInError20	Bool	false	False	False	False	False	False		Error 20 In Error Array
bInError21	Bool	false	False	False	False	False	False		Error 21 In Error Array
bInError22	Bool	false	False	False	False	False	False		Error 22 In Error Array
bInError23	Bool	false	False	False	False	False	False		Error 23 In Error Array
bInError24	Bool	false	False	False	False	False	False		Error 24 In Error Array
bInError25	Bool	false	False	False	False	False	False		Error 25 In Error Array
bInError26	Bool	false	False	False	False	False	False		Error 26 In Error Array
bInError27	Bool	false	False	False	False	False	False		Error 27 In Error Array
bInError28	Bool	false	False	False	False	False	False		Error 28 In Error Array
bInError29	Bool	false	False	False	False	False	False		Error 29 In Error Array
bInError30	Bool	false	False	False	False	False	False		Error 30 In Error Array
Output									
bOutErrorExists	Bool	false	False	False	False	False	False		An Error Exists
iOutScrollingErrorNumber	Int	0	False	False	False	False	False		Current Index when scrolling through errors
InOut									
Static									
TON_ErrorDelay	TON_TIME		False	False	False	False	True		Delay between each scroll for a new error
PT	Time	T#0ms	False	False	False	False	False		
ET	Time	T#0ms	False	False	False	False	False		
IN	Bool	false	False	False	False	False	False		
Q	Bool	false	False	False	False	False	False		
abErrors	Array[1..30] of Bool		False	False	False	False	False		
abErrors[1]	Bool	false	False	False	False	False	False		
abErrors[2]	Bool	false	False	False	False	False	False		
abErrors[3]	Bool	false	False	False	False	False	False		
abErrors[4]	Bool	false	False	False	False	False	False		
abErrors[5]	Bool	false	False	False	False	False	False		
abErrors[6]	Bool	false	False	False	False	False	False		
abErrors[7]	Bool	false	False	False	False	False	False		
abErrors[8]	Bool	false	False	False	False	False	False		
abErrors[9]	Bool	false	False	False	False	False	False		
abErrors[10]	Bool	false	False	False	False	False	False		
abErrors[11]	Bool	false	False	False	False	False	False		
abErrors[12]	Bool	false	False	False	False	False	False		
abErrors[13]	Bool	false	False	False	False	False	False		
abErrors[14]	Bool	false	False	False	False	False	False		
abErrors[15]	Bool	false	False	False	False	False	False		
abErrors[16]	Bool	false	False	False	False	False	False		
abErrors[17]	Bool	false	False	False	False	False	False		
abErrors[18]	Bool	false	False	False	False	False	False		

Name	Data type	Start value	Retain	Accessible from HMI/OPC UA/Web API	Writable from HMI/OPC UA/Web API	Visible in HMI engineering	Setpoint	Supervision	Comment
abErrors[19]	Bool	false	False	False	False	False	False		
abErrors[20]	Bool	false	False	False	False	False	False		
abErrors[21]	Bool	false	False	False	False	False	False		
abErrors[22]	Bool	false	False	False	False	False	False		
abErrors[23]	Bool	false	False	False	False	False	False		
abErrors[24]	Bool	false	False	False	False	False	False		
abErrors[25]	Bool	false	False	False	False	False	False		
abErrors[26]	Bool	false	False	False	False	False	False		
abErrors[27]	Bool	false	False	False	False	False	False		
abErrors[28]	Bool	false	False	False	False	False	False		
abErrors[29]	Bool	false	False	False	False	False	False		
abErrors[30]	Bool	false	False	False	False	False	False		
iNextScrollNum	Int	1	False	False	False	False	False		Index of next error position
iErrorsScrollNum	Int	1	False	False	False	False	False		Index of current error position
bScrolling	Bool	false	False	False	False	False	False		Indicates we are scrolling
bTON_ErrorDelay	Bool	false	False	False	False	False	False		
rValue	Real	0.0	False	False	False	False	False		
bSignalOutOfTolerance	Bool	false	False	False	False	False	False		
bReset	Bool	false	False	False	False	False	False		
bTON_Timeout	Bool	false	False	False	False	False	False		
bPB_ResetError	Bool	false	False	False	False	False	False		
▼ PRS_XV81	"fbValve_Solenoid"		False	True	True	True	True		
▼ Input									
tInTimeout	Time	T#0ms	False	False	False	False	False		Timeout time for an actuator's feedback to activate before giving a fault
iInMode	Int	0	False	False	False	False	False		Mode Selection
bInEstop	Bool	false	False	False	False	False	False		Estop
bInSignalHome	Bool	false	False	False	False	False	False		Home position feedback
bInSignalWork	Bool	false	False	False	False	False	False		Work position feedback
bInEnable	Bool	false	False	False	False	False	False		Home and Work Enabled
bInCommandWork	Bool	false	False	False	False	False	False		Move to work position in automatic mode
bInResetError	Bool	false	False	False	False	False	False		Reset Error
bInSimulate	Bool	false	False	False	False	False	False		Activate device simulation
▼ Output									
bOutCommandHome	Bool	false	False	False	False	False	False		Home position command
bOutCommandWork	Bool	false	False	False	False	False	False		Work position command
bOutActiveHome	Bool	false	False	False	False	False	False		Valve is in home position
bOutActiveWork	Bool	false	False	False	False	False	False		Valve is in work position
bOutAuto	Bool	false	False	False	False	False	False		Block in auto mode
bOutError	Bool	false	False	False	False	False	False		Error exists
▼ ERROR_Valve	"udtError_Valve"		False	False	False	False	False		Valve error structure
NoHomeFeedback	Bool	false	False	False	False	False	False		Home position feedback not active
NoWorkFeedback	Bool	false	False	False	False	False	False		Work position feedback not active
HomeFeedbackStillActive	Bool	false	False	False	False	False	False		Home position feedback still active
WorkFeedbackStillActive	Bool	false	False	False	False	False	False		Work position feedback still active
▼ InOut									
HMI_ValveControl	"udtHMI_ValveControl"		False	False	False	False	False		HMI valve control
▼ Static									
▼ ErrorScroller	"fbErrorScroller"		False	False	False	False	True		Sub-block to handle error scroller
▼ Input									
bInError01	Bool	false	False	False	False	False	False		Error 1 In Error Array
bInError02	Bool	false	False	False	False	False	False		Error 2 In Error Array
bInError03	Bool	false	False	False	False	False	False		Error 3 In Error Array
bInError04	Bool	false	False	False	False	False	False		Error 4 In Error Array
bInError05	Bool	false	False	False	False	False	False		Error 5 In Error Array
bInError06	Bool	false	False	False	False	False	False		Error 6 In Error Array
bInError07	Bool	false	False	False	False	False	False		Error 7 In Error Array
bInError08	Bool	false	False	False	False	False	False		Error 8 In Error Array
bInError09	Bool	false	False	False	False	False	False		Error 9 In Error Array
bInError10	Bool	false	False	False	False	False	False		Error 10 In Error Array
bInError11	Bool	false	False	False	False	False	False		Error 11 In Error Array
bInError12	Bool	false	False	False	False	False	False		Error 12 In Error Array
bInError13	Bool	false	False	False	False	False	False		Error 13 In Error Array
bInError14	Bool	false	False	False	False	False	False		Error 14 In Error Array
bInError15	Bool	false	False	False	False	False	False		Error 15 In Error Array
bInError16	Bool	false	False	False	False	False	False		Error 16 In Error Array
bInError17	Bool	false	False	False	False	False	False		Error 17 In Error Array
bInError18	Bool	false	False	False	False	False	False		Error 18 In Error Array

Name	Data type	Start value	Retain	Accessible from HMI/OPC UA/Web API	Writable from HMI/OPC UA/Web API	Visible in HMI engineering	Setpoint	Supervision	Comment
bInError19	Bool	false	False	False	False	False	False		Error 19 In Error Array
bInError20	Bool	false	False	False	False	False	False		Error 20 In Error Array
bInError21	Bool	false	False	False	False	False	False		Error 21 In Error Array
bInError22	Bool	false	False	False	False	False	False		Error 22 In Error Array
bInError23	Bool	false	False	False	False	False	False		Error 23 In Error Array
bInError24	Bool	false	False	False	False	False	False		Error 24 In Error Array
bInError25	Bool	false	False	False	False	False	False		Error 25 In Error Array
bInError26	Bool	false	False	False	False	False	False		Error 26 In Error Array
bInError27	Bool	false	False	False	False	False	False		Error 27 In Error Array
bInError28	Bool	false	False	False	False	False	False		Error 28 In Error Array
bInError29	Bool	false	False	False	False	False	False		Error 29 In Error Array
bInError30	Bool	false	False	False	False	False	False		Error 30 In Error Array
▼ Output									
bOutErrorExists	Bool	false	False	False	False	False	False		An Error Exists
iOutScrollingErrorNumber	Int	0	False	False	False	False	False		Current Index when scrolling through errors
InOut									
▼ Static									
▼ TON_ErrorDelay	TON_TIME		False	False	False	False	True		Delay between each scroll for a new error
PT	Time	T#0ms	False	False	False	False	False		
ET	Time	T#0ms	False	False	False	False	False		
IN	Bool	false	False	False	False	False	False		
Q	Bool	false	False	False	False	False	False		
▼ abErrors	Array[1..30] of Bool		False	False	False	False	False		
abErrors[1]	Bool	false	False	False	False	False	False		
abErrors[2]	Bool	false	False	False	False	False	False		
abErrors[3]	Bool	false	False	False	False	False	False		
abErrors[4]	Bool	false	False	False	False	False	False		
abErrors[5]	Bool	false	False	False	False	False	False		
abErrors[6]	Bool	false	False	False	False	False	False		
abErrors[7]	Bool	false	False	False	False	False	False		
abErrors[8]	Bool	false	False	False	False	False	False		
abErrors[9]	Bool	false	False	False	False	False	False		
abErrors[10]	Bool	false	False	False	False	False	False		
abErrors[11]	Bool	false	False	False	False	False	False		
abErrors[12]	Bool	false	False	False	False	False	False		
abErrors[13]	Bool	false	False	False	False	False	False		
abErrors[14]	Bool	false	False	False	False	False	False		
abErrors[15]	Bool	false	False	False	False	False	False		
abErrors[16]	Bool	false	False	False	False	False	False		
abErrors[17]	Bool	false	False	False	False	False	False		
abErrors[18]	Bool	false	False	False	False	False	False		
abErrors[19]	Bool	false	False	False	False	False	False		
abErrors[20]	Bool	false	False	False	False	False	False		
abErrors[21]	Bool	false	False	False	False	False	False		
abErrors[22]	Bool	false	False	False	False	False	False		
abErrors[23]	Bool	false	False	False	False	False	False		
abErrors[24]	Bool	false	False	False	False	False	False		
abErrors[25]	Bool	false	False	False	False	False	False		
abErrors[26]	Bool	false	False	False	False	False	False		
abErrors[27]	Bool	false	False	False	False	False	False		
abErrors[28]	Bool	false	False	False	False	False	False		
abErrors[29]	Bool	false	False	False	False	False	False		
abErrors[30]	Bool	false	False	False	False	False	False		
iNextScrollNum	Int	1	False	False	False	False	False		Index of next error position
iErrorsScrollNum	Int	1	False	False	False	False	False		Index of current error position
bScrolling	Bool	false	False	False	False	False	False		Indicates we are scrolling
bTON_ErrorDelay	Bool	false	False	False	False	False	False		
▼ TON_TimeOut	TON_TIME		False	False	False	False	True		Timer for Error Timeout
PT	Time	T#0ms	False	False	False	False	False		
ET	Time	T#0ms	False	False	False	False	False		
IN	Bool	false	False	False	False	False	False		
Q	Bool	false	False	False	False	False	False		
iLastMode	Int	0	False	False	False	False	False		Last mode code
bNewMode	Bool	false	False	False	False	False	False		New mode selected
bEnableHome	Bool	false	False	False	False	False	False		Home position enabled
bEnableWork	Bool	false	False	False	False	False	False		Work position enabled
bAutoMode	Bool	false	False	False	False	False	False		Auto Mode is active
bManualMode	Bool	false	False	False	False	False	False		Manual Mode is active
bReset	Bool	false	False	False	False	False	False		
bTON_TimeOut	Bool	false	False	False	False	False	False		

Name	Data type	Start value	Retain	Accessible from HMI/OPC UA/Web API	Writable from HMI/OPC UA/Web API	Visible in HMI engineering	Setpoint	Supervision	Comment
bPB_Home	Bool	false	False	False	False	False	False		
bPB_Work	Bool	false	False	False	False	False	False		
bPB_ResetError	Bool	false	False	False	False	False	False		
IN1	"fbValve_Solenoid"		False	True	True	True	True		
Input									
tInTimeout	Time	T#0ms	False	False	False	False	False		Timeout time for an actuator's feedback to activate before giving a fault
iInMode	Int	0	False	False	False	False	False		Mode Selection
bInEstop	Bool	false	False	False	False	False	False		Estop
bInSignalHome	Bool	false	False	False	False	False	False		Home position feedback
bInSignalWork	Bool	false	False	False	False	False	False		Work position feedback
bInEnable	Bool	false	False	False	False	False	False		Home and Work Enabled
bInCommandWork	Bool	false	False	False	False	False	False		Move to work position in automatic mode
bInResetError	Bool	false	False	False	False	False	False		Reset Error
bInSimulate	Bool	false	False	False	False	False	False		Activate device simulation
Output									
bOutCommandHome	Bool	false	False	False	False	False	False		Home position command
bOutCommandWork	Bool	false	False	False	False	False	False		Work position command
bOutActiveHome	Bool	false	False	False	False	False	False		Valve is in home position
bOutActiveWork	Bool	false	False	False	False	False	False		Valve is in work position
bOutAuto	Bool	false	False	False	False	False	False		Block in auto mode
bOutError	Bool	false	False	False	False	False	False		Error exists
ERROR_Valve	"udtError_Valve"		False	False	False	False	False		Valve error structure
NoHomeFeedback	Bool	false	False	False	False	False	False		Home position feedback not active
NoWorkFeedback	Bool	false	False	False	False	False	False		Work position feedback not active
HomeFeedbackStillActive	Bool	false	False	False	False	False	False		Home position feedback still active
WorkFeedbackStillActive	Bool	false	False	False	False	False	False		Work position feedback still active
InOut									
HMI_ValveControl	"udtHMI_ValveControl"		False	False	False	False	False		HMI valve control
Static									
ErrorScroller	"fbErrorScroller"		False	False	False	False	True		Sub-block to handle error scroller
Input									
bInError01	Bool	false	False	False	False	False	False		Error 1 In Error Array
bInError02	Bool	false	False	False	False	False	False		Error 2 In Error Array
bInError03	Bool	false	False	False	False	False	False		Error 3 In Error Array
bInError04	Bool	false	False	False	False	False	False		Error 4 In Error Array
bInError05	Bool	false	False	False	False	False	False		Error 5 In Error Array
bInError06	Bool	false	False	False	False	False	False		Error 6 In Error Array
bInError07	Bool	false	False	False	False	False	False		Error 7 In Error Array
bInError08	Bool	false	False	False	False	False	False		Error 8 In Error Array
bInError09	Bool	false	False	False	False	False	False		Error 9 In Error Array
bInError10	Bool	false	False	False	False	False	False		Error 10 In Error Array
bInError11	Bool	false	False	False	False	False	False		Error 11 In Error Array
bInError12	Bool	false	False	False	False	False	False		Error 12 In Error Array
bInError13	Bool	false	False	False	False	False	False		Error 13 In Error Array
bInError14	Bool	false	False	False	False	False	False		Error 14 In Error Array
bInError15	Bool	false	False	False	False	False	False		Error 15 In Error Array
bInError16	Bool	false	False	False	False	False	False		Error 16 In Error Array
bInError17	Bool	false	False	False	False	False	False		Error 17 In Error Array
bInError18	Bool	false	False	False	False	False	False		Error 18 In Error Array
bInError19	Bool	false	False	False	False	False	False		Error 19 In Error Array
bInError20	Bool	false	False	False	False	False	False		Error 20 In Error Array
bInError21	Bool	false	False	False	False	False	False		Error 21 In Error Array
bInError22	Bool	false	False	False	False	False	False		Error 22 In Error Array
bInError23	Bool	false	False	False	False	False	False		Error 23 In Error Array
bInError24	Bool	false	False	False	False	False	False		Error 24 In Error Array
bInError25	Bool	false	False	False	False	False	False		Error 25 In Error Array
bInError26	Bool	false	False	False	False	False	False		Error 26 In Error Array
bInError27	Bool	false	False	False	False	False	False		Error 27 In Error Array
bInError28	Bool	false	False	False	False	False	False		Error 28 In Error Array
bInError29	Bool	false	False	False	False	False	False		Error 29 In Error Array
bInError30	Bool	false	False	False	False	False	False		Error 30 In Error Array
Output									
bOutErrorExists	Bool	false	False	False	False	False	False		An Error Exists
iOutScrollingErrorNumber	Int	0	False	False	False	False	False		Current Index when scrolling through errors
InOut									

Name	Data type	Start value	Retain	Accessible from HMI/OPC UA/Web API	Writable from HMI/OPC UA/Web API	Visible in HMI engineering	Setpoint	Supervision	Comment
Static									
TON_ErrorDelay	TON_TIME		False	False	False	False	True		Delay between each scroll for a new error
PT	Time	T#0ms	False	False	False	False	False		
ET	Time	T#0ms	False	False	False	False	False		
IN	Bool	false	False	False	False	False	False		
Q	Bool	false	False	False	False	False	False		
abErrors	Array[1..30] of Bool		False	False	False	False	False		
abErrors[1]	Bool	false	False	False	False	False	False		
abErrors[2]	Bool	false	False	False	False	False	False		
abErrors[3]	Bool	false	False	False	False	False	False		
abErrors[4]	Bool	false	False	False	False	False	False		
abErrors[5]	Bool	false	False	False	False	False	False		
abErrors[6]	Bool	false	False	False	False	False	False		
abErrors[7]	Bool	false	False	False	False	False	False		
abErrors[8]	Bool	false	False	False	False	False	False		
abErrors[9]	Bool	false	False	False	False	False	False		
abErrors[10]	Bool	false	False	False	False	False	False		
abErrors[11]	Bool	false	False	False	False	False	False		
abErrors[12]	Bool	false	False	False	False	False	False		
abErrors[13]	Bool	false	False	False	False	False	False		
abErrors[14]	Bool	false	False	False	False	False	False		
abErrors[15]	Bool	false	False	False	False	False	False		
abErrors[16]	Bool	false	False	False	False	False	False		
abErrors[17]	Bool	false	False	False	False	False	False		
abErrors[18]	Bool	false	False	False	False	False	False		
abErrors[19]	Bool	false	False	False	False	False	False		
abErrors[20]	Bool	false	False	False	False	False	False		
abErrors[21]	Bool	false	False	False	False	False	False		
abErrors[22]	Bool	false	False	False	False	False	False		
abErrors[23]	Bool	false	False	False	False	False	False		
abErrors[24]	Bool	false	False	False	False	False	False		
abErrors[25]	Bool	false	False	False	False	False	False		
abErrors[26]	Bool	false	False	False	False	False	False		
abErrors[27]	Bool	false	False	False	False	False	False		
abErrors[28]	Bool	false	False	False	False	False	False		
abErrors[29]	Bool	false	False	False	False	False	False		
abErrors[30]	Bool	false	False	False	False	False	False		
iNextScrollNum	Int	1	False	False	False	False	False		Index of next error position
iErrorsScrollNum	Int	1	False	False	False	False	False		Index of current error position
bScrolling	Bool	false	False	False	False	False	False		Indicates we are scrolling
bTON_ErrorDelay	Bool	false	False	False	False	False	False		
TON_TimeOut	TON_TIME		False	False	False	False	True		Timer for Error Timeout
PT	Time	T#0ms	False	False	False	False	False		
ET	Time	T#0ms	False	False	False	False	False		
IN	Bool	false	False	False	False	False	False		
Q	Bool	false	False	False	False	False	False		
iLastMode	Int	0	False	False	False	False	False		Last mode code
bNewMode	Bool	false	False	False	False	False	False		New mode selected
bEnableHome	Bool	false	False	False	False	False	False		Home position enabled
bEnableWork	Bool	false	False	False	False	False	False		Work position enabled
bAutoMode	Bool	false	False	False	False	False	False		Auto Mode is active
bManualMode	Bool	false	False	False	False	False	False		Manual Mode is active
bReset	Bool	false	False	False	False	False	False		
bTON_TimeOut	Bool	false	False	False	False	False	False		
bPB_Home	Bool	false	False	False	False	False	False		
bPB_Work	Bool	false	False	False	False	False	False		
bPB_ResetError	Bool	false	False	False	False	False	False		
IN2	"fbValve_Solenoid"		False	True	True	True	True		
Input									
tInTimeout	Time	T#0ms	False	False	False	False	False		Timeout time for an actuator's feedback to activate before giving a fault
iInMode	Int	0	False	False	False	False	False		Mode Selection
bInEstop	Bool	false	False	False	False	False	False		Estop
bInSignalHome	Bool	false	False	False	False	False	False		Home position feedback
bInSignalWork	Bool	false	False	False	False	False	False		Work position feedback
bInEnable	Bool	false	False	False	False	False	False		Home and Work Enabled
bInCommandWork	Bool	false	False	False	False	False	False		Move to work position in automatic mode
bInResetError	Bool	false	False	False	False	False	False		Reset Error
bInSimulate	Bool	false	False	False	False	False	False		Activate device simulation

Name	Data type	Start value	Retain	Accessible from HMI/OPC UA/Web API	Writable from HMI/OPC UA/Web API	Visible in HMI engineering	Setpoint	Supervision	Comment
Output									
bOutCommandHome	Bool	false	False	False	False	False	False		Home position command
bOutCommandWork	Bool	false	False	False	False	False	False		Work position command
bOutActiveHome	Bool	false	False	False	False	False	False		Valve is in home position
bOutActiveWork	Bool	false	False	False	False	False	False		Valve is in work position
bOutAuto	Bool	false	False	False	False	False	False		Block in auto mode
bOutError	Bool	false	False	False	False	False	False		Error exists
ERROR_Valve	"udtError_Valve"		False	False	False	False	False		Valve error structure
NoHomeFeedback	Bool	false	False	False	False	False	False		Home position feedback not active
NoWorkFeedback	Bool	false	False	False	False	False	False		Work position feedback not active
HomeFeedbackStillActive	Bool	false	False	False	False	False	False		Home position feedback still active
WorkFeedbackStillActive	Bool	false	False	False	False	False	False		Work position feedback still active
InOut									
HMI_ValveControl	"udtHMI_ValveControl"		False	False	False	False	False		HMI valve control
Static									
ErrorScroller	"fbErrorScroller"		False	False	False	False	True		Sub-block to handle error scroller
Input									
bInError01	Bool	false	False	False	False	False	False		Error 1 In Error Array
bInError02	Bool	false	False	False	False	False	False		Error 2 In Error Array
bInError03	Bool	false	False	False	False	False	False		Error 3 In Error Array
bInError04	Bool	false	False	False	False	False	False		Error 4 In Error Array
bInError05	Bool	false	False	False	False	False	False		Error 5 In Error Array
bInError06	Bool	false	False	False	False	False	False		Error 6 In Error Array
bInError07	Bool	false	False	False	False	False	False		Error 7 In Error Array
bInError08	Bool	false	False	False	False	False	False		Error 8 In Error Array
bInError09	Bool	false	False	False	False	False	False		Error 9 In Error Array
bInError10	Bool	false	False	False	False	False	False		Error 10 In Error Array
bInError11	Bool	false	False	False	False	False	False		Error 11 In Error Array
bInError12	Bool	false	False	False	False	False	False		Error 12 In Error Array
bInError13	Bool	false	False	False	False	False	False		Error 13 In Error Array
bInError14	Bool	false	False	False	False	False	False		Error 14 In Error Array
bInError15	Bool	false	False	False	False	False	False		Error 15 In Error Array
bInError16	Bool	false	False	False	False	False	False		Error 16 In Error Array
bInError17	Bool	false	False	False	False	False	False		Error 17 In Error Array
bInError18	Bool	false	False	False	False	False	False		Error 18 In Error Array
bInError19	Bool	false	False	False	False	False	False		Error 19 In Error Array
bInError20	Bool	false	False	False	False	False	False		Error 20 In Error Array
bInError21	Bool	false	False	False	False	False	False		Error 21 In Error Array
bInError22	Bool	false	False	False	False	False	False		Error 22 In Error Array
bInError23	Bool	false	False	False	False	False	False		Error 23 In Error Array
bInError24	Bool	false	False	False	False	False	False		Error 24 In Error Array
bInError25	Bool	false	False	False	False	False	False		Error 25 In Error Array
bInError26	Bool	false	False	False	False	False	False		Error 26 In Error Array
bInError27	Bool	false	False	False	False	False	False		Error 27 In Error Array
bInError28	Bool	false	False	False	False	False	False		Error 28 In Error Array
bInError29	Bool	false	False	False	False	False	False		Error 29 In Error Array
bInError30	Bool	false	False	False	False	False	False		Error 30 In Error Array
Output									
bOutErrorExists	Bool	false	False	False	False	False	False		An Error Exists
iOutScrollingErrorNumber	Int	0	False	False	False	False	False		Current Index when scrolling through errors
InOut									
Static									
TON_ErrorDelay	TON_TIME		False	False	False	False	True		Delay between each scroll for a new error
PT	Time	T#0ms	False	False	False	False	False		
ET	Time	T#0ms	False	False	False	False	False		
IN	Bool	false	False	False	False	False	False		
Q	Bool	false	False	False	False	False	False		
abErrors	Array[1..30] of Bool		False	False	False	False	False		
abErrors[1]	Bool	false	False	False	False	False	False		
abErrors[2]	Bool	false	False	False	False	False	False		
abErrors[3]	Bool	false	False	False	False	False	False		
abErrors[4]	Bool	false	False	False	False	False	False		
abErrors[5]	Bool	false	False	False	False	False	False		
abErrors[6]	Bool	false	False	False	False	False	False		
abErrors[7]	Bool	false	False	False	False	False	False		
abErrors[8]	Bool	false	False	False	False	False	False		

Name	Data type	Start value	Retain	Accessible from HMI/OPC UA/Web API	Writable from HMI/OPC UA/Web API	Visible in HMI engineering	Setpoint	Supervision	Comment
abErrors[9]	Bool	false	False	False	False	False	False		
abErrors[10]	Bool	false	False	False	False	False	False		
abErrors[11]	Bool	false	False	False	False	False	False		
abErrors[12]	Bool	false	False	False	False	False	False		
abErrors[13]	Bool	false	False	False	False	False	False		
abErrors[14]	Bool	false	False	False	False	False	False		
abErrors[15]	Bool	false	False	False	False	False	False		
abErrors[16]	Bool	false	False	False	False	False	False		
abErrors[17]	Bool	false	False	False	False	False	False		
abErrors[18]	Bool	false	False	False	False	False	False		
abErrors[19]	Bool	false	False	False	False	False	False		
abErrors[20]	Bool	false	False	False	False	False	False		
abErrors[21]	Bool	false	False	False	False	False	False		
abErrors[22]	Bool	false	False	False	False	False	False		
abErrors[23]	Bool	false	False	False	False	False	False		
abErrors[24]	Bool	false	False	False	False	False	False		
abErrors[25]	Bool	false	False	False	False	False	False		
abErrors[26]	Bool	false	False	False	False	False	False		
abErrors[27]	Bool	false	False	False	False	False	False		
abErrors[28]	Bool	false	False	False	False	False	False		
abErrors[29]	Bool	false	False	False	False	False	False		
abErrors[30]	Bool	false	False	False	False	False	False		
iNextScrollNum	Int	1	False	False	False	False	False		Index of next error position
iErrorsScrollNum	Int	1	False	False	False	False	False		Index of current error position
bScrolling	Bool	false	False	False	False	False	False		Indicates we are scrolling
bTON_ErrorDelay	Bool	false	False	False	False	False	False		
▼ TON_TimeOut	TON_TIME		False	False	False	False	True		Timer for Error Timeout
PT	Time	T#0ms	False	False	False	False	False		
ET	Time	T#0ms	False	False	False	False	False		
IN	Bool	false	False	False	False	False	False		
Q	Bool	false	False	False	False	False	False		
iLastMode	Int	0	False	False	False	False	False		Last mode code
bNewMode	Bool	false	False	False	False	False	False		New mode selected
bEnableHome	Bool	false	False	False	False	False	False		Home position enabled
bEnableWork	Bool	false	False	False	False	False	False		Work position enabled
bAutoMode	Bool	false	False	False	False	False	False		Auto Mode is active
bManualMode	Bool	false	False	False	False	False	False		Manual Mode is active
bReset	Bool	false	False	False	False	False	False		
bTON_TimeOut	Bool	false	False	False	False	False	False		
bPB_Home	Bool	false	False	False	False	False	False		
bPB_Work	Bool	false	False	False	False	False	False		
bPB_ResetError	Bool	false	False	False	False	False	False		
▼ OUT1	"fbValve_Solenoid"		False	True	True	True	True		
▼ Input									
tInTimeout	Time	T#0ms	False	False	False	False	False		Timeout time for an actuator's feedback to activate before giving a fault
iInMode	Int	0	False	False	False	False	False		Mode Selection
bInEstop	Bool	false	False	False	False	False	False		Estop
bInSignalHome	Bool	false	False	False	False	False	False		Home position feedback
bInSignalWork	Bool	false	False	False	False	False	False		Work position feedback
bInEnable	Bool	false	False	False	False	False	False		Home and Work Enabled
bInCommandWork	Bool	false	False	False	False	False	False		Move to work position in automatic mode
bInResetError	Bool	false	False	False	False	False	False		Reset Error
bInSimulate	Bool	false	False	False	False	False	False		Activate device simulation
▼ Output									
bOutCommandHome	Bool	false	False	False	False	False	False		Home position command
bOutCommandWork	Bool	false	False	False	False	False	False		Work position command
bOutActiveHome	Bool	false	False	False	False	False	False		Valve is in home position
bOutActiveWork	Bool	false	False	False	False	False	False		Valve is in work position
bOutAuto	Bool	false	False	False	False	False	False		Block in auto mode
bOutError	Bool	false	False	False	False	False	False		Error exists
▼ ERROR_Valve	"udtError_Valve"		False	False	False	False	False		Valve error structure
NoHomeFeedback	Bool	false	False	False	False	False	False		Home position feedback not active
NoWorkFeedback	Bool	false	False	False	False	False	False		Work position feedback not active
HomeFeedbackStillActive	Bool	false	False	False	False	False	False		Home position feedback still active
WorkFeedbackStillActive	Bool	false	False	False	False	False	False		Work position feedback still active
▼ InOut									
HMI_ValveControl	"udtHMI_ValveControl"		False	False	False	False	False		HMI valve control

Name	Data type	Start value	Retain	Accessible from HMI/OPC UA/Web API	Writable from HMI/OPC UA/Web API	Visible in HMI engineering	Setpoint	Supervision	Comment
Static									
ErrorScroller	"fbErrorScroller"		False	False	False	False	True		Sub-block to handle error scroller
Input									
bInError01	Bool	false	False	False	False	False	False		Error 1 In Error Array
bInError02	Bool	false	False	False	False	False	False		Error 2 In Error Array
bInError03	Bool	false	False	False	False	False	False		Error 3 In Error Array
bInError04	Bool	false	False	False	False	False	False		Error 4 In Error Array
bInError05	Bool	false	False	False	False	False	False		Error 5 In Error Array
bInError06	Bool	false	False	False	False	False	False		Error 6 In Error Array
bInError07	Bool	false	False	False	False	False	False		Error 7 In Error Array
bInError08	Bool	false	False	False	False	False	False		Error 8 In Error Array
bInError09	Bool	false	False	False	False	False	False		Error 9 In Error Array
bInError10	Bool	false	False	False	False	False	False		Error 10 In Error Array
bInError11	Bool	false	False	False	False	False	False		Error 11 In Error Array
bInError12	Bool	false	False	False	False	False	False		Error 12 In Error Array
bInError13	Bool	false	False	False	False	False	False		Error 13 In Error Array
bInError14	Bool	false	False	False	False	False	False		Error 14 In Error Array
bInError15	Bool	false	False	False	False	False	False		Error 15 In Error Array
bInError16	Bool	false	False	False	False	False	False		Error 16 In Error Array
bInError17	Bool	false	False	False	False	False	False		Error 17 In Error Array
bInError18	Bool	false	False	False	False	False	False		Error 18 In Error Array
bInError19	Bool	false	False	False	False	False	False		Error 19 In Error Array
bInError20	Bool	false	False	False	False	False	False		Error 20 In Error Array
bInError21	Bool	false	False	False	False	False	False		Error 21 In Error Array
bInError22	Bool	false	False	False	False	False	False		Error 22 In Error Array
bInError23	Bool	false	False	False	False	False	False		Error 23 In Error Array
bInError24	Bool	false	False	False	False	False	False		Error 24 In Error Array
bInError25	Bool	false	False	False	False	False	False		Error 25 In Error Array
bInError26	Bool	false	False	False	False	False	False		Error 26 In Error Array
bInError27	Bool	false	False	False	False	False	False		Error 27 In Error Array
bInError28	Bool	false	False	False	False	False	False		Error 28 In Error Array
bInError29	Bool	false	False	False	False	False	False		Error 29 In Error Array
bInError30	Bool	false	False	False	False	False	False		Error 30 In Error Array
Output									
bOutErrorExists	Bool	false	False	False	False	False	False		An Error Exists
iOutScrollingError-Number	Int	0	False	False	False	False	False		Current Index when scrolling through errors
InOut									
Static									
TON_ErrorDelay	TON_TIME		False	False	False	False	True		Delay between each scroll for a new error
PT	Time	T#0ms	False	False	False	False	False		
ET	Time	T#0ms	False	False	False	False	False		
IN	Bool	false	False	False	False	False	False		
Q	Bool	false	False	False	False	False	False		
abErrors	Array[1..30] of Bool		False	False	False	False	False		
abErrors[1]	Bool	false	False	False	False	False	False		
abErrors[2]	Bool	false	False	False	False	False	False		
abErrors[3]	Bool	false	False	False	False	False	False		
abErrors[4]	Bool	false	False	False	False	False	False		
abErrors[5]	Bool	false	False	False	False	False	False		
abErrors[6]	Bool	false	False	False	False	False	False		
abErrors[7]	Bool	false	False	False	False	False	False		
abErrors[8]	Bool	false	False	False	False	False	False		
abErrors[9]	Bool	false	False	False	False	False	False		
abErrors[10]	Bool	false	False	False	False	False	False		
abErrors[11]	Bool	false	False	False	False	False	False		
abErrors[12]	Bool	false	False	False	False	False	False		
abErrors[13]	Bool	false	False	False	False	False	False		
abErrors[14]	Bool	false	False	False	False	False	False		
abErrors[15]	Bool	false	False	False	False	False	False		
abErrors[16]	Bool	false	False	False	False	False	False		
abErrors[17]	Bool	false	False	False	False	False	False		
abErrors[18]	Bool	false	False	False	False	False	False		
abErrors[19]	Bool	false	False	False	False	False	False		
abErrors[20]	Bool	false	False	False	False	False	False		
abErrors[21]	Bool	false	False	False	False	False	False		
abErrors[22]	Bool	false	False	False	False	False	False		
abErrors[23]	Bool	false	False	False	False	False	False		
abErrors[24]	Bool	false	False	False	False	False	False		
abErrors[25]	Bool	false	False	False	False	False	False		

Name	Data type	Start value	Retain	Accessible from HMI/OPC UA/Web API	Writable from HMI/OPC UA/Web API	Visible in HMI engineering	Setpoint	Supervision	Comment
abErrors[26]	Bool	false	False	False	False	False	False		
abErrors[27]	Bool	false	False	False	False	False	False		
abErrors[28]	Bool	false	False	False	False	False	False		
abErrors[29]	Bool	false	False	False	False	False	False		
abErrors[30]	Bool	false	False	False	False	False	False		
iNextScrollNum	Int	1	False	False	False	False	False		Index of next error position
iErrorsScrollNum	Int	1	False	False	False	False	False		Index of current error position
bScrolling	Bool	false	False	False	False	False	False		Indicates we are scrolling
bTON_ErrorDelay	Bool	false	False	False	False	False	False		
▼ TON_TimeOut	TON_TIME		False	False	False	False	True		Timer for Error Timeout
PT	Time	T#0ms	False	False	False	False	False		
ET	Time	T#0ms	False	False	False	False	False		
IN	Bool	false	False	False	False	False	False		
Q	Bool	false	False	False	False	False	False		
iLastMode	Int	0	False	False	False	False	False		Last mode code
bNewMode	Bool	false	False	False	False	False	False		New mode selected
bEnableHome	Bool	false	False	False	False	False	False		Home position enabled
bEnableWork	Bool	false	False	False	False	False	False		Work position enabled
bAutoMode	Bool	false	False	False	False	False	False		Auto Mode is active
bManualMode	Bool	false	False	False	False	False	False		Manual Mode is active
bReset	Bool	false	False	False	False	False	False		
bTON_TimeOut	Bool	false	False	False	False	False	False		
bPB_Home	Bool	false	False	False	False	False	False		
bPB_Work	Bool	false	False	False	False	False	False		
bPB_ResetError	Bool	false	False	False	False	False	False		
▼ OUT2	"fbValve_Solenoid"		False	True	True	True	True		
▼ Input									
tInTimeout	Time	T#0ms	False	False	False	False	False		Timeout time for an actuator's feedback to activate before giving a fault
iInMode	Int	0	False	False	False	False	False		Mode Selection
bInEstop	Bool	false	False	False	False	False	False		Estop
bInSignalHome	Bool	false	False	False	False	False	False		Home position feedback
bInSignalWork	Bool	false	False	False	False	False	False		Work position feedback
bInEnable	Bool	false	False	False	False	False	False		Home and Work Enabled
bInCommandWork	Bool	false	False	False	False	False	False		Move to work position in automatic mode
bInResetError	Bool	false	False	False	False	False	False		Reset Error
bInSimulate	Bool	false	False	False	False	False	False		Activate device simulation
▼ Output									
bOutCommandHome	Bool	false	False	False	False	False	False		Home position command
bOutCommandWork	Bool	false	False	False	False	False	False		Work position command
bOutActiveHome	Bool	false	False	False	False	False	False		Valve is in home position
bOutActiveWork	Bool	false	False	False	False	False	False		Valve is in work position
bOutAuto	Bool	false	False	False	False	False	False		Block in auto mode
bOutError	Bool	false	False	False	False	False	False		Error exists
▼ ERROR_Valve	"udtError_Valve"		False	False	False	False	False		Valve error structure
NoHomeFeedback	Bool	false	False	False	False	False	False		Home position feedback not active
NoWorkFeedback	Bool	false	False	False	False	False	False		Work position feedback not active
HomeFeedbackStillActive	Bool	false	False	False	False	False	False		Home position feedback still active
WorkFeedbackStillActive	Bool	false	False	False	False	False	False		Work position feedback still active
▼ InOut									
HMI_ValveControl	"udtHMI_ValveControl"		False	False	False	False	False		HMI valve control
▼ Static									
▼ ErrorScroller	"fbErrorScroller"		False	False	False	False	True		Sub-block to handle error scroller
▼ Input									
bInError01	Bool	false	False	False	False	False	False		Error 1 In Error Array
bInError02	Bool	false	False	False	False	False	False		Error 2 In Error Array
bInError03	Bool	false	False	False	False	False	False		Error 3 In Error Array
bInError04	Bool	false	False	False	False	False	False		Error 4 In Error Array
bInError05	Bool	false	False	False	False	False	False		Error 5 In Error Array
bInError06	Bool	false	False	False	False	False	False		Error 6 In Error Array
bInError07	Bool	false	False	False	False	False	False		Error 7 In Error Array
bInError08	Bool	false	False	False	False	False	False		Error 8 In Error Array
bInError09	Bool	false	False	False	False	False	False		Error 9 In Error Array
bInError10	Bool	false	False	False	False	False	False		Error 10 In Error Array
bInError11	Bool	false	False	False	False	False	False		Error 11 In Error Array
bInError12	Bool	false	False	False	False	False	False		Error 12 In Error Array
bInError13	Bool	false	False	False	False	False	False		Error 13 In Error Array

Name	Data type	Start value	Retain	Accessible from HMI/OPC UA/Web API	Writable from HMI/OPC UA/Web API	Visible in HMI engineering	Setpoint	Supervision	Comment
bInError14	Bool	false	False	False	False	False	False		Error 14 In Error Array
bInError15	Bool	false	False	False	False	False	False		Error 15 In Error Array
bInError16	Bool	false	False	False	False	False	False		Error 16 In Error Array
bInError17	Bool	false	False	False	False	False	False		Error 17 In Error Array
bInError18	Bool	false	False	False	False	False	False		Error 18 In Error Array
bInError19	Bool	false	False	False	False	False	False		Error 19 In Error Array
bInError20	Bool	false	False	False	False	False	False		Error 20 In Error Array
bInError21	Bool	false	False	False	False	False	False		Error 21 In Error Array
bInError22	Bool	false	False	False	False	False	False		Error 22 In Error Array
bInError23	Bool	false	False	False	False	False	False		Error 23 In Error Array
bInError24	Bool	false	False	False	False	False	False		Error 24 In Error Array
bInError25	Bool	false	False	False	False	False	False		Error 25 In Error Array
bInError26	Bool	false	False	False	False	False	False		Error 26 In Error Array
bInError27	Bool	false	False	False	False	False	False		Error 27 In Error Array
bInError28	Bool	false	False	False	False	False	False		Error 28 In Error Array
bInError29	Bool	false	False	False	False	False	False		Error 29 In Error Array
bInError30	Bool	false	False	False	False	False	False		Error 30 In Error Array
▼ Output									
bOutErrorExists	Bool	false	False	False	False	False	False		An Error Exists
iOutScrollingErrorNumber	Int	0	False	False	False	False	False		Current Index when scrolling through errors
InOut									
▼ Static									
▼ TON_ErrorDelay	TON_TIME		False	False	False	False	True		Delay between each scroll for a new error
PT	Time	T#0ms	False	False	False	False	False		
ET	Time	T#0ms	False	False	False	False	False		
IN	Bool	false	False	False	False	False	False		
Q	Bool	false	False	False	False	False	False		
▼ abErrors	Array[1..30] of Bool		False	False	False	False	False		
abErrors[1]	Bool	false	False	False	False	False	False		
abErrors[2]	Bool	false	False	False	False	False	False		
abErrors[3]	Bool	false	False	False	False	False	False		
abErrors[4]	Bool	false	False	False	False	False	False		
abErrors[5]	Bool	false	False	False	False	False	False		
abErrors[6]	Bool	false	False	False	False	False	False		
abErrors[7]	Bool	false	False	False	False	False	False		
abErrors[8]	Bool	false	False	False	False	False	False		
abErrors[9]	Bool	false	False	False	False	False	False		
abErrors[10]	Bool	false	False	False	False	False	False		
abErrors[11]	Bool	false	False	False	False	False	False		
abErrors[12]	Bool	false	False	False	False	False	False		
abErrors[13]	Bool	false	False	False	False	False	False		
abErrors[14]	Bool	false	False	False	False	False	False		
abErrors[15]	Bool	false	False	False	False	False	False		
abErrors[16]	Bool	false	False	False	False	False	False		
abErrors[17]	Bool	false	False	False	False	False	False		
abErrors[18]	Bool	false	False	False	False	False	False		
abErrors[19]	Bool	false	False	False	False	False	False		
abErrors[20]	Bool	false	False	False	False	False	False		
abErrors[21]	Bool	false	False	False	False	False	False		
abErrors[22]	Bool	false	False	False	False	False	False		
abErrors[23]	Bool	false	False	False	False	False	False		
abErrors[24]	Bool	false	False	False	False	False	False		
abErrors[25]	Bool	false	False	False	False	False	False		
abErrors[26]	Bool	false	False	False	False	False	False		
abErrors[27]	Bool	false	False	False	False	False	False		
abErrors[28]	Bool	false	False	False	False	False	False		
abErrors[29]	Bool	false	False	False	False	False	False		
abErrors[30]	Bool	false	False	False	False	False	False		
iNextScrollNum	Int	1	False	False	False	False	False		Index of next error position
iErrorsScrollNum	Int	1	False	False	False	False	False		Index of current error position
bScrolling	Bool	false	False	False	False	False	False		Indicates we are scrolling
bTON_ErrorDelay	Bool	false	False	False	False	False	False		
▼ TON_TimeOut	TON_TIME		False	False	False	False	True		Timer for Error Timeout
PT	Time	T#0ms	False	False	False	False	False		
ET	Time	T#0ms	False	False	False	False	False		
IN	Bool	false	False	False	False	False	False		
Q	Bool	false	False	False	False	False	False		
iLastMode	Int	0	False	False	False	False	False		Last mode code
bNewMode	Bool	false	False	False	False	False	False		New mode selected
bEnableHome	Bool	false	False	False	False	False	False		Home position enabled

Name	Data type	Start value	Retain	Accessible from HMI/OPC UA/Web API	Writable from HMI/OPC UA/Web API	Visible in HMI engineering	Setpoint	Supervision	Comment
bEnableWork	Bool	false	False	False	False	False	False		Work position enabled
bAutoMode	Bool	false	False	False	False	False	False		Auto Mode is active
bManualMode	Bool	false	False	False	False	False	False		Manual Mode is active
bReset	Bool	false	False	False	False	False	False		
bTON_TimeOut	Bool	false	False	False	False	False	False		
bPB_Home	Bool	false	False	False	False	False	False		
bPB_Work	Bool	false	False	False	False	False	False		
bPB_ResetError	Bool	false	False	False	False	False	False		
▼ OUT3	"fbValve_Solenoid"		False	True	True	True	True		
▼ Input									
tInTimeout	Time	T#0ms	False	False	False	False	False		Timeout time for an actuator's feedback to activate before giving a fault
iInMode	Int	0	False	False	False	False	False		Mode Selection
bInEstop	Bool	false	False	False	False	False	False		Estop
bInSignalHome	Bool	false	False	False	False	False	False		Home position feedback
bInSignalWork	Bool	false	False	False	False	False	False		Work position feedback
bInEnable	Bool	false	False	False	False	False	False		Home and Work Enabled
bInCommandWork	Bool	false	False	False	False	False	False		Move to work position in automatic mode
bInResetError	Bool	false	False	False	False	False	False		Reset Error
bInSimulate	Bool	false	False	False	False	False	False		Activate device simulation
▼ Output									
bOutCommandHome	Bool	false	False	False	False	False	False		Home position command
bOutCommandWork	Bool	false	False	False	False	False	False		Work position command
bOutActiveHome	Bool	false	False	False	False	False	False		Valve is in home position
bOutActiveWork	Bool	false	False	False	False	False	False		Valve is in work position
bOutAuto	Bool	false	False	False	False	False	False		Block in auto mode
bOutError	Bool	false	False	False	False	False	False		Error exists
▼ ERROR_Valve	"udtError_Valve"		False	False	False	False	False		Valve error structure
NoHomeFeedback	Bool	false	False	False	False	False	False		Home position feedback not active
NoWorkFeedback	Bool	false	False	False	False	False	False		Work position feedback not active
HomeFeedbackStillActive	Bool	false	False	False	False	False	False		Home position feedback still active
WorkFeedbackStillActive	Bool	false	False	False	False	False	False		Work position feedback still active
▼ InOut									
HMI_ValveControl	"udtHMI_ValveControl"		False	False	False	False	False		HMI valve control
▼ Static									
▼ ErrorScroller	"fbErrorScroller"		False	False	False	False	True		Sub-block to handle error scroller
▼ Input									
bInError01	Bool	false	False	False	False	False	False		Error 1 In Error Array
bInError02	Bool	false	False	False	False	False	False		Error 2 In Error Array
bInError03	Bool	false	False	False	False	False	False		Error 3 In Error Array
bInError04	Bool	false	False	False	False	False	False		Error 4 In Error Array
bInError05	Bool	false	False	False	False	False	False		Error 5 In Error Array
bInError06	Bool	false	False	False	False	False	False		Error 6 In Error Array
bInError07	Bool	false	False	False	False	False	False		Error 7 In Error Array
bInError08	Bool	false	False	False	False	False	False		Error 8 In Error Array
bInError09	Bool	false	False	False	False	False	False		Error 9 In Error Array
bInError10	Bool	false	False	False	False	False	False		Error 10 In Error Array
bInError11	Bool	false	False	False	False	False	False		Error 11 In Error Array
bInError12	Bool	false	False	False	False	False	False		Error 12 In Error Array
bInError13	Bool	false	False	False	False	False	False		Error 13 In Error Array
bInError14	Bool	false	False	False	False	False	False		Error 14 In Error Array
bInError15	Bool	false	False	False	False	False	False		Error 15 In Error Array
bInError16	Bool	false	False	False	False	False	False		Error 16 In Error Array
bInError17	Bool	false	False	False	False	False	False		Error 17 In Error Array
bInError18	Bool	false	False	False	False	False	False		Error 18 In Error Array
bInError19	Bool	false	False	False	False	False	False		Error 19 In Error Array
bInError20	Bool	false	False	False	False	False	False		Error 20 In Error Array
bInError21	Bool	false	False	False	False	False	False		Error 21 In Error Array
bInError22	Bool	false	False	False	False	False	False		Error 22 In Error Array
bInError23	Bool	false	False	False	False	False	False		Error 23 In Error Array
bInError24	Bool	false	False	False	False	False	False		Error 24 In Error Array
bInError25	Bool	false	False	False	False	False	False		Error 25 In Error Array
bInError26	Bool	false	False	False	False	False	False		Error 26 In Error Array
bInError27	Bool	false	False	False	False	False	False		Error 27 In Error Array
bInError28	Bool	false	False	False	False	False	False		Error 28 In Error Array
bInError29	Bool	false	False	False	False	False	False		Error 29 In Error Array
bInError30	Bool	false	False	False	False	False	False		Error 30 In Error Array

Name	Data type	Start value	Retain	Accessible from HMI/OPC UA/Web API	Writable from HMI/OPC UA/Web API	Visible in HMI engineering	Setpoint	Supervision	Comment
Output									
bOutErrorExists	Bool	false	False	False	False	False	False		An Error Exists
iOutScrollingErrorNumber	Int	0	False	False	False	False	False		Current Index when scrolling through errors
InOut									
Static									
TON_ErrorDelay	TON_TIME		False	False	False	False	True		Delay between each scroll for a new error
PT	Time	T#0ms	False	False	False	False	False		
ET	Time	T#0ms	False	False	False	False	False		
IN	Bool	false	False	False	False	False	False		
Q	Bool	false	False	False	False	False	False		
abErrors	Array[1..30] of Bool		False	False	False	False	False		
abErrors[1]	Bool	false	False	False	False	False	False		
abErrors[2]	Bool	false	False	False	False	False	False		
abErrors[3]	Bool	false	False	False	False	False	False		
abErrors[4]	Bool	false	False	False	False	False	False		
abErrors[5]	Bool	false	False	False	False	False	False		
abErrors[6]	Bool	false	False	False	False	False	False		
abErrors[7]	Bool	false	False	False	False	False	False		
abErrors[8]	Bool	false	False	False	False	False	False		
abErrors[9]	Bool	false	False	False	False	False	False		
abErrors[10]	Bool	false	False	False	False	False	False		
abErrors[11]	Bool	false	False	False	False	False	False		
abErrors[12]	Bool	false	False	False	False	False	False		
abErrors[13]	Bool	false	False	False	False	False	False		
abErrors[14]	Bool	false	False	False	False	False	False		
abErrors[15]	Bool	false	False	False	False	False	False		
abErrors[16]	Bool	false	False	False	False	False	False		
abErrors[17]	Bool	false	False	False	False	False	False		
abErrors[18]	Bool	false	False	False	False	False	False		
abErrors[19]	Bool	false	False	False	False	False	False		
abErrors[20]	Bool	false	False	False	False	False	False		
abErrors[21]	Bool	false	False	False	False	False	False		
abErrors[22]	Bool	false	False	False	False	False	False		
abErrors[23]	Bool	false	False	False	False	False	False		
abErrors[24]	Bool	false	False	False	False	False	False		
abErrors[25]	Bool	false	False	False	False	False	False		
abErrors[26]	Bool	false	False	False	False	False	False		
abErrors[27]	Bool	false	False	False	False	False	False		
abErrors[28]	Bool	false	False	False	False	False	False		
abErrors[29]	Bool	false	False	False	False	False	False		
abErrors[30]	Bool	false	False	False	False	False	False		
iNextScrollNum	Int	1	False	False	False	False	False		Index of next error position
iErrorsScrollNum	Int	1	False	False	False	False	False		Index of current error position
bScrolling	Bool	false	False	False	False	False	False		Indicates we are scrolling
bTON_ErrorDelay	Bool	false	False	False	False	False	False		
TON_TimeOut	TON_TIME		False	False	False	False	True		Timer for Error Timeout
PT	Time	T#0ms	False	False	False	False	False		
ET	Time	T#0ms	False	False	False	False	False		
IN	Bool	false	False	False	False	False	False		
Q	Bool	false	False	False	False	False	False		
iLastMode	Int	0	False	False	False	False	False		Last mode code
bNewMode	Bool	false	False	False	False	False	False		New mode selected
bEnableHome	Bool	false	False	False	False	False	False		Home position enabled
bEnableWork	Bool	false	False	False	False	False	False		Work position enabled
bAutoMode	Bool	false	False	False	False	False	False		Auto Mode is active
bManualMode	Bool	false	False	False	False	False	False		Manual Mode is active
bReset	Bool	false	False	False	False	False	False		
bTON_TimeOut	Bool	false	False	False	False	False	False		
bPB_Home	Bool	false	False	False	False	False	False		
bPB_Work	Bool	false	False	False	False	False	False		
bPB_ResetError	Bool	false	False	False	False	False	False		

Fabrica / PLC_1 [CPU 1511-1 PN] / Program blocks

Modes [DB2]

Modes Properties							
General							
Name	Modes	**Number**	2	**Type**	DB	**Language**	DB
Numbering	Automatic						
Information							
Title		**Author**		**Comment**		**Family**	
Version	0.1	**User-defined ID**					

Name	Data type	Start value	Retain	Accessible from HMI/OPC UA/Web API	Writable from HMI/OPC UA/Web API	Visible in HMI engineering	Setpoint	Supervision	Comment
▼ Static									
Static_2	Bool	false	False	True	True	True	False		
Manual	Bool	false	False	True	True	True	False		
Auto	Bool	false	False	True	True	True	False		

Fabrica / PLC_1 [CPU 1511-1 PN] / Program blocks

dbIOs [DB3]

dbIOs Properties							
General							
Name	dbIOs	**Number**	3	**Type**	DB	**Language**	DB
Numbering	Automatic						
Information							
Title		**Author**		**Comment**		**Family**	
Version	0.1	**User-defined ID**					

Name	Data type	Start value	Retain	Accessible from HMI/OPC UA/Web API	Writable from HMI/OPC UA/Web API	Visible in HMI engineering	Setpoint	Supervision	Comment
▼ Static									
PRS_PCV51	Int	0	False	True	True	True	False		
PLS_PCV51	Int	0	False	True	True	True	False		
PRS_XV51	Bool	FALSE	False	True	True	True	False		
PLS_XV51	Bool	FALSE	False	True	True	True	False		
PRS_XV91	Bool	FALSE	False	True	True	True	False		
PLS_XV91	Bool	FALSE	False	True	True	True	False		
PRS_XV81	Bool	FALSE	False	True	True	True	False		
PLS_XV81	Bool	FALSE	False	True	True	True	False		
PRS_XV22	Bool	FALSE	False	True	True	True	False		
PLS_XV22	Bool	FALSE	False	True	True	True	False		
PRS_XV21	Bool	FALSE	False	True	True	True	False		
PLS_XV21	Bool	FALSE	False	True	True	True	False		
Vana_OUT3	Bool	FALSE	False	True	True	True	False		
Vana_OUT2	Bool	FALSE	False	True	True	True	False		
Vana_OUT1	Bool	FALSE	False	True	True	True	False		
Vana_IN2	Bool	FALSE	False	True	True	True	False		
Vana_IN1	Bool	FALSE	False	True	True	True	False		
OUT3_ZS2	Bool	FALSE	False	True	True	True	False		
OUT3_ZS1	Bool	FALSE	False	True	True	True	False		
OUT2_ZS2	Bool	FALSE	False	True	True	True	False		
OUT2_ZS1	Bool	FALSE	False	True	True	True	False		
OUT1_ZS2	Bool	FALSE	False	True	True	True	False		
OUT1_ZS1	Bool	FALSE	False	True	True	True	False		
ZS22	Bool	FALSE	False	True	True	True	False		
ZS21	Bool	TRUE	False	True	True	True	False		
ZS12	Bool	FALSE	False	True	True	True	False		
ZS11	Bool	TRUE	False	True	True	True	False		
PRS_PT13_Input	Int	0	False	True	True	True	False		
PLS_PT13_Input	Int	0	False	True	True	True	False		
IN1_Home	Bool	TRUE	False	True	True	True	False		
IN1_Work	Bool	FALSE	False	True	True	True	False		
IN2_Home	Bool	TRUE	False	True	True	True	False		
IN2_Work	Bool	FALSE	False	True	True	True	False		
OUT1_Home	Bool	TRUE	False	True	True	True	False		
OUT1_Work	Bool	FALSE	False	True	True	True	False		
OUT2_Home	Bool	TRUE	False	True	True	True	False		
OUT2_Work	Bool	FALSE	False	True	True	True	False		
OUT3_Home	Bool	TRUE	False	True	True	True	False		
OUT3_Work	Bool	FALSE	False	True	True	True	False		
PLS_XV21_Home	Bool	TRUE	False	True	True	True	False		
PLS_XV21_Work	Bool	FALSE	False	True	True	True	False		
PLS_XV22_Home	Bool	TRUE	False	True	True	True	False		
PLS_XV22_Work	Bool	FALSE	False	True	True	True	False		
PRS_XV21_Home	Bool	TRUE	False	True	True	True	False		
PRS_XV21_Work	Bool	FALSE	False	True	True	True	False		
PRS_XV22_Home	Bool	TRUE	False	True	True	True	False		
PRS_XV22_Work	Bool	FALSE	False	True	True	True	False		
PLS_XV81_Home	Bool	TRUE	False	True	True	True	False		
PLS_XV81_Work	Bool	FALSE	False	True	True	True	False		
PRS_XV81_Home	Bool	TRUE	False	True	True	True	False		
PRS_XV81_Work	Bool	FALSE	False	True	True	True	False		
PLS_XV91_Home	Bool	TRUE	False	True	True	True	False		
PLS_XV91_Work	Bool	FALSE	False	True	True	True	False		
PRS_XV91_Home	Bool	TRUE	False	True	True	True	False		
PRS_XV91_Work	Bool	FALSE	False	True	True	True	False		
PRS_XV51_Home	Bool	TRUE	False	True	True	True	False		
PRS_XV51_Work	Bool	FALSE	False	True	True	True	False		
PLS_XV51_Home	Bool	TRUE	False	True	True	True	False		
PLS_XV51_Work	Bool	FALSE	False	True	True	True	False		

Fabrica / PLC_1 [CPU 1511-1 PN] / Program blocks / Open Library V19 / Resources / HMI


fbErrorScroller [FB330] [fbErrorScroller V 3.0.0 default]

fbErrorScroller Properties							
General							
Name	fbErrorScroller	**Number**	330	**Type**	FB	**Language**	LAD
Numbering	Manual						
Information							
Title	Scrolls through the error codes for display on the HMI	**Author**	DMC	**Comment**		**Family**	Error
Version	0.1	**User-defined ID**					

Name	Data type	Default value	Retain	Accessible from HMI/OPC UA/Web API	Writable from HMI/OPC UA/Web API	Visible in HMI engineering	Setpoint	Supervision	Comment
▼ Input									
bInError01	Bool	false	Set in IDB	False	False	False	False		Error 1 In Error Array
bInError02	Bool	false	Set in IDB	False	False	False	False		Error 2 In Error Array
bInError03	Bool	false	Set in IDB	False	False	False	False		Error 3 In Error Array
bInError04	Bool	false	Set in IDB	False	False	False	False		Error 4 In Error Array
bInError05	Bool	false	Set in IDB	False	False	False	False		Error 5 In Error Array
bInError06	Bool	false	Set in IDB	False	False	False	False		Error 6 In Error Array
bInError07	Bool	false	Set in IDB	False	False	False	False		Error 7 In Error Array
bInError08	Bool	false	Set in IDB	False	False	False	False		Error 8 In Error Array
bInError09	Bool	false	Set in IDB	False	False	False	False		Error 9 In Error Array
bInError10	Bool	false	Set in IDB	False	False	False	False		Error 10 In Error Array
bInError11	Bool	false	Set in IDB	False	False	False	False		Error 11 In Error Array
bInError12	Bool	false	Set in IDB	False	False	False	False		Error 12 In Error Array
bInError13	Bool	false	Set in IDB	False	False	False	False		Error 13 In Error Array
bInError14	Bool	false	Set in IDB	False	False	False	False		Error 14 In Error Array
bInError15	Bool	false	Set in IDB	False	False	False	False		Error 15 In Error Array
bInError16	Bool	false	Set in IDB	False	False	False	False		Error 16 In Error Array
bInError17	Bool	false	Set in IDB	False	False	False	False		Error 17 In Error Array
bInError18	Bool	false	Set in IDB	False	False	False	False		Error 18 In Error Array
bInError19	Bool	false	Set in IDB	False	False	False	False		Error 19 In Error Array
bInError20	Bool	false	Set in IDB	False	False	False	False		Error 20 In Error Array
bInError21	Bool	false	Set in IDB	False	False	False	False		Error 21 In Error Array
bInError22	Bool	false	Set in IDB	False	False	False	False		Error 22 In Error Array
bInError23	Bool	false	Set in IDB	False	False	False	False		Error 23 In Error Array
bInError24	Bool	false	Set in IDB	False	False	False	False		Error 24 In Error Array
bInError25	Bool	false	Set in IDB	False	False	False	False		Error 25 In Error Array
bInError26	Bool	false	Set in IDB	False	False	False	False		Error 26 In Error Array
bInError27	Bool	false	Set in IDB	False	False	False	False		Error 27 In Error Array
bInError28	Bool	false	Set in IDB	False	False	False	False		Error 28 In Error Array
bInError29	Bool	false	Set in IDB	False	False	False	False		Error 29 In Error Array
bInError30	Bool	false	Set in IDB	False	False	False	False		Error 30 In Error Array
▼ Output									
bOutErrorExists	Bool	false	Set in IDB	False	False	False	False		An Error Exists
iOutScrollingErrorNumber	Int	0	Set in IDB	False	False	False	False		Current Index when scrolling through errors
InOut									
▼ Static									
▼ TON_ErrorDelay	TON_TIME		Non-retain	False	False	False	True		Delay between each scroll for a new error
PT	Time	T#0ms	Non-retain	False	False	False	False		
ET	Time	T#0ms	Non-retain	False	False	False	False		
IN	Bool	false	Non-retain	False	False	False	False		
Q	Bool	false	Non-retain	False	False	False	False		
▼ abErrors	Array[#ciIndexLow..#ciIndexHigh] of Bool		Set in IDB	False	False	False	False		
abErrors[1]	Bool	false	Set in IDB	False	False	False	False		
abErrors[2]	Bool	false	Set in IDB	False	False	False	False		
abErrors[3]	Bool	false	Set in IDB	False	False	False	False		
abErrors[4]	Bool	false	Set in IDB	False	False	False	False		
abErrors[5]	Bool	false	Set in IDB	False	False	False	False		
abErrors[6]	Bool	false	Set in IDB	False	False	False	False		
abErrors[7]	Bool	false	Set in IDB	False	False	False	False		
abErrors[8]	Bool	false	Set in IDB	False	False	False	False		
abErrors[9]	Bool	false	Set in IDB	False	False	False	False		
abErrors[10]	Bool	false	Set in IDB	False	False	False	False		
abErrors[11]	Bool	false	Set in IDB	False	False	False	False		
abErrors[12]	Bool	false	Set in IDB	False	False	False	False		
abErrors[13]	Bool	false	Set in IDB	False	False	False	False		
abErrors[14]	Bool	false	Set in IDB	False	False	False	False		


Name	Data type	Default value	Retain	Accessible from HMI/OPC UA/Web API	Writable from HMI/OPC UA/Web API	Visible in HMI engineering	Setpoint	Supervision	Comment
abErrors[15]	Bool	false	Set in IDB	False	False	False	False		
abErrors[16]	Bool	false	Set in IDB	False	False	False	False		
abErrors[17]	Bool	false	Set in IDB	False	False	False	False		
abErrors[18]	Bool	false	Set in IDB	False	False	False	False		
abErrors[19]	Bool	false	Set in IDB	False	False	False	False		
abErrors[20]	Bool	false	Set in IDB	False	False	False	False		
abErrors[21]	Bool	false	Set in IDB	False	False	False	False		
abErrors[22]	Bool	false	Set in IDB	False	False	False	False		
abErrors[23]	Bool	false	Set in IDB	False	False	False	False		
abErrors[24]	Bool	false	Set in IDB	False	False	False	False		
abErrors[25]	Bool	false	Set in IDB	False	False	False	False		
abErrors[26]	Bool	false	Set in IDB	False	False	False	False		
abErrors[27]	Bool	false	Set in IDB	False	False	False	False		
abErrors[28]	Bool	false	Set in IDB	False	False	False	False		
abErrors[29]	Bool	false	Set in IDB	False	False	False	False		
abErrors[30]	Bool	false	Set in IDB	False	False	False	False		
iNextScrollNum	Int	1	Non-retain	False	False	False	False		Index of next error position
iErrorsScrollNum	Int	1	Non-retain	False	False	False	False		Index of current error position
bScrolling	Bool	false	Non-retain	False	False	False	False		Indicates we are scrolling
bTON_ErrorDelay	Bool	false	Non-retain	False	False	False	False		
▼ Temp									
bErrorExists	Bool								Error Exists
▼ Constant									
ci NoErrrors	Int	0							
ci IndexLow	Int	1							
ci IndexHigh	Int	30							

Network 1: Check for valid array indexes

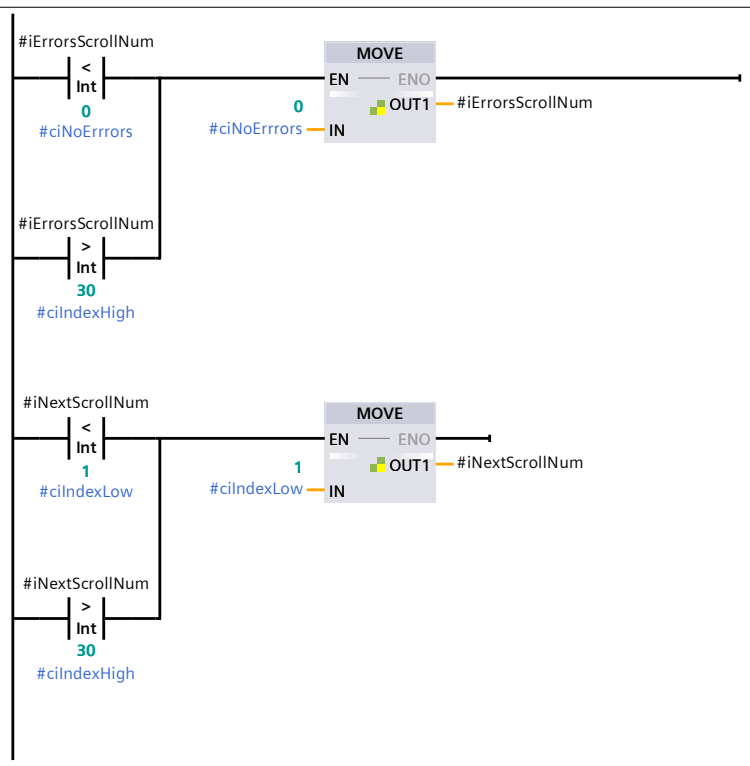


Network 2: Check if error exists

OR all of the possible errors. If any error Exists, SET bErrorExists

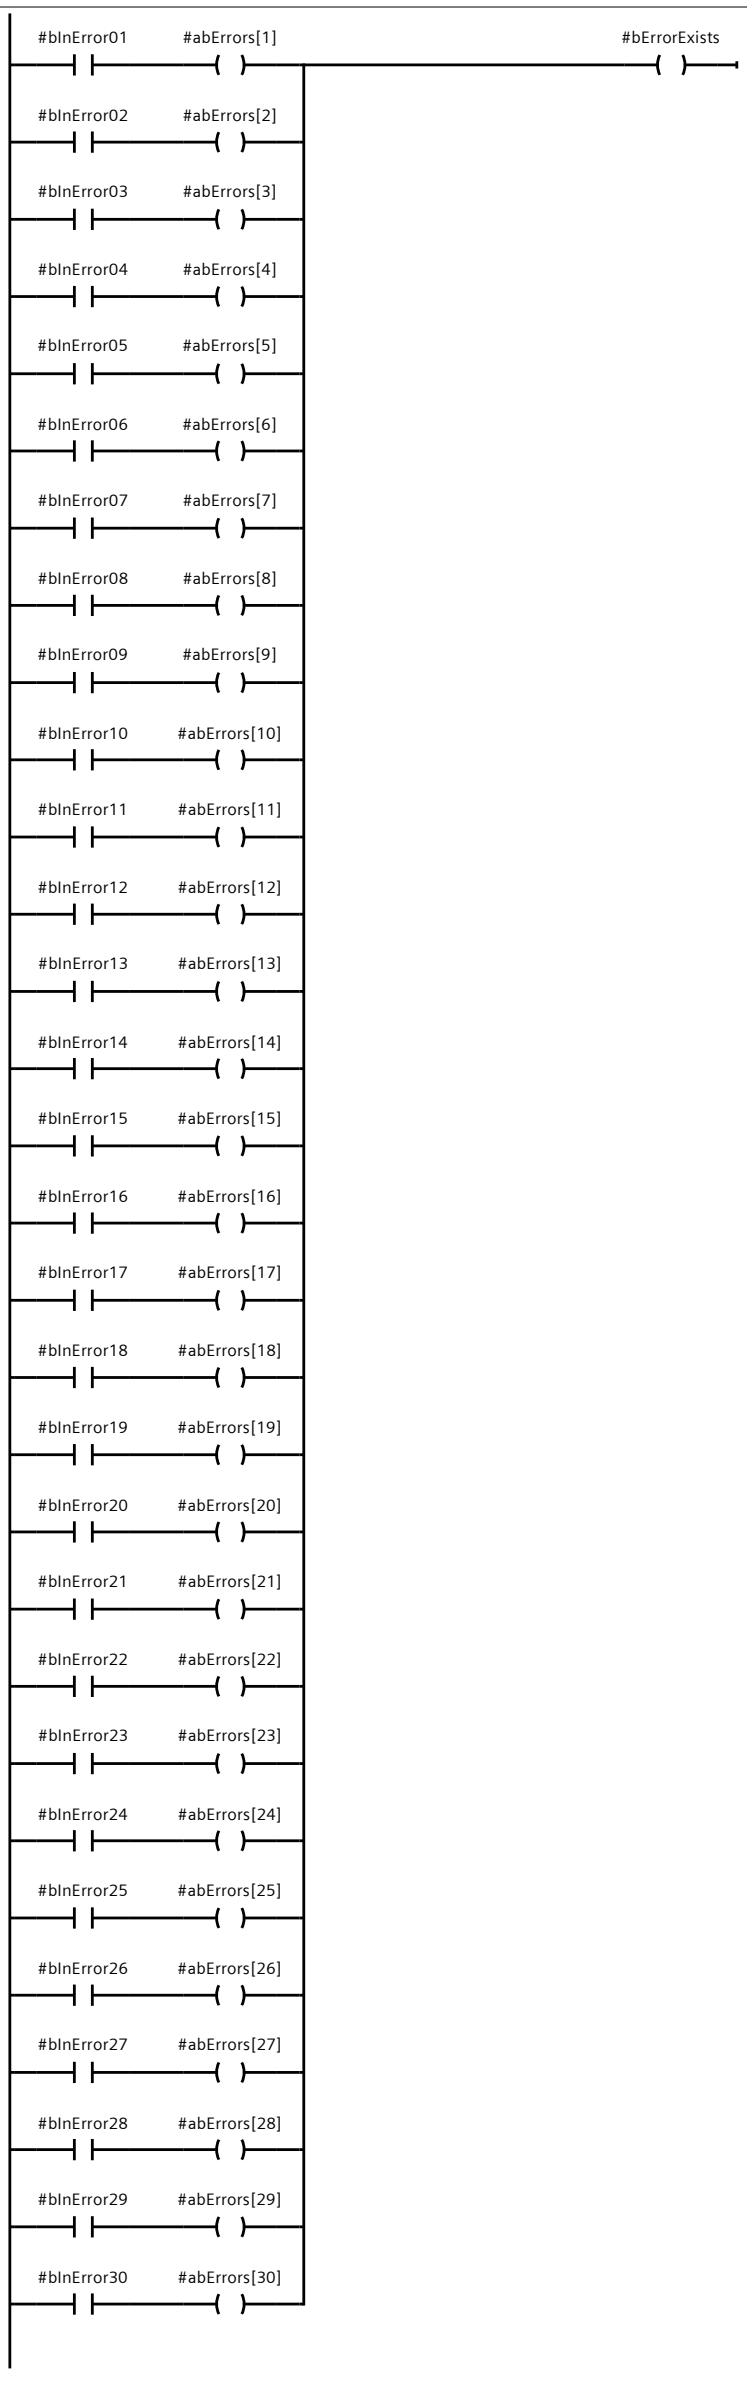


Network 3: Timer to change displayed error

========== Scroll errors on HMI ==========
Timed delay

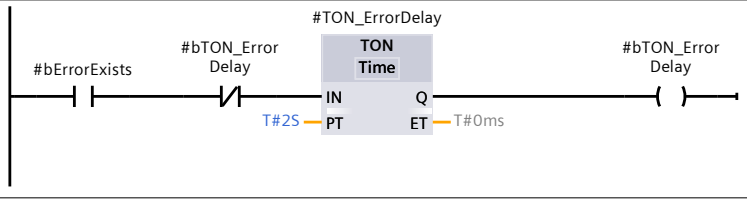


Network 4: Set bit to scroll for the next error

Set a static bit indicating that we are scrolling.
Each pass cycle through the function, we will increment.
If there is no error, set the scroll num to 0 and turn off scrolling.
It scrolls to an error immediately when an error occurs.

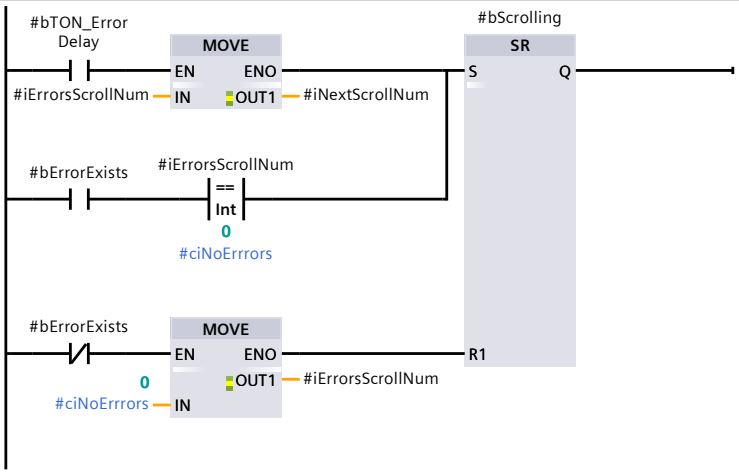


Network 5: Increment the error index checked

The function will only increment the scroll num one value per scan.
It will scroll until it finds the next active error, then stop scrolling.
Roll iNextScrollNum to 0 if it exceeds 30.

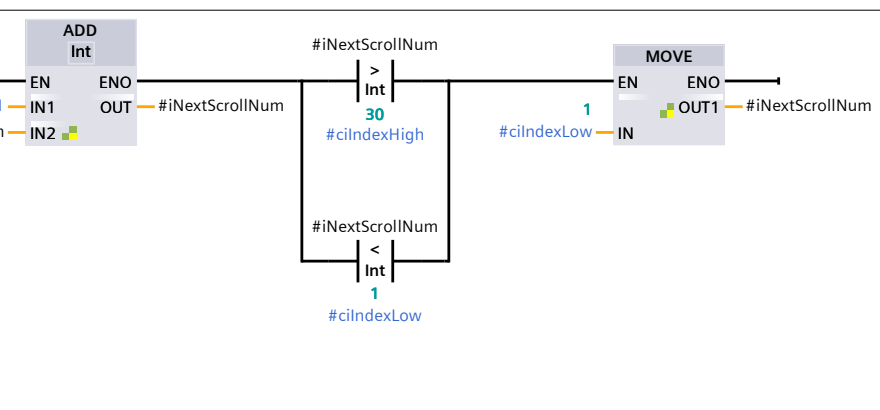


Network 6: Check if the next scroll number has an error

If we found an error, stop scrolling.

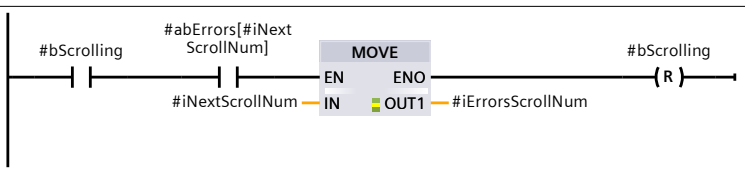


Network 7: Output: Error

Output the index of the error that exists.

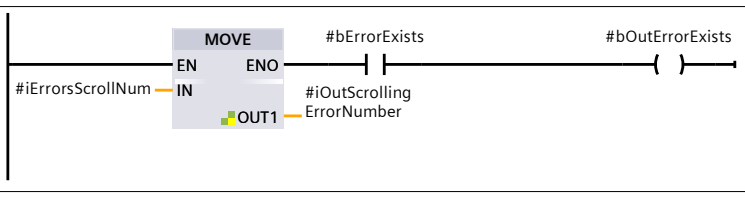

Network 8: Set ENO




Fabrica / PLC_1 [CPU 1511-1 PN] / Program blocks / Open Library V19 / Resources / HMI

fcHMIBitEnable [FC329] [fcHMIBitEnable V 3.0.1 default]


fcHMIBitEnable Properties							
General							
Name	fcHMIBitEnable	**Number**	329	**Type**	FC	**Language**	LAD
Numbering	Automatic						
Information							
Title	Handles an async reading of an HMI bit to avoid race conditions, includes an enable bit	**Author**		**Comment**		**Family**	
Version	0.1	**User-defined ID**					

Name	Data type	Default value	Comment
▼ Input			
bInToggle	Bool		
bInLatch	Bool		
bInEnable	Bool		
▼ Output			
bOutEnable	Bool		
▼ InOut			
bInOutHMI	Bool		
bInOutPLC	Bool		
Temp			
Constant			
▼ Return			
fcHMIBitEnable	Void		


Network 1: If not latching or toggling, reset the PLC bit every scan

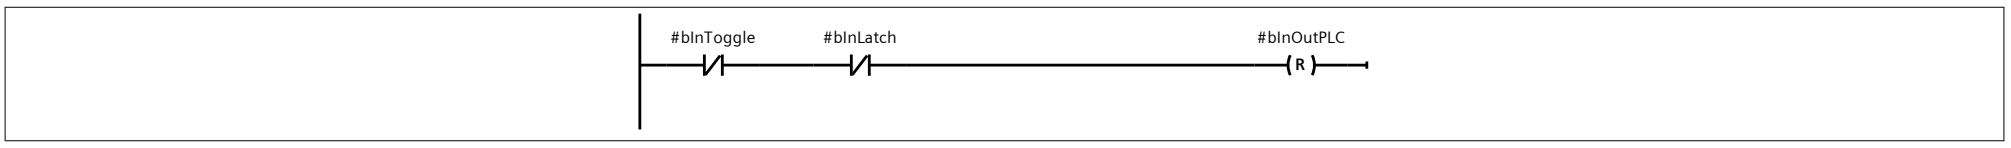


Network 2: Reset PLC bit if on and toggling

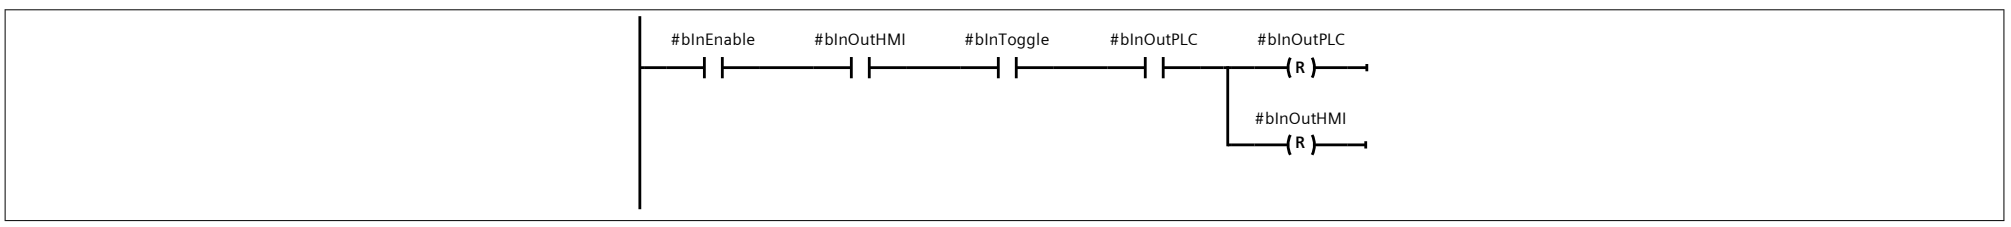


Network 3: Set PLC bit if off and toggling

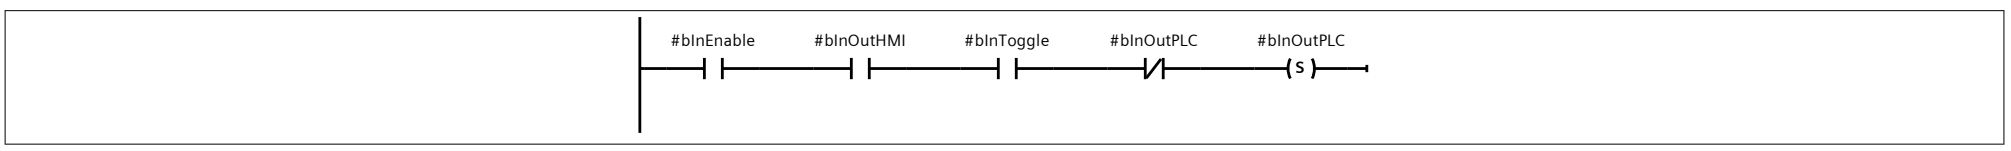


Network 4: If not toggling, set PLC bit

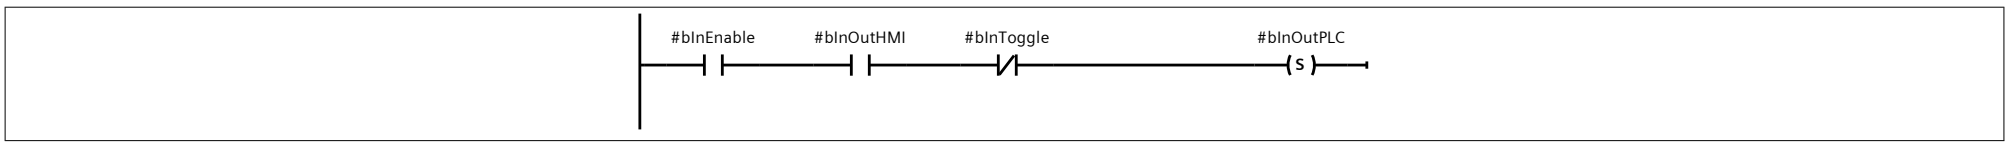


Network 5: Pass through enable

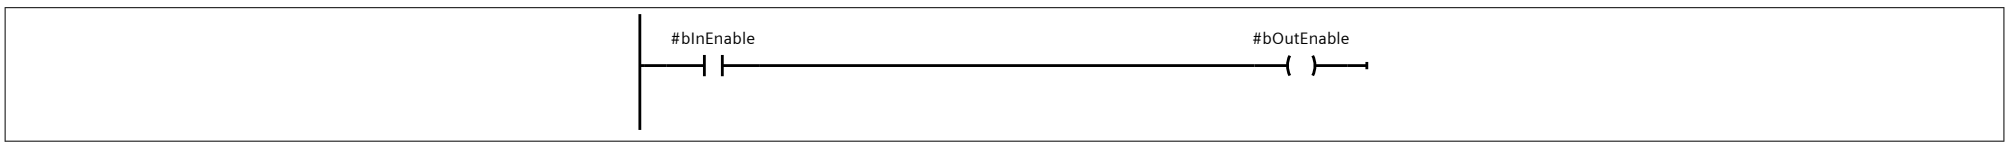

Network 6: Reset HMI Bit

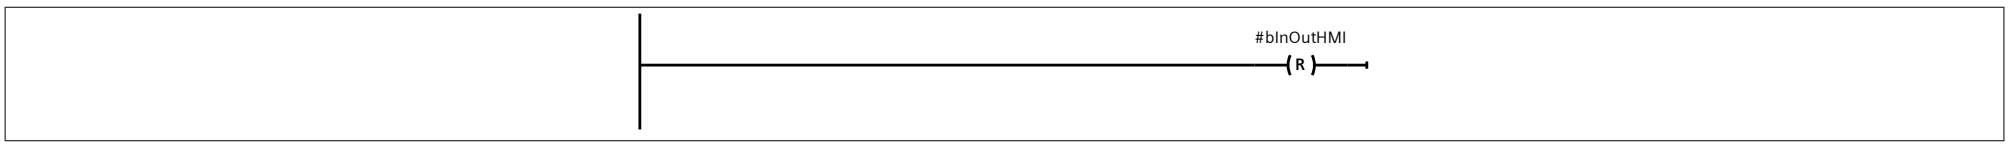

Network 7: Set ENO

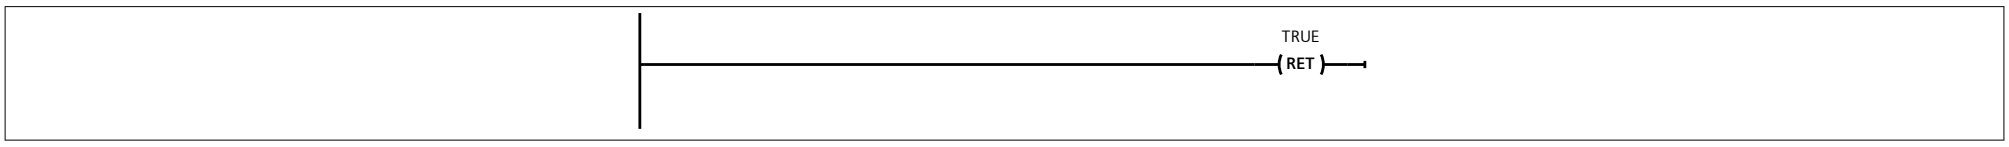


Fabrica / PLC_1 [CPU 1511-1 PN] / Program blocks / Open Library V19 / Resources / HMI

fcSetHMIStatusSimulation [FC333] [fcSetHMIStatusSimulation V 3.0.3 default]


fcSetHMIStatusSimulation Properties							
General							
Name	fcSetHMIStatusSimulation	**Number**	333	**Type**	FC	**Language**	LAD
Numbering	Automatic						
Information							
Title	Sets HMI Status	**Author**		**Comment**	Wrapper function for setting the HMI status of a device In order of priority: 1. E-stop 2. Error 3. Forward/Work Position 4. Reverse/Home Position 5. Forward/Work On 6. Reverse/Home On 7. None	**Family**	
Version	0.1	**User-defined ID**					

Name	Data type	Default value	Comment
▼ Input			
bInEstop	Bool		
bInError	Bool		
bInForwardWork	Bool		
bInReverseHome	Bool		
bInOnForwardWork	Bool		
bInOnReverseHome	Bool		
bInSimulate	Bool		
▼ Output			
iOutStatus	Int		
InOut			
Temp			
Constant			
▼ Return			
fcSetHMIStatusSimulation	Void		


Network 1: Set Reverse/Home On

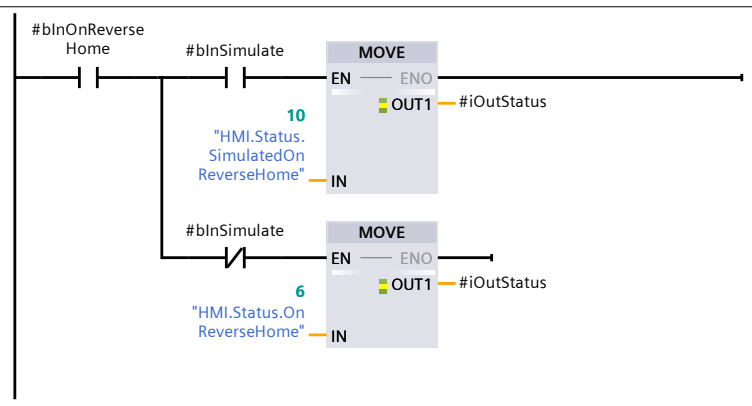


Network 2: Set Forward/Work On

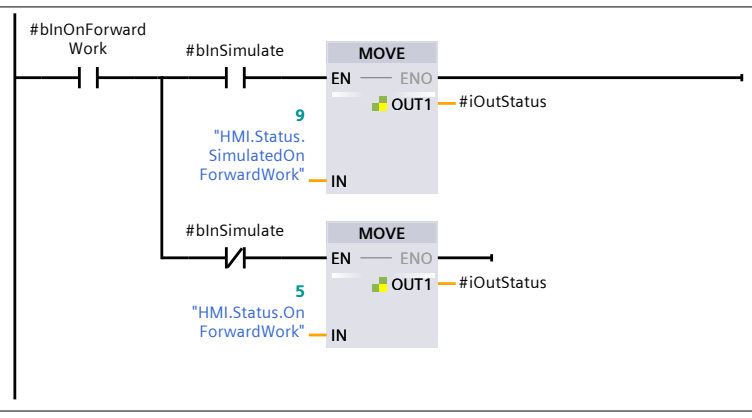


Network 3: Set Reverse/Home Position

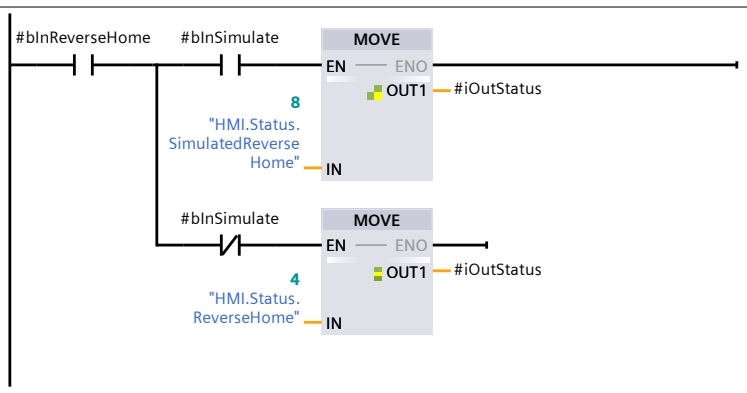


Network 4: Set Forward/Work Position

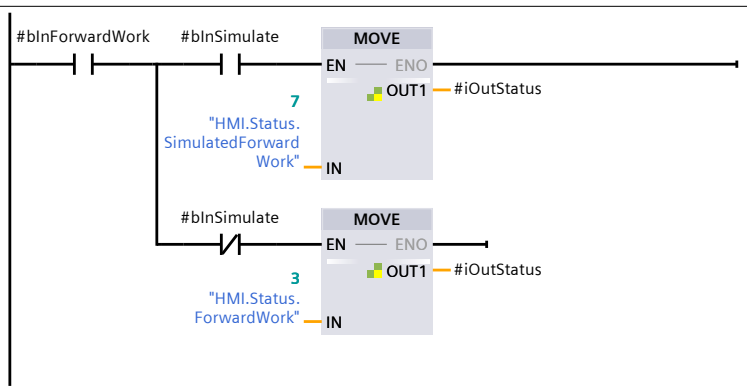


Network 5: Set Error

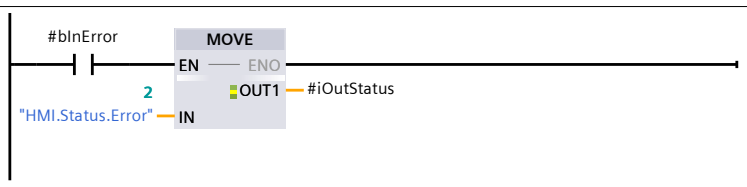


Network 6: Set Estop

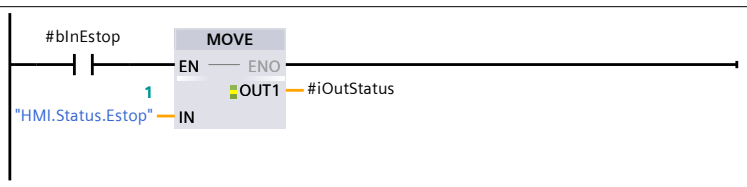

Network 7: Set to none/stopped if nothing is selected

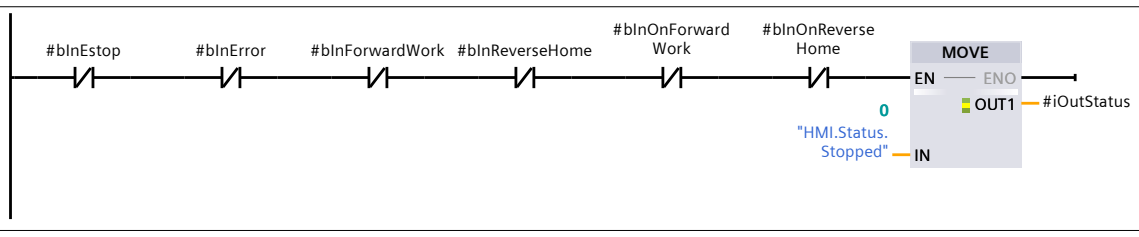

Network 8: Set ENO



Fabrica / PLC_1 [CPU 1511-1 PN] / Program blocks / Open Library V19 / Resources / Conversion


fcSwapBytes [FC304] [fcSwapBytes V 3.0.1 default]

fcSwapBytes Properties							
General							
Name	fcSwapBytes	**Number**	304	**Type**	FC	**Language**	LAD
Numbering	Manual						
Information							
Title	Swap the bytes in a word	**Author**	DMC	**Comment**	High byte and Low Byte are swapped	**Family**	LowLevel
Version	0.1	**User-defined ID**					


Name	Data type	Default value	Comment
▼ Input			
wInWord	Word		Word to be swapped
▼ Output			
wOutWord	Word		
InOut			
Temp			
Constant			
▼ Return			
fcSwapBytes	Void		

Network 1: Swap the bytes

High byte and Low Byte are swapped

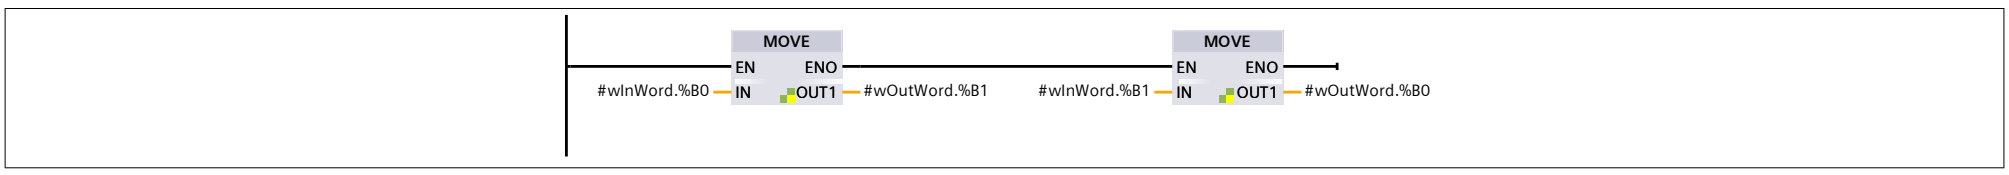

Network 2: Set ENO

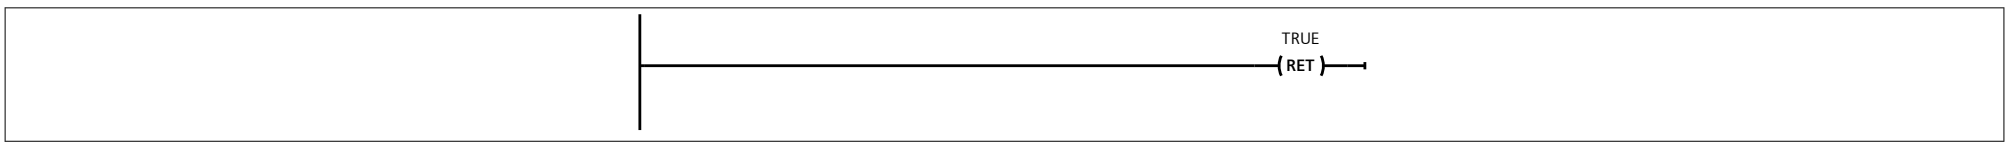


Fabrica / PLC_1 [CPU 1511-1 PN] / Program blocks / Open Library V19 / Resources / IO

fcWriteOutput [FC355] [fcWriteOutput V 3.0.1 default]


fcWriteOutput Properties							
General							
Name	fcWriteOutput	**Number**	355	**Type**	FC	**Language**	LAD
Numbering	Manual						
Information							
Title	Writes a scaled output	**Author**	DMC	**Comment**		**Family**	IO
Version	0.1	**User-defined ID**					

Name	Data type	Default value	Comment
▼ Input			
rInValue	Real		Input value
rInScaledMax	Real		Engineering units range max
rInScaledMin	Real		Engineering units range min
iInRawMax	Int		Raw maximum - overflow limit
iInRawMin	Int		Raw minimum - underflow limit
bInSwapBytes	Bool		
▼ Output			
wOutValue	Word		
InOut			
▼ Temp			
wValue	Word		
diTemp	DInt		
rTemp	Real		
rRawMax	Real		
rRawMin	Real		
rRawRange	Real		
rScaledRange	Real		
rOutput	Real		
iOutput	Int		
Constant			
▼ Return			
fcWriteOutput	Void		

Network 1: Convert raw min and max to real

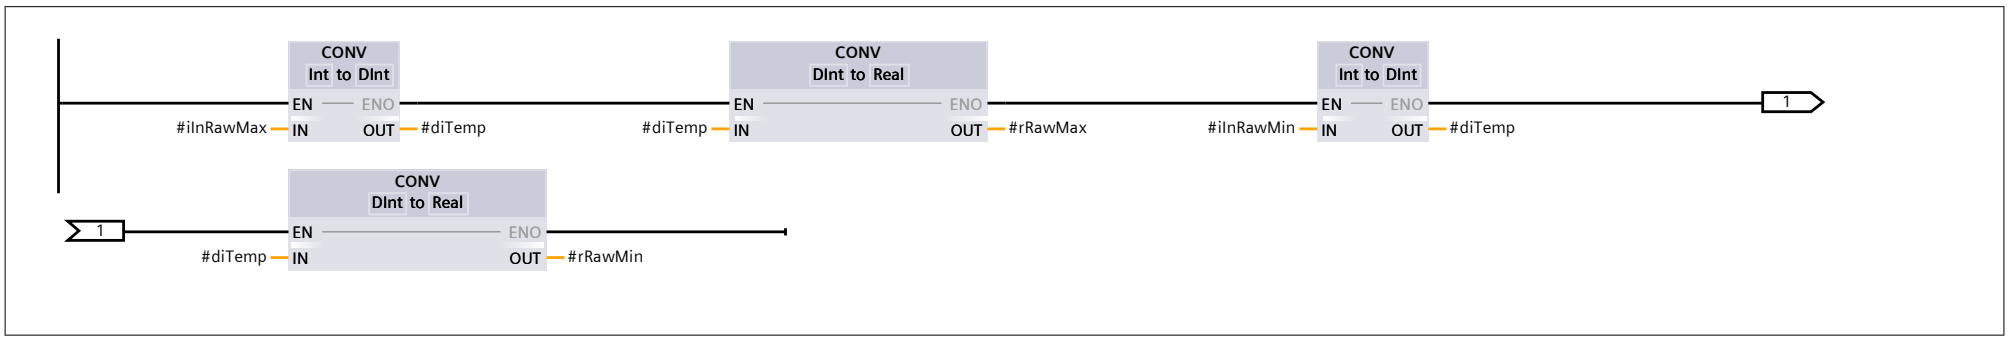


Network 2: Calculate scaled range

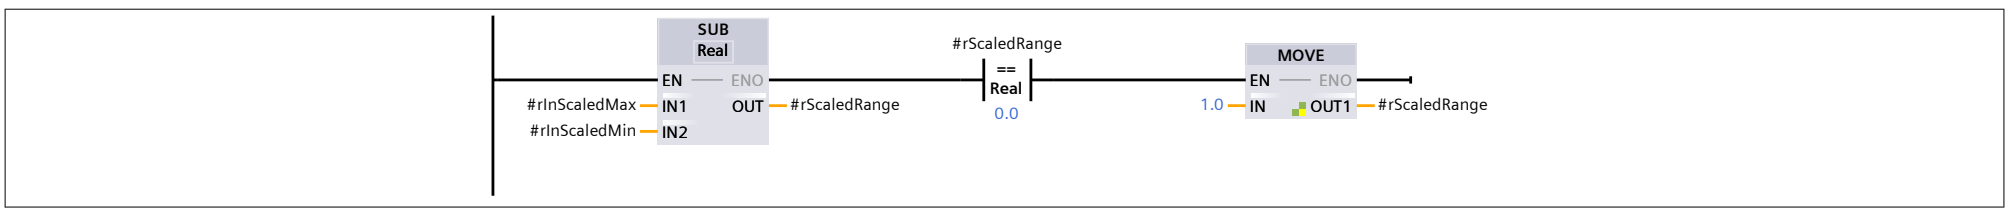


Network 3: Calculate Scaled output


Output = ((ScaledIn - ScaledMin)/ScaledRange)*RawRange + RawMin

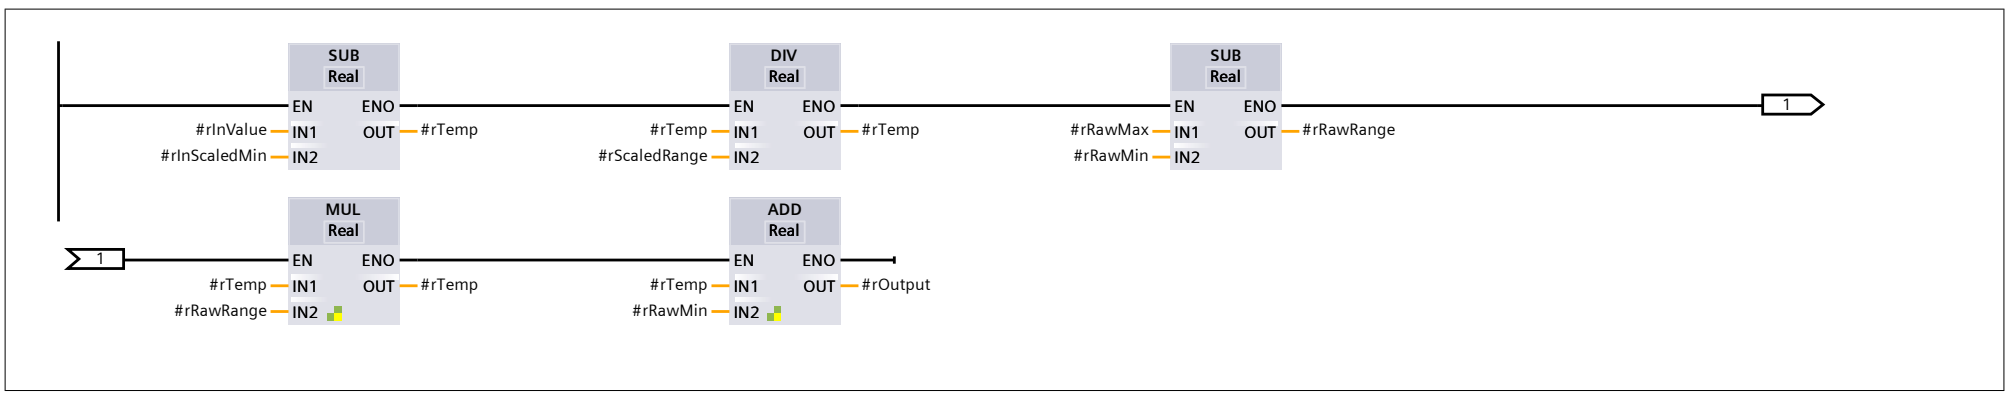


Network 4: Convert output to word

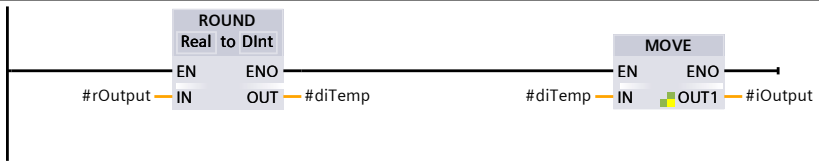


Network 5: Clamp output

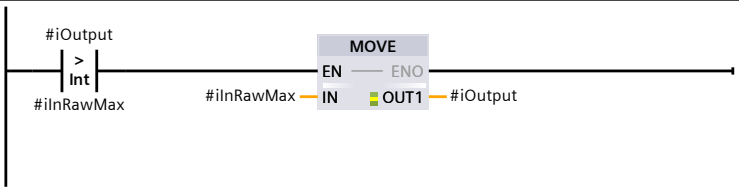


Network 6: Clamp output

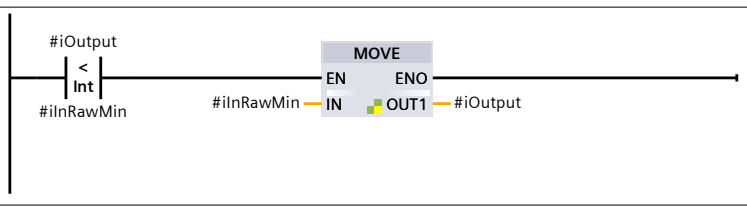


Network 7: Convert output to word

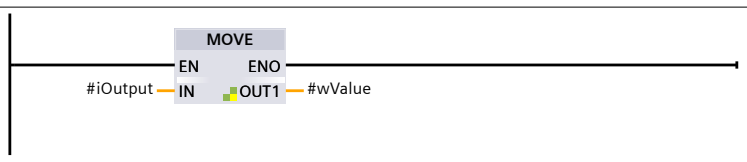


Network 8: Swap bytes if necessary

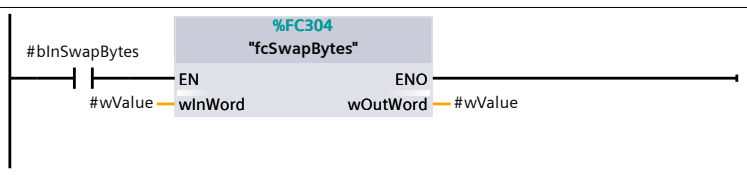

Network 9: Write output

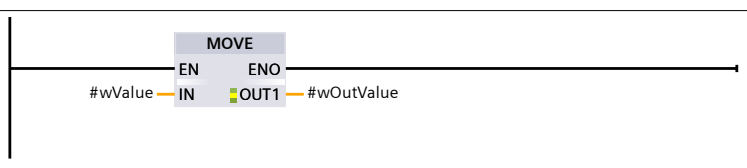

Network 10: Set ENO



Fabrica / PLC_1 [CPU 1511-1 PN] / Program blocks / Open Library V19 / Devices

fbValve_Solenoid [FB110] [fbValve_Solenoid V 3.0.3 in test]

fbValve_Solenoid Properties							
General							
Name	fbValve_Solenoid	**Number**	110	**Type**	FB	**Language**	LAD
Numbering	Manual						
Information							
Title	Controls a double- or single-acting valve	**Author**		**Comment**		**Family**	
Version	0.1	**User-defined ID**					


Name	Data type	Default value	Retain	Accessible from HMI/OPC UA/Web API	Writable from HMI/OPC UA/Web API	Visible in HMI engineering	Setpoint	Supervision	Comment
▼ Input									
tInTimeout	Time	T#0ms	Non-retain	False	False	False	False		Timeout time for an actuator's feedback to activate before giving a fault
iInMode	Int	0	Non-retain	False	False	False	False		Mode Selection
bInEstop	Bool	false	Non-retain	False	False	False	False		Estop
bInSignalHome	Bool	false	Non-retain	False	False	False	False		Home position feedback
bInSignalWork	Bool	false	Non-retain	False	False	False	False		Work position feedback
bInEnable	Bool	false	Non-retain	False	False	False	False		Home and Work Enabled
bInCommandWork	Bool	false	Non-retain	False	False	False	False		Move to work position in automatic mode
bInResetError	Bool	false	Non-retain	False	False	False	False		Reset Error
bInSimulate	Bool	false	Non-retain	False	False	False	False		Activate device simulation
▼ Output									
bOutCommandHome	Bool	false	Non-retain	False	False	False	False		Home position command
bOutCommandWork	Bool	false	Non-retain	False	False	False	False		Work position command
bOutActiveHome	Bool	false	Non-retain	False	False	False	False		Valve is in home position
bOutActiveWork	Bool	false	Non-retain	False	False	False	False		Valve is in work position
bOutAuto	Bool	false	Non-retain	False	False	False	False		Block in auto mode
bOutError	Bool	false	Non-retain	False	False	False	False		Error exists
▼ ERROR_Valve	"udtError_Valve"		Non-retain	False	False	False	False		Valve error structure
NoHomeFeedback	Bool	false	Non-retain	False	False	False	False		Home position feedback not active
NoWorkFeedback	Bool	false	Non-retain	False	False	False	False		Work position feedback not active
HomeFeedbackStillActive	Bool	false	Non-retain	False	False	False	False		Home position feedback still active
WorkFeedbackStillActive	Bool	false	Non-retain	False	False	False	False		Work position feedback still active
▼ InOut									
▼ HMI_ValveControl	"udtHMI_ValveControl"			False	False	False	False		HMI valve control
iMode	Int			False	False	False	False		Current mode
iErrorCode	Int			False	False	False	False		Error code
iStatus	Int			False	False	False	False		Status for HMI display
bPB_ResetError	Bool			False	False	False	False		PB Reset block errors
bPB_Home	Bool			False	False	False	False		PB Move to home in manual mode
bPB_Work	Bool			False	False	False	False		PB Move to work in manual mode
bPBEN_ResetError	Bool			False	False	False	False		PB Reset error enabled
bPBEN_Home	Bool			False	False	False	False		PB Home enabled
bPBEN_Work	Bool			False	False	False	False		PB Work enabled
bHomeOn	Bool			False	False	False	False		Home command is on
bWorkOn	Bool			False	False	False	False		Work command is on
bSignalHome	Bool			False	False	False	False		Home feedback
bSignalWork	Bool			False	False	False	False		Work feedback
bError	Bool			False	False	False	False		Error status
bInterlock	Bool			False	False	False	False		Valve interlocked
▼ Static									
▼ ErrorScroller	"fbErrorScroller"			False	False	False	True		Sub-block to handle error scroller
▼ Input									
bInError01	Bool	false	Set in IDB	False	False	False	False		Error 1 In Error Array
bInError02	Bool	false	Set in IDB	False	False	False	False		Error 2 In Error Array
bInError03	Bool	false	Set in IDB	False	False	False	False		Error 3 In Error Array
bInError04	Bool	false	Set in IDB	False	False	False	False		Error 4 In Error Array
bInError05	Bool	false	Set in IDB	False	False	False	False		Error 5 In Error Array
bInError06	Bool	false	Set in IDB	False	False	False	False		Error 6 In Error Array
bInError07	Bool	false	Set in IDB	False	False	False	False		Error 7 In Error Array
bInError08	Bool	false	Set in IDB	False	False	False	False		Error 8 In Error Array

Name	Data type	Default value	Retain	Accessible from HMI/OPC UA/Web API	Writable from HMI/OPC UA/Web API	Visible in HMI engineering	Setpoint	Supervision	Comment
bInError09	Bool	false	Set in IDB	False	False	False	False		Error 9 In Error Array
bInError10	Bool	false	Set in IDB	False	False	False	False		Error 10 In Error Array
bInError11	Bool	false	Set in IDB	False	False	False	False		Error 11 In Error Array
bInError12	Bool	false	Set in IDB	False	False	False	False		Error 12 In Error Array
bInError13	Bool	false	Set in IDB	False	False	False	False		Error 13 In Error Array
bInError14	Bool	false	Set in IDB	False	False	False	False		Error 14 In Error Array
bInError15	Bool	false	Set in IDB	False	False	False	False		Error 15 In Error Array
bInError16	Bool	false	Set in IDB	False	False	False	False		Error 16 In Error Array
bInError17	Bool	false	Set in IDB	False	False	False	False		Error 17 In Error Array
bInError18	Bool	false	Set in IDB	False	False	False	False		Error 18 In Error Array
bInError19	Bool	false	Set in IDB	False	False	False	False		Error 19 In Error Array
bInError20	Bool	false	Set in IDB	False	False	False	False		Error 20 In Error Array
bInError21	Bool	false	Set in IDB	False	False	False	False		Error 21 In Error Array
bInError22	Bool	false	Set in IDB	False	False	False	False		Error 22 In Error Array
bInError23	Bool	false	Set in IDB	False	False	False	False		Error 23 In Error Array
bInError24	Bool	false	Set in IDB	False	False	False	False		Error 24 In Error Array
bInError25	Bool	false	Set in IDB	False	False	False	False		Error 25 In Error Array
bInError26	Bool	false	Set in IDB	False	False	False	False		Error 26 In Error Array
bInError27	Bool	false	Set in IDB	False	False	False	False		Error 27 In Error Array
bInError28	Bool	false	Set in IDB	False	False	False	False		Error 28 In Error Array
bInError29	Bool	false	Set in IDB	False	False	False	False		Error 29 In Error Array
bInError30	Bool	false	Set in IDB	False	False	False	False		Error 30 In Error Array
▼ Output									
bOutErrorExists	Bool	false	Set in IDB	False	False	False	False		An Error Exists
iOutScrollingErrorNumber	Int	0	Set in IDB	False	False	False	False		Current Index when scrolling through errors
InOut									
▼ Static									
▼ TON_ErrorDelay	TON_TIME		Non-retain	False	False	False	True		Delay between each scroll for a new error
PT	Time	T#0ms	Non-retain	False	False	False	False		
ET	Time	T#0ms	Non-retain	False	False	False	False		
IN	Bool	false	Non-retain	False	False	False	False		
Q	Bool	false	Non-retain	False	False	False	False		
▼ abErrors	Array[1..30] of Bool		Set in IDB	False	False	False	False		
abErrors[1]	Bool	false	Set in IDB	False	False	False	False		
abErrors[2]	Bool	false	Set in IDB	False	False	False	False		
abErrors[3]	Bool	false	Set in IDB	False	False	False	False		
abErrors[4]	Bool	false	Set in IDB	False	False	False	False		
abErrors[5]	Bool	false	Set in IDB	False	False	False	False		
abErrors[6]	Bool	false	Set in IDB	False	False	False	False		
abErrors[7]	Bool	false	Set in IDB	False	False	False	False		
abErrors[8]	Bool	false	Set in IDB	False	False	False	False		
abErrors[9]	Bool	false	Set in IDB	False	False	False	False		
abErrors[10]	Bool	false	Set in IDB	False	False	False	False		
abErrors[11]	Bool	false	Set in IDB	False	False	False	False		
abErrors[12]	Bool	false	Set in IDB	False	False	False	False		
abErrors[13]	Bool	false	Set in IDB	False	False	False	False		
abErrors[14]	Bool	false	Set in IDB	False	False	False	False		
abErrors[15]	Bool	false	Set in IDB	False	False	False	False		
abErrors[16]	Bool	false	Set in IDB	False	False	False	False		
abErrors[17]	Bool	false	Set in IDB	False	False	False	False		
abErrors[18]	Bool	false	Set in IDB	False	False	False	False		
abErrors[19]	Bool	false	Set in IDB	False	False	False	False		
abErrors[20]	Bool	false	Set in IDB	False	False	False	False		
abErrors[21]	Bool	false	Set in IDB	False	False	False	False		
abErrors[22]	Bool	false	Set in IDB	False	False	False	False		
abErrors[23]	Bool	false	Set in IDB	False	False	False	False		
abErrors[24]	Bool	false	Set in IDB	False	False	False	False		
abErrors[25]	Bool	false	Set in IDB	False	False	False	False		
abErrors[26]	Bool	false	Set in IDB	False	False	False	False		
abErrors[27]	Bool	false	Set in IDB	False	False	False	False		
abErrors[28]	Bool	false	Set in IDB	False	False	False	False		
abErrors[29]	Bool	false	Set in IDB	False	False	False	False		
abErrors[30]	Bool	false	Set in IDB	False	False	False	False		
iNextScrollNum	Int	1	Non-retain	False	False	False	False		Index of next error position
iErrorsScrollNum	Int	1	Non-retain	False	False	False	False		Index of current error position
bScrolling	Bool	false	Non-retain	False	False	False	False		Indicates we are scrolling
bTON_ErrorDelay	Bool	false	Non-retain	False	False	False	False		
▼ TON_TimeOut	TON_TIME		Non-retain	False	False	False	True		Timer for Error Timeout
PT	Time	T#0ms	Non-retain	False	False	False	False		


Name	Data type	Default value	Retain	Accessible from HMI/OPC UA/Web API	Writable from HMI/OPC UA/Web API	Visible in HMI engineering	Setpoint	Supervision	Comment
ET	Time	T#0ms	Non-retain	False	False	False	False		
IN	Bool	false	Non-retain	False	False	False	False		
Q	Bool	false	Non-retain	False	False	False	False		
iLastMode	Int	0	Non-retain	False	False	False	False		Last mode code
bNewMode	Bool	false	Non-retain	False	False	False	False		New mode selected
bEnableHome	Bool	false	Non-retain	False	False	False	False		Home position enabled
bEnableWork	Bool	false	Non-retain	False	False	False	False		Work position enabled
bAutoMode	Bool	false	Non-retain	False	False	False	False		Auto Mode is active
bManualMode	Bool	false	Non-retain	False	False	False	False		Manual Mode is active
bReset	Bool	false	Non-retain	False	False	False	False		
bTON_TimeOut	Bool	false	Non-retain	False	False	False	False		
bPB_Home	Bool	false	Non-retain	False	False	False	False		
bPB_Work	Bool	false	Non-retain	False	False	False	False		
bPB_ResetError	Bool	false	Non-retain	False	False	False	False		
▼ Temp									
tTimeoutElapsed	Time								Elapsed time for TON_Time-out
bTemp	Bool								
Constant									

Network 1: ---------- Inputs ----------


Network 2: Read HMI input buttons

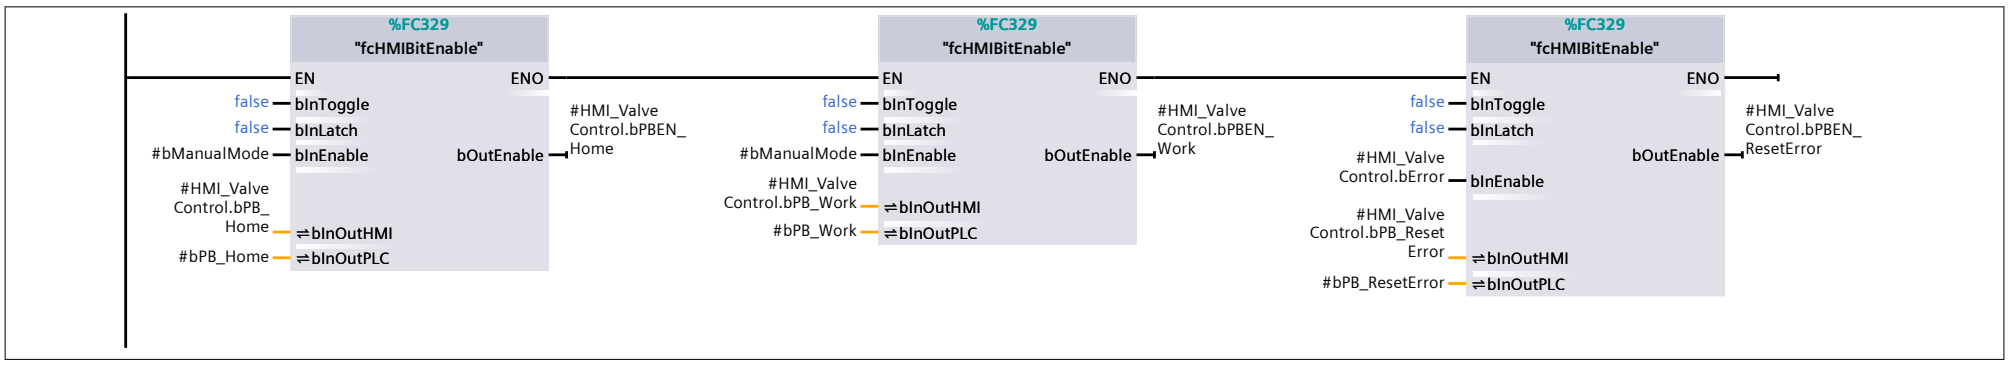

Network 3: Update the signal home bit

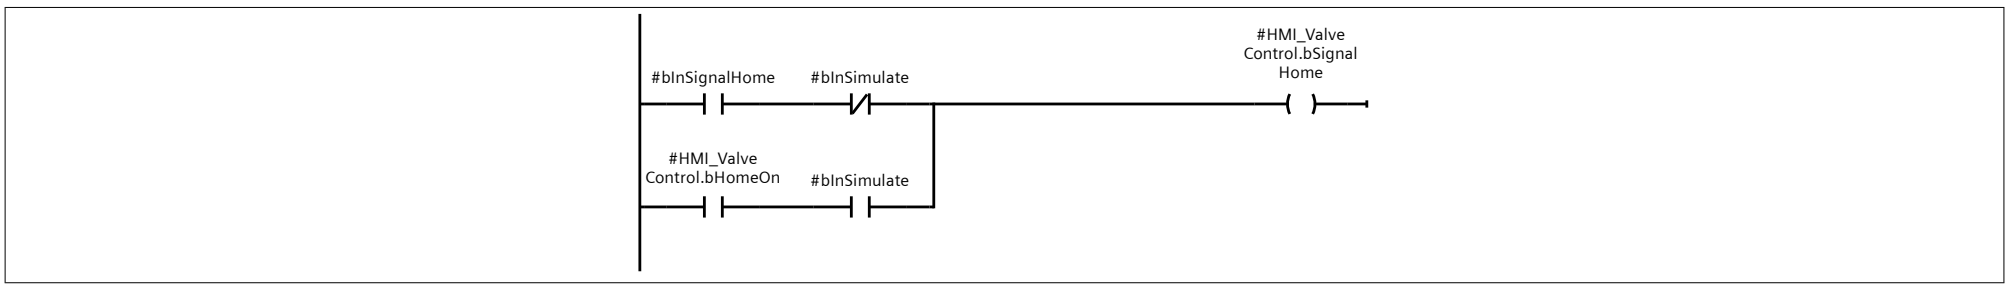


Network 4: Update the signal work bit

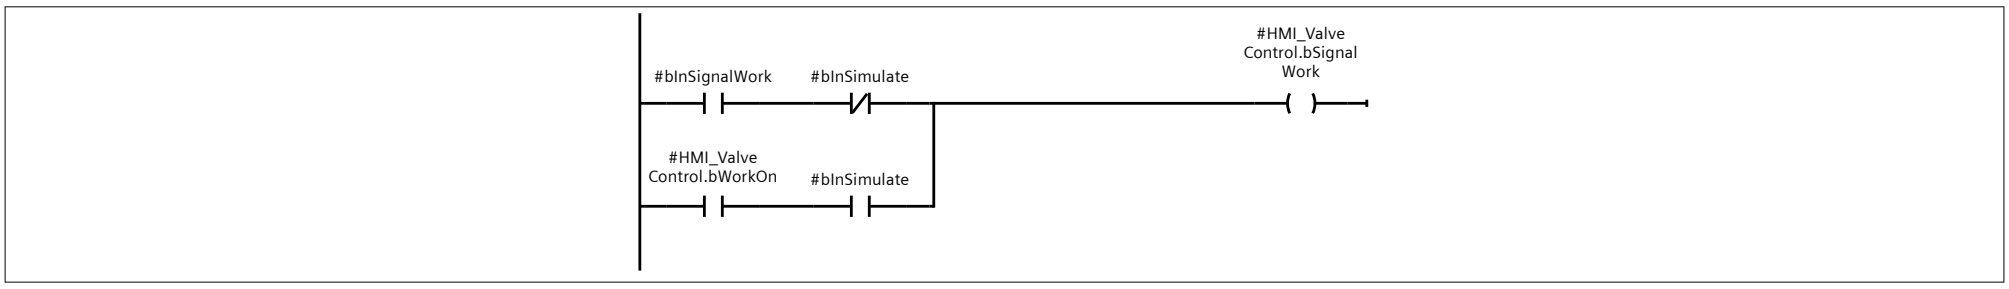


Network 5: ---------- Control Logic ----------


Network 6: Clear all errors

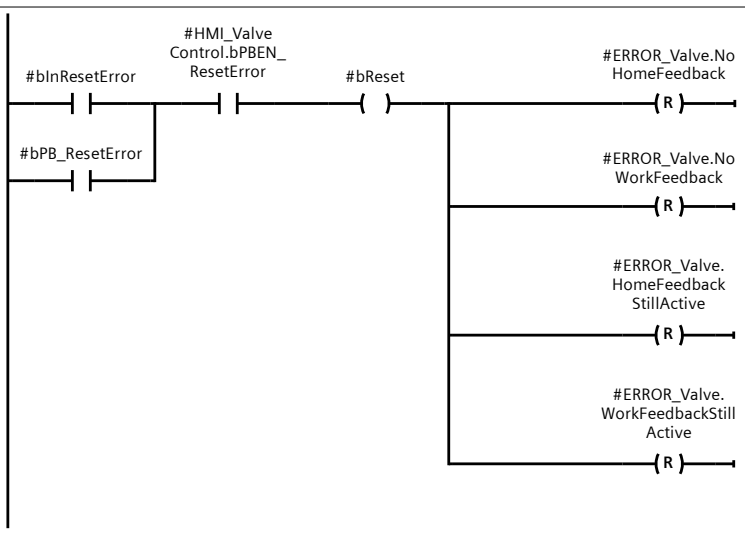


Network 7: Override HMI mode selection

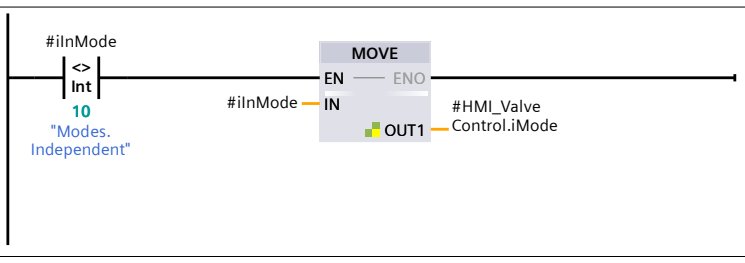


Network 8: Detect change in mode

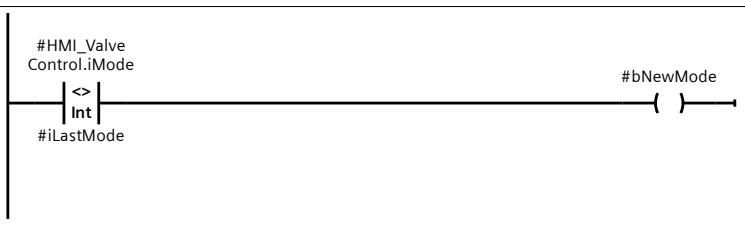

Network 9: Keep track of last mode

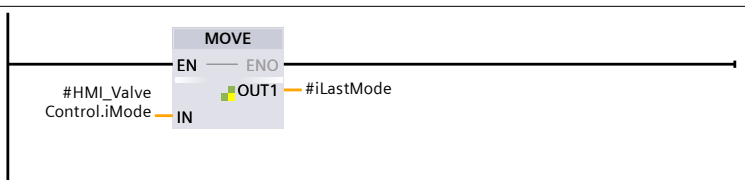


Network 10: Determine if auto or manual mode is active

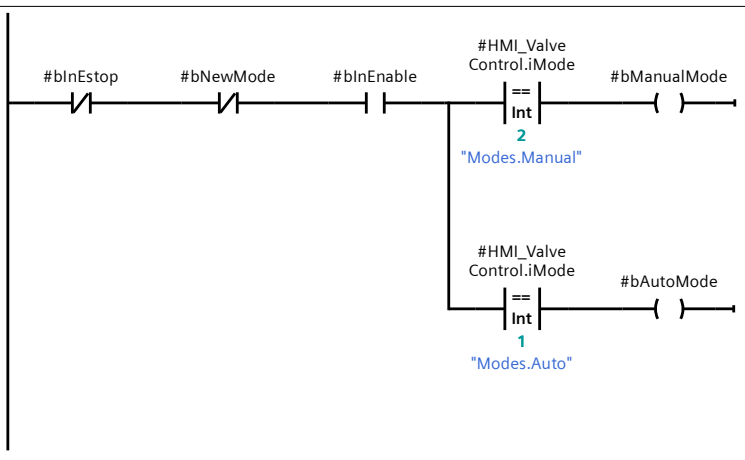


Network 11: Enable Home & Work Positions

IF manual mode AND no estop AND not a new mode AND enabled =>
--if no cylinder errors, enable move to Home and Work
--enable home and work HMI buttons only in manual mode

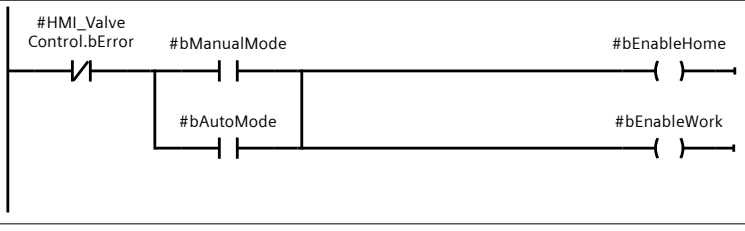


Network 12: Move to Home Position (Retracted)

IF manual mode and home button is pressed =>
--Set close cylinder

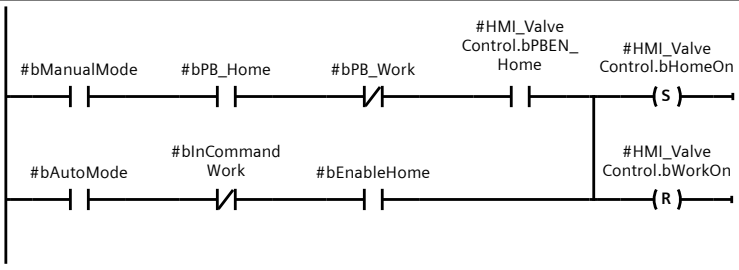


Network 13: Move to Work Position (Extended)

IF manual mode and work button button is pressed =>
--Set open cylinder

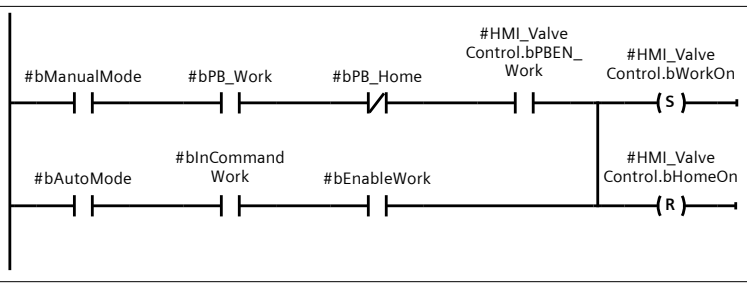


Network 14: Reset home on if not enabled

IF in auto AND home is not enabled => RESET home command

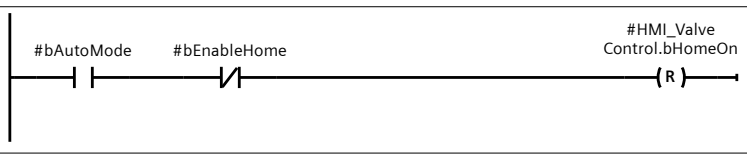


Network 15: Reset work on if not enabled

IF in auto AND work is not enabled => RESET work command

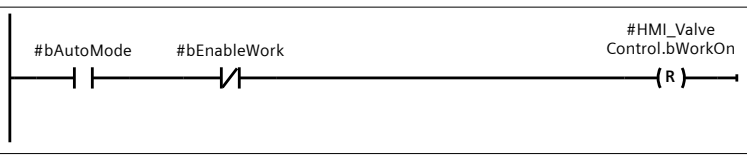

Network 16: Reset both home and work if not in auto or manual


IF not in auto AND not in manual => RESET home and work commands

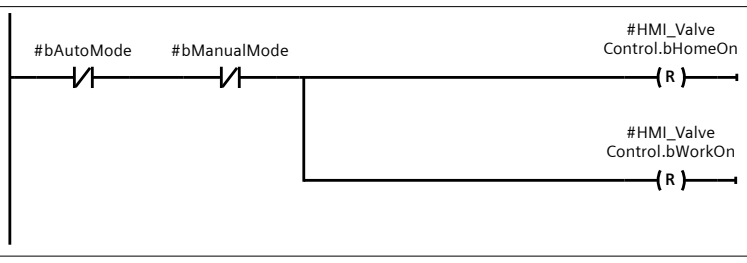


Network 17: ---------- Errors ----------

Network 18: Timeout timer

Time delay for errors

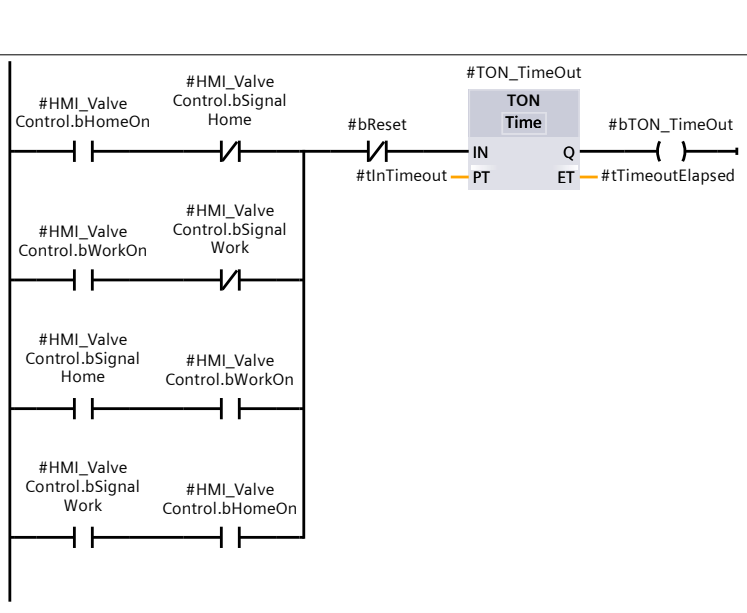


Network 19: Error: Home position feedback not active

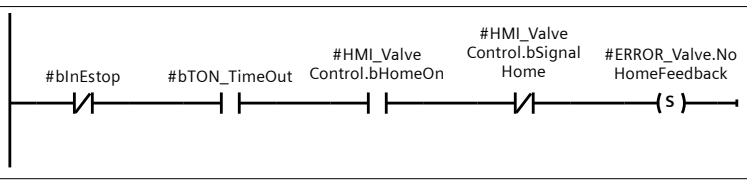


Network 20: Error: Work position feedback not active

Not reach work position

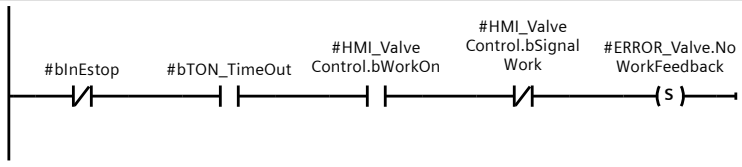


Network 21: Error: Home position feedback still active

Home position still active

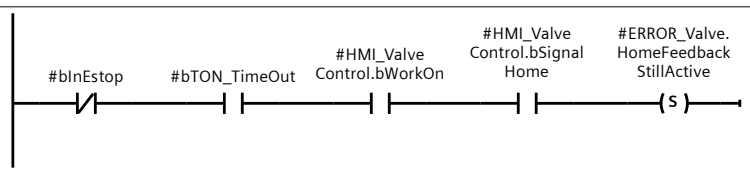


Network 22: Error: Work position feedback still active

Work position still active

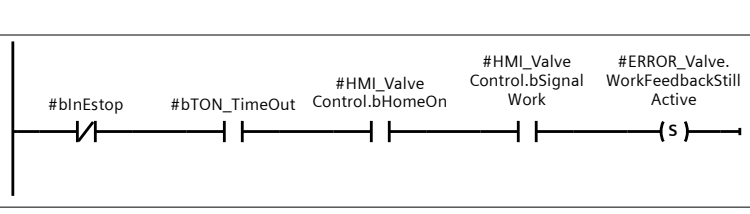


Network 23: Error scroller


Call the Error-Scroller which cyles through all possible errors and checks their state for display on the HMI

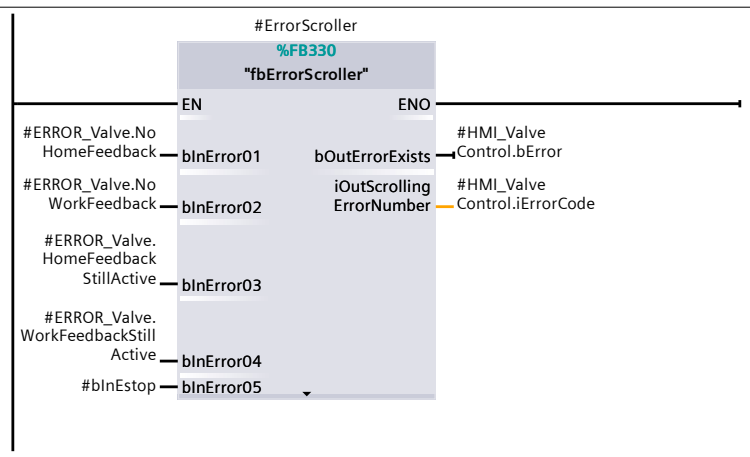

Network 24: Interlock

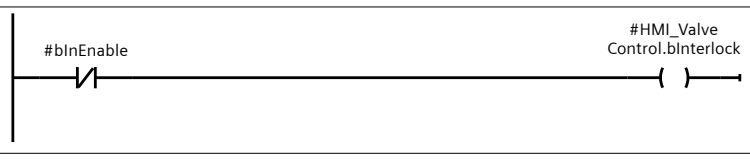


Network 25: Set HMI status

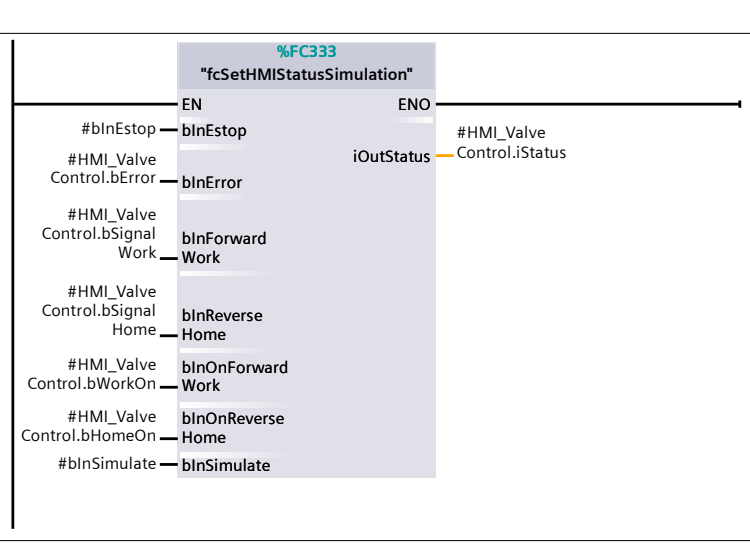


Network 26: ---------- Outputs ----------


Network 27: Output: Home Command




Network 28: Output: Work Command

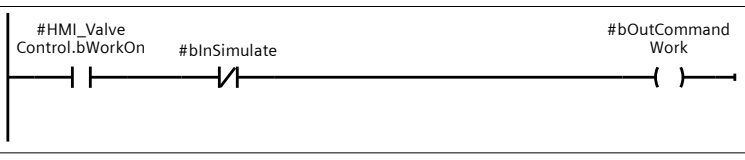


Network 29: Output: Home Active

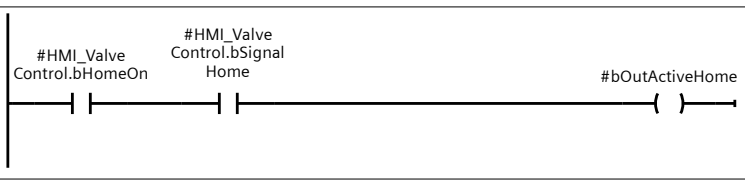


Network 30: Output: Work Active

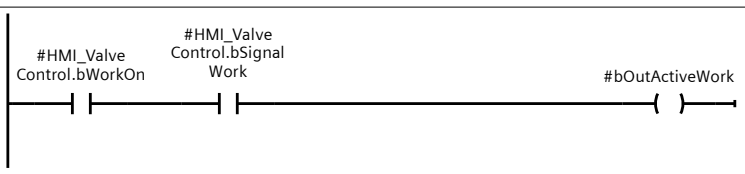


Network 31: Output: Auto

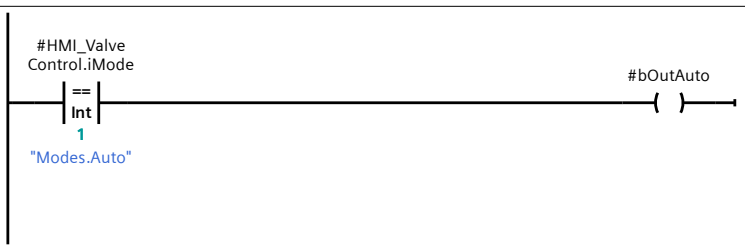

Network 32: Output: Error

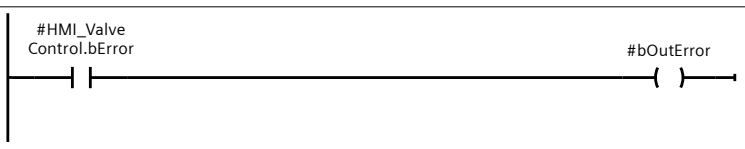

Network 33: Set ENO



Fabrica / PLC_1 [CPU 1511-1 PN] / Program blocks / Open Library V19 / Devices

fbValve_Analog [FB111] [fbValve_Analog V 3.0.2 default]


fbValve_Analog Properties							
General							
Name	fbValve_Analog	**Number**	111	**Type**	FB	**Language**	LAD
Numbering	Manual						
Information							
Title	Controls an analog valve	**Author**		**Comment**		**Family**	
Version	0.1	**User-defined ID**					

Name	Data type	Default value	Retain	Accessible from HMI/OPC UA/Web API	Writable from HMI/OPC UA/Web API	Visible in HMI engineering	Setpoint	Supervision	Comment
▼ Input									
tInTimeout	Time	t#10s	Non-retain	False	False	False	False		Feedback error timeout
iInMode	Int	0	Non-retain	False	False	False	False		Mode Selection
iInEstopFunction	Int	0	Non-retain	False	False	False	False		Enum of E-Stop repsonse (Estop.xxx)
bInEstop	Bool	false	Non-retain	False	False	False	False		Estop
bInEnable	Bool	false	Non-retain	False	False	False	False		Valve is Enabled to Operate
rInSignalCommand	Real	-1.0	Non-retain	False	False	False	False		Actual % open from valve (-1 to disable)
rInAutoCommand	Real	0.0	Non-retain	False	False	False	False		Auto Mode command
bInResetError	Bool	false	Non-retain	False	False	False	False		Reset errors
bInSimulate	Bool	false	Non-retain	False	False	False	False		Activate device simulation
▼ Output									
wOutCommand	Word	16#0	Non-retain	False	False	False	False		Output value for analog write
rOutCommand	Real	0.0	Non-retain	False	False	False	False		Output value
bOutAuto	Bool	false	Non-retain	False	False	False	False		Block in auto Mode
bOutError	Bool	false	Non-retain	False	False	False	False		Error exists
▼ ERROR_AnalogValve	"udtError_AnalogValve"		Non-retain	False	False	False	False		Error structure for analog valve
InvalidFeedback	Bool	false	Non-retain	False	False	False	False		Valve feedback is not within command tolerance
▼ InOut									
▼ HMI_AnalogValveControl	"udtHMI_AnalogValveControl"			False	False	False	False		HMI control structure for analog valve
iMode	Int			False	False	False	False		Current mode
iErrorCode	Int			False	False	False	False		Error code
iStatus	Int			False	False	False	False		Color status for HMI
rManualSP	Real			False	False	False	False		Set point for manual mode
rAutoSP	Real			False	False	False	False		Set point for automatic mode
rEstopSP	Real			False	False	False	False		Set point for an e-stop condition, if selected
rActual	Real			False	False	False	False		Actual value
bPB_ResetError	Bool			False	False	False	False		PB Reset errors
bPBEN_ResetError	Bool			False	False	False	False		PB reset errors enable
bError	Bool			False	False	False	False		Overall error
bInterlock	Bool			False	False	False	False		Valve Interlocked
iEstopFunction	Int			False	False	False	False		Enum of E-Stop repsonse (Estop.xxx)
▼ Static									
▼ TON_Timeout	TON_TIME		Non-retain	False	False	False	True		
PT	Time	T#0ms	Non-retain	False	False	False	False		
ET	Time	T#0ms	Non-retain	False	False	False	False		
IN	Bool	false	Non-retain	False	False	False	False		
Q	Bool	false	Non-retain	False	False	False	False		
▼ ErrorScroller	"fbErrorScroller"			False	False	False	True		
▼ Input									
bInError01	Bool	false	Set in IDB	False	False	False	False		Error 1 In Error Array
bInError02	Bool	false	Set in IDB	False	False	False	False		Error 2 In Error Array
bInError03	Bool	false	Set in IDB	False	False	False	False		Error 3 In Error Array
bInError04	Bool	false	Set in IDB	False	False	False	False		Error 4 In Error Array
bInError05	Bool	false	Set in IDB	False	False	False	False		Error 5 In Error Array
bInError06	Bool	false	Set in IDB	False	False	False	False		Error 6 In Error Array
bInError07	Bool	false	Set in IDB	False	False	False	False		Error 7 In Error Array
bInError08	Bool	false	Set in IDB	False	False	False	False		Error 8 In Error Array
bInError09	Bool	false	Set in IDB	False	False	False	False		Error 9 In Error Array
bInError10	Bool	false	Set in IDB	False	False	False	False		Error 10 In Error Array
bInError11	Bool	false	Set in IDB	False	False	False	False		Error 11 In Error Array
bInError12	Bool	false	Set in IDB	False	False	False	False		Error 12 In Error Array
bInError13	Bool	false	Set in IDB	False	False	False	False		Error 13 In Error Array


Name	Data type	Default value	Retain	Accessible from HMI/OPC UA/Web API	Writable from HMI/OPC UA/Web API	Visible in HMI engineering	Setpoint	Supervision	Comment
bInError14	Bool	false	Set in IDB	False	False	False	False		Error 14 In Error Array
bInError15	Bool	false	Set in IDB	False	False	False	False		Error 15 In Error Array
bInError16	Bool	false	Set in IDB	False	False	False	False		Error 16 In Error Array
bInError17	Bool	false	Set in IDB	False	False	False	False		Error 17 In Error Array
bInError18	Bool	false	Set in IDB	False	False	False	False		Error 18 In Error Array
bInError19	Bool	false	Set in IDB	False	False	False	False		Error 19 In Error Array
bInError20	Bool	false	Set in IDB	False	False	False	False		Error 20 In Error Array
bInError21	Bool	false	Set in IDB	False	False	False	False		Error 21 In Error Array
bInError22	Bool	false	Set in IDB	False	False	False	False		Error 22 In Error Array
bInError23	Bool	false	Set in IDB	False	False	False	False		Error 23 In Error Array
bInError24	Bool	false	Set in IDB	False	False	False	False		Error 24 In Error Array
bInError25	Bool	false	Set in IDB	False	False	False	False		Error 25 In Error Array
bInError26	Bool	false	Set in IDB	False	False	False	False		Error 26 In Error Array
bInError27	Bool	false	Set in IDB	False	False	False	False		Error 27 In Error Array
bInError28	Bool	false	Set in IDB	False	False	False	False		Error 28 In Error Array
bInError29	Bool	false	Set in IDB	False	False	False	False		Error 29 In Error Array
bInError30	Bool	false	Set in IDB	False	False	False	False		Error 30 In Error Array
▼ Output									
bOutErrorExists	Bool	false	Set in IDB	False	False	False	False		An Error Exists
iOutScrollingErrorNumber	Int	0	Set in IDB	False	False	False	False		Current Index when scrolling through errors
InOut									
▼ Static									
▼ TON_ErrorDelay	TON_TIME		Non-retain	False	False	False	True		Delay between each scroll for a new error
PT	Time	T#0ms	Non-retain	False	False	False	False		
ET	Time	T#0ms	Non-retain	False	False	False	False		
IN	Bool	false	Non-retain	False	False	False	False		
Q	Bool	false	Non-retain	False	False	False	False		
▼ abErrors	Array[1..30] of Bool		Set in IDB	False	False	False	False		
abErrors[1]	Bool	false	Set in IDB	False	False	False	False		
abErrors[2]	Bool	false	Set in IDB	False	False	False	False		
abErrors[3]	Bool	false	Set in IDB	False	False	False	False		
abErrors[4]	Bool	false	Set in IDB	False	False	False	False		
abErrors[5]	Bool	false	Set in IDB	False	False	False	False		
abErrors[6]	Bool	false	Set in IDB	False	False	False	False		
abErrors[7]	Bool	false	Set in IDB	False	False	False	False		
abErrors[8]	Bool	false	Set in IDB	False	False	False	False		
abErrors[9]	Bool	false	Set in IDB	False	False	False	False		
abErrors[10]	Bool	false	Set in IDB	False	False	False	False		
abErrors[11]	Bool	false	Set in IDB	False	False	False	False		
abErrors[12]	Bool	false	Set in IDB	False	False	False	False		
abErrors[13]	Bool	false	Set in IDB	False	False	False	False		
abErrors[14]	Bool	false	Set in IDB	False	False	False	False		
abErrors[15]	Bool	false	Set in IDB	False	False	False	False		
abErrors[16]	Bool	false	Set in IDB	False	False	False	False		
abErrors[17]	Bool	false	Set in IDB	False	False	False	False		
abErrors[18]	Bool	false	Set in IDB	False	False	False	False		
abErrors[19]	Bool	false	Set in IDB	False	False	False	False		
abErrors[20]	Bool	false	Set in IDB	False	False	False	False		
abErrors[21]	Bool	false	Set in IDB	False	False	False	False		
abErrors[22]	Bool	false	Set in IDB	False	False	False	False		
abErrors[23]	Bool	false	Set in IDB	False	False	False	False		
abErrors[24]	Bool	false	Set in IDB	False	False	False	False		
abErrors[25]	Bool	false	Set in IDB	False	False	False	False		
abErrors[26]	Bool	false	Set in IDB	False	False	False	False		
abErrors[27]	Bool	false	Set in IDB	False	False	False	False		
abErrors[28]	Bool	false	Set in IDB	False	False	False	False		
abErrors[29]	Bool	false	Set in IDB	False	False	False	False		
abErrors[30]	Bool	false	Set in IDB	False	False	False	False		
iNextScrollNum	Int	1	Non-retain	False	False	False	False		Index of next error position
iErrorsScrollNum	Int	1	Non-retain	False	False	False	False		Index of current error position
bScrolling	Bool	false	Non-retain	False	False	False	False		Indicates we are scrolling
bTON_ErrorDelay	Bool	false	Non-retain	False	False	False	False		
rValue	Real	0.0	Non-retain	False	False	False	False		
bSignalOutOfTolerance	Bool	false	Non-retain	False	False	False	False		
bReset	Bool	false	Non-retain	False	False	False	False		
bTON_Timeout	Bool	false	Non-retain	False	False	False	False		
bPB_ResetError	Bool	false	Non-retain	False	False	False	False		
▼ Temp									
bTemp	Bool								

Name	Data type	Default value	Retain	Accessible from HMI/OPC UA/Web API	Writable from HMI/OPC UA/Web API	Visible in HMI engineering	Setpoint	Supervision	Comment
tTemp	Time								
rTempUpperLimit	Real								
rTempLowerLimit	Real								
▼ Constant									
crMaxSetPoint	Real	100.0							Maximum set point range
crMinSetPoint	Real	0.0							Minimum set point range
crTolerance	Real	5.0							Tolerance for actual value


Network 1: Read HMI input buttons

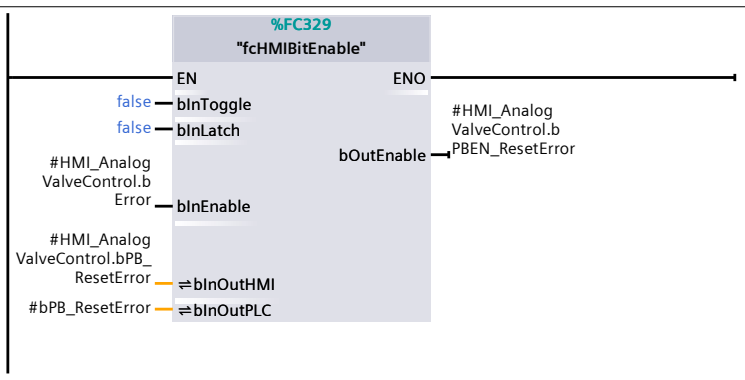

Network 2: Set the automatic mode speed set point

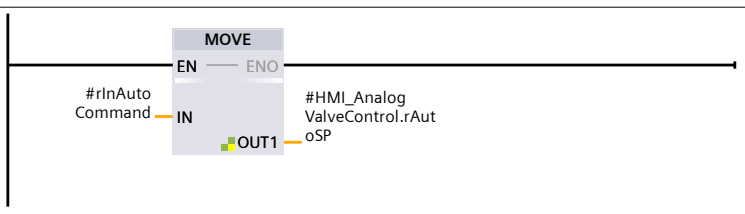


Network 3: Read in actual value

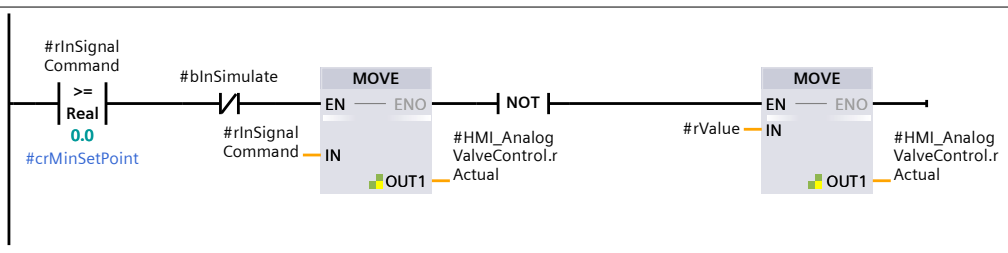


Network 4: ---------- Control Logic ----------


Network 5: Limit manual and auto set points to the max and min constants

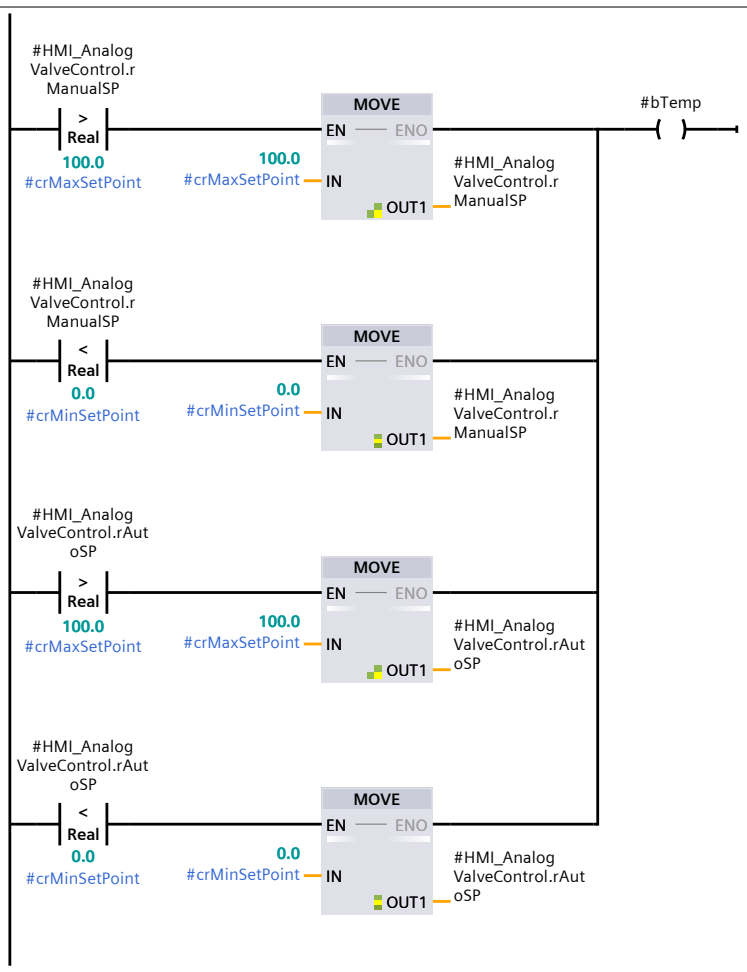


Network 6: Reset Errors

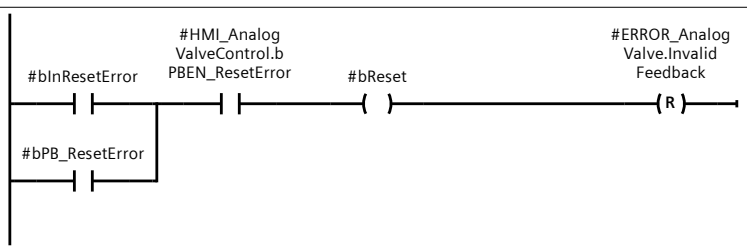


Network 7: Set mode override if neccesary

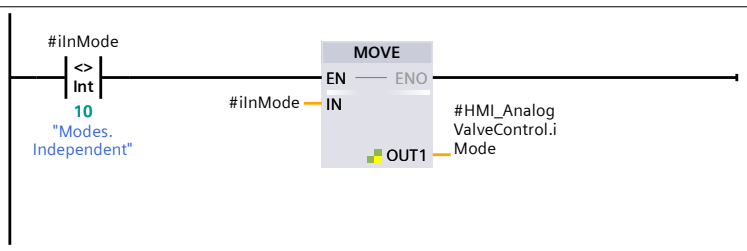


Network 8: Set actual value based on mode

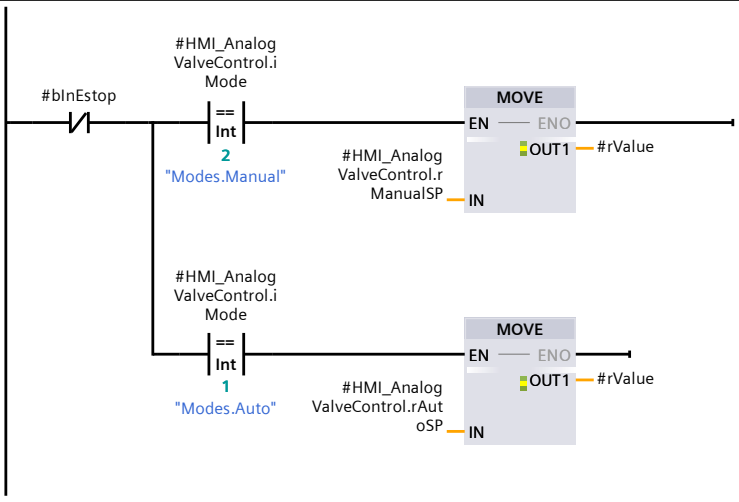


Network 9: Check if valve is enabled

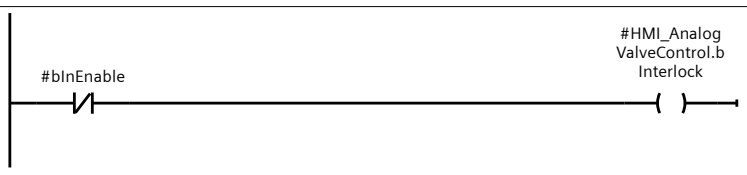


Network 10: Set actual value to 0 on bad mode or not enabled

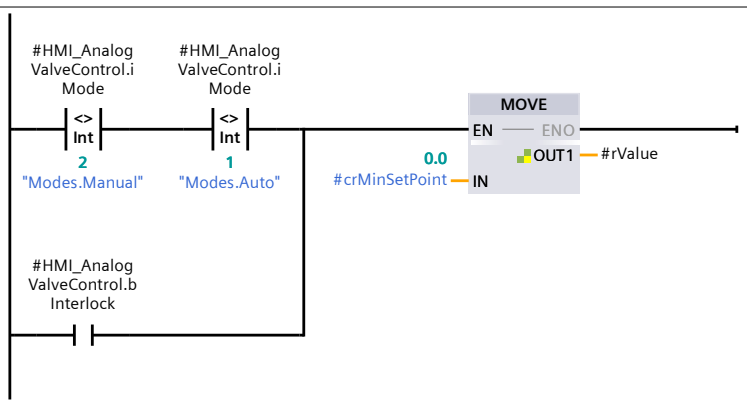


Network 11: Set actual value to 0 on bad mode

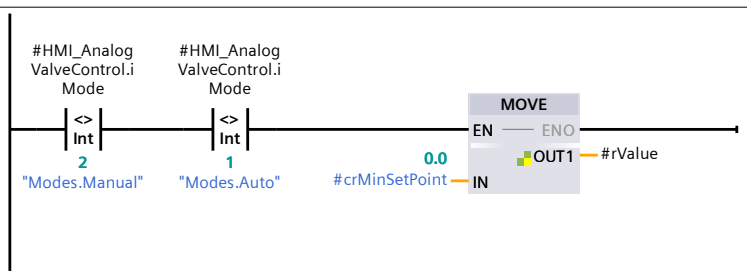


Network 12: Set HMI Estop function

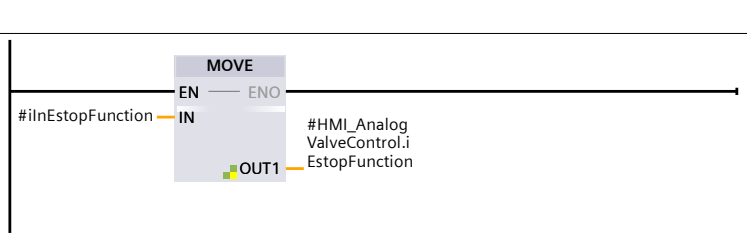


Network 13: Determine E-Stop set point

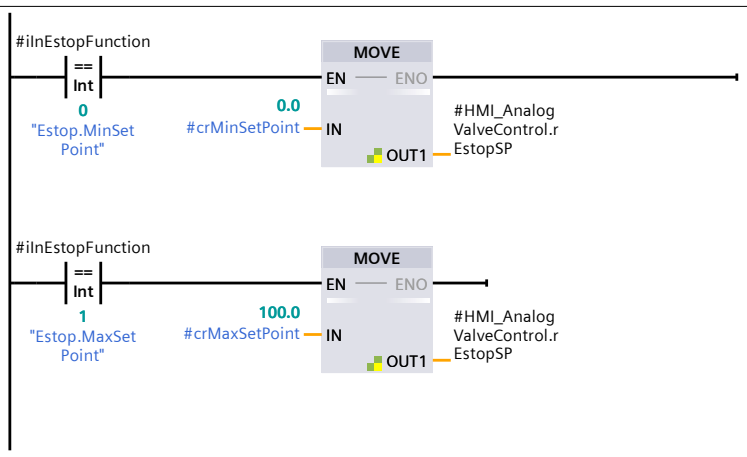

Network 14: Set actual value on e-stop

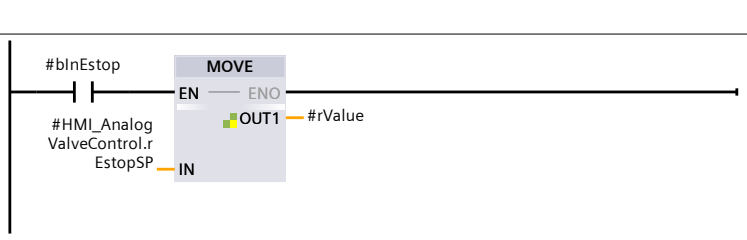


Network 15: Error timeout timer

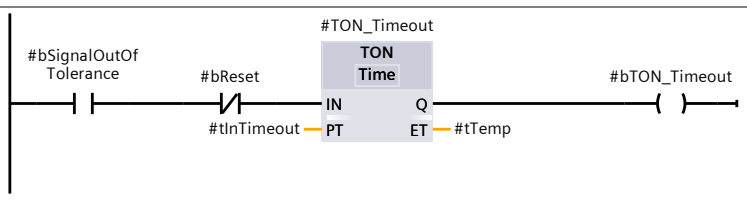

Network 16: Calculate tolerance limits




Network 17: Error: Signal out of tolerance

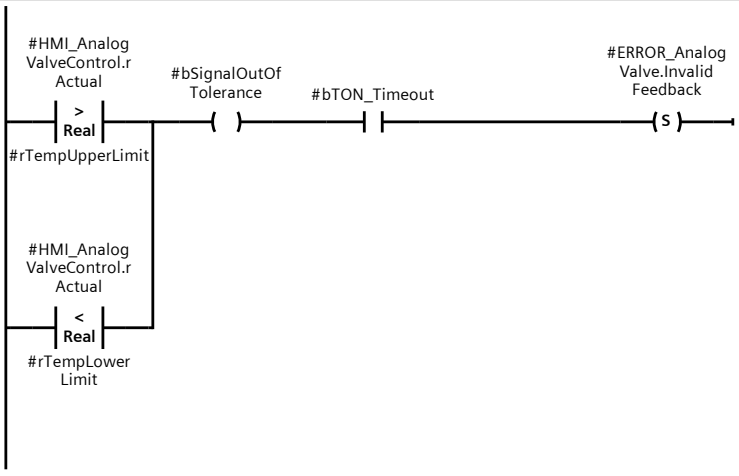


Network 18: Scroll errors on the HMI

Call the Error-Scroller which cyles through all possible errors and checks their state for display on the HMI

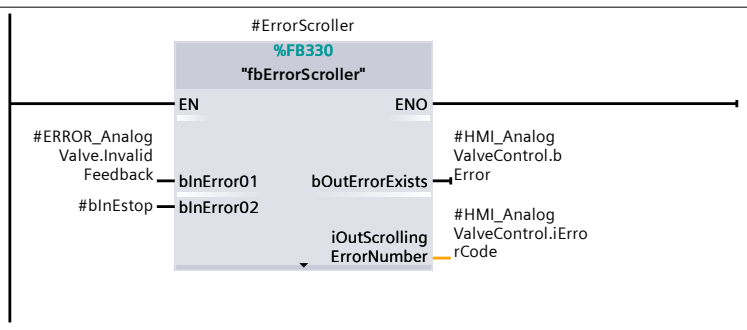


Network 19: Set HMI status

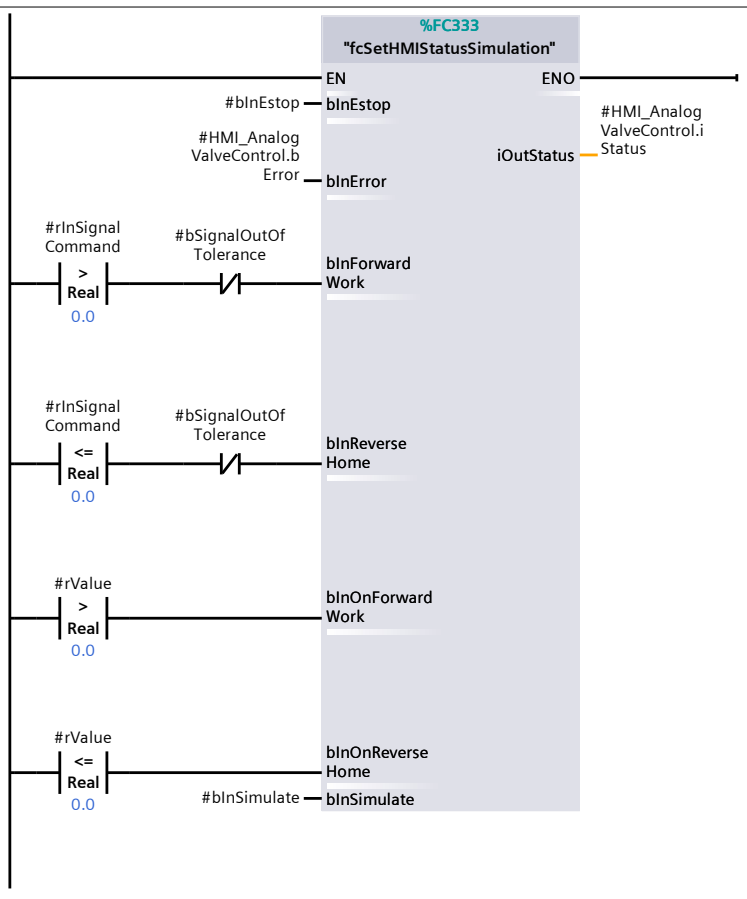


Network 20: ---------- Outputs ----------


Network 21: Output: Command for analog

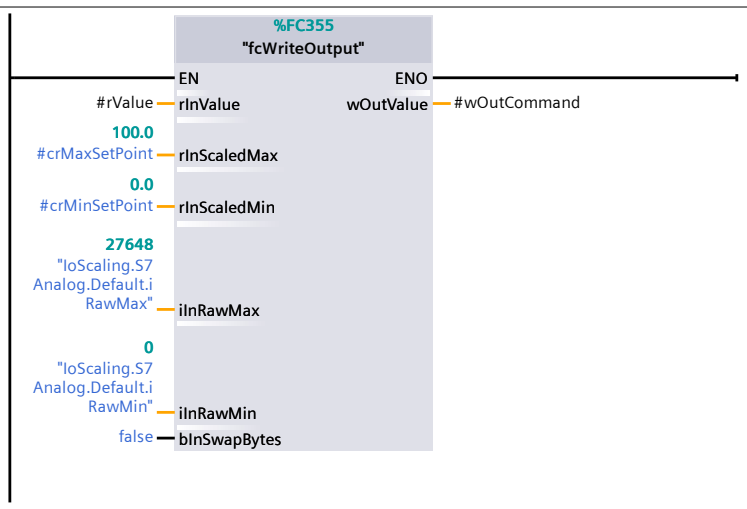


Network 22: Output: Command

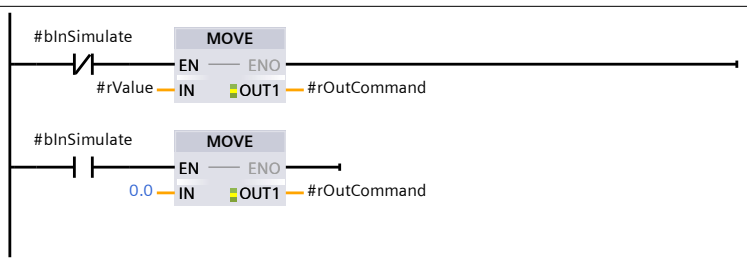


Network 23: Output: Auto

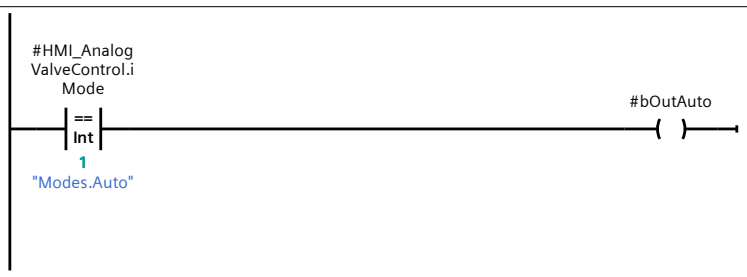

Network 24: Output: Error

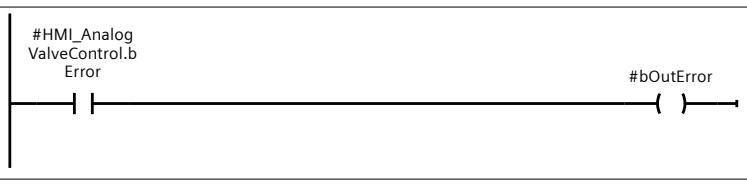

Network 25: Set ENO



Fabrica / PLC_1 [CPU 1511-1 PN] / Program blocks / System blocks / Program resources

IEC_Timer_0_DB [DB4]

IEC_Timer_0_DB Properties							
General							
Name	IEC_Timer_0_DB	**Number**	4	**Type**	DB	**Language**	DB
Numbering	Automatic						
Information							
Title		**Author**	Simatic	**Comment**		**Family**	IEC
Version	1.0	**User-defined ID**	IEC_TMR				

Name	Data type	Start value	Retain	Accessible from HMI/OPC UA/Web API	Writable from HMI/OPC UA/Web API	Visible in HMI engineering	Setpoint	Supervision	Comment
▼ Static									
PT	Time	T#0ms	False	True	True	True	False		
ET	Time	T#0ms	False	True	False	True	False		
IN	Bool	false	False	True	True	True	False		
Q	Bool	false	False	True	False	True	False		

Fabrica / PLC_1 [CPU 1511-1 PN] / Program blocks / System blocks / Program resources

Intarziere_procesare_comenzi [DB5]

Intarziere_procesare_comenzi Properties							
General							
Name	Intarziere_procesare_comenzi	**Number**	5	**Type**	DB	**Language**	DB
Numbering	Automatic						
Information							
Title		**Author**	Simatic	**Comment**		**Family**	IEC
Version	1.0	**User-defined ID**	IEC_TMR				

Name	Data type	Start value	Retain	Accessible from HMI/OPC UA/Web API	Writable from HMI/OPC UA/Web API	Visible in HMI engineering	Setpoint	Supervision	Comment
▼ Static									
PT	Time	T#0ms	False	True	True	True	False		
ET	Time	T#0ms	False	True	False	True	False		
IN	Bool	false	False	True	True	True	False		
Q	Bool	false	False	True	False	True	False		

Fabrica / PLC_1 [CPU 1511-1 PN] / Program blocks / System blocks / Program resources

Umplere_apa [DB7]

Umplere_apa Properties							
General							
Name	Umplere_apa	**Number**	7	**Type**	DB	**Language**	DB
Numbering	Automatic						
Information							
Title		**Author**	Simatic	**Comment**		**Family**	IEC
Version	1.0	**User-defined ID**	IEC_TMR				

Name	Data type	Start value	Retain	Accessible from HMI/OPC UA/Web API	Writable from HMI/OPC UA/Web API	Visible in HMI engineering	Setpoint	Supervision	Comment
▼ Static									
PT	Time	T#0ms	False	True	True	True	False		
ET	Time	T#0ms	False	True	False	True	False		
IN	Bool	false	False	True	True	True	False		
Q	Bool	false	False	True	False	True	False		

Fabrica / PLC_1 [CPU 1511-1 PN] / Program blocks / System blocks / Program resources

Delay_senzori_pas2 [DB8]

Delay_senzori_pas2 Properties							
General							
Name	Delay_senzori_pas2	**Number**	8	**Type**	DB	**Language**	DB
Numbering	Automatic						
Information							
Title		**Author**	Simatic	**Comment**		**Family**	IEC
Version	1.0	**User-defined ID**	IEC_TMR				

Name	Data type	Start value	Retain	Accessible from HMI/OPC UA/Web API	Writ-able from HMI/ OPC UA/ Web API	Visible in HMI engi-neering	Setpoint	Supervi-sion	Comment
▼ Static									
PT	Time	T#0ms	False	True	True	True	False		
ET	Time	T#0ms	False	True	False	True	False		
IN	Bool	false	False	True	True	True	False		
Q	Bool	false	False	True	False	True	False		

Fabrica / PLC_1 [CPU 1511-1 PN] / Program blocks / System blocks / Program resources

Activare_senzori_final_pas_10 [DB9]

Activare_senzori_final_pas_10 Properties							
General							
Name	Activare_senzori_final_pas_10	**Number**	9	**Type**	DB	**Language**	DB
Numbering	Automatic						
Information							
Title		**Author**	Simatic	**Comment**		**Family**	IEC
Version	1.0	**User-defined ID**	IEC_TMR				

Name	Data type	Start value	Retain	Accessible from HMI/OPC UA/Web API	Writable from HMI/OPC UA/Web API	Visible in HMI engineering	Setpoint	Supervision	Comment
▼ Static									
PT	Time	T#0ms	False	True	True	True	False		
ET	Time	T#0ms	False	True	False	True	False		
IN	Bool	false	False	True	True	True	False		
Q	Bool	false	False	True	False	True	False		

Fabrica / PLC_1 [CPU 1511-1 PN] / Program blocks / System blocks / Program resources

Activare_senzor_PRS_ambii_porcusori [DB10]

Activare_senzor_PRS_ambii_porcusori Properties							
General							
Name	Activare_senzor_PRS_ambii_porcusori	**Number**	10	**Type**	DB	**Language**	DB
Numbering	Automatic						
Information							
Title		**Author**	Simatic	**Comment**		**Family**	IEC
Version	1.0	**User-defined ID**	IEC_TMR				

Name	Data type	Start value	Retain	Accessible from HMI/OPC UA/Web API	Writable from HMI/OPC UA/Web API	Visible in HMI engineering	Setpoint	Supervision	Comment
▼ Static									
PT	Time	T#0ms	False	True	True	True	False		
ET	Time	T#0ms	False	True	False	True	False		
IN	Bool	false	False	True	True	True	False		
Q	Bool	false	False	True	False	True	False		

Fabrica / PLC_1 [CPU 1511-1 PN] / Program blocks / System blocks / Program resources

Delay_senzori_pas10 [DB11]

Delay_senzori_pas10 Properties							
General							
Name	Delay_senzori_pas10	**Number**	11	**Type**	DB	**Language**	DB
Numbering	Automatic						
Information							
Title		**Author**	Simatic	**Comment**		**Family**	IEC
Version	1.0	**User-defined ID**	IEC_TMR				

Name	Data type	Start value	Retain	Accessible from HMI/OPC UA/Web API	Writ-able from HMI/ OPC UA/ Web API	Visible in HMI engi-neering	Setpoint	Supervi-sion	Comment
▼ Static									
PT	Time	T#0ms	False	True	True	True	False		
ET	Time	T#0ms	False	True	False	True	False		
IN	Bool	false	False	True	True	True	False		
Q	Bool	false	False	True	False	True	False		

Fabrica / PLC_1 [CPU 1511-1 PN] / Program blocks / System blocks / Program resources

Delay_OUT1_ZS! [DB12]

Delay_OUT1_ZS! Properties							
General							
Name	Delay_OUT1_ZS!	**Number**	12	**Type**	DB	**Language**	DB
Numbering	Automatic						
Information							
Title		**Author**	Simatic	**Comment**		**Family**	IEC
Version	1.0	**User-defined ID**	IEC_TMR				

Name	Data type	Start value	Retain	Accessible from HMI/OPC UA/Web API	Writable from HMI/OPC UA/Web API	Visible in HMI engineering	Setpoint	Supervision	Comment
▼ Static									
PT	Time	T#0ms	False	True	True	True	False		
ET	Time	T#0ms	False	True	False	True	False		
IN	Bool	false	False	True	True	True	False		
Q	Bool	false	False	True	False	True	False		

Fabrica / PLC_1 [CPU 1511-1 PN] / Program blocks / System blocks / Program resources

Delay_OUT1_ZS2 [DB13]

Delay_OUT1_ZS2 Properties							
General							
Name	Delay_OUT1_ZS2	**Number**	13	**Type**	DB	**Language**	DB
Numbering	Automatic						
Information							
Title		**Author**	Simatic	**Comment**		**Family**	IEC
Version	1.0	**User-defined ID**	IEC_TMR				

Name	Data type	Start value	Retain	Accessible from HMI/OPC UA/Web API	Writable from HMI/OPC UA/Web API	Visible in HMI engineering	Setpoint	Supervision	Comment
▼ Static									
PT	Time	T#0ms	False	True	True	True	False		
ET	Time	T#0ms	False	True	False	True	False		
IN	Bool	false	False	True	True	True	False		
Q	Bool	false	False	True	False	True	False		

Fabrica / PLC_1 [CPU 1511-1 PN] / Program blocks / System blocks / Program resources

Delay_OUT2_ZS1 [DB14]

Delay_OUT2_ZS1 Properties							
General							
Name	Delay_OUT2_ZS1	**Number**	14	**Type**	DB	**Language**	DB
Numbering	Automatic						
Information							
Title		**Author**	Simatic	**Comment**		**Family**	IEC
Version	1.0	**User-defined ID**	IEC_TMR				

Name	Data type	Start value	Retain	Accessible from HMI/OPC UA/Web API	Writable from HMI/OPC UA/Web API	Visible in HMI engineering	Setpoint	Supervision	Comment
▼ Static									
PT	Time	T#0ms	False	True	True	True	False		
ET	Time	T#0ms	False	True	False	True	False		
IN	Bool	false	False	True	True	True	False		
Q	Bool	false	False	True	False	True	False		

Fabrica / PLC_1 [CPU 1511-1 PN] / Program blocks / System blocks / Program resources

Delay_OUT2_ZS2 [DB15]

Delay_OUT2_ZS2 Properties							
General							
Name	Delay_OUT2_ZS2	**Number**	15	**Type**	DB	**Language**	DB
Numbering	Automatic						
Information							
Title		**Author**	Simatic	**Comment**		**Family**	IEC
Version	1.0	**User-defined ID**	IEC_TMR				

Name	Data type	Start value	Retain	Accessible from HMI/OPC UA/Web API	Writable from HMI/OPC UA/Web API	Visible in HMI engineering	Setpoint	Supervision	Comment
▼ Static									
PT	Time	T#0ms	False	True	True	True	False		
ET	Time	T#0ms	False	True	False	True	False		
IN	Bool	false	False	True	True	True	False		
Q	Bool	false	False	True	False	True	False		

Fabrica / PLC_1 [CPU 1511-1 PN] / Program blocks / System blocks / Program resources

Delay_OUT3_ZS1 [DB16]

Delay_OUT3_ZS1 Properties							
General							
Name	Delay_OUT3_ZS1	**Number**	16	**Type**	DB	**Language**	DB
Numbering	Automatic						
Information							
Title		**Author**	Simatic	**Comment**		**Family**	IEC
Version	1.0	**User-defined ID**	IEC_TMR				

Name	Data type	Start value	Retain	Accessible from HMI/OPC UA/Web API	Writable from HMI/OPC UA/Web API	Visible in HMI engineering	Setpoint	Supervision	Comment
▼ Static									
PT	Time	T#0ms	False	True	True	True	False		
ET	Time	T#0ms	False	True	False	True	False		
IN	Bool	false	False	True	True	True	False		
Q	Bool	false	False	True	False	True	False		

Fabrica / PLC_1 [CPU 1511-1 PN] / Program blocks / System blocks / Program resources

Delay_OUT3_ZS2 [DB17]

Delay_OUT3_ZS2 Properties							
General							
Name	Delay_OUT3_ZS2	**Number**	17	**Type**	DB	**Language**	DB
Numbering	Automatic						
Information							
Title		**Author**	Simatic	**Comment**		**Family**	IEC
Version	1.0	**User-defined ID**	IEC_TMR				

Name	Data type	Start value	Retain	Accessible from HMI/OPC UA/Web API	Writ-able from HMI/ OPC UA/ Web API	Visible in HMI engi-neering	Setpoint	Supervi-sion	Comment
▼ Static									
PT	Time	T#0ms	False	True	True	True	False		
ET	Time	T#0ms	False	True	False	True	False		
IN	Bool	false	False	True	True	True	False		
Q	Bool	false	False	True	False	True	False		

Fabrica / PLC_1 [CPU 1511-1 PN] / Program blocks / System blocks / Program resources

Delay_final_pas_13 [DB18]

Delay_final_pas_13 Properties							
General							
Name	Delay_final_pas_13	**Number**	18	**Type**	DB	**Language**	DB
Numbering	Automatic						
Information							
Title		**Author**	Simatic	**Comment**		**Family**	IEC
Version	1.0	**User-defined ID**	IEC_TMR				

Name	Data type	Start value	Retain	Accessible from HMI/OPC UA/Web API	Writable from HMI/OPC UA/Web API	Visible in HMI engineering	Setpoint	Supervision	Comment
▼ Static									
PT	Time	T#0ms	False	True	True	True	False		
ET	Time	T#0ms	False	True	False	True	False		
IN	Bool	false	False	True	True	True	False		
Q	Bool	false	False	True	False	True	False		

Fabrica / PLC_1 [CPU 1511-1 PN] / Program blocks / System blocks / Program resources

Mentinere_senzor_ZS12_pas12 [DB19]

Mentinere_senzor_ZS12_pas12 Properties							
General							
Name	Mentinere_sen-zor_ZS12_pas12	**Number**	19	**Type**	DB	**Language**	DB
Numbering	Automatic						
Information							
Title		**Author**	Simatic	**Comment**		**Family**	IEC
Version	1.0	**User-defined ID**	IEC_TMR				

Name	Data type	Start value	Retain	Accessible from HMI/OPC UA/Web API	Writ-able from HMI/ OPC UA/ Web API	Visible in HMI engi-neering	Setpoint	Supervi-sion	Comment
▼ Static									
PT	Time	T#0ms	False	True	True	True	False		
ET	Time	T#0ms	False	True	False	True	False		
IN	Bool	false	False	True	True	True	False		
Q	Bool	false	False	True	False	True	False		

Fabrica / PLC_1 [CPU 1511-1 PN] / Program blocks / System blocks / Program resources

Mentinere_senzor_ZS22_pas10 [DB21]

Mentinere_senzor_ZS22_pas10 Properties							
General							
Name	Mentinere_sen-zor_ZS22_pas10	**Number**	21	**Type**	DB	**Language**	DB
Numbering	Automatic						
Information							
Title		**Author**	Simatic	**Comment**		**Family**	IEC
Version	1.0	**User-defined ID**	IEC_TMR				

Name	Data type	Start value	Retain	Accessible from HMI/OPC UA/Web API	Writ-able from HMI/ OPC UA/ Web API	Visible in HMI engi-neering	Setpoint	Supervi-sion	Comment
▼ Static									
PT	Time	T#0ms	False	True	True	True	False		
ET	Time	T#0ms	False	True	False	True	False		
IN	Bool	false	False	True	True	True	False		
Q	Bool	false	False	True	False	True	False		

Fabrica / PLC_1 [CPU 1511-1 PN] / Program blocks / System blocks / Program resources

T_Sim_presiune [DB22]

T_Sim_presiune Properties							
General							
Name	T_Sim_presiune	**Number**	22	**Type**	DB	**Language**	DB
Numbering	Automatic						
Information							
Title		**Author**	Simatic	**Comment**		**Family**	IEC
Version	1.0	**User-defined ID**	IEC_TMR				

Name	Data type	Start value	Retain	Accessible from HMI/OPC UA/Web API	Writable from HMI/OPC UA/Web API	Visible in HMI engineering	Setpoint	Supervision	Comment
▼ Static									
PT	Time	T#0ms	False	True	True	True	False		
ET	Time	T#0ms	False	True	False	True	False		
IN	Bool	false	False	True	True	True	False		
Q	Bool	false	False	True	False	True	False		

Fabrica / PLC_1 [CPU 1511-1 PN] / Program blocks / System blocks / Program resources

T_Sim_4-5 [DB23]

T_Sim_4-5 Properties							
General							
Name	T_Sim_4-5	**Number**	23	**Type**	DB	**Language**	DB
Numbering	Automatic						
Information							
Title		**Author**	Simatic	**Comment**		**Family**	IEC
Version	1.0	**User-defined ID**	IEC_TMR				

Name	Data type	Start value	Retain	Accessible from HMI/OPC UA/Web API	Writable from HMI/OPC UA/Web API	Visible in HMI engineering	Setpoint	Supervision	Comment
▼ Static									
PT	Time	T#0ms	False	True	True	True	False		
ET	Time	T#0ms	False	True	False	True	False		
IN	Bool	false	False	True	True	True	False		
Q	Bool	false	False	True	False	True	False		

Fabrica / PLC_1 [CPU 1511-1 PN] / Program blocks / System blocks / Program resources

T_Sim_depresiune [DB24]

T_Sim_depresiune Properties							
General							
Name	T_Sim_depresiune	**Number**	24	**Type**	DB	**Language**	DB
Numbering	Automatic						
Information							
Title		**Author**	Simatic	**Comment**		**Family**	IEC
Version	1.0	**User-defined ID**	IEC_TMR				

Name	Data type	Start value	Retain	Accessible from HMI/OPC UA/Web API	Writable from HMI/OPC UA/Web API	Visible in HMI engineering	Setpoint	Supervision	Comment
▼ Static									
PT	Time	T#0ms	False	True	True	True	False		
ET	Time	T#0ms	False	True	False	True	False		
IN	Bool	false	False	True	True	True	False		
Q	Bool	false	False	True	False	True	False		

Fabrica / PLC_1 [CPU 1511-1 PN] / Program blocks / System blocks / Program resources

Intarziere_trecere_pasi_9-10 [DB6]

Intarziere_trecere_pasi_9-10 Properties							
General							
Name	Intarziere_trecere_pasi_9-10	**Number**	6	**Type**	DB	**Language**	DB
Numbering	Automatic						
Information							
Title		**Author**	Simatic	**Comment**		**Family**	IEC
Version	1.0	**User-defined ID**	IEC_TMR				

Name	Data type	Start value	Retain	Accessible from HMI/OPC UA/Web API	Writable from HMI/OPC UA/Web API	Visible in HMI engineering	Setpoint	Supervision	Comment
▼ Static									
PT	Time	T#0ms	False	True	True	True	False		
ET	Time	T#0ms	False	True	False	True	False		
IN	Bool	false	False	True	True	True	False		
Q	Bool	false	False	True	False	True	False		

Fabrica / PLC_1 [CPU 1511-1 PN]

Technology objects

This folder is empty.

Fabrica / PLC_1 [CPU 1511-1 PN] / PLC tags / Default tag table [128]

PLC tags

PLC tags

	Name	Data type	Address	Retain	Accessible from HMI/OPC UA/Web API	Writable from HMI/OPC UA/Web API	Visible in HMI engineering	Supervision	Comment
	System_Byte	Byte	%MB1	False	True	True	True		
	FirstScan	Bool	%M1.0	False	True	True	True		
	DiagStatusUpdate	Bool	%M1.1	False	True	True	True		
	AlwaysTRUE	Bool	%M1.2	False	True	True	True		
	AlwaysFALSE	Bool	%M1.3	False	True	True	True		
	Clock_Byte	Byte	%MB0	False	True	True	True		
	Clock_10Hz	Bool	%M0.0	False	True	True	True		
	Clock_5Hz	Bool	%M0.1	False	True	True	True		
	Clock_2.5Hz	Bool	%M0.2	False	True	True	True		
	Clock_2Hz	Bool	%M0.3	False	True	True	True		
	Clock_1.25Hz	Bool	%M0.4	False	True	True	True		
	Clock_1Hz	Bool	%M0.5	False	True	True	True		
	Clock_0.625Hz	Bool	%M0.6	False	True	True	True		
	Clock_0.5Hz	Bool	%M0.7	False	True	True	True		
	Vane_PLS_poz_init	Bool	%M10.1	False	True	True	True		
	Vane_PRS_poz_init	Bool	%M10.2	False	True	True	True		
	IN_OUT_poz_init	Bool	%M10.3	False	True	True	True		
	Porcusori _poz_initiala	Bool	%M10.0	False	True	True	True		
	PT13_Sender_Norm	Real	%MD100	False	True	True	True		
	PT13_Sender_Bar	Real	%MD104	False	True	True	True		
	PT13_Receiver_Norm	Real	%MD108	False	True	True	True		
	PT13_Receiver_Bar	Real	%MD112	False	True	True	True		
	PLS_Presiune_OK	Bool	%M10.4	False	True	True	True		
	PRS_Presiune_OK	Bool	%M10.5	False	True	True	True		
	PLS_Presiune_Prea_Mare	Bool	%M10.6	False	True	True	True		
	PRS_Presiune_Prea_Mare	Bool	%M10.7	False	True	True	True		
	Pozitie_initiala_OK	Bool	%M11.0	False	True	True	True		
	STEP_NUMBER	Int	%MW200	False	True	True	True		
	HMI_Btn_Start	Bool	%M20.0	False	True	True	True		
	HMI_Btn_Stop	Bool	%M20.1	False	True	True	True		
	HMI_Btn_Reset_Alarma	Bool	%M20.2	False	True	True	True		
	HMI_Btn_IN1	Bool	%M20.3	False	True	True	True		
	HMI_Btn_IN2	Bool	%M20.4	False	True	True	True		
	HMI_Btn_OUT1	Bool	%M21.0	False	True	True	True		
	HMI_Btn_OUT2	Bool	%M21.1	False	True	True	True		
	HMI_Btn_OUT3	Bool	%M21.2	False	True	True	True		
	IN_Selection	Int	%MW202	False	True	True	True		
	OUT_Selection	Int	%MW204	False	True	True	True		
	Traseu_Valid_OK	Bool	%M20.5	False	True	True	True		
	Vana_IN1	Bool	%Q0.0	False	True	True	True		

	Name	Data type	Address	Retain	Accessible from HMI/OPC UA/Web API	Writable from HMI/OPC UA/Web API	Visible in HMI engineering	Supervision	Comment
	Vana_IN2	Bool	%Q0.1	False	True	True	True		
	Vana_OUT1	Bool	%Q0.2	False	True	True	True		
	Vana_OUT2	Bool	%Q0.3	False	True	True	True		
	Vana_OUT3	Bool	%Q0.4	False	True	True	True		
	PLS_XV21	Bool	%Q0.5	False	True	True	True		
	PRS_XV21	Bool	%Q0.6	False	True	True	True		
	PLS_XV81	Bool	%Q1.1	False	True	True	True		
	PRS_XV81	Bool	%Q1.2	False	True	True	True		
	PLS_XV91	Bool	%Q1.3	False	True	True	True		
	PRS_XV91	Bool	%Q1.4	False	True	True	True		
	PLS_XV22	Bool	%Q0.7	False	True	True	True		
	PRS_XV22	Bool	%Q1.0	False	True	True	True		
	PLS_XV51	Bool	%Q1.5	False	True	True	True		
	PRS_XV51	Bool	%Q1.6	False	True	True	True		
	PLS_PCV51	Int	%QW2	False	True	True	True		
	PRS_PCV51	Int	%QW4	False	True	True	True		
	Bit_temp_OUT	Bool	%M123.7	False	True	True	True		
	Vane_IN_inchise	Bool	%M125.0	False	True	True	True		
	Vane_OUT_inchise	Bool	%M125.1	False	True	True	True		
	Bit_temp_step_2	Bool	%M111.0	False	True	True	True		
	Bit_temp_step_10	Bool	%M111.1	False	True	True	True		
	Sim_PLS_Presiune_Bar	Real	%MD300	False	True	True	True		
	Sim_PRS_Presiune_Bar	Real	%MD304	False	True	True	True		
	Simulation_Mode	Bool	%M21.3	False	True	True	True		
	Edge_Clock_1Hz	Bool	%M21.4	False	True	True	True		
	Pulse_1s	Bool	%M21.5	False	True	True	True		
	Debug	Bool	%M21.6	False	True	True	True		

Fabrica / PLC_1 [CPU 1511-1 PN] / PLC tags / Default tag table [128]

User constants

User constants				
	Name	Data type	Value	Comment

Fabrica / PLC_1 [CPU 1511-1 PN] / PLC tags / Inputs [42]

PLC tags

PLC tags

	Name	Data type	Address	Retain	Accessible from HMI/OPC UA/Web API	Writable from HMI/OPC UA/Web API	Visible in HMI engineering	Supervision	Comment
	IN1_Home	Bool	%I18.0	False	True	True	True		
	IN1_Work	Bool	%I18.1	False	True	True	True		
	IN2_Home	Bool	%I18.2	False	True	True	True		
	IN2_Work	Bool	%I18.3	False	True	True	True		
	OUT1_Home	Bool	%I18.4	False	True	True	True		
	OUT1_Work	Bool	%I18.5	False	True	True	True		
	OUT2_Home	Bool	%I18.6	False	True	True	True		
	OUT2_Work	Bool	%I18.7	False	True	True	True		
	OUT3_Home	Bool	%I19.0	False	True	True	True		
	OUT3_Work	Bool	%I19.1	False	True	True	True		
	PLS_XV21_Home	Bool	%I19.2	False	True	True	True		
	PLS_XV21_Work	Bool	%I19.3	False	True	True	True		
	PLS_XV22_Home	Bool	%I19.6	False	True	True	True		
	PLS_XV22_Work	Bool	%I19.7	False	True	True	True		
	PRS_XV21_Home	Bool	%I19.4	False	True	True	True		
	PRS_XV21_Work	Bool	%I19.5	False	True	True	True		
	PRS_XV22_Home	Bool	%I20.0	False	True	True	True		
	PRS_XV22_Work	Bool	%I20.1	False	True	True	True		
	PLS_XV81_Home	Bool	%I20.2	False	True	True	True		
	PLS_XV81_Work	Bool	%I20.3	False	True	True	True		
	PRS_XV81_Home	Bool	%I20.4	False	True	True	True		
	PRS_XV81_Work	Bool	%I20.5	False	True	True	True		
	PLS_XV91_Home	Bool	%I20.6	False	True	True	True		
	PLS_XV91_Work	Bool	%I20.7	False	True	True	True		
	PRS_XV91_Home	Bool	%I21.0	False	True	True	True		
	PRS_XV91_Work	Bool	%I21.1	False	True	True	True		
	PRS_XV51_Home	Bool	%I21.4	False	True	True	True		
	PRS_XV51_Work	Bool	%I21.5	False	True	True	True		
	PLS_XV51_Home	Bool	%I21.2	False	True	True	True		
	PLS_XV51_Work	Bool	%I21.3	False	True	True	True		
	ZS11	Bool	%I16.0	False	True	True	True		
	ZS12	Bool	%I16.1	False	True	True	True		
	ZS21	Bool	%I16.2	False	True	True	True		
	OUT1_ZS1	Bool	%I17.0	False	True	True	True		
	PRS_PT13_Input	Int	%IW2	False	True	True	True		
	PLS_PT13_Input	Int	%IW0	False	True	True	True		
	OUT3_ZS2	Bool	%I17.5	False	True	True	True		
	OUT3_ZS1	Bool	%I17.4	False	True	True	True		
	OUT2_ZS2	Bool	%I17.3	False	True	True	True		
	OUT2_ZS1	Bool	%I17.2	False	True	True	True		

	Name	Data type	Address	Retain	Accessible from HMI/OPC UA/Web API	Writable from HMI/OPC UA/Web API	Visible in HMI engineering	Supervision	Comment
	OUT1_ZS2	Bool	%I17.1	False	True	True	True		
	ZS22	Bool	%I16.3	False	True	True	True		

Fabrica / PLC_1 [CPU 1511-1 PN] / PLC tags / Inputs [42]

User constants

User constants				
	Name	Data type	Value	Comment

Fabrica / PLC_1 [CPU 1511-1 PN] / PLC tags / Open Library [88]

PLC tags

PLC tags

	Name	Data type	Address	Retain	Accessible from HMI/OPC UA/Web API	Writable from HMI/OPC UA/Web API	Visible in HMI engineering	Supervision	Comment

Fabrica / PLC_1 [CPU 1511-1 PN] / PLC tags / Open Library [88]

User constants

User constants				
	Name	Data type	Value	Comment
	Modes.Auto	Int	1	
	Modes.Manual	Int	2	
	Modes.Independent	Int	10	
	Modes.Stop	Int	0	
	HMI.Status.Stopped	Int	0	
	HMI.Status.Estop	Int	1	
	HMI.Status.Error	Int	2	
	HMI.Status.ForwardWork	Int	3	
	HMI.Status.ReverseHome	Int	4	
	HMI.Status.OnForwardWork	Int	5	
	HMI.Status.OnReverseHome	Int	6	
	IoScaling.S7Analog.Default.iRawMax	Int	27648	
	IoScaling.S7Analog.Default.iRawMin	Int	0	
	IoScaling.S7Analog.Default.bSwapBytes	Bool	false	
	IoScaling.S7Analog.+-V/mA.iRawMax	Int	27648	
	IoScaling.S7Analog.+-V/mA.iRawMin	Int	-27648	
	IoScaling.S7Analog.Types.Default	Int	0	
	IoScaling.S7Analog.Pt100.iRawMax	Int	8500	
	IoScaling.S7Analog.Pt100.iRawMin	Int	-2000	
	IoScaling.S7Analog.Pt100.Climate.iRawMax	Int	13000	
	IoScaling.S7Analog.Pt100.Climate.iRawMin	Int	-12000	
	IoScaling.S7Analog.Ni100.iRawMax	Int	2500	
	IoScaling.S7Analog.Ni100.iRawMin	Int	-600	
	IoScaling.S7Analog.Ni100.Climate.iRawMax	Int	25000	
	IoScaling.S7Analog.Ni100.Climate.iRawMin	Int	-6000	
	IoScaling.S7Analog.Types.+-V/mA	Int	1	
	IoScaling.S7Analog.Types.Pt100	Int	2	
	IoScaling.S7Analog.Types.Pt100.Climate	Int	3	
	IoScaling.S7Analog.Types.Ni100	Int	4	
	IoScaling.S7Analog.Types.Ni100.Climate	Int	5	
	IoScaling.S7Analog.Pt100.rScaledMax	Real	850.0	
	IoScaling.S7Analog.Pt100.rScaledMin	Real	-200.0	
	IoScaling.S7Analog.Pt100.Climate.rScaledMax	Real	130.0	
	IoScaling.S7Analog.Pt100.Climate.rScaledMin	Real	-120.0	
	IoScaling.S7Analog.Ni100.rScaledMax	Real	250.0	
	IoScaling.S7Analog.Ni100.rScaledMin	Real	-60.0	
	IoScaling.S7Analog.Ni100.Climate.rScaledMax	Real	250.0	
	IoScaling.S7Analog.Ni100.Climate.rScaledMin	Real	-60.0	
	IoScaling.S7Analog.150Ohms.rScaledMax	Real	150.0	
	IoScaling.S7Analog.150Ohms.rScaledMin	Real	0.0	
	IoScaling.S7Analog.300Ohms.rScaledMax	Real	300.0	
	IoScaling.S7Analog.300Ohms.rScaledMin	Real	0.0	
	IoScaling.S7Analog.600Ohms.rScaledMax	Real	600.0	
	IoScaling.S7Analog.600Ohms.rScaledMin	Real	0.0	
	Estop.MinSetPoint	Int	0	
	Estop.MaxSetPoint	Int	1	
	Estop.HMISetPoint	Int	2	
	Modes.PID.Inactive	Int	0	
	Modes.PID.Pretuning	Int	1	
	Modes.PID.FineTuning	Int	2	
	Modes.PID.AutoMode	Int	3	
	Modes.PID.ManualMode	Int	4	
	HMI.Status.Generic1	Int	101	
	HMI.Status.Generic2	Int	102	
	HMI.Status.Generic3	Int	103	
	HMI.Status.Generic4	Int	104	
	HMI.Status.Generic5	Int	105	
	HMI.Status.GenericNone	Int	100	

	Name	Data type	Value	Comment
	HMI.Status.Generic6	Int	106	
	DataTypes.rMaxReal	Real	3.402823e38	
	DataTypes.rMinReal	Real	-3.402823e38	
	DataTypes.iMaxInt	Int	32767	
	DataTypes.iMinInt	Int	-32768	
	Handshakes.iSize	Int	5	
	SoftStarter.Types.3RW30	Int	30	
	SoftStarter.Types.3RW40	Int	40	
	Simocode.Types.OverloadRelay	Int	0	
	Simocode.Types.DirectStarter	Int	1	
	Simocode.Types.ReversingStarter	Int	2	
	SoftStarter.HMI.Status.RampDown	Int	5	
	SoftStarter.HMI.Status.On	Int	4	
	SoftStarter.HMI.Status.RampUp	Int	3	
	SoftStarter.HMI.Status.EStop	Int	1	
	SoftStarter.HMI.Status.Off	Int	0	
	SoftStarter.HMI.Status.Error	Int	2	
	FIFO.iQueueSize	Int	5	
	FIFO.iQueueDisabled	Int	-1	
	TotalizerTimeUnits.MILLISECONDS	Int	0	
	TotalizerTimeUnits.SECONDS	Int	1	
	TotalizerTimeUnits.MINUTES	Int	2	
	TotalizerTimeUnits.HOURS	Int	3	
	TotalizerTimeUnits.DAYS	Int	4	
	HMI.Status.SimulatedForwardWork	Int	7	
	HMI.Status.SimulatedOnForwardWork	Int	9	
	HMI.Status.SimulatedReverseHome	Int	8	
	HMI.Status.SimulatedOnReverseHome	Int	10	
	Ramp.Continuous	Int	0	
	Ramp.Timed	Int	1	

Fabrica / PLC_1 [CPU 1511-1 PN] / PLC data types / Open Library V19 / Data Types / Error

udtError_Valve [udtError_Valve V 3.0.0 default]

udtError_Valve Properties							
General							
Name	udtError_Valve	**Number**	6	**Type**	UDT	**Language**	
Numbering							
Information							
Title		**Author**		**Comment**		**Family**	
Version		**User-defined ID**					

Name	Data type	Default value	Accessible from HMI/OPC UA/Web API	Writable from HMI/OPC UA/Web API	Visible in HMI engi-neering	Setpoint	Supervi-sion	Comment
NoHomeFeedback	Bool	false	True	False	True	False		Home position feedback not active
NoWorkFeedback	Bool	false	True	False	True	False		Work position feedback not active
HomeFeedbackStillActive	Bool	false	True	False	True	False		Home position feedback still active
WorkFeedbackStillActive	Bool	false	True	False	True	False		Work position feedback still active

Fabrica / PLC_1 [CPU 1511-1 PN] / PLC data types / Open Library V19 / Data Types / Error

udtError_AnalogValve [udtError_AnalogValve V 3.0.0 default]

udtError_AnalogValve Properties							
General							
Name	udtError_AnalogValve	**Number**	14	**Type**	UDT	**Language**	
Numbering							
Information							
Title		**Author**		**Comment**		**Family**	
Version		**User-defined ID**					

Name	Data type	Default value	Accessible from HMI/OPC UA/Web API	Writable from HMI/OPC UA/Web API	Visible in HMI engineering	Setpoint	Supervision	Comment
InvalidFeedback	Bool	false	True	False	True	False		Valve feedback is not within command tolerance

Fabrica / PLC_1 [CPU 1511-1 PN] / PLC data types / Open Library V19 / Data Types / HMI

udtHMI_ValveControl [udtHMI_ValveControl V 3.0.0 default]

udtHMI_ValveControl Properties							
General							
Name	udtHMI_ValveControl	**Number**	5	**Type**	UDT	**Language**	
Numbering							
Information							
Title		**Author**		**Comment**		**Family**	
Version		**User-defined ID**					

Name	Data type	Default value	Accessible from HMI/OPC UA/Web API	Writable from HMI/OPC UA/Web API	Visible in HMI engineering	Setpoint	Supervision	Comment
iMode	Int	0	True	True	True	False		Current mode
iErrorCode	Int	0	True	False	True	False		Error code
iStatus	Int	0	True	False	True	False		Status for HMI display
bPB_ResetError	Bool	false	True	True	True	False		PB Reset block errors
bPB_Home	Bool	false	True	True	True	False		PB Move to home in manual mode
bPB_Work	Bool	false	True	True	True	False		PB Move to work in manual mode
bPBEN_ResetError	Bool	false	True	False	True	False		PB Reset error enabled
bPBEN_Home	Bool	false	True	False	True	False		PB Home enabled
bPBEN_Work	Bool	false	True	False	True	False		PB Work enabled
bHomeOn	Bool	false	True	False	True	False		Home command is on
bWorkOn	Bool	false	True	False	True	False		Work command is on
bSignalHome	Bool	false	True	False	True	False		Home feedback
bSignalWork	Bool	false	True	False	True	False		Work feedback
bError	Bool	false	True	False	True	False		Error status
bInterlock	Bool	false	True	False	True	False		Valve interlocked

Fabrica / PLC_1 [CPU 1511-1 PN] / PLC data types / Open Library V19 / Data Types / HMI

udtHMI_AnalogValveControl [udtHMI_AnalogValveControl V 3.0.0 default]

udtHMI_AnalogValveControl Properties							
General							
Name	udtHMI_AnalogValveControl	**Number**	13	**Type**	UDT	**Language**	
Numbering							
Information							
Title		**Author**		**Comment**		**Family**	
Version		**User-defined ID**					

Name	Data type	Default value	Accessible from HMI/OPC UA/Web API	Writable from HMI/OPC UA/Web API	Visible in HMI engineering	Setpoint	Supervision	Comment
iMode	Int	0	True	True	True	False		Current mode
iErrorCode	Int	0	True	False	True	False		Error code
iStatus	Int	0	True	False	True	False		Color status for HMI
rManualSP	Real	0.0	True	True	True	True		Set point for manual mode
rAutoSP	Real	0.0	True	False	True	False		Set point for automatic mode
rEstopSP	Real	0.0	True	True	True	True		Set point for an e-stop condition, if selected
rActual	Real	0.0	True	False	True	False		Actual value
bPB_ResetError	Bool	false	True	True	True	False		PB Reset errors
bPBEN_ResetError	Bool	false	True	False	True	False		PB reset errors enable
bError	Bool	false	True	False	True	False		Overall error
bInterlock	Bool	false	True	False	True	False		Valve Interlocked
iEstopFunction	Int	0	True	True	True	True		Enum of E-Stop repsonse (Estop.xxx)

Fabrica / PLC_1 [CPU 1511-1 PN] / PLC data types / Open Library V19 / Data Types / Process

udtHandshake [udtHandshake V 3.0.0 default]

udtHandshake Properties							
General							
Name	udtHandshake	**Number**	300	**Type**	UDT	**Language**	
Numbering							
Information							
Title		**Author**		**Comment**		**Family**	
Version		**User-defined ID**					

Name	Data type	Default value	Accessible from HMI/OPC UA/Web API	Writable from HMI/OPC UA/Web API	Visible in HMI engineering	Setpoint	Supervision	Comment
bConnect	Bool	false	True	False	True	False		Connect request
bRequest	Bool	false	True	False	True	False		Delivery request
bRequestFast	Bool	false	True	False	True	False		Delivery fast request
iQueue	Int	0	True	False	True	False		Number in queue
iPriority	Int	0	True	False	True	False		Priority number, 0 = default
rSetPoint	Real	0.0	True	False	True	False		Requested amount

Fabrica / PLC_1 [CPU 1511-1 PN] / PLC data types / Open Library V19 / Data Types / Process

udtHandshakes [udtHandshakes V 3.0.0 default]

udtHandshakes Properties							
General							
Name	udtHandshakes	**Number**	310	**Type**	UDT	**Language**	
Numbering							
Information							
Title		**Author**		**Comment**		**Family**	
Version		**User-defined ID**					

Name	Data type	Default value	Accessible from HMI/OPC UA/Web API	Writable from HMI/OPC UA/Web API	Visible in HMI engineering	Setpoint	Supervision	Comment
bDelivering	Bool	false	True	False	True	False		Delivery in progress
bSystemReady	Bool	false	True	False	True	False		System not ready for selection
iSelected	Int	0	True	False	True	False		Currently selected queue item
rActual	Real	0.0	True	False	True	False		Delivered actual value
Handshake	Array[1.."Handshakes.iSize"] of "udtHandshake"		True	False	True	True		Requests array
Handshake[1]	"udtHandshake"		True	False	True	True		Requests array
bConnect	Bool	false	True	False	True	False		Connect request
bRequest	Bool	false	True	False	True	False		Delivery request
bRequestFast	Bool	false	True	False	True	False		Delivery fast request
iQueue	Int	0	True	False	True	False		Number in queue
iPriority	Int	0	True	False	True	False		Priority number, 0 = default
rSetPoint	Real	0.0	True	False	True	False		Requested amount
Handshake[2]	"udtHandshake"		True	False	True	True		Requests array
bConnect	Bool	false	True	False	True	False		Connect request
bRequest	Bool	false	True	False	True	False		Delivery request
bRequestFast	Bool	false	True	False	True	False		Delivery fast request
iQueue	Int	0	True	False	True	False		Number in queue
iPriority	Int	0	True	False	True	False		Priority number, 0 = default
rSetPoint	Real	0.0	True	False	True	False		Requested amount
Handshake[3]	"udtHandshake"		True	False	True	True		Requests array
bConnect	Bool	false	True	False	True	False		Connect request
bRequest	Bool	false	True	False	True	False		Delivery request
bRequestFast	Bool	false	True	False	True	False		Delivery fast request
iQueue	Int	0	True	False	True	False		Number in queue
iPriority	Int	0	True	False	True	False		Priority number, 0 = default
rSetPoint	Real	0.0	True	False	True	False		Requested amount
Handshake[4]	"udtHandshake"		True	False	True	True		Requests array
bConnect	Bool	false	True	False	True	False		Connect request
bRequest	Bool	false	True	False	True	False		Delivery request
bRequestFast	Bool	false	True	False	True	False		Delivery fast request
iQueue	Int	0	True	False	True	False		Number in queue
iPriority	Int	0	True	False	True	False		Priority number, 0 = default
rSetPoint	Real	0.0	True	False	True	False		Requested amount

Name	Data type	Default value	Accessible from HMI/OPC UA/Web API	Writable from HMI/OPC UA/Web API	Visible in HMI engineering	Setpoint	Supervision	Comment
▼ Handshake[5]	"udtHandshake"		True	False	True	True		Requests array
bConnect	Bool	false	True	False	True	False		Connect request
bRequest	Bool	false	True	False	True	False		Delivery request
bRequestFast	Bool	false	True	False	True	False		Delivery fast request
iQueue	Int	0	True	False	True	False		Number in queue
iPriority	Int	0	True	False	True	False		Priority number, 0 = default
rSetPoint	Real	0.0	True	False	True	False		Requested amount

Fabrica / PLC_1 [CPU 1511-1 PN] / PLC data types / Open Library V19 / Data Types / Process

udtQueueItem [udtQueueItem V 3.0.0 default]

udtQueueItem Properties							
General							
Name	udtQueueItem	**Number**	1	**Type**	UDT	**Language**	
Numbering							
Information							
Title		**Author**		**Comment**		**Family**	
Version		**User-defined ID**					

Name	Data type	Default value	Accessible from HMI/OPC UA/Web API	Writable from HMI/OPC UA/Web API	Visible in HMI engineering	Setpoint	Supervision	Comment
bQueueRequest	Bool	false	True	False	True	False		Request to be queued
iQueuePosition	Int	0	True	False	True	False		Position in the queue
iPriority	Int	0	True	False	True	False		Priority number, 0 = default/none

Fabrica / PLC_1 [CPU 1511-1 PN] / PLC data types / Open Library V19 / Data Types / Process

udtQueue [udtQueue V 3.0.0 default]

udtQueue Properties							
General							
Name	udtQueue	**Number**	3	**Type**	UDT	**Language**	
Numbering							
Information							
Title		**Author**		**Comment**		**Family**	
Version		**User-defined ID**					

Name	Data type	Default value	Accessible from HMI/OPC UA/Web API	Writable from HMI/OPC UA/Web API	Visible in HMI engineering	Setpoint	Supervision	Comment
bEnabled	Bool	false	True	False	True	False		Queue is enabled for dequeuing
iQueuedCount	Int	0	True	False	True	False		Number of items in the queue
iSelectedItem	Int	0	True	False	True	False		Currently selected queue item
▼ Item	Array[1.."FIFO.iQueueSize"] of "udtQueueItem"		True	False	True	True		The queue
▼ Item[1]	"udtQueueItem"		True	False	True	True		The queue
bQueueRequest	Bool	false	True	False	True	False		Request to be queued
iQueuePosition	Int	0	True	False	True	False		Position in the queue
iPriority	Int	0	True	False	True	False		Priority number, 0 = default/none
▼ Item[2]	"udtQueueItem"		True	False	True	True		The queue
bQueueRequest	Bool	false	True	False	True	False		Request to be queued
iQueuePosition	Int	0	True	False	True	False		Position in the queue
iPriority	Int	0	True	False	True	False		Priority number, 0 = default/none
▼ Item[3]	"udtQueueItem"		True	False	True	True		The queue
bQueueRequest	Bool	false	True	False	True	False		Request to be queued
iQueuePosition	Int	0	True	False	True	False		Position in the queue
iPriority	Int	0	True	False	True	False		Priority number, 0 = default/none
▼ Item[4]	"udtQueueItem"		True	False	True	True		The queue
bQueueRequest	Bool	false	True	False	True	False		Request to be queued
iQueuePosition	Int	0	True	False	True	False		Position in the queue
iPriority	Int	0	True	False	True	False		Priority number, 0 = default/none
▼ Item[5]	"udtQueueItem"		True	False	True	True		The queue
bQueueRequest	Bool	false	True	False	True	False		Request to be queued
iQueuePosition	Int	0	True	False	True	False		Position in the queue
iPriority	Int	0	True	False	True	False		Priority number, 0 = default/none

Fabrica / PLC_1 [CPU 1511-1 PN] / PLC data types / Open Library V19 / Data Types / Process

udtAnyPointer [udtAnyPointer V 3.0.0 default]

udtAnyPointer Properties							
General							
Name	udtAnyPointer	**Number**	252	**Type**	UDT	**Language**	
Numbering							
Information							
Title		**Author**		**Comment**		**Family**	
Version		**User-defined ID**					

Name	Data type	Default value	Accessible from HMI/OPC UA/Web API	Writable from HMI/OPC UA/Web API	Visible in HMI engineering	Setpoint	Supervision	Comment
bySyntaxID	Byte	16#0	False	False	False	False		Always 10 Hex
byDataTypeBasic	Byte	16#0	False	False	False	False		Code for data type
wLength	Word	16#0	False	False	False	False		Number of Byte
wDBNumber	Word	16#0	False	False	False	False		Number of DB
dwAddress	DWord	16#0	False	False	False	False		Pointer to bit and byte address

Fabrica / PLC_1 [CPU 1511-1 PN] / PLC data types / Open Library V19 / Data Types / Process

udtContC_C [udtContC_C V 3.0.0 default]

udtContC_C Properties							
General							
Name	udtContC_C	**Number**	422	**Type**	UDT	**Language**	
Numbering							
Information							
Title		**Author**		**Comment**		**Family**	
Version		**User-defined ID**					

Name	Data type	Default value	Accessible from HMI/OPC UA/Web API	Writable from HMI/OPC UA/Web API	Visible in HMI engineering	Setpoint	Supervision	Comment
COM_RST	Bool	false	True	True	True	False		
MAN_ON	Bool	false	True	True	True	False		
PVPER_ON	Bool	false	True	True	True	False		
P_SEL	Bool	false	True	True	True	False		
I_SEL	Bool	false	True	True	True	False		
P_SEL	Bool	false	True	True	True	False		
I_SEL	Bool	false	True	True	True	False		
INT_HOLD	Bool	false	True	True	True	False		
I_ITL_ON	Bool	false	True	True	True	False		
D_SEL	Bool	false	True	True	True	False		
CYCLE	Time	T#0ms	True	True	True	False		
SP_INT	Real	0.0	True	True	True	False		
PV_IN	Real	0.0	True	True	True	False		
PV_PER	Word	16#0	True	True	True	False		
MAN	Real	0.0	True	True	True	False		
GAIN	Real	0.0	True	True	True	False		
TI	Time	T#0ms	True	True	True	False		
TD	Time	T#0ms	True	True	True	False		
TM_LAG	Time	T#0ms	True	True	True	False		
DEADB_W	Real	0.0	True	True	True	False		
LMN_HLM	Real	0.0	True	True	True	False		
LMN_LLM	Real	0.0	True	True	True	False		
PV_FAC	Real	0.0	True	True	True	False		
PV_OFF	Real	0.0	True	True	True	False		
LMN_FAC	Real	0.0	True	True	True	False		
LMN_OFF	Real	0.0	True	True	True	False		
I_ITLVAL	Real	0.0	True	True	True	False		
DISV	Real	0.0	True	True	True	False		

Fabrica / PLC_1 [CPU 1511-1 PN] / PLC data types / Open Library V19 / Data Types / Process

udtContC_S [udtContC_S V 3.0.0 default]

udtContC_S Properties							
General							
Name	udtContC_S	**Number**	423	**Type**	UDT	**Language**	
Numbering							
Information							
Title		**Author**		**Comment**		**Family**	
Version		**User-defined ID**					

Name	Data type	Default value	Accessible from HMI/OPC UA/Web API	Writable from HMI/OPC UA/Web API	Visible in HMI engineering	Setpoint	Supervision	Comment
LMN	Real	0.0	True	True	True	False		
LMN_PER	Word	16#0	True	True	True	False		
QLMN_HLM	Bool	false	True	True	True	False		
QLMN_LLM	Bool	false	True	True	True	False		
LMN_P	Real	0.0	True	True	True	False		
LMN_I	Real	0.0	True	True	True	False		
LMN_D	Real	0.0	True	True	True	False		
PV	Real	0.0	True	True	True	False		
ER	Real	0.0	True	True	True	False		

Fabrica / PLC_1 [CPU 1511-1 PN] / PLC data types / Open Library V19 / Data Types / Process

udtContC [udtContC V 3.0.0 default]

udtContC Properties							
General							
Name	udtContC	**Number**	421	**Type**	UDT	**Language**	
Numbering							
Information							
Title		**Author**		**Comment**		**Family**	
Version		**User-defined ID**					

Name	Data type	Default value	Accessible from HMI/OPC UA/Web API	Writable from HMI/OPC UA/Web API	Visible in HMI engineering	Setpoint	Supervision	Comment
▼ Control	"udtContC_C"		True	True	True	True		
COM_RST	Bool	false	True	True	True	False		
MAN_ON	Bool	false	True	True	True	False		
PVPER_ON	Bool	false	True	True	True	False		
P_SEL	Bool	false	True	True	True	False		
I_SEL	Bool	false	True	True	True	False		
INT_HOLD	Bool	false	True	True	True	False		
I_ITL_ON	Bool	false	True	True	True	False		
D_SEL	Bool	false	True	True	True	False		
CYCLE	Time	T#0ms	True	True	True	False		
SP_INT	Real	0.0	True	True	True	False		
PV_IN	Real	0.0	True	True	True	False		
PV_PER	Word	16#0	True	True	True	False		
MAN	Real	0.0	True	True	True	False		
GAIN	Real	0.0	True	True	True	False		
TI	Time	T#0ms	True	True	True	False		
TD	Time	T#0ms	True	True	True	False		
TM_LAG	Time	T#0ms	True	True	True	False		
DEADB_W	Real	0.0	True	True	True	False		
LMN_HLM	Real	0.0	True	True	True	False		
LMN_LLM	Real	0.0	True	True	True	False		
PV_FAC	Real	0.0	True	True	True	False		
PV_OFF	Real	0.0	True	True	True	False		
LMN_FAC	Real	0.0	True	True	True	False		
LMN_OFF	Real	0.0	True	True	True	False		
I_ITLVAL	Real	0.0	True	True	True	False		
DISV	Real	0.0	True	True	True	False		
▼ Status	"udtContC_S"		True	True	True	True		
LMN	Real	0.0	True	True	True	False		
LMN_PER	Word	16#0	True	True	True	False		
QLMN_HLM	Bool	false	True	True	True	False		
QLMN_LLM	Bool	false	True	True	True	False		
LMN_P	Real	0.0	True	True	True	False		
LMN_I	Real	0.0	True	True	True	False		
LMN_D	Real	0.0	True	True	True	False		
PV	Real	0.0	True	True	True	False		
ER	Real	0.0	True	True	True	False		

Fabrica / PLC_1 [CPU 1511-1 PN] / PLC data types / Open Library V19 / Data Types / Process

udtModbusTCPTransaction [udtModbusTCPTransaction V 0.0.1 default]

udtModbusTCPTransaction Properties							
General							
Name	udtModbusTCPTransaction	**Number**	169	**Type**	UDT	**Language**	
Numbering							
Information							
Title		**Author**		**Comment**		**Family**	
Version		**User-defined ID**					

Name	Data type	Default value	Accessible from HMI/OPC UA/Web API	Writable from HMI/OPC UA/Web API	Visible in HMI engineering	Setpoint	Supervision	Comment
usiMode	USInt	0	True	True	True	False		0 = read; 1 = write
udiStartAddress	UDInt	0	True	True	True	False		
uiLength	UInt	0	True	True	True	False		

Fabrica / PLC_1 [CPU 1511-1 PN] / PLC data types

System data types

This folder is empty.

Fabrica / PLC_1 [CPU 1511-1 PN] / Watch and force tables

Force table

Name	Address	Display format	Force value	Comment

Fabrica / PLC_1 [CPU 1511-1 PN] / Watch and force tables

Watch table_1

Name	Address	Display format	Modify value	Comment
"STEP_NUMBER"	%MW200	DEC+/-	1	
"Simulation_Mode"	%M21.3	Bool	TRUE	
"IN_Selection"	%MW202	DEC+/-	1	
"OUT_Selection"	%MW204	DEC+/-	1	
"HMI_Btn_Start"	%M20.0	Bool	TRUE	
"Pozitie_initiala_OK"	%M11.0	Bool		
"Traseu_Valid_OK"	%M20.5	Bool		
"Porcusori _poz_initiala"	%M10.0	Bool		
"Vane_PRS_poz_init"	%M10.2	Bool		
"Vane_PLS_poz_init"	%M10.1	Bool		
"IN_OUT_poz_init"	%M10.3	Bool		
"Sim_PLS_Presiune_Bar"	%MD300	Floating-point number		
"Debug"	%M21.6	Bool		

Fabrica / PLC_1 [CPU 1511-1 PN]

Traces

Name

Fabrica / PLC_1 [CPU 1511-1 PN] / Traces

Measurements

This folder is empty.

Fabrica / PLC_1 [CPU 1511-1 PN] / Traces

Combined measurements

Name

Fabrica / PLC_1 [CPU 1511-1 PN] / Traces / Long-term traces

Measurements

This folder is empty.

Fabrica / PLC_1 [CPU 1511-1 PN] / Traces / Long-term traces

Combined measurements

This folder is empty.

Fabrica / PLC_1 [CPU 1511-1 PN] / OPC UA communication

Server interfaces

This folder is empty.

Fabrica / PLC_1 [CPU 1511-1 PN] / OPC UA communication

Client interfaces

This folder is empty.

Fabrica / PLC_1 [CPU 1511-1 PN]

Web applications

This folder is empty.

Fabrica / PLC_1 [CPU 1511-1 PN] / PLC supervisions & alarms

Supervisions

This folder is empty.

Fabrica / PLC_1 [CPU 1511-1 PN] / PLC supervisions & alarms

PLC alarms

PLC alarms
No entries

Fabrica / PLC_1 [CPU 1511-1 PN] / PLC supervisions & alarms

System alarms

System alarms			
Name	SDIAG_ALCAT_SUBMODUL_MSG_0002	**Type**	PLC alarm
ID	2	**Location**	PLC_1
Alarm text	Error: @1W%t#7W@ @5W%t#7W@ @6W%t#257K@ / @6W%t#258K@.@6W%t#259K@ @6W%t#262K@ @6W%t#263K@	**Info text**	Short name: @6W%t#260K@ Order number: @6W%t#265K@
Alarm class	No Acknowledgement	**Acknowledgment**	False
Information only	True	**Priority**	0
Report	False	**Created by**	System diagnostics
Date created	7/22/2026 8:45 AM	**Last change**	7/22/2026 8:45 AM
Group ID	0	**Additional text 1**	PLC_1
Additional text 2		**Additional text 3**	
Additional text 4		**Additional text 5**	
Additional text 6		**Additional text 7**	
Additional text 8		**Additional text 9**	
Name	SDIAG_ALCAT_MODUL_MSG_0003	**Type**	PLC alarm
ID	3	**Location**	PLC_1
Alarm text	Error: @1W%t#7W@ @5W%t#7W@ @6W%t#257K@ / @6W%t#258K@ @6W%t#262K@ @6W%t#263K@	**Info text**	Short name: @6W%t#260K@ Order number: @6W%t#265K@
Alarm class	No Acknowledgement	**Acknowledgment**	False
Information only	True	**Priority**	0
Report	False	**Created by**	System diagnostics
Date created	7/22/2026 8:45 AM	**Last change**	7/22/2026 8:45 AM
Group ID	0	**Additional text 1**	PLC_1
Additional text 2		**Additional text 3**	
Additional text 4		**Additional text 5**	
Additional text 6		**Additional text 7**	
Additional text 8		**Additional text 9**	
Name	SDIAG_ALCAT_RACK_MSG_0004	**Type**	PLC alarm
ID	4	**Location**	PLC_1
Alarm text	Error: @1W%t#7W@ @5W%t#7W@ @6W%t#257K@ @6W%t#262K@ @6W%t#263K@	**Info text**	Short name: @6W%t#260K@ Order number: @6W%t#265K@
Alarm class	No Acknowledgement	**Acknowledgment**	False
Information only	True	**Priority**	0
Report	False	**Created by**	System diagnostics
Date created	7/22/2026 8:45 AM	**Last change**	7/22/2026 8:45 AM
Group ID	0	**Additional text 1**	PLC_1
Additional text 2		**Additional text 3**	
Additional text 4		**Additional text 5**	
Additional text 6		**Additional text 7**	
Additional text 8		**Additional text 9**	
Name	SDIAG_ALCAT_DEVICE_MSG_0005	**Type**	PLC alarm
ID	5	**Location**	PLC_1
Alarm text	Error: @1W%t#7W@ @5W%t#7W@ @6W%t#257K@ @6W%t#262K@ @6W%t#263K@ @8W%t#7W@	**Info text**	Short name: @6W%t#260K@ Order number: @6W%t#265K@
Alarm class	No Acknowledgement	**Acknowledgment**	False
Information only	True	**Priority**	0
Report	False	**Created by**	System diagnostics
Date created	7/22/2026 8:45 AM	**Last change**	7/22/2026 8:45 AM
Group ID	0	**Additional text 1**	PLC_1
Additional text 2		**Additional text 3**	
Additional text 4		**Additional text 5**	
Additional text 6		**Additional text 7**	
Additional text 8		**Additional text 9**	
Name	SDIAG_ALCAT_IOSYSTEM_MSG_0006	**Type**	PLC alarm
ID	6	**Location**	PLC_1
Alarm text	Error: @1W%t#7W@ @5W%t#7W@ @6W%t#276K@ @6W%t#262K@ @6W%t#263K@ @8W%t#7W@	**Info text**	Short name: @6W%t#260K@ Order number: @6W%t#265K@
Alarm class	No Acknowledgement	**Acknowledgment**	False
Information only	True	**Priority**	0
Report	False	**Created by**	System diagnostics
Date created	7/22/2026 8:45 AM	**Last change**	7/22/2026 8:45 AM
Group ID	0	**Additional text 1**	PLC_1
Additional text 2		**Additional text 3**	
Additional text 4		**Additional text 5**	
Additional text 6		**Additional text 7**	
Additional text 8		**Additional text 9**	
Name	SDIAG_ALCAT_CPU_OST_MSG_000D	**Type**	PLC alarm
ID	13	**Location**	PLC_1
Alarm text	CPU status message: @1W%t#7W@ @5W%t#7W@ @6W%t#257K@ / @6W%t#258K@ @6W%t#262K@ @6W%t#263K@ @8W%t#7W@	**Info text**	Short name: @6W%t#260K@ Order number: @6W%t#265K@
Alarm class	No Acknowledgement	**Acknowledgment**	False
Information only	True	**Priority**	0
Report	False	**Created by**	System diagnostics
Date created	7/22/2026 8:45 AM	**Last change**	7/22/2026 8:45 AM
Group ID	0	**Additional text 1**	PLC_1
Additional text 2		**Additional text 3**	
Additional text 4		**Additional text 5**	
Additional text 6		**Additional text 7**	
Additional text 8		**Additional text 9**	
Name	SDIAG_ALCAT_CPU_INFO_MSG_000F	**Type**	PLC alarm

ID	15	**Location**	PLC_1
Alarm text	CPU info: @1W%t#7W@ @5W%t#7W@ @6W%t#257K@ / @6W%t#258K@ @6W%t#262K@ @6W%t#263K@ @8W%t#7W@	**Info text**	Short name: @6W%t#260K@ Order number: @6W%t#265K@
Alarm class	No Acknowledgement	**Acknowledgment**	False
Information only	True	**Priority**	0
Report	False	**Created by**	System diagnostics
Date created	7/22/2026 8:45 AM	**Last change**	7/22/2026 8:45 AM
Group ID	0	**Additional text 1**	PLC_1
Additional text 2		**Additional text 3**	
Additional text 4		**Additional text 5**	
Additional text 6		**Additional text 7**	
Additional text 8		**Additional text 9**	
Name	SDIAG_ALCAT_CPU_ERR_MSG_0010	**Type**	PLC alarm
ID	16	**Location**	PLC_1
Alarm text	CPU error: @1W%t#7W@ @5W%t#7W@ @6W%t#257K@ / @6W%t#258K@ @6W%t#262K@ @6W%t#263K@ @8W%t#7W@	**Info text**	Short name: @6W%t#260K@ Order number: @6W%t#265K@
Alarm class	No Acknowledgement	**Acknowledgment**	False
Information only	True	**Priority**	0
Report	False	**Created by**	System diagnostics
Date created	7/22/2026 8:45 AM	**Last change**	7/22/2026 8:45 AM
Group ID	0	**Additional text 1**	PLC_1
Additional text 2		**Additional text 3**	
Additional text 4		**Additional text 5**	
Additional text 6		**Additional text 7**	
Additional text 8		**Additional text 9**	
Name	SDIAG_ALCAT_CPU_MD_MSG_0011	**Type**	PLC alarm
ID	17	**Location**	PLC_1
Alarm text	CPU maintenance demanded: @1W%t#7W@ @6W%t#257K@ / @5W%t#7W@ @6W%t#258K@ @6W%t#262K@ @6W%t#263K@ @8W%t#7W@	**Info text**	Short name: @6W%t#260K@ Order number: @6W%t#265K@
Alarm class	No Acknowledgement	**Acknowledgment**	False
Information only	True	**Priority**	0
Report	False	**Created by**	System diagnostics
Date created	7/22/2026 8:45 AM	**Last change**	7/22/2026 8:45 AM
Group ID	0	**Additional text 1**	PLC_1
Additional text 2		**Additional text 3**	
Additional text 4		**Additional text 5**	
Additional text 6		**Additional text 7**	
Additional text 8		**Additional text 9**	
Name	SDIAG_ALCAT_CPU_MR_MSG1_0012	**Type**	PLC alarm
ID	18	**Location**	PLC_1
Alarm text	CPU maintenance required: @1W%t#7W@ @6W%t#257K@ / @5W%t#7W@ @6W%t#258K@ @6W%t#262K@ @6W%t#263K@ @8W%t#7W@	**Info text**	Short name: @6W%t#260K@ Order number: @6W%t#265K@
Alarm class	No Acknowledgement	**Acknowledgment**	False
Information only	True	**Priority**	0
Report	False	**Created by**	System diagnostics
Date created	7/22/2026 8:45 AM	**Last change**	7/22/2026 8:45 AM
Group ID	0	**Additional text 1**	PLC_1
Additional text 2		**Additional text 3**	
Additional text 4		**Additional text 5**	
Additional text 6		**Additional text 7**	
Additional text 8		**Additional text 9**	
Name	SDIAG_ALCAT_CPU_TMPERR_MSG_0013	**Type**	PLC alarm
ID	19	**Location**	PLC_1
Alarm text	Temporary CPU error: @1W%t#7W@ @5W%t#7W@ @6W%t#257K@ / @6W%t#258K@ @6W%t#262K@ @6W%t#263K@ @8W%t#7W@	**Info text**	Short name: @6W%t#260K@ Order number: @6W%t#265K@
Alarm class	No Acknowledgement	**Acknowledgment**	False
Information only	True	**Priority**	0
Report	False	**Created by**	System diagnostics
Date created	7/22/2026 8:45 AM	**Last change**	7/22/2026 8:45 AM
Group ID	0	**Additional text 1**	PLC_1
Additional text 2		**Additional text 3**	
Additional text 4		**Additional text 5**	
Additional text 6		**Additional text 7**	
Additional text 8		**Additional text 9**	
Name	SDIAG_ALCAT_CH_ERR_MSG_0015	**Type**	PLC alarm
ID	21	**Location**	PLC_1
Alarm text	Error: @1W%t#7W@ on @8W%t#280K@ @6W%t#257K@ / @6W%t#258K@.@6W%t#259K@ @6W%t#262K@ @6W%t#263K@	**Info text**	Short name: @6W%t#260K@ Order number: @6W%t#265K@
Alarm class	No Acknowledgement	**Acknowledgment**	False
Information only	True	**Priority**	0
Report	False	**Created by**	System diagnostics
Date created	7/22/2026 8:45 AM	**Last change**	7/22/2026 8:45 AM
Group ID	0	**Additional text 1**	PLC_1
Additional text 2		**Additional text 3**	
Additional text 4		**Additional text 5**	
Additional text 6		**Additional text 7**	
Additional text 8		**Additional text 9**	
Name	SDIAG_ALCAT_ECH_ERR_MSG_0016	**Type**	PLC alarm
ID	22	**Location**	PLC_1
Alarm text	Error: @1W%t#7W@ - @5W%t#7W@ on @8W%t#280K@ @6W%t#257K@ / @6W%t#258K@.@6W%t#259K@ @6W%t#262K@ @6W%t#263K@	**Info text**	Short name: @6W%t#260K@ Order number: @6W%t#265K@

Alarm class	No Acknowledgement	**Acknowledgment**	False
Information only	True	**Priority**	0
Report	False	**Created by**	System diagnostics
Date created	7/22/2026 8:45 AM	**Last change**	7/22/2026 8:45 AM
Group ID	0	**Additional text 1**	PLC_1
Additional text 2		**Additional text 3**	
Additional text 4		**Additional text 5**	
Additional text 6		**Additional text 7**	
Additional text 8		**Additional text 9**	
Name	SDIAG_ALCAT_CH_MD_MSG_0018	**Type**	PLC alarm
ID	24	**Location**	PLC_1
Alarm text	Maintenance demanded:@1W%t#7W@ on @8W%t#280K@ @6W%t#257K@ / @6W%t#258K@.@6W%t#259K@ @6W%t#262K@ @6W%t#263K@	**Info text**	Short name: @6W%t#260K@ Order number: @6W%t#265K@
Alarm class	No Acknowledgement	**Acknowledgment**	False
Information only	True	**Priority**	0
Report	False	**Created by**	System diagnostics
Date created	7/22/2026 8:45 AM	**Last change**	7/22/2026 8:45 AM
Group ID	0	**Additional text 1**	PLC_1
Additional text 2		**Additional text 3**	
Additional text 4		**Additional text 5**	
Additional text 6		**Additional text 7**	
Additional text 8		**Additional text 9**	
Name	SDIAG_ALCAT_ECH_MD_MSG_0019	**Type**	PLC alarm
ID	25	**Location**	PLC_1
Alarm text	Maintenance demanded:@1W%t#7W@ - @5W%t#7W@ on @8W%t#280K@ @6W%t#257K@ / @6W%t#258K@.@6W%t#259K@ @6W%t#262K@ @6W%t#263K@	**Info text**	Short name: @6W%t#260K@ Order number: @6W%t#265K@
Alarm class	No Acknowledgement	**Acknowledgment**	False
Information only	True	**Priority**	0
Report	False	**Created by**	System diagnostics
Date created	7/22/2026 8:45 AM	**Last change**	7/22/2026 8:45 AM
Group ID	0	**Additional text 1**	PLC_1
Additional text 2		**Additional text 3**	
Additional text 4		**Additional text 5**	
Additional text 6		**Additional text 7**	
Additional text 8		**Additional text 9**	
Name	SDIAG_ALCAT_CH_MR_MSG_001B	**Type**	PLC alarm
ID	27	**Location**	PLC_1
Alarm text	Maintenance required:@1W%t#7W@ on @8W%t#280K@ @6W%t#257K@ / @6W%t#258K@.@6W%t#259K@ @6W%t#262K@ @6W%t#263K@	**Info text**	Short name: @6W%t#260K@ Order number: @6W%t#265K@
Alarm class	No Acknowledgement	**Acknowledgment**	False
Information only	True	**Priority**	0
Report	False	**Created by**	System diagnostics
Date created	7/22/2026 8:45 AM	**Last change**	7/22/2026 8:45 AM
Group ID	0	**Additional text 1**	PLC_1
Additional text 2		**Additional text 3**	
Additional text 4		**Additional text 5**	
Additional text 6		**Additional text 7**	
Additional text 8		**Additional text 9**	
Name	SDIAG_ALCAT_ECH_MR_MSG_001C	**Type**	PLC alarm
ID	28	**Location**	PLC_1
Alarm text	Maintenance required:@1W%t#7W@ - @5W%t#7W@ on @8W%t#280K@ @6W%t#257K@ / @6W%t#258K@.@6W%t#259K@ @6W%t#262K@ @6W%t#263K@	**Info text**	Short name: @6W%t#260K@ Order number: @6W%t#265K@
Alarm class	No Acknowledgement	**Acknowledgment**	False
Information only	True	**Priority**	0
Report	False	**Created by**	System diagnostics
Date created	7/22/2026 8:45 AM	**Last change**	7/22/2026 8:45 AM
Group ID	0	**Additional text 1**	PLC_1
Additional text 2		**Additional text 3**	
Additional text 4		**Additional text 5**	
Additional text 6		**Additional text 7**	
Additional text 8		**Additional text 9**	
Name	SDIAG_ALCAT_SUB_ERR_MSG_001E	**Type**	PLC alarm
ID	30	**Location**	PLC_1
Alarm text	Error: @1W%t#7W@ @6W%t#257K@ / @6W%t#258K@.@6W%t#259K@ @6W%t#262K@ @6W%t#263K@	**Info text**	Short name: @6W%t#260K@ Order number: @6W%t#265K@
Alarm class	No Acknowledgement	**Acknowledgment**	False
Information only	True	**Priority**	0
Report	False	**Created by**	System diagnostics
Date created	7/22/2026 8:45 AM	**Last change**	7/22/2026 8:45 AM
Group ID	0	**Additional text 1**	PLC_1
Additional text 2		**Additional text 3**	
Additional text 4		**Additional text 5**	
Additional text 6		**Additional text 7**	
Additional text 8		**Additional text 9**	
Name	SDIAG_ALCAT_ESUB_ERR_MSG_001F	**Type**	PLC alarm
ID	31	**Location**	PLC_1
Alarm text	Error: @1W%t#7W@ - @5W%t#7W@ @6W%t#257K@ / @6W%t#258K@.@6W%t#259K@ @6W%t#262K@ @6W%t#263K@	**Info text**	Short name: @6W%t#260K@ Order number: @6W%t#265K@
Alarm class	No Acknowledgement	**Acknowledgment**	False

Information only	True	**Priority**	0
Report	False	**Created by**	System diagnostics
Date created	7/22/2026 8:45 AM	**Last change**	7/22/2026 8:45 AM
Group ID	0	**Additional text 1**	PLC_1
Additional text 2		**Additional text 3**	
Additional text 4		**Additional text 5**	
Additional text 6		**Additional text 7**	
Additional text 8		**Additional text 9**	
Name	SDIAG_ALCAT_SUB_MD_MSG_0021	**Type**	PLC alarm
ID	33	**Location**	PLC_1
Alarm text	Maintenance demanded: @1W%t#7W@ @6W%t#257K@ / @6W%t#258K@.@6W%t#259K@ @6W%t#262K@ @6W%t#263K@	**Info text**	Short name: @6W%t#260K@ Order number: @6W%t#265K@
Alarm class	No Acknowledgement	**Acknowledgment**	False
Information only	True	**Priority**	0
Report	False	**Created by**	System diagnostics
Date created	7/22/2026 8:45 AM	**Last change**	7/22/2026 8:45 AM
Group ID	0	**Additional text 1**	PLC_1
Additional text 2		**Additional text 3**	
Additional text 4		**Additional text 5**	
Additional text 6		**Additional text 7**	
Additional text 8		**Additional text 9**	
Name	SDIAG_ALCAT_ESUB_MD_MSG_0022	**Type**	PLC alarm
ID	34	**Location**	PLC_1
Alarm text	Maintenance demanded: @1W%t#7W@ - @5W%t#7W@ @6W%t#257K@ / @6W%t#258K@.@6W%t#259K@ @6W%t#262K@ @6W%t#263K@	**Info text**	Short name: @6W%t#260K@ Order number: @6W%t#265K@
Alarm class	No Acknowledgement	**Acknowledgment**	False
Information only	True	**Priority**	0
Report	False	**Created by**	System diagnostics
Date created	7/22/2026 8:45 AM	**Last change**	7/22/2026 8:45 AM
Group ID	0	**Additional text 1**	PLC_1
Additional text 2		**Additional text 3**	
Additional text 4		**Additional text 5**	
Additional text 6		**Additional text 7**	
Additional text 8		**Additional text 9**	
Name	SDIAG_ALCAT_SUB_MR_MSG_0024	**Type**	PLC alarm
ID	36	**Location**	PLC_1
Alarm text	Maintenance required: @1W%t#7W@ @6W%t#257K@ / @6W%t#258K@.@6W%t#259K@ @6W%t#262K@ @6W%t#263K@	**Info text**	Short name: @6W%t#260K@ Order number: @6W%t#265K@
Alarm class	No Acknowledgement	**Acknowledgment**	False
Information only	True	**Priority**	0
Report	False	**Created by**	System diagnostics
Date created	7/22/2026 8:45 AM	**Last change**	7/22/2026 8:45 AM
Group ID	0	**Additional text 1**	PLC_1
Additional text 2		**Additional text 3**	
Additional text 4		**Additional text 5**	
Additional text 6		**Additional text 7**	
Additional text 8		**Additional text 9**	
Name	SDIAG_ALCAT_ESUB_MR_MSG_0025	**Type**	PLC alarm
ID	37	**Location**	PLC_1
Alarm text	Maintenance required: @1W%t#7W@ - @5W%t#7W@ @6W%t#257K@ / @6W%t#258K@.@6W%t#259K@ @6W%t#262K@ @6W%t#263K@	**Info text**	Short name: @6W%t#260K@ Order number: @6W%t#265K@
Alarm class	No Acknowledgement	**Acknowledgment**	False
Information only	True	**Priority**	0
Report	False	**Created by**	System diagnostics
Date created	7/22/2026 8:45 AM	**Last change**	7/22/2026 8:45 AM
Group ID	0	**Additional text 1**	PLC_1
Additional text 2		**Additional text 3**	
Additional text 4		**Additional text 5**	
Additional text 6		**Additional text 7**	
Additional text 8		**Additional text 9**	
Name	SDIAG_ALCAT_CONFIG_INFO_0028	**Type**	PLC alarm
ID	40	**Location**	PLC_1
Alarm text	Info: @1W%t#7W@ - @5W%t#7W@ @6W%t#257K@ @6W%t#262K@ @6W%t#263K@ @8W%t#7W@	**Info text**	Short name: @6W%t#260K@ Order number: @6W%t#265K@
Alarm class	No Acknowledgement	**Acknowledgment**	False
Information only	True	**Priority**	0
Report	False	**Created by**	System diagnostics
Date created	7/22/2026 8:45 AM	**Last change**	7/22/2026 8:45 AM
Group ID	0	**Additional text 1**	PLC_1
Additional text 2		**Additional text 3**	
Additional text 4		**Additional text 5**	
Additional text 6		**Additional text 7**	
Additional text 8		**Additional text 9**	
Name	SDIAG_ALCAT_CONFIG_REPORT_0029	**Type**	PLC alarm
ID	41	**Location**	PLC_1
Alarm text	Info: @1W%t#7W@ - @5W%t#7W@ @6W%t#257K@ / @6W%t#258K@ @6W%t#262K@ @6W%t#263K@	**Info text**	Short name: @6W%t#260K@ Order number: @6W%t#265K@
Alarm class	No Acknowledgement	**Acknowledgment**	False
Information only	True	**Priority**	0
Report	False	**Created by**	System diagnostics
Date created	7/22/2026 8:45 AM	**Last change**	7/22/2026 8:45 AM
Group ID	0	**Additional text 1**	PLC_1
Additional text 2		**Additional text 3**	

Additional text 4		**Additional text 5**	
Additional text 6		**Additional text 7**	
Additional text 8		**Additional text 9**	
Name	SDIAG_ALCAT_SECU_EV_MSG_005E	**Type**	PLC alarm
ID	94	**Location**	PLC_1
Alarm text	Security event: @1W%t#7W@ @5W%t#7W@ @6W%t#258K@ @6W%t#262K@ @6W%t#263K@ @8W%t#7W@	**Info text**	Short name: @6W%t#260K@ Order number: @6W%t#265K@
Alarm class	No Acknowledgement	**Acknowledgment**	False
Information only	True	**Priority**	0
Report	False	**Created by**	Security
Date created	7/22/2026 8:45 AM	**Last change**	7/22/2026 8:45 AM
Group ID	0	**Additional text 1**	PLC_1
Additional text 2		**Additional text 3**	
Additional text 4		**Additional text 5**	
Additional text 6		**Additional text 7**	
Additional text 8		**Additional text 9**	
Name	SDIAG_ALCAT_SECU_EV_INFO_005F	**Type**	PLC alarm
ID	95	**Location**	PLC_1
Alarm text	Security information: @1W%t#7W@ @5W%t#7W@ @6W%t#258K@ @6W%t#262K@ @6W%t#263K@ @8W%t#7W@	**Info text**	Short name: @6W%t#260K@ Order number: @6W%t#265K@
Alarm class	No Acknowledgement	**Acknowledgment**	False
Information only	True	**Priority**	0
Report	False	**Created by**	Security
Date created	7/22/2026 8:45 AM	**Last change**	7/22/2026 8:45 AM
Group ID	0	**Additional text 1**	PLC_1
Additional text 2		**Additional text 3**	
Additional text 4		**Additional text 5**	
Additional text 6		**Additional text 7**	
Additional text 8		**Additional text 9**	
Name	SDIAG_ALCAT_USER_MSG_0080	**Type**	PLC alarm
ID	128	**Location**	PLC_1
Alarm text	User message: @1W%t#2W@	**Info text**	Short name: @6W%t#260K@ Order number: @6W%t#265K@
Alarm class	No Acknowledgement	**Acknowledgment**	False
Information only	True	**Priority**	0
Report	False	**Created by**	System diagnostics
Date created	7/22/2026 8:45 AM	**Last change**	7/22/2026 8:45 AM
Group ID	0	**Additional text 1**	PLC_1
Additional text 2		**Additional text 3**	
Additional text 4		**Additional text 5**	
Additional text 6		**Additional text 7**	
Additional text 8		**Additional text 9**	
Name	SDIAG_ALCAT_PLC_MSG_00FF	**Type**	PLC alarm
ID	255	**Location**	PLC_1
Alarm text	PLC notification: @1W%t#7W@ @5W%t#7W@ @6W%t#256K@ @6W%t#262K@ @6W%t#263K@	**Info text**	Short name: @6W%t#260K@ Order number: @6W%t#265K@
Alarm class	No Acknowledgement	**Acknowledgment**	False
Information only	True	**Priority**	0
Report	False	**Created by**	System diagnostics
Date created	7/22/2026 8:45 AM	**Last change**	7/22/2026 8:45 AM
Group ID	0	**Additional text 1**	PLC_1
Additional text 2		**Additional text 3**	
Additional text 4		**Additional text 5**	
Additional text 6		**Additional text 7**	
Additional text 8		**Additional text 9**	
Name	SDIAG_ALCAT_SUBMODUL_MSG_0102	**Type**	PLC alarm
ID	258	**Location**	PLC_1
Alarm text	Error: @1W%t#7W@ @5W%t#7W@ @6W%t#257K@ / @6W%t#258K@.@6W%t#259K@ @6W%t#262K@ @6W%t#263K@	**Info text**	Short name: @6W%t#260K@ Order number: @6W%t#265K@
Alarm class	No Acknowledgement	**Acknowledgment**	False
Information only	False	**Priority**	0
Report	False	**Created by**	System diagnostics
Date created	7/22/2026 8:45 AM	**Last change**	7/22/2026 8:45 AM
Group ID	0	**Additional text 1**	PLC_1
Additional text 2		**Additional text 3**	
Additional text 4		**Additional text 5**	
Additional text 6		**Additional text 7**	
Additional text 8		**Additional text 9**	
Name	SDIAG_ALCAT_MODUL_MSG_0103	**Type**	PLC alarm
ID	259	**Location**	PLC_1
Alarm text	Error: @1W%t#7W@ @5W%t#7W@ @6W%t#257K@ / @6W%t#258K@ @6W%t#262K@ @6W%t#263K@	**Info text**	Short name: @6W%t#260K@ Order number: @6W%t#265K@
Alarm class	No Acknowledgement	**Acknowledgment**	False
Information only	False	**Priority**	0
Report	False	**Created by**	System diagnostics
Date created	7/22/2026 8:45 AM	**Last change**	7/22/2026 8:45 AM
Group ID	0	**Additional text 1**	PLC_1
Additional text 2		**Additional text 3**	
Additional text 4		**Additional text 5**	
Additional text 6		**Additional text 7**	
Additional text 8		**Additional text 9**	
Name	SDIAG_ALCAT_RACK_MSG_0104	**Type**	PLC alarm
ID	260	**Location**	PLC_1

Alarm text	Error: @1W%t#7W@ @5W%t#7W@ @6W%t#257K@ @6W%t#262K@ @6W%t#263K@	**Info text**	Short name: @6W%t#260K@ Order number: @6W%t#265K@
Alarm class	No Acknowledgement	**Acknowledgment**	False
Information only	False	**Priority**	0
Report	False	**Created by**	System diagnostics
Date created	7/22/2026 8:45 AM	**Last change**	7/22/2026 8:45 AM
Group ID	0	**Additional text 1**	PLC_1
Additional text 2		**Additional text 3**	
Additional text 4		**Additional text 5**	
Additional text 6		**Additional text 7**	
Additional text 8		**Additional text 9**	
Name	SDIAG_ALCAT_DEVICE_MSG_0105	**Type**	PLC alarm
ID	261	**Location**	PLC_1
Alarm text	Error: @1W%t#7W@ @5W%t#7W@ @6W%t#257K@ @6W%t#262K@ @6W%t#263K@ @8W%t#7W@	**Info text**	Short name: @6W%t#260K@ Order number: @6W%t#265K@
Alarm class	No Acknowledgement	**Acknowledgment**	False
Information only	False	**Priority**	0
Report	False	**Created by**	System diagnostics
Date created	7/22/2026 8:45 AM	**Last change**	7/22/2026 8:45 AM
Group ID	0	**Additional text 1**	PLC_1
Additional text 2		**Additional text 3**	
Additional text 4		**Additional text 5**	
Additional text 6		**Additional text 7**	
Additional text 8		**Additional text 9**	
Name	SDIAG_ALCAT_IOSYSTEM_MSG_0106	**Type**	PLC alarm
ID	262	**Location**	PLC_1
Alarm text	Error: @1W%t#7W@ @5W%t#7W@ @6W%t#276K@ @6W%t#262K@ @6W%t#263K@ @8W%t#7W@	**Info text**	Short name: @6W%t#260K@ Order number: @6W%t#265K@
Alarm class	No Acknowledgement	**Acknowledgment**	False
Information only	False	**Priority**	0
Report	False	**Created by**	System diagnostics
Date created	7/22/2026 8:45 AM	**Last change**	7/22/2026 8:45 AM
Group ID	0	**Additional text 1**	PLC_1
Additional text 2		**Additional text 3**	
Additional text 4		**Additional text 5**	
Additional text 6		**Additional text 7**	
Additional text 8		**Additional text 9**	
Name	SDIAG_ALCAT_CPU_OST_MSG_010D	**Type**	PLC alarm
ID	269	**Location**	PLC_1
Alarm text	CPU status message: @1W%t#7W@ @5W%t#7W@ @6W%t#257K@ / @6W%t#258K@ @6W%t#262K@ @6W%t#263K@ @8W%t#7W@	**Info text**	Short name: @6W%t#260K@ Order number: @6W%t#265K@
Alarm class	No Acknowledgement	**Acknowledgment**	False
Information only	False	**Priority**	0
Report	False	**Created by**	System diagnostics
Date created	7/22/2026 8:45 AM	**Last change**	7/22/2026 8:45 AM
Group ID	0	**Additional text 1**	PLC_1
Additional text 2		**Additional text 3**	
Additional text 4		**Additional text 5**	
Additional text 6		**Additional text 7**	
Additional text 8		**Additional text 9**	
Name	SDIAG_ALCAT_CPU_ERR_MSG_0110	**Type**	PLC alarm
ID	272	**Location**	PLC_1
Alarm text	CPU error: @1W%t#7W@ @5W%t#7W@ @6W%t#257K@ / @6W%t#258K@ @6W%t#262K@ @6W%t#263K@ @8W%t#7W@	**Info text**	Short name: @6W%t#260K@ Order number: @6W%t#265K@
Alarm class	No Acknowledgement	**Acknowledgment**	False
Information only	False	**Priority**	0
Report	False	**Created by**	System diagnostics
Date created	7/22/2026 8:45 AM	**Last change**	7/22/2026 8:45 AM
Group ID	0	**Additional text 1**	PLC_1
Additional text 2		**Additional text 3**	
Additional text 4		**Additional text 5**	
Additional text 6		**Additional text 7**	
Additional text 8		**Additional text 9**	
Name	SDIAG_ALCAT_CPU_MD_MSG_0111	**Type**	PLC alarm
ID	273	**Location**	PLC_1
Alarm text	CPU maintenance demanded: @1W%t#7W@ @6W%t#257K@ / @5W%t#7W@ @6W%t#258K@ @6W%t#262K@ @6W%t#263K@ @8W%t#7W@	**Info text**	Short name: @6W%t#260K@ Order number: @6W%t#265K@
Alarm class	No Acknowledgement	**Acknowledgment**	False
Information only	False	**Priority**	0
Report	False	**Created by**	System diagnostics
Date created	7/22/2026 8:45 AM	**Last change**	7/22/2026 8:45 AM
Group ID	0	**Additional text 1**	PLC_1
Additional text 2		**Additional text 3**	
Additional text 4		**Additional text 5**	
Additional text 6		**Additional text 7**	
Additional text 8		**Additional text 9**	
Name	SDIAG_ALCAT_CPU_MR_MSG1_0112	**Type**	PLC alarm
ID	274	**Location**	PLC_1
Alarm text	CPU maintenance required: @1W%t#7W@ @6W%t#257K@ / @5W%t#7W@ @6W%t#258K@ @6W%t#262K@ @6W%t#263K@ @8W%t#7W@	**Info text**	Short name: @6W%t#260K@ Order number: @6W%t#265K@
Alarm class	No Acknowledgement	**Acknowledgment**	False
Information only	False	**Priority**	0
Report	False	**Created by**	System diagnostics

Date created	7/22/2026 8:45 AM	**Last change**	7/22/2026 8:45 AM
Group ID	0	**Additional text 1**	PLC_1
Additional text 2		**Additional text 3**	
Additional text 4		**Additional text 5**	
Additional text 6		**Additional text 7**	
Additional text 8		**Additional text 9**	
Name	SDIAG_ALCAT_CH_ERR_MSG_0115	**Type**	PLC alarm
ID	277	**Location**	PLC_1
Alarm text	Error: @1W%t#7W@ on @8W%t#280K@ @6W%t#257K@ / @6W%t#258K@.@6W%t#259K@ @6W%t#262K@ @6W%t#263K@	**Info text**	Short name: @6W%t#260K@ Order number: @6W%t#265K@
Alarm class	No Acknowledgement	**Acknowledgment**	False
Information only	False	**Priority**	0
Report	False	**Created by**	System diagnostics
Date created	7/22/2026 8:45 AM	**Last change**	7/22/2026 8:45 AM
Group ID	0	**Additional text 1**	PLC_1
Additional text 2		**Additional text 3**	
Additional text 4		**Additional text 5**	
Additional text 6		**Additional text 7**	
Additional text 8		**Additional text 9**	
Name	SDIAG_ALCAT_ECH_ERR_MSG_0116	**Type**	PLC alarm
ID	278	**Location**	PLC_1
Alarm text	Error: @1W%t#7W@ - @5W%t#7W@ on @8W%t#280K@ @6W%t#257K@ / @6W%t#258K@.@6W%t#259K@ @6W%t#262K@ @6W%t#263K@	**Info text**	Short name: @6W%t#260K@ Order number: @6W%t#265K@
Alarm class	No Acknowledgement	**Acknowledgment**	False
Information only	False	**Priority**	0
Report	False	**Created by**	System diagnostics
Date created	7/22/2026 8:45 AM	**Last change**	7/22/2026 8:45 AM
Group ID	0	**Additional text 1**	PLC_1
Additional text 2		**Additional text 3**	
Additional text 4		**Additional text 5**	
Additional text 6		**Additional text 7**	
Additional text 8		**Additional text 9**	
Name	SDIAG_ALCAT_CH_MD_MSG_0118	**Type**	PLC alarm
ID	280	**Location**	PLC_1
Alarm text	Maintenance demanded:@1W%t#7W@ on @8W%t#280K@ @6W%t#257K@ / @6W%t#258K@.@6W%t#259K@ @6W%t#262K@ @6W%t#263K@	**Info text**	Short name: @6W%t#260K@ Order number: @6W%t#265K@
Alarm class	No Acknowledgement	**Acknowledgment**	False
Information only	False	**Priority**	0
Report	False	**Created by**	System diagnostics
Date created	7/22/2026 8:45 AM	**Last change**	7/22/2026 8:45 AM
Group ID	0	**Additional text 1**	PLC_1
Additional text 2		**Additional text 3**	
Additional text 4		**Additional text 5**	
Additional text 6		**Additional text 7**	
Additional text 8		**Additional text 9**	
Name	SDIAG_ALCAT_ECH_MD_MSG_0119	**Type**	PLC alarm
ID	281	**Location**	PLC_1
Alarm text	Maintenance demanded:@1W%t#7W@ - @5W%t#7W@ on @8W%t#280K@ @6W%t#257K@ / @6W%t#258K@.@6W%t#259K@ @6W%t#262K@ @6W%t#263K@	**Info text**	Short name: @6W%t#260K@ Order number: @6W%t#265K@
Alarm class	No Acknowledgement	**Acknowledgment**	False
Information only	False	**Priority**	0
Report	False	**Created by**	System diagnostics
Date created	7/22/2026 8:45 AM	**Last change**	7/22/2026 8:45 AM
Group ID	0	**Additional text 1**	PLC_1
Additional text 2		**Additional text 3**	
Additional text 4		**Additional text 5**	
Additional text 6		**Additional text 7**	
Additional text 8		**Additional text 9**	
Name	SDIAG_ALCAT_CH_MR_MSG_011B	**Type**	PLC alarm
ID	283	**Location**	PLC_1
Alarm text	Maintenance required:@1W%t#7W@ on @8W%t#280K@ @6W%t#257K@ / @6W%t#258K@.@6W%t#259K@ @6W%t#262K@ @6W%t#263K@	**Info text**	Short name: @6W%t#260K@ Order number: @6W%t#265K@
Alarm class	No Acknowledgement	**Acknowledgment**	False
Information only	False	**Priority**	0
Report	False	**Created by**	System diagnostics
Date created	7/22/2026 8:45 AM	**Last change**	7/22/2026 8:45 AM
Group ID	0	**Additional text 1**	PLC_1
Additional text 2		**Additional text 3**	
Additional text 4		**Additional text 5**	
Additional text 6		**Additional text 7**	
Additional text 8		**Additional text 9**	
Name	SDIAG_ALCAT_ECH_MR_MSG_011C	**Type**	PLC alarm
ID	284	**Location**	PLC_1
Alarm text	Maintenance required:@1W%t#7W@ - @5W%t#7W@ on @8W%t#280K@ @6W%t#257K@ / @6W%t#258K@.@6W%t#259K@ @6W%t#262K@ @6W%t#263K@	**Info text**	Short name: @6W%t#260K@ Order number: @6W%t#265K@
Alarm class	No Acknowledgement	**Acknowledgment**	False
Information only	False	**Priority**	0
Report	False	**Created by**	System diagnostics
Date created	7/22/2026 8:45 AM	**Last change**	7/22/2026 8:45 AM

Group ID	0	**Additional text 1**	PLC_1
Additional text 2		**Additional text 3**	
Additional text 4		**Additional text 5**	
Additional text 6		**Additional text 7**	
Additional text 8		**Additional text 9**	
Name	SDIAG_ALCAT_SUB_ERR_MSG_011E	**Type**	PLC alarm
ID	286	**Location**	PLC_1
Alarm text	Error: @1W%t#7W@ @6W%t#257K@ / @6W%t#258K@.@6W%t#259K@ @6W%t#262K@ @6W%t#263K@	**Info text**	Short name: @6W%t#260K@ Order number: @6W%t#265K@
Alarm class	No Acknowledgement	**Acknowledgment**	False
Information only	False	**Priority**	0
Report	False	**Created by**	System diagnostics
Date created	7/22/2026 8:45 AM	**Last change**	7/22/2026 8:45 AM
Group ID	0	**Additional text 1**	PLC_1
Additional text 2		**Additional text 3**	
Additional text 4		**Additional text 5**	
Additional text 6		**Additional text 7**	
Additional text 8		**Additional text 9**	
Name	SDIAG_ALCAT_ESUB_ERR_MSG_011F	**Type**	PLC alarm
ID	287	**Location**	PLC_1
Alarm text	Error: @1W%t#7W@ - @5W%t#7W@ @6W%t#257K@ / @6W%t#258K@.@6W%t#259K@ @6W%t#262K@ @6W%t#263K@	**Info text**	Short name: @6W%t#260K@ Order number: @6W%t#265K@
Alarm class	No Acknowledgement	**Acknowledgment**	False
Information only	False	**Priority**	0
Report	False	**Created by**	System diagnostics
Date created	7/22/2026 8:45 AM	**Last change**	7/22/2026 8:45 AM
Group ID	0	**Additional text 1**	PLC_1
Additional text 2		**Additional text 3**	
Additional text 4		**Additional text 5**	
Additional text 6		**Additional text 7**	
Additional text 8		**Additional text 9**	
Name	SDIAG_ALCAT_SUB_MD_MSG_0121	**Type**	PLC alarm
ID	289	**Location**	PLC_1
Alarm text	Maintenance demanded: @1W%t#7W@ @6W%t#257K@ / @6W%t#258K@.@6W%t#259K@ @6W%t#262K@ @6W%t#263K@	**Info text**	Short name: @6W%t#260K@ Order number: @6W%t#265K@
Alarm class	No Acknowledgement	**Acknowledgment**	False
Information only	False	**Priority**	0
Report	False	**Created by**	System diagnostics
Date created	7/22/2026 8:45 AM	**Last change**	7/22/2026 8:45 AM
Group ID	0	**Additional text 1**	PLC_1
Additional text 2		**Additional text 3**	
Additional text 4		**Additional text 5**	
Additional text 6		**Additional text 7**	
Additional text 8		**Additional text 9**	
Name	SDIAG_ALCAT_ESUB_MD_MSG_0122	**Type**	PLC alarm
ID	290	**Location**	PLC_1
Alarm text	Maintenance demanded: @1W%t#7W@ - @5W%t#7W@ @6W%t#257K@ / @6W%t#258K@.@6W%t#259K@ @6W%t#262K@ @6W%t#263K@	**Info text**	Short name: @6W%t#260K@ Order number: @6W%t#265K@
Alarm class	No Acknowledgement	**Acknowledgment**	False
Information only	False	**Priority**	0
Report	False	**Created by**	System diagnostics
Date created	7/22/2026 8:45 AM	**Last change**	7/22/2026 8:45 AM
Group ID	0	**Additional text 1**	PLC_1
Additional text 2		**Additional text 3**	
Additional text 4		**Additional text 5**	
Additional text 6		**Additional text 7**	
Additional text 8		**Additional text 9**	
Name	SDIAG_ALCAT_SUB_MR_MSG_0124	**Type**	PLC alarm
ID	292	**Location**	PLC_1
Alarm text	Maintenance required: @1W%t#7W@ @6W%t#257K@ / @6W%t#258K@.@6W%t#259K@ @6W%t#262K@ @6W%t#263K@	**Info text**	Short name: @6W%t#260K@ Order number: @6W%t#265K@
Alarm class	No Acknowledgement	**Acknowledgment**	False
Information only	False	**Priority**	0
Report	False	**Created by**	System diagnostics
Date created	7/22/2026 8:45 AM	**Last change**	7/22/2026 8:45 AM
Group ID	0	**Additional text 1**	PLC_1
Additional text 2		**Additional text 3**	
Additional text 4		**Additional text 5**	
Additional text 6		**Additional text 7**	
Additional text 8		**Additional text 9**	
Name	SDIAG_ALCAT_ESUB_MR_MSG_0125	**Type**	PLC alarm
ID	293	**Location**	PLC_1
Alarm text	Maintenance required: @1W%t#7W@ - @5W%t#7W@ @6W%t#257K@ / @6W%t#258K@.@6W%t#259K@ @6W%t#262K@ @6W%t#263K@	**Info text**	Short name: @6W%t#260K@ Order number: @6W%t#265K@
Alarm class	No Acknowledgement	**Acknowledgment**	False
Information only	False	**Priority**	0
Report	False	**Created by**	System diagnostics
Date created	7/22/2026 8:45 AM	**Last change**	7/22/2026 8:45 AM
Group ID	0	**Additional text 1**	PLC_1
Additional text 2		**Additional text 3**	
Additional text 4		**Additional text 5**	
Additional text 6		**Additional text 7**	

Additional text 8		**Additional text 9**	
Name	SDIAG_ALCAT_CONFIG_INFO_0128	**Type**	PLC alarm
ID	296	**Location**	PLC_1
Alarm text	Info: @1W%t#7W@ - @5W%t#7W@ @6W%t#257K@ @6W%t#262K@ @6W%t#263K@ @8W%t#7W@	**Info text**	Short name: @6W%t#260K@ Order number: @6W%t#265K@
Alarm class	No Acknowledgement	**Acknowledgment**	False
Information only	False	**Priority**	0
Report	False	**Created by**	System diagnostics
Date created	7/22/2026 8:45 AM	**Last change**	7/22/2026 8:45 AM
Group ID	0	**Additional text 1**	PLC_1
Additional text 2		**Additional text 3**	
Additional text 4		**Additional text 5**	
Additional text 6		**Additional text 7**	
Additional text 8		**Additional text 9**	
Name	SDIAG_ALCAT_PLC_MSG_01FF	**Type**	PLC alarm
ID	511	**Location**	PLC_1
Alarm text	PLC notification: @1W%t#7W@ @5W%t#7W@ @6W%t#256K@ @6W%t#262K@ @6W%t#263K@	**Info text**	Short name: @6W%t#260K@ Order number: @6W%t#265K@
Alarm class	No Acknowledgement	**Acknowledgment**	False
Information only	False	**Priority**	0
Report	False	**Created by**	System diagnostics
Date created	7/22/2026 8:45 AM	**Last change**	7/22/2026 8:45 AM
Group ID	0	**Additional text 1**	PLC_1
Additional text 2		**Additional text 3**	
Additional text 4		**Additional text 5**	
Additional text 6		**Additional text 7**	
Additional text 8		**Additional text 9**	
Name	SDIAG_ALCAT_SUBMODUL_MAN_SPEC_002F	**Type**	PLC alarm
ID	47	**Location**	PLC_1
Alarm text	Error (vendor-specific): @1W%t#7W@ @6W%t#257K@ / @6W%t#258K@.@6W%t#259K@ @6W%t#262K@ @6W%t#263K@	**Info text**	Short name: @6W%t#260K@ Order number: @6W%t#265K@
Alarm class	No Acknowledgement	**Acknowledgment**	False
Information only	True	**Priority**	0
Report	False	**Created by**	System diagnostics
Date created	7/29/2026 2:36 PM	**Last change**	7/29/2026 2:36 PM
Group ID	0	**Additional text 1**	PLC_1
Additional text 2		**Additional text 3**	
Additional text 4		**Additional text 5**	
Additional text 6		**Additional text 7**	
Additional text 8		**Additional text 9**	
Name	SDIAG_ALCAT_SUBMODUL_MAN_SPEC_012F	**Type**	PLC alarm
ID	303	**Location**	PLC_1
Alarm text	Error (vendor-specific): @1W%t#7W@ @6W%t#257K@ / @6W%t#258K@.@6W%t#259K@ @6W%t#262K@ @6W%t#263K@	**Info text**	Short name: @6W%t#260K@ Order number: @6W%t#265K@
Alarm class	No Acknowledgement	**Acknowledgment**	False
Information only	False	**Priority**	0
Report	False	**Created by**	System diagnostics
Date created	7/29/2026 2:36 PM	**Last change**	7/29/2026 2:36 PM
Group ID	0	**Additional text 1**	PLC_1
Additional text 2		**Additional text 3**	
Additional text 4		**Additional text 5**	
Additional text 6		**Additional text 7**	
Additional text 8		**Additional text 9**	


Fabrica / PLC_1 [CPU 1511-1 PN]


PLC alarm text lists

This folder is empty.

Fabrica / PLC_1 [CPU 1511-1 PN] / Local modules

PLC_1 [CPU 1511-1 PN]

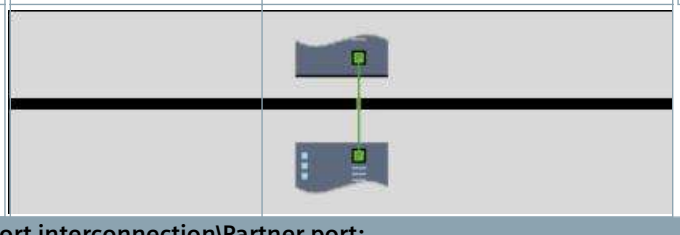PLC_1					
General\Project information					
Name	PLC_1	**Author**	Administrator	**Comment**	
Rack	0	**Slot**	1		
General\Catalog information					
Short designation	CPU 1511-1 PN	**Description**	CPU with display; work memory 150 KB code and 1 MB data; 60 ns bit operation time; 4-stage protection concept, technology functions: motion control, closed-loop control, counting and measuring; tracing; Runtime options; isochronous mode (central); for all PROFINET interfaces: transport protocol TCP/IP, secure Open User Communication, S7 communication, S7 routing, IP forwarding, Web server, DNS client, OPC UA: Server DA, Client DA, methods, companion specifications; PROFINET IO controller, supports RT/IRT, performance upgrade PROFINET V2.3, 2 ports, I-Device, MRP, MRPD, isochronous mode; firmware V2.9	**Article number**	6ES7 511-1AK02-0AB0
Firmware version	V2.9		False		
General\Identification & Maintenance					
Plant designation		**Location identifier**		**Installation date**	2026-07-07 05:39:27.667
Additional information					
General\Checksums					
Text lists	FA 70 E8 75 1D 5A 8E 29	**Software**	F2 89 3A 4C 69 1E 2F 09		
PROFINET interface [X1]\General					
Name	PROFINET interface_1	**Author**	Administrator	**Comment**	
PROFINET interface [X1]\Ethernet addresses\Interface networked with					
Subnet:	PN/IE_1				
PROFINET interface [X1]\Ethernet addresses\Internet protocol version 4 (IPv4)					
IP configuration	Set IP address in the project	**IP address:**	192.168.1.1	**Subnet mask:**	255.255.255.0
Use router	False				
PROFINET interface [X1]\Ethernet addresses\PROFINET					
PROFINET device name is set directly at the device	False	**Generate PROFINET device name automatically**	True	**PROFINET device name:**	plc_1.profinet interface_1
Converted name:	plcxb1.profinetxainterfacexb1036c	**Device number:**	0		
PROFINET interface [X1]\Time-of-day synchronization\NTP mode					
Time-of-day synchronization	Disabled	**NTP Server 1**		**NTP Server 2**	
NTP Server 3		**NTP Server 4**		**Update interval**	10s
PROFINET interface [X1]\Operating mode					
IO controller	True	**IO system**	PROFINET IO-System (100)	**Device number**	0
IO device	False				
PROFINET interface [X1]\Advanced options\Interface options					
Maintain PROFINET IO communication on data record communication timeout	False	**Call the user program if communication errors occur**	False	**Support device replacement without exchangeable medium**	True
Permit overwriting of device names of all assigned IO devices	False	**Limit data infeed into the network**	True	**Use IEC V2.2 LLDP mode**	False
Keep-Alive connection monitoring:	30s				
PROFINET interface [X1]\Advanced options\Media redundancy					
MRP domain	mrpdomain-1	**Media redundancy role:**	Not device in the ring		
PROFINET interface [X1]\Advanced options\Real time settings\IO communication					
Send clock:	1.000ms				
PROFINET interface [X1]\Advanced options\Real time settings\Synchronization					
Sync domain:	Sync-Domain_1	**Synchronization role:**	Unsynchronized	**RT class:**	RT,IRT
PROFINET interface [X1]\Advanced options\Real time settings\Real time options					
Calculated bandwidth for cyclic IO data:	0.007ms	**Calculated bandwidth for cyclic IO data:**	0.704%		
PROFINET interface [X1]\Advanced options\Port [X1 P1 R]\General					
Name	Port_1	**Author**	Administrator	**Comment**	
PROFINET interface [X1]\Advanced options\Port [X1 P1 R]\Port interconnection\Local port:					
Local port:	PLC_1\PROFINET interface_1 [X1]\Port_1 [X1 P1 R]	**Medium:**	Copper	**Cable name:**	---
					
PROFINET interface [X1]\Advanced options\Port [X1 P1 R]\Port interconnection\Partner port:					
	Monitoring of partner port is executed	**Alternative partners**	False	**Partner port:**	IE general_1\PROFINET interface [X1]\Port_1 [X1 P1]
Medium:	Copper	**Cable length:**			

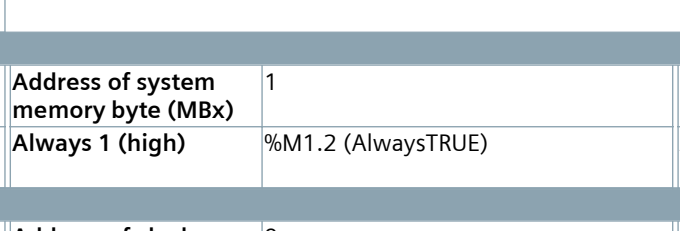PROFINET interface [X1]\Advanced options\Port [X1 P1 R]\Port options\Activate					
Activate this port for use	True				
PROFINET interface [X1]\Advanced options\Port [X1 P1 R]\Port options\Connection					
Transmission rate / duplex:	Automatic	**Monitor**	False	**Enable autonegotiation**	True
PROFINET interface [X1]\Advanced options\Port [X1 P1 R]\Port options\Boundaries					
End of detection of accessible devices	False	**End of topology discovery**	False	**End of the sync domain**	False
PROFINET interface [X1]\Advanced options\Port [X1 P2 R]\General					
Name	Port_2	**Author**	Administrator	**Comment**	
PROFINET interface [X1]\Advanced options\Port [X1 P2 R]\Port interconnection\Local port:					
Local port:	PLC_1\PROFINET interface_1 [X1]\Port_2 [X1 P2 R]	**Medium:**	Copper	**Cable name:**	---
					
PROFINET interface [X1]\Advanced options\Port [X1 P2 R]\Port interconnection\Partner port:					
	Monitoring of partner port is not possible	**Alternative partners**	False	**Partner port:**	Any partner
PROFINET interface [X1]\Advanced options\Port [X1 P2 R]\Port options\Activate					
Activate this port for use	True				
PROFINET interface [X1]\Advanced options\Port [X1 P2 R]\Port options\Connection					
Transmission rate / duplex:	Automatic	**Monitor**	False	**Enable autonegotiation**	True
PROFINET interface [X1]\Advanced options\Port [X1 P2 R]\Port options\Boundaries					
End of detection of accessible devices	False	**End of topology discovery**	False	**End of the sync domain**	False
PROFINET interface [X1]\Web server access					
Note	The Web server must also be activated in the properties of the PLC.	**Enable Web server via IP address of this interface**	False		
Startup					
Startup after POWER ON	Warm restart - Operating mode before POWER OFF	**Comparison preset to actual configuration**	Startup CPU even if mismatch	**Configuration time**	60000ms
Cycle					
Maximum cycle time	150ms			**Enable minimum cycle time for cyclic OBs**	True
Minimum cycle time	1ms				
Communication load					
Cycle load due to communication	50%				
System and clock memory\System memory bits					
Enable the use of system memory byte	True	**Address of system memory byte (MBx)**	1	**First cycle**	%M1.0 (FirstScan)
Diagnostic status changed	%M1.1 (DiagStatusUpdate)	**Always 1 (high)**	%M1.2 (AlwaysTRUE)	**Always 0 (low)**	%M1.3 (AlwaysFALSE)
System and clock memory\Clock memory bits					
Enable the use of clock memory byte	True	**Address of clock memory byte (MBx)**	0	**10 Hz clock**	%M0.0 (Clock_10Hz)
5 Hz clock	%M0.1 (Clock_5Hz)	**2.5 Hz clock**	%M0.2 (Clock_2.5Hz)	**2 Hz clock**	%M0.3 (Clock_2Hz)
1.25 Hz clock	%M0.4 (Clock_1.25Hz)	**1 Hz clock**	%M0.5 (Clock_1Hz)	**0.625 Hz clock**	%M0.6 (Clock_0.625Hz)
0.5 Hz clock	%M0.7 (Clock_0.5Hz)				
SIMATIC Memory Card\Diagnostics					
Aging of the SIMATIC memory card	False	**Threshold value**	80%		
System diagnostics					
Use fixed numbers for alarm IDs	True	**Report network faults as maintenance instead of fault**	False		
PLC alarms\General					
Central alarm management in the PLC	True				
Web server\General					
Activate web server on this module	False	**Permit access only with HTTPS**	True		
Web server\Automatic update					
Enable automatic update	True	**Update interval**	0s		

Web server\User management

User name	User rights
Everybody	

Web server\User-defined web pages

Application name	HTML source path	Default HTML page	Files with dynamic content	Web DB number	Fragment DB number
		index.htm	.htm;.html	333	334

Web server\Overview of interfaces

Device	Interface	Enabled web server access
PLC_1	PROFINET interface_1	False

Display\General\Display standby mode			
Time to standby mode	30 minutes		
Display\General\Energy saving mode			
Time to energy saving mode	15 minutes		

Display\General\Display language					
Default language on display	English				
Display\Automatic update					
Time to update	5 seconds				
Display\Password\Display protection					
Enable write access	True	**Enable display protection**	False		
Display\User-defined logo					
User logo activated	False	**Adapt logo**	False	**Resolution**	128x120
Company logo	---				

User interface languages	
Assign project language	**User interface languages**
English (United States)	German
English (United States)	English
English (United States)	French
English (United States)	Spanish
English (United States)	Italian
English (United States)	Japanese
English (United States)	Chinese (simplified)
English (United States)	Korean
English (United States)	Russian
English (United States)	Turkish
English (United States)	Portuguese (Brazil)

Time of day\Local time					
Time zone	(UTC) Dublin, Edinburgh, Lisbon, London				
Time of day\Time-of-day synchronization\NTP mode					
Time-of-day synchronization	Disabled	**NTP Server 1**		**NTP Server 2**	
NTP Server 3		**NTP Server 4**		**Update interval**	10s
Time of day\Daylight saving time					
Activate daylight saving time	True	**Difference between standard and daylight saving time**	60min		
Time of day\Daylight saving time\Start of daylight saving time					
Week	Last	**Day**	Sunday	**in**	March
at	1:00 a.m.				
Time of day\Daylight saving time\Start of standard time					
Week	Last	**Day**	Sunday	**in**	October
at	2:00 a.m.				
Protection					
Level of protection	Full access (no protection)				
Protection\Protection of the PLC configuration data					
Protect confidential PLC configuration data	False				
Protection\Connection mechanisms					
Permit access with PUT/GET communication from remote partner	False				
Protection\Security event					
Summarize security events in case of high message volume	True	**Length of an interval**	20	**Unit**	seconds
OPC UA\Accessibility of the server					
Activate OPC UA server	False				
System power supply\General					
General	Connection to supply voltage L+				

System power supply\Power segment overview		
Module	**Slot**	**Supply/consumption**
PLC_1	1	10.00W
DI 16x24VDC HF_1	2	-1.10W
DI 16x24VDC HF_2	3	-1.10W
DI 16x24VDC HF_3	4	-1.10W
DQ 16x24VDC/0.5A ST_1	5	-1.10W
AI 8xU/I HS_1	6	-1.15W
AQ 2xU/I ST_1	7	-0.65W
	Summary	3.80W

Advanced configuration\DNS configuration	
No DNS server address is configured.	
Advanced configuration\IP Forwarding\Configuration IPv4 Forwarding	
Enable IPv4 forwarding for interfaces of this PLC	False
Advanced configuration\Configuration control\Configuration control for central configuration	
Allow reconfiguration of device via the user program	False

Connection resources\				
	Station resources - Reserved - Maximum	**Station resources - Reserved - Configured**	**Station resources - Dynamic - Configured**	**Module resources - PLC_1 [CPU 1511-1 PN] - Configured**
Maximum number of resources:		10	54	64
	Maximum	Configured	Configured	Configured
PG communication:	4	-	-	-
HMI communication:	4	2	0	2
S7 communication:	0	-	0	0
Open user communication:	0	-	0	0
Web communication:	2	-	-	-
OPC UA client/server communication:	0	-	-	-
Other communication:	-	-	0	0
Total resources used:		2	0	2
Available resources:		8	54	62

Overview of addresses\Overview of addresses\Overview of addresses					
Inputs	True	**Outputs**	True	**Address gaps**	False
Slot	True				

Type	Addr. from	Addr. to	Module	PIP	OB	Device name	Device number	Size	Master / IO system	Rack	Slot
I	16	17	DI 16x24VDC HF_1	Automatic update	-	PLC_1 [CPU 1511-1 PN]	-	2 Bytes	-	0	2
I	18	19	DI 16x24VDC HF_2	Automatic update	-	PLC_1 [CPU 1511-1 PN]	-	2 Bytes	-	0	3
I	20	21	DI 16x24VDC HF_3	Automatic update	-	PLC_1 [CPU 1511-1 PN]	-	2 Bytes	-	0	4
O	0	1	DQ 16x24VDC/ 0.5A ST_1	Automatic update	-	PLC_1 [CPU 1511-1 PN]	-	2 Bytes	-	0	5
I	0	15	AI 8xU/I HS_1	Automatic update	-	PLC_1 [CPU 1511-1 PN]	-	16 Bytes	-	0	6
O	2	5	AQ 2xU/I ST_1	Automatic update	-	PLC_1 [CPU 1511-1 PN]	-	4 Bytes	-	0	7

Runtime licenses\OPC UA\Runtime licenses			
Type of required license	None	**Type of purchased license**	No license

Runtime licenses\ProDiag\Supervisions	
Number of used supervisions	0

Runtime licenses\ProDiag\Runtime licenses			
Number of required licenses	None (<= 25 supervisions)	**Used ProDiag licenses**	No license

Runtime licenses\Energy Suite\Energy objects	
Number of configured energy objects	0

Runtime licenses\Energy Suite\Runtime licenses	
Total number of licensed energy objects	0

Runtime licenses\Energy Suite\Runtime licenses\Number of purchased licenses			
License type '5 energy objects'	No license	**License type '10 energy objects'**	No license

Runtime licenses\MAC\Runtime licenses	
Type of purchased license	No license

Fabrica / PLC_1 [CPU 1511-1 PN] / Local modules

DI 16x24VDC HF_1

DI 16x24VDC HF_1					
General\Project information					
Name	DI 16x24VDC HF_1	**Author**	Administrator	**Comment**	
Rack	0	**Slot**	2		
General\Catalog information					
Short designation	DI 16x24VDC HF	**Description**	Digital input module DI16 x 24VDC; grouping 16; input delay 0.05..20ms; input type 3 (IEC 61131); configurable diagnostics; hardware interrupts; value status; integrated counter for channel 0 and 1; isochronous mode	**Article number**	6ES7 521-1BH00-0AB0
Firmware version	V2.2		False		
General\Identification & Maintenance					
Plant designation		**Location identifier**		**Installation date**	2026-07-21 07:38:16.385
Additional information					
Module parameters\General\Startup					
Comparison preset to actual module	From CPU				
Module parameters\Channel template\Inputs\Apply to all channels that use the template\Diagnostics					
No supply voltage L+	False	**Wire break**	False		
Module parameters\Channel template\Inputs\Apply to all channels that use the template\Input parameters					
Input delay	3.2ms				
Module parameters\DI Configuration\Configuration of submodules					
Module distribution	None				
Module parameters\DI Configuration\Value status (Quality Information)					
Value status	False				
Module parameters\DI Configuration\Copy of module for Shared Device (MSI)					
Copy of module:	None				
Module parameters\DI Configuration\Counter configuration\Counter configuration on channel 0 and channel 1 enabled					
Counter configuration on channel 0 and channel 1 enabled	False				
Input 0 - 15\General					
Name	DI 16x24VDC HF_1	**Comment**			
Input 0 - 15\Inputs\General\Module failure					
Input values with module failure	Input value 0				
Input 0 - 15\Inputs\Channel 0-7\Channel 0					
Parameter settings	From template				
Input 0 - 15\Inputs\Channel 0-7\Channel 0\Diagnostics					
No supply voltage L+	False	**Wire break**	False		
Input 0 - 15\Inputs\Channel 0-7\Channel 0\Input parameters					
Input delay	3.2ms				
Input 0 - 15\Inputs\Channel 0-7\Channel 0\Counter configuration					
Reaction to violation of a counting limit		**Edge selection**		**Set output DQ**	
High counting limit		**Low counting limit**		**Start value**	
Comparison value					
Input 0 - 15\Inputs\Channel 0-7\Channel 0\Hardware interrupts					
Comparison event for DQ has occurred	0	**CountRidPrefixEvent**	49248	**Event name**	
Hardware interrupt	0	**Rising edge0**	Count0	**Channel number**	0
CountHwEventType	5				
Input 0 - 15\Inputs\Channel 0-7\Channel 0\Hardware interrupts					
Enable rising edge detection	0	**RidPrefixRisingEdgeEvent**	49152	**Event name**	
Hardware interrupt	0	**Rising edge0**	Rising edge0	**Channel number**	0
HwEventTypeRisingEdge	1				
Input 0 - 15\Inputs\Channel 0-7\Channel 0\Hardware interrupts					
Enable falling edge detection	0	**RidPrefixFallingEdgeEvent**	49280	**Event name**	
Hardware interrupt	0	**Falling edge0**	Falling edge0	**Channel number**	0
HwEventTypeFallingEdge	2				
Input 0 - 15\Inputs\Channel 0-7\Channel 1					
Parameter settings	From template				
Input 0 - 15\Inputs\Channel 0-7\Channel 1\Diagnostics					
No supply voltage L+	False	**Wire break**	False		
Input 0 - 15\Inputs\Channel 0-7\Channel 1\Input parameters					
Input delay	3.2ms				
Input 0 - 15\Inputs\Channel 0-7\Channel 1\Counter configuration					
Reaction to violation of a counting limit		**Edge selection**		**Set output DQ**	
High counting limit		**Low counting limit**		**Start value**	
Comparison value					
Input 0 - 15\Inputs\Channel 0-7\Channel 1\Hardware interrupts					
Comparison event for DQ has occurred	0	**CountRidPrefixEvent**	49249	**Event name**	
Hardware interrupt	0	**Rising edge1**	Count1	**Channel number**	1
CountHwEventType	5				

Input 0 - 15\Inputs\Channel 0-7\Channel 1\Hardware interrupts					
Enable rising edge detection	0	**RidPrefixRisingEdgeEvent**	49153	**Event name**	
Hardware interrupt	0	**Rising edge1**	Rising edge1	**Channel number**	1
HwEventTypeRisingEdge	1				
Input 0 - 15\Inputs\Channel 0-7\Channel 1\Hardware interrupts					
Enable falling edge detection	0	**RidPrefixFallingEdgeEvent**	49281	**Event name**	
Hardware interrupt	0	**Falling edge1**	Falling edge1	**Channel number**	1
HwEventTypeFallingEdge	2				
Input 0 - 15\Inputs\Channel 0-7\Channel 2					
Parameter settings	From template				
Input 0 - 15\Inputs\Channel 0-7\Channel 2\Diagnostics					
No supply voltage L+	False	**Wire break**	False		
Input 0 - 15\Inputs\Channel 0-7\Channel 2\Input parameters					
Input delay	3.2ms				
Input 0 - 15\Inputs\Channel 0-7\Channel 2\Hardware interrupts					
Enable rising edge detection	0	**RidPrefixRisingEdgeEvent**	49154	**Event name**	
Hardware interrupt	0	**Rising edge2**	Rising edge2	**Channel number**	2
HwEventTypeRisingEdge	1				
Input 0 - 15\Inputs\Channel 0-7\Channel 2\Hardware interrupts					
Enable falling edge detection	0	**RidPrefixFallingEdgeEvent**	49282	**Event name**	
Hardware interrupt	0	**Falling edge2**	Falling edge2	**Channel number**	2
HwEventTypeFallingEdge	2				
Input 0 - 15\Inputs\Channel 0-7\Channel 3					
Parameter settings	From template				
Input 0 - 15\Inputs\Channel 0-7\Channel 3\Diagnostics					
No supply voltage L+	False	**Wire break**	False		
Input 0 - 15\Inputs\Channel 0-7\Channel 3\Input parameters					
Input delay	3.2ms				
Input 0 - 15\Inputs\Channel 0-7\Channel 3\Hardware interrupts					
Enable rising edge detection	0	**RidPrefixRisingEdgeEvent**	49155	**Event name**	
Hardware interrupt	0	**Rising edge3**	Rising edge3	**Channel number**	3
HwEventTypeRisingEdge	1				
Input 0 - 15\Inputs\Channel 0-7\Channel 3\Hardware interrupts					
Enable falling edge detection	0	**RidPrefixFallingEdgeEvent**	49283	**Event name**	
Hardware interrupt	0	**Falling edge3**	Falling edge3	**Channel number**	3
HwEventTypeFallingEdge	2				
Input 0 - 15\Inputs\Channel 0-7\Channel 4					
Parameter settings	From template				
Input 0 - 15\Inputs\Channel 0-7\Channel 4\Diagnostics					
No supply voltage L+	False	**Wire break**	False		
Input 0 - 15\Inputs\Channel 0-7\Channel 4\Input parameters					
Input delay	3.2ms				
Input 0 - 15\Inputs\Channel 0-7\Channel 4\Hardware interrupts					
Enable rising edge detection	0	**RidPrefixRisingEdgeEvent**	49156	**Event name**	
Hardware interrupt	0	**Rising edge4**	Rising edge4	**Channel number**	4
HwEventTypeRisingEdge	1				
Input 0 - 15\Inputs\Channel 0-7\Channel 4\Hardware interrupts					
Enable falling edge detection	0	**RidPrefixFallingEdgeEvent**	49284	**Event name**	
Hardware interrupt	0	**Falling edge4**	Falling edge4	**Channel number**	4
HwEventTypeFallingEdge	2				
Input 0 - 15\Inputs\Channel 0-7\Channel 5					
Parameter settings	From template				
Input 0 - 15\Inputs\Channel 0-7\Channel 5\Diagnostics					
No supply voltage L+	False	**Wire break**	False		
Input 0 - 15\Inputs\Channel 0-7\Channel 5\Input parameters					
Input delay	3.2ms				
Input 0 - 15\Inputs\Channel 0-7\Channel 5\Hardware interrupts					
Enable rising edge detection	0	**RidPrefixRisingEdgeEvent**	49157	**Event name**	
Hardware interrupt	0	**Rising edge5**	Rising edge5	**Channel number**	5
HwEventTypeRisingEdge	1				
Input 0 - 15\Inputs\Channel 0-7\Channel 5\Hardware interrupts					
Enable falling edge detection	0	**RidPrefixFallingEdgeEvent**	49285	**Event name**	
Hardware interrupt	0	**Falling edge5**	Falling edge5	**Channel number**	5
HwEventTypeFallingEdge	2				
Input 0 - 15\Inputs\Channel 0-7\Channel 6					
Parameter settings	From template				
Input 0 - 15\Inputs\Channel 0-7\Channel 6\Diagnostics					
No supply voltage L+	False	**Wire break**	False		

Input 0 - 15\Inputs\Channel 0-7\Channel 6\Input parameters					
Input delay	3.2ms				
Input 0 - 15\Inputs\Channel 0-7\Channel 6\Hardware interrupts					
Enable rising edge detection	0	**RidPrefixRisingEdgeEvent**	49158	**Event name**	
Hardware interrupt	0	**Rising edge6**	Rising edge6	**Channel number**	6
HwEventTypeRisingEdge	1				
Input 0 - 15\Inputs\Channel 0-7\Channel 6\Hardware interrupts					
Enable falling edge detection	0	**RidPrefixFallingEdgeEvent**	49286	**Event name**	
Hardware interrupt	0	**Falling edge6**	Falling edge6	**Channel number**	6
HwEventTypeFallingEdge	2				
Input 0 - 15\Inputs\Channel 0-7\Channel 7					
Parameter settings	From template				
Input 0 - 15\Inputs\Channel 0-7\Channel 7\Diagnostics					
No supply voltage L+	False	**Wire break**	False		
Input 0 - 15\Inputs\Channel 0-7\Channel 7\Input parameters					
Input delay	3.2ms				
Input 0 - 15\Inputs\Channel 0-7\Channel 7\Hardware interrupts					
Enable rising edge detection	0	**RidPrefixRisingEdgeEvent**	49159	**Event name**	
Hardware interrupt	0	**Rising edge7**	Rising edge7	**Channel number**	7
HwEventTypeRisingEdge	1				
Input 0 - 15\Inputs\Channel 0-7\Channel 7\Hardware interrupts					
Enable falling edge detection	0	**RidPrefixFallingEdgeEvent**	49287	**Event name**	
Hardware interrupt	0	**Falling edge7**	Falling edge7	**Channel number**	7
HwEventTypeFallingEdge	2				
Input 0 - 15\Inputs\Channel 8-15\Channel 8					
Parameter settings	From template				
Input 0 - 15\Inputs\Channel 8-15\Channel 8\Diagnostics					
No supply voltage L+	False	**Wire break**	False		
Input 0 - 15\Inputs\Channel 8-15\Channel 8\Input parameters					
Input delay	3.2ms				
Input 0 - 15\Inputs\Channel 8-15\Channel 8\Hardware interrupts					
Enable rising edge detection	0	**RidPrefixRisingEdgeEvent**	49160	**Event name**	
Hardware interrupt	0	**Rising edge8**	Rising edge8	**Channel number**	8
HwEventTypeRisingEdge	1				
Input 0 - 15\Inputs\Channel 8-15\Channel 8\Hardware interrupts					
Enable falling edge detection	0	**RidPrefixFallingEdgeEvent**	49288	**Event name**	
Hardware interrupt	0	**Falling edge8**	Falling edge8	**Channel number**	8
HwEventTypeFallingEdge	2				
Input 0 - 15\Inputs\Channel 8-15\Channel 9					
Parameter settings	From template				
Input 0 - 15\Inputs\Channel 8-15\Channel 9\Diagnostics					
No supply voltage L+	False	**Wire break**	False		
Input 0 - 15\Inputs\Channel 8-15\Channel 9\Input parameters					
Input delay	3.2ms				
Input 0 - 15\Inputs\Channel 8-15\Channel 9\Hardware interrupts					
Enable rising edge detection	0	**RidPrefixRisingEdgeEvent**	49161	**Event name**	
Hardware interrupt	0	**Rising edge9**	Rising edge9	**Channel number**	9
HwEventTypeRisingEdge	1				
Input 0 - 15\Inputs\Channel 8-15\Channel 9\Hardware interrupts					
Enable falling edge detection	0	**RidPrefixFallingEdgeEvent**	49289	**Event name**	
Hardware interrupt	0	**Falling edge9**	Falling edge9	**Channel number**	9
HwEventTypeFallingEdge	2				
Input 0 - 15\Inputs\Channel 8-15\Channel 10					
Parameter settings	From template				
Input 0 - 15\Inputs\Channel 8-15\Channel 10\Diagnostics					
No supply voltage L+	False	**Wire break**	False		
Input 0 - 15\Inputs\Channel 8-15\Channel 10\Input parameters					
Input delay	3.2ms				
Input 0 - 15\Inputs\Channel 8-15\Channel 10\Hardware interrupts					
Enable rising edge detection	0	**RidPrefixRisingEdgeEvent**	49162	**Event name**	
Hardware interrupt	0	**Rising edge10**	Rising edge10	**Channel number**	10
HwEventTypeRisingEdge	1				
Input 0 - 15\Inputs\Channel 8-15\Channel 10\Hardware interrupts					
Enable falling edge detection	0	**RidPrefixFallingEdgeEvent**	49290	**Event name**	
Hardware interrupt	0	**Falling edge10**	Falling edge10	**Channel number**	10
HwEventTypeFallingEdge	2				
Input 0 - 15\Inputs\Channel 8-15\Channel 11					
Parameter settings	From template				

Input 0 - 15\Inputs\Channel 8-15\Channel 11\Diagnostics					
No supply voltage L+	False	**Wire break**	False		
Input 0 - 15\Inputs\Channel 8-15\Channel 11\Input parameters					
Input delay	3.2ms				
Input 0 - 15\Inputs\Channel 8-15\Channel 11\Hardware interrupts					
Enable rising edge detection	0	**RidPrefixRisingEdgeEvent**	49163	**Event name**	
Hardware interrupt	0	**Rising edge11**	Rising edge11	**Channel number**	11
HwEventTypeRisingEdge	1				
Input 0 - 15\Inputs\Channel 8-15\Channel 11\Hardware interrupts					
Enable falling edge detection	0	**RidPrefixFallingEdgeEvent**	49291	**Event name**	
Hardware interrupt	0	**Falling edge11**	Falling edge11	**Channel number**	11
HwEventTypeFallingEdge	2				
Input 0 - 15\Inputs\Channel 8-15\Channel 12					
Parameter settings	From template				
Input 0 - 15\Inputs\Channel 8-15\Channel 12\Diagnostics					
No supply voltage L+	False	**Wire break**	False		
Input 0 - 15\Inputs\Channel 8-15\Channel 12\Input parameters					
Input delay	3.2ms				
Input 0 - 15\Inputs\Channel 8-15\Channel 12\Hardware interrupts					
Enable rising edge detection	0	**RidPrefixRisingEdgeEvent**	49164	**Event name**	
Hardware interrupt	0	**Rising edge12**	Rising edge12	**Channel number**	12
HwEventTypeRisingEdge	1				
Input 0 - 15\Inputs\Channel 8-15\Channel 12\Hardware interrupts					
Enable falling edge detection	0	**RidPrefixFallingEdgeEvent**	49292	**Event name**	
Hardware interrupt	0	**Falling edge12**	Falling edge12	**Channel number**	12
HwEventTypeFallingEdge	2				
Input 0 - 15\Inputs\Channel 8-15\Channel 13					
Parameter settings	From template				
Input 0 - 15\Inputs\Channel 8-15\Channel 13\Diagnostics					
No supply voltage L+	False	**Wire break**	False		
Input 0 - 15\Inputs\Channel 8-15\Channel 13\Input parameters					
Input delay	3.2ms				
Input 0 - 15\Inputs\Channel 8-15\Channel 13\Hardware interrupts					
Enable rising edge detection	0	**RidPrefixRisingEdgeEvent**	49165	**Event name**	
Hardware interrupt	0	**Rising edge13**	Rising edge13	**Channel number**	13
HwEventTypeRisingEdge	1				
Input 0 - 15\Inputs\Channel 8-15\Channel 13\Hardware interrupts					
Enable falling edge detection	0	**RidPrefixFallingEdgeEvent**	49293	**Event name**	
Hardware interrupt	0	**Falling edge13**	Falling edge13	**Channel number**	13
HwEventTypeFallingEdge	2				
Input 0 - 15\Inputs\Channel 8-15\Channel 14					
Parameter settings	From template				
Input 0 - 15\Inputs\Channel 8-15\Channel 14\Diagnostics					
No supply voltage L+	False	**Wire break**	False		
Input 0 - 15\Inputs\Channel 8-15\Channel 14\Input parameters					
Input delay	3.2ms				
Input 0 - 15\Inputs\Channel 8-15\Channel 14\Hardware interrupts					
Enable rising edge detection	0	**RidPrefixRisingEdgeEvent**	49166	**Event name**	
Hardware interrupt	0	**Rising edge14**	Rising edge14	**Channel number**	14
HwEventTypeRisingEdge	1				
Input 0 - 15\Inputs\Channel 8-15\Channel 14\Hardware interrupts					
Enable falling edge detection	0	**RidPrefixFallingEdgeEvent**	49294	**Event name**	
Hardware interrupt	0	**Falling edge14**	Falling edge14	**Channel number**	14
HwEventTypeFallingEdge	2				
Input 0 - 15\Inputs\Channel 8-15\Channel 15					
Parameter settings	From template				
Input 0 - 15\Inputs\Channel 8-15\Channel 15\Diagnostics					
No supply voltage L+	False	**Wire break**	False		
Input 0 - 15\Inputs\Channel 8-15\Channel 15\Input parameters					
Input delay	3.2ms				
Input 0 - 15\Inputs\Channel 8-15\Channel 15\Hardware interrupts					
Enable rising edge detection	0	**RidPrefixRisingEdgeEvent**	49167	**Event name**	
Hardware interrupt	0	**Rising edge15**	Rising edge15	**Channel number**	15
HwEventTypeRisingEdge	1				
Input 0 - 15\Inputs\Channel 8-15\Channel 15\Hardware interrupts					
Enable falling edge detection	0	**RidPrefixFallingEdgeEvent**	49295	**Event name**	
Hardware interrupt	0	**Falling edge15**	Falling edge15	**Channel number**	15
HwEventTypeFallingEdge	2				

Input 0 - 15\I/O addresses\Input addresses					
Start address	16.0	**End address**	17.7	**Isochronous mode**	False
Organization block	0	**Process image**	0		

Fabrica / PLC_1 [CPU 1511-1 PN] / Local modules

DI 16x24VDC HF_2

DI 16x24VDC HF_2					
General\Project information					
Name	DI 16x24VDC HF_2	**Author**	Administrator	**Comment**	
Rack	0	**Slot**	3		
General\Catalog information					
Short designation	DI 16x24VDC HF	**Description**	Digital input module DI16 x 24VDC; grouping 16; input delay 0.05..20ms; input type 3 (IEC 61131); configurable diagnostics; hardware interrupts; value status; integrated counter for channel 0 and 1; isochronous mode	**Article number**	6ES7 521-1BH00-0AB0
Firmware version	V2.2		False		
General\Identification & Maintenance					
Plant designation		**Location identifier**		**Installation date**	2026-07-22 06:17:40.987
Additional information					
Module parameters\General\Startup					
Comparison preset to actual module	From CPU				
Module parameters\Channel template\Inputs\Apply to all channels that use the template\Diagnostics					
No supply voltage L+	False	**Wire break**	False		
Module parameters\Channel template\Inputs\Apply to all channels that use the template\Input parameters					
Input delay	3.2ms				
Module parameters\DI Configuration\Configuration of submodules					
Module distribution	None				
Module parameters\DI Configuration\Value status (Quality Information)					
Value status	False				
Module parameters\DI Configuration\Copy of module for Shared Device (MSI)					
Copy of module:	None				
Module parameters\DI Configuration\Counter configuration\Counter configuration on channel 0 and channel 1 enabled					
Counter configuration on channel 0 and channel 1 enabled	False				
Input 0 - 15\General					
Name	DI 16x24VDC HF_2	**Comment**			
Input 0 - 15\Inputs\General\Module failure					
Input values with module failure	Input value 0				
Input 0 - 15\Inputs\Channel 0-7\Channel 0					
Parameter settings	From template				
Input 0 - 15\Inputs\Channel 0-7\Channel 0\Diagnostics					
No supply voltage L+	False	**Wire break**	False		
Input 0 - 15\Inputs\Channel 0-7\Channel 0\Input parameters					
Input delay	3.2ms				
Input 0 - 15\Inputs\Channel 0-7\Channel 0\Counter configuration					
Reaction to violation of a counting limit		**Edge selection**		**Set output DQ**	
High counting limit		**Low counting limit**		**Start value**	
Comparison value					
Input 0 - 15\Inputs\Channel 0-7\Channel 0\Hardware interrupts					
Comparison event for DQ has occurred	0	**CountRidPrefixEvent**	49248	**Event name**	
Hardware interrupt	0	**Rising edge0**	Count0	**Channel number**	0
CountHwEventType	5				
Input 0 - 15\Inputs\Channel 0-7\Channel 0\Hardware interrupts					
Enable rising edge detection	0	**RidPrefixRisingEdgeEvent**	49152	**Event name**	
Hardware interrupt	0	**Rising edge0**	Rising edge0	**Channel number**	0
HwEventTypeRisingEdge	1				
Input 0 - 15\Inputs\Channel 0-7\Channel 0\Hardware interrupts					
Enable falling edge detection	0	**RidPrefixFallingEdgeEvent**	49280	**Event name**	
Hardware interrupt	0	**Falling edge0**	Falling edge0	**Channel number**	0
HwEventTypeFallingEdge	2				
Input 0 - 15\Inputs\Channel 0-7\Channel 1					
Parameter settings	From template				
Input 0 - 15\Inputs\Channel 0-7\Channel 1\Diagnostics					
No supply voltage L+	False	**Wire break**	False		
Input 0 - 15\Inputs\Channel 0-7\Channel 1\Input parameters					
Input delay	3.2ms				
Input 0 - 15\Inputs\Channel 0-7\Channel 1\Counter configuration					
Reaction to violation of a counting limit		**Edge selection**		**Set output DQ**	
High counting limit		**Low counting limit**		**Start value**	
Comparison value					
Input 0 - 15\Inputs\Channel 0-7\Channel 1\Hardware interrupts					
Comparison event for DQ has occurred	0	**CountRidPrefixEvent**	49249	**Event name**	
Hardware interrupt	0	**Rising edge1**	Count1	**Channel number**	1
CountHwEventType	5				

Input 0 - 15\Inputs\Channel 0-7\Channel 1\Hardware interrupts					
Enable rising edge detection	0	**RidPrefixRisingEdgeEvent**	49153	**Event name**	
Hardware interrupt	0	**Rising edge1**	Rising edge1	**Channel number**	1
HwEventTypeRisingEdge	1				
Input 0 - 15\Inputs\Channel 0-7\Channel 1\Hardware interrupts					
Enable falling edge detection	0	**RidPrefixFallingEdgeEvent**	49281	**Event name**	
Hardware interrupt	0	**Falling edge1**	Falling edge1	**Channel number**	1
HwEventTypeFallingEdge	2				
Input 0 - 15\Inputs\Channel 0-7\Channel 2					
Parameter settings	From template				
Input 0 - 15\Inputs\Channel 0-7\Channel 2\Diagnostics					
No supply voltage L+	False	**Wire break**	False		
Input 0 - 15\Inputs\Channel 0-7\Channel 2\Input parameters					
Input delay	3.2ms				
Input 0 - 15\Inputs\Channel 0-7\Channel 2\Hardware interrupts					
Enable rising edge detection	0	**RidPrefixRisingEdgeEvent**	49154	**Event name**	
Hardware interrupt	0	**Rising edge2**	Rising edge2	**Channel number**	2
HwEventTypeRisingEdge	1				
Input 0 - 15\Inputs\Channel 0-7\Channel 2\Hardware interrupts					
Enable falling edge detection	0	**RidPrefixFallingEdgeEvent**	49282	**Event name**	
Hardware interrupt	0	**Falling edge2**	Falling edge2	**Channel number**	2
HwEventTypeFallingEdge	2				
Input 0 - 15\Inputs\Channel 0-7\Channel 3					
Parameter settings	From template				
Input 0 - 15\Inputs\Channel 0-7\Channel 3\Diagnostics					
No supply voltage L+	False	**Wire break**	False		
Input 0 - 15\Inputs\Channel 0-7\Channel 3\Input parameters					
Input delay	3.2ms				
Input 0 - 15\Inputs\Channel 0-7\Channel 3\Hardware interrupts					
Enable rising edge detection	0	**RidPrefixRisingEdgeEvent**	49155	**Event name**	
Hardware interrupt	0	**Rising edge3**	Rising edge3	**Channel number**	3
HwEventTypeRisingEdge	1				
Input 0 - 15\Inputs\Channel 0-7\Channel 3\Hardware interrupts					
Enable falling edge detection	0	**RidPrefixFallingEdgeEvent**	49283	**Event name**	
Hardware interrupt	0	**Falling edge3**	Falling edge3	**Channel number**	3
HwEventTypeFallingEdge	2				
Input 0 - 15\Inputs\Channel 0-7\Channel 4					
Parameter settings	From template				
Input 0 - 15\Inputs\Channel 0-7\Channel 4\Diagnostics					
No supply voltage L+	False	**Wire break**	False		
Input 0 - 15\Inputs\Channel 0-7\Channel 4\Input parameters					
Input delay	3.2ms				
Input 0 - 15\Inputs\Channel 0-7\Channel 4\Hardware interrupts					
Enable rising edge detection	0	**RidPrefixRisingEdgeEvent**	49156	**Event name**	
Hardware interrupt	0	**Rising edge4**	Rising edge4	**Channel number**	4
HwEventTypeRisingEdge	1				
Input 0 - 15\Inputs\Channel 0-7\Channel 4\Hardware interrupts					
Enable falling edge detection	0	**RidPrefixFallingEdgeEvent**	49284	**Event name**	
Hardware interrupt	0	**Falling edge4**	Falling edge4	**Channel number**	4
HwEventTypeFallingEdge	2				
Input 0 - 15\Inputs\Channel 0-7\Channel 5					
Parameter settings	From template				
Input 0 - 15\Inputs\Channel 0-7\Channel 5\Diagnostics					
No supply voltage L+	False	**Wire break**	False		
Input 0 - 15\Inputs\Channel 0-7\Channel 5\Input parameters					
Input delay	3.2ms				
Input 0 - 15\Inputs\Channel 0-7\Channel 5\Hardware interrupts					
Enable rising edge detection	0	**RidPrefixRisingEdgeEvent**	49157	**Event name**	
Hardware interrupt	0	**Rising edge5**	Rising edge5	**Channel number**	5
HwEventTypeRisingEdge	1				
Input 0 - 15\Inputs\Channel 0-7\Channel 5\Hardware interrupts					
Enable falling edge detection	0	**RidPrefixFallingEdgeEvent**	49285	**Event name**	
Hardware interrupt	0	**Falling edge5**	Falling edge5	**Channel number**	5
HwEventTypeFallingEdge	2				
Input 0 - 15\Inputs\Channel 0-7\Channel 6					
Parameter settings	From template				
Input 0 - 15\Inputs\Channel 0-7\Channel 6\Diagnostics					
No supply voltage L+	False	**Wire break**	False		

Input 0 - 15\Inputs\Channel 0-7\Channel 6\Input parameters					
Input delay	3.2ms				
Input 0 - 15\Inputs\Channel 0-7\Channel 6\Hardware interrupts					
Enable rising edge detection	0	**RidPrefixRisingEdgeEvent**	49158	**Event name**	
Hardware interrupt	0	**Rising edge6**	Rising edge6	**Channel number**	6
HwEventTypeRisingEdge	1				
Input 0 - 15\Inputs\Channel 0-7\Channel 6\Hardware interrupts					
Enable falling edge detection	0	**RidPrefixFallingEdgeEvent**	49286	**Event name**	
Hardware interrupt	0	**Falling edge6**	Falling edge6	**Channel number**	6
HwEventTypeFallingEdge	2				
Input 0 - 15\Inputs\Channel 0-7\Channel 7					
Parameter settings	From template				
Input 0 - 15\Inputs\Channel 0-7\Channel 7\Diagnostics					
No supply voltage L+	False	**Wire break**	False		
Input 0 - 15\Inputs\Channel 0-7\Channel 7\Input parameters					
Input delay	3.2ms				
Input 0 - 15\Inputs\Channel 0-7\Channel 7\Hardware interrupts					
Enable rising edge detection	0	**RidPrefixRisingEdgeEvent**	49159	**Event name**	
Hardware interrupt	0	**Rising edge7**	Rising edge7	**Channel number**	7
HwEventTypeRisingEdge	1				
Input 0 - 15\Inputs\Channel 0-7\Channel 7\Hardware interrupts					
Enable falling edge detection	0	**RidPrefixFallingEdgeEvent**	49287	**Event name**	
Hardware interrupt	0	**Falling edge7**	Falling edge7	**Channel number**	7
HwEventTypeFallingEdge	2				
Input 0 - 15\Inputs\Channel 8-15\Channel 8					
Parameter settings	From template				
Input 0 - 15\Inputs\Channel 8-15\Channel 8\Diagnostics					
No supply voltage L+	False	**Wire break**	False		
Input 0 - 15\Inputs\Channel 8-15\Channel 8\Input parameters					
Input delay	3.2ms				
Input 0 - 15\Inputs\Channel 8-15\Channel 8\Hardware interrupts					
Enable rising edge detection	0	**RidPrefixRisingEdgeEvent**	49160	**Event name**	
Hardware interrupt	0	**Rising edge8**	Rising edge8	**Channel number**	8
HwEventTypeRisingEdge	1				
Input 0 - 15\Inputs\Channel 8-15\Channel 8\Hardware interrupts					
Enable falling edge detection	0	**RidPrefixFallingEdgeEvent**	49288	**Event name**	
Hardware interrupt	0	**Falling edge8**	Falling edge8	**Channel number**	8
HwEventTypeFallingEdge	2				
Input 0 - 15\Inputs\Channel 8-15\Channel 9					
Parameter settings	From template				
Input 0 - 15\Inputs\Channel 8-15\Channel 9\Diagnostics					
No supply voltage L+	False	**Wire break**	False		
Input 0 - 15\Inputs\Channel 8-15\Channel 9\Input parameters					
Input delay	3.2ms				
Input 0 - 15\Inputs\Channel 8-15\Channel 9\Hardware interrupts					
Enable rising edge detection	0	**RidPrefixRisingEdgeEvent**	49161	**Event name**	
Hardware interrupt	0	**Rising edge9**	Rising edge9	**Channel number**	9
HwEventTypeRisingEdge	1				
Input 0 - 15\Inputs\Channel 8-15\Channel 9\Hardware interrupts					
Enable falling edge detection	0	**RidPrefixFallingEdgeEvent**	49289	**Event name**	
Hardware interrupt	0	**Falling edge9**	Falling edge9	**Channel number**	9
HwEventTypeFallingEdge	2				
Input 0 - 15\Inputs\Channel 8-15\Channel 10					
Parameter settings	From template				
Input 0 - 15\Inputs\Channel 8-15\Channel 10\Diagnostics					
No supply voltage L+	False	**Wire break**	False		
Input 0 - 15\Inputs\Channel 8-15\Channel 10\Input parameters					
Input delay	3.2ms				
Input 0 - 15\Inputs\Channel 8-15\Channel 10\Hardware interrupts					
Enable rising edge detection	0	**RidPrefixRisingEdgeEvent**	49162	**Event name**	
Hardware interrupt	0	**Rising edge10**	Rising edge10	**Channel number**	10
HwEventTypeRisingEdge	1				
Input 0 - 15\Inputs\Channel 8-15\Channel 10\Hardware interrupts					
Enable falling edge detection	0	**RidPrefixFallingEdgeEvent**	49290	**Event name**	
Hardware interrupt	0	**Falling edge10**	Falling edge10	**Channel number**	10
HwEventTypeFallingEdge	2				
Input 0 - 15\Inputs\Channel 8-15\Channel 11					
Parameter settings	From template				

Input 0 - 15\Inputs\Channel 8-15\Channel 11\Diagnostics					
No supply voltage L+	False	**Wire break**	False		
Input 0 - 15\Inputs\Channel 8-15\Channel 11\Input parameters					
Input delay	3.2ms				
Input 0 - 15\Inputs\Channel 8-15\Channel 11\Hardware interrupts					
Enable rising edge detection	0	**RidPrefixRisingEdgeEvent**	49163	**Event name**	
Hardware interrupt	0	**Rising edge11**	Rising edge11	**Channel number**	11
HwEventTypeRisingEdge	1				
Input 0 - 15\Inputs\Channel 8-15\Channel 11\Hardware interrupts					
Enable falling edge detection	0	**RidPrefixFallingEdgeEvent**	49291	**Event name**	
Hardware interrupt	0	**Falling edge11**	Falling edge11	**Channel number**	11
HwEventTypeFallingEdge	2				
Input 0 - 15\Inputs\Channel 8-15\Channel 12					
Parameter settings	From template				
Input 0 - 15\Inputs\Channel 8-15\Channel 12\Diagnostics					
No supply voltage L+	False	**Wire break**	False		
Input 0 - 15\Inputs\Channel 8-15\Channel 12\Input parameters					
Input delay	3.2ms				
Input 0 - 15\Inputs\Channel 8-15\Channel 12\Hardware interrupts					
Enable rising edge detection	0	**RidPrefixRisingEdgeEvent**	49164	**Event name**	
Hardware interrupt	0	**Rising edge12**	Rising edge12	**Channel number**	12
HwEventTypeRisingEdge	1				
Input 0 - 15\Inputs\Channel 8-15\Channel 12\Hardware interrupts					
Enable falling edge detection	0	**RidPrefixFallingEdgeEvent**	49292	**Event name**	
Hardware interrupt	0	**Falling edge12**	Falling edge12	**Channel number**	12
HwEventTypeFallingEdge	2				
Input 0 - 15\Inputs\Channel 8-15\Channel 13					
Parameter settings	From template				
Input 0 - 15\Inputs\Channel 8-15\Channel 13\Diagnostics					
No supply voltage L+	False	**Wire break**	False		
Input 0 - 15\Inputs\Channel 8-15\Channel 13\Input parameters					
Input delay	3.2ms				
Input 0 - 15\Inputs\Channel 8-15\Channel 13\Hardware interrupts					
Enable rising edge detection	0	**RidPrefixRisingEdgeEvent**	49165	**Event name**	
Hardware interrupt	0	**Rising edge13**	Rising edge13	**Channel number**	13
HwEventTypeRisingEdge	1				
Input 0 - 15\Inputs\Channel 8-15\Channel 13\Hardware interrupts					
Enable falling edge detection	0	**RidPrefixFallingEdgeEvent**	49293	**Event name**	
Hardware interrupt	0	**Falling edge13**	Falling edge13	**Channel number**	13
HwEventTypeFallingEdge	2				
Input 0 - 15\Inputs\Channel 8-15\Channel 14					
Parameter settings	From template				
Input 0 - 15\Inputs\Channel 8-15\Channel 14\Diagnostics					
No supply voltage L+	False	**Wire break**	False		
Input 0 - 15\Inputs\Channel 8-15\Channel 14\Input parameters					
Input delay	3.2ms				
Input 0 - 15\Inputs\Channel 8-15\Channel 14\Hardware interrupts					
Enable rising edge detection	0	**RidPrefixRisingEdgeEvent**	49166	**Event name**	
Hardware interrupt	0	**Rising edge14**	Rising edge14	**Channel number**	14
HwEventTypeRisingEdge	1				
Input 0 - 15\Inputs\Channel 8-15\Channel 14\Hardware interrupts					
Enable falling edge detection	0	**RidPrefixFallingEdgeEvent**	49294	**Event name**	
Hardware interrupt	0	**Falling edge14**	Falling edge14	**Channel number**	14
HwEventTypeFallingEdge	2				
Input 0 - 15\Inputs\Channel 8-15\Channel 15					
Parameter settings	From template				
Input 0 - 15\Inputs\Channel 8-15\Channel 15\Diagnostics					
No supply voltage L+	False	**Wire break**	False		
Input 0 - 15\Inputs\Channel 8-15\Channel 15\Input parameters					
Input delay	3.2ms				
Input 0 - 15\Inputs\Channel 8-15\Channel 15\Hardware interrupts					
Enable rising edge detection	0	**RidPrefixRisingEdgeEvent**	49167	**Event name**	
Hardware interrupt	0	**Rising edge15**	Rising edge15	**Channel number**	15
HwEventTypeRisingEdge	1				
Input 0 - 15\Inputs\Channel 8-15\Channel 15\Hardware interrupts					
Enable falling edge detection	0	**RidPrefixFallingEdgeEvent**	49295	**Event name**	
Hardware interrupt	0	**Falling edge15**	Falling edge15	**Channel number**	15
HwEventTypeFallingEdge	2				

Input 0 - 15\I/O addresses\Input addresses					
Start address	18.0	**End address**	19.7	**Isochronous mode**	False
Organization block	0	**Process image**	0		

Fabrica / PLC_1 [CPU 1511-1 PN] / Local modules

DI 16x24VDC HF_3

DI 16x24VDC HF_3					
General\Project information					
Name	DI 16x24VDC HF_3	**Author**	Administrator	**Comment**	
Rack	0	**Slot**	4		
General\Catalog information					
Short designation	DI 16x24VDC HF	**Description**	Digital input module DI16 x 24VDC; grouping 16; input delay 0.05..20ms; input type 3 (IEC 61131); configurable diagnostics; hardware interrupts; value status; integrated counter for channel 0 and 1; isochronous mode	**Article number**	6ES7 521-1BH00-0AB0
Firmware version	V2.2		False		
General\Identification & Maintenance					
Plant designation		**Location identifier**		**Installation date**	2026-07-22 07:03:08.678
Additional information					
Module parameters\General\Startup					
Comparison preset to actual module	From CPU				
Module parameters\Channel template\Inputs\Apply to all channels that use the template\Diagnostics					
No supply voltage L+	False	**Wire break**	False		
Module parameters\Channel template\Inputs\Apply to all channels that use the template\Input parameters					
Input delay	3.2ms				
Module parameters\DI Configuration\Configuration of submodules					
Module distribution	None				
Module parameters\DI Configuration\Value status (Quality Information)					
Value status	False				
Module parameters\DI Configuration\Copy of module for Shared Device (MSI)					
Copy of module:	None				
Module parameters\DI Configuration\Counter configuration\Counter configuration on channel 0 and channel 1 enabled					
Counter configuration on channel 0 and channel 1 enabled	False				
Input 0 - 15\General					
Name	DI 16x24VDC HF_3	**Comment**			
Input 0 - 15\Inputs\General\Module failure					
Input values with module failure	Input value 0				
Input 0 - 15\Inputs\Channel 0-7\Channel 0					
Parameter settings	From template				
Input 0 - 15\Inputs\Channel 0-7\Channel 0\Diagnostics					
No supply voltage L+	False	**Wire break**	False		
Input 0 - 15\Inputs\Channel 0-7\Channel 0\Input parameters					
Input delay	3.2ms				
Input 0 - 15\Inputs\Channel 0-7\Channel 0\Counter configuration					
Reaction to violation of a counting limit		**Edge selection**		**Set output DQ**	
High counting limit		**Low counting limit**		**Start value**	
Comparison value					
Input 0 - 15\Inputs\Channel 0-7\Channel 0\Hardware interrupts					
Comparison event for DQ has occurred	0	**CountRidPrefixEvent**	49248	**Event name**	
Hardware interrupt	0	**Rising edge0**	Count0	**Channel number**	0
CountHwEventType	5				
Input 0 - 15\Inputs\Channel 0-7\Channel 0\Hardware interrupts					
Enable rising edge detection	0	**RidPrefixRisingEdgeEvent**	49152	**Event name**	
Hardware interrupt	0	**Rising edge0**	Rising edge0	**Channel number**	0
HwEventTypeRisingEdge	1				
Input 0 - 15\Inputs\Channel 0-7\Channel 0\Hardware interrupts					
Enable falling edge detection	0	**RidPrefixFallingEdgeEvent**	49280	**Event name**	
Hardware interrupt	0	**Falling edge0**	Falling edge0	**Channel number**	0
HwEventTypeFallingEdge	2				
Input 0 - 15\Inputs\Channel 0-7\Channel 1					
Parameter settings	From template				
Input 0 - 15\Inputs\Channel 0-7\Channel 1\Diagnostics					
No supply voltage L+	False	**Wire break**	False		
Input 0 - 15\Inputs\Channel 0-7\Channel 1\Input parameters					
Input delay	3.2ms				
Input 0 - 15\Inputs\Channel 0-7\Channel 1\Counter configuration					
Reaction to violation of a counting limit		**Edge selection**		**Set output DQ**	
High counting limit		**Low counting limit**		**Start value**	
Comparison value					
Input 0 - 15\Inputs\Channel 0-7\Channel 1\Hardware interrupts					
Comparison event for DQ has occurred	0	**CountRidPrefixEvent**	49249	**Event name**	
Hardware interrupt	0	**Rising edge1**	Count1	**Channel number**	1
CountHwEventType	5				

Input 0 - 15\Inputs\Channel 0-7\Channel 1\Hardware interrupts					
Enable rising edge detection	0	**RidPrefixRisingEdgeEvent**	49153	**Event name**	
Hardware interrupt	0	**Rising edge1**	Rising edge1	**Channel number**	1
HwEventTypeRisingEdge	1				
Input 0 - 15\Inputs\Channel 0-7\Channel 1\Hardware interrupts					
Enable falling edge detection	0	**RidPrefixFallingEdgeEvent**	49281	**Event name**	
Hardware interrupt	0	**Falling edge1**	Falling edge1	**Channel number**	1
HwEventTypeFallingEdge	2				
Input 0 - 15\Inputs\Channel 0-7\Channel 2					
Parameter settings	From template				
Input 0 - 15\Inputs\Channel 0-7\Channel 2\Diagnostics					
No supply voltage L+	False	**Wire break**	False		
Input 0 - 15\Inputs\Channel 0-7\Channel 2\Input parameters					
Input delay	3.2ms				
Input 0 - 15\Inputs\Channel 0-7\Channel 2\Hardware interrupts					
Enable rising edge detection	0	**RidPrefixRisingEdgeEvent**	49154	**Event name**	
Hardware interrupt	0	**Rising edge2**	Rising edge2	**Channel number**	2
HwEventTypeRisingEdge	1				
Input 0 - 15\Inputs\Channel 0-7\Channel 2\Hardware interrupts					
Enable falling edge detection	0	**RidPrefixFallingEdgeEvent**	49282	**Event name**	
Hardware interrupt	0	**Falling edge2**	Falling edge2	**Channel number**	2
HwEventTypeFallingEdge	2				
Input 0 - 15\Inputs\Channel 0-7\Channel 3					
Parameter settings	From template				
Input 0 - 15\Inputs\Channel 0-7\Channel 3\Diagnostics					
No supply voltage L+	False	**Wire break**	False		
Input 0 - 15\Inputs\Channel 0-7\Channel 3\Input parameters					
Input delay	3.2ms				
Input 0 - 15\Inputs\Channel 0-7\Channel 3\Hardware interrupts					
Enable rising edge detection	0	**RidPrefixRisingEdgeEvent**	49155	**Event name**	
Hardware interrupt	0	**Rising edge3**	Rising edge3	**Channel number**	3
HwEventTypeRisingEdge	1				
Input 0 - 15\Inputs\Channel 0-7\Channel 3\Hardware interrupts					
Enable falling edge detection	0	**RidPrefixFallingEdgeEvent**	49283	**Event name**	
Hardware interrupt	0	**Falling edge3**	Falling edge3	**Channel number**	3
HwEventTypeFallingEdge	2				
Input 0 - 15\Inputs\Channel 0-7\Channel 4					
Parameter settings	From template				
Input 0 - 15\Inputs\Channel 0-7\Channel 4\Diagnostics					
No supply voltage L+	False	**Wire break**	False		
Input 0 - 15\Inputs\Channel 0-7\Channel 4\Input parameters					
Input delay	3.2ms				
Input 0 - 15\Inputs\Channel 0-7\Channel 4\Hardware interrupts					
Enable rising edge detection	0	**RidPrefixRisingEdgeEvent**	49156	**Event name**	
Hardware interrupt	0	**Rising edge4**	Rising edge4	**Channel number**	4
HwEventTypeRisingEdge	1				
Input 0 - 15\Inputs\Channel 0-7\Channel 4\Hardware interrupts					
Enable falling edge detection	0	**RidPrefixFallingEdgeEvent**	49284	**Event name**	
Hardware interrupt	0	**Falling edge4**	Falling edge4	**Channel number**	4
HwEventTypeFallingEdge	2				
Input 0 - 15\Inputs\Channel 0-7\Channel 5					
Parameter settings	From template				
Input 0 - 15\Inputs\Channel 0-7\Channel 5\Diagnostics					
No supply voltage L+	False	**Wire break**	False		
Input 0 - 15\Inputs\Channel 0-7\Channel 5\Input parameters					
Input delay	3.2ms				
Input 0 - 15\Inputs\Channel 0-7\Channel 5\Hardware interrupts					
Enable rising edge detection	0	**RidPrefixRisingEdgeEvent**	49157	**Event name**	
Hardware interrupt	0	**Rising edge5**	Rising edge5	**Channel number**	5
HwEventTypeRisingEdge	1				
Input 0 - 15\Inputs\Channel 0-7\Channel 5\Hardware interrupts					
Enable falling edge detection	0	**RidPrefixFallingEdgeEvent**	49285	**Event name**	
Hardware interrupt	0	**Falling edge5**	Falling edge5	**Channel number**	5
HwEventTypeFallingEdge	2				
Input 0 - 15\Inputs\Channel 0-7\Channel 6					
Parameter settings	From template				
Input 0 - 15\Inputs\Channel 0-7\Channel 6\Diagnostics					
No supply voltage L+	False	**Wire break**	False		

Input 0 - 15\Inputs\Channel 0-7\Channel 6\Input parameters					
Input delay	3.2ms				
Input 0 - 15\Inputs\Channel 0-7\Channel 6\Hardware interrupts					
Enable rising edge detection	0	**RidPrefixRisingEdgeEvent**	49158	**Event name**	
Hardware interrupt	0	**Rising edge6**	Rising edge6	**Channel number**	6
HwEventTypeRisingEdge	1				
Input 0 - 15\Inputs\Channel 0-7\Channel 6\Hardware interrupts					
Enable falling edge detection	0	**RidPrefixFallingEdgeEvent**	49286	**Event name**	
Hardware interrupt	0	**Falling edge6**	Falling edge6	**Channel number**	6
HwEventTypeFallingEdge	2				
Input 0 - 15\Inputs\Channel 0-7\Channel 7					
Parameter settings	From template				
Input 0 - 15\Inputs\Channel 0-7\Channel 7\Diagnostics					
No supply voltage L+	False	**Wire break**	False		
Input 0 - 15\Inputs\Channel 0-7\Channel 7\Input parameters					
Input delay	3.2ms				
Input 0 - 15\Inputs\Channel 0-7\Channel 7\Hardware interrupts					
Enable rising edge detection	0	**RidPrefixRisingEdgeEvent**	49159	**Event name**	
Hardware interrupt	0	**Rising edge7**	Rising edge7	**Channel number**	7
HwEventTypeRisingEdge	1				
Input 0 - 15\Inputs\Channel 0-7\Channel 7\Hardware interrupts					
Enable falling edge detection	0	**RidPrefixFallingEdgeEvent**	49287	**Event name**	
Hardware interrupt	0	**Falling edge7**	Falling edge7	**Channel number**	7
HwEventTypeFallingEdge	2				
Input 0 - 15\Inputs\Channel 8-15\Channel 8					
Parameter settings	From template				
Input 0 - 15\Inputs\Channel 8-15\Channel 8\Diagnostics					
No supply voltage L+	False	**Wire break**	False		
Input 0 - 15\Inputs\Channel 8-15\Channel 8\Input parameters					
Input delay	3.2ms				
Input 0 - 15\Inputs\Channel 8-15\Channel 8\Hardware interrupts					
Enable rising edge detection	0	**RidPrefixRisingEdgeEvent**	49160	**Event name**	
Hardware interrupt	0	**Rising edge8**	Rising edge8	**Channel number**	8
HwEventTypeRisingEdge	1				
Input 0 - 15\Inputs\Channel 8-15\Channel 8\Hardware interrupts					
Enable falling edge detection	0	**RidPrefixFallingEdgeEvent**	49288	**Event name**	
Hardware interrupt	0	**Falling edge8**	Falling edge8	**Channel number**	8
HwEventTypeFallingEdge	2				
Input 0 - 15\Inputs\Channel 8-15\Channel 9					
Parameter settings	From template				
Input 0 - 15\Inputs\Channel 8-15\Channel 9\Diagnostics					
No supply voltage L+	False	**Wire break**	False		
Input 0 - 15\Inputs\Channel 8-15\Channel 9\Input parameters					
Input delay	3.2ms				
Input 0 - 15\Inputs\Channel 8-15\Channel 9\Hardware interrupts					
Enable rising edge detection	0	**RidPrefixRisingEdgeEvent**	49161	**Event name**	
Hardware interrupt	0	**Rising edge9**	Rising edge9	**Channel number**	9
HwEventTypeRisingEdge	1				
Input 0 - 15\Inputs\Channel 8-15\Channel 9\Hardware interrupts					
Enable falling edge detection	0	**RidPrefixFallingEdgeEvent**	49289	**Event name**	
Hardware interrupt	0	**Falling edge9**	Falling edge9	**Channel number**	9
HwEventTypeFallingEdge	2				
Input 0 - 15\Inputs\Channel 8-15\Channel 10					
Parameter settings	From template				
Input 0 - 15\Inputs\Channel 8-15\Channel 10\Diagnostics					
No supply voltage L+	False	**Wire break**	False		
Input 0 - 15\Inputs\Channel 8-15\Channel 10\Input parameters					
Input delay	3.2ms				
Input 0 - 15\Inputs\Channel 8-15\Channel 10\Hardware interrupts					
Enable rising edge detection	0	**RidPrefixRisingEdgeEvent**	49162	**Event name**	
Hardware interrupt	0	**Rising edge10**	Rising edge10	**Channel number**	10
HwEventTypeRisingEdge	1				
Input 0 - 15\Inputs\Channel 8-15\Channel 10\Hardware interrupts					
Enable falling edge detection	0	**RidPrefixFallingEdgeEvent**	49290	**Event name**	
Hardware interrupt	0	**Falling edge10**	Falling edge10	**Channel number**	10
HwEventTypeFallingEdge	2				
Input 0 - 15\Inputs\Channel 8-15\Channel 11					
Parameter settings	From template				

Input 0 - 15\Inputs\Channel 8-15\Channel 11\Diagnostics					
No supply voltage L+	False	**Wire break**	False		
Input 0 - 15\Inputs\Channel 8-15\Channel 11\Input parameters					
Input delay	3.2ms				
Input 0 - 15\Inputs\Channel 8-15\Channel 11\Hardware interrupts					
Enable rising edge detection	0	**RidPrefixRisingEdgeEvent**	49163	**Event name**	
Hardware interrupt	0	**Rising edge11**	Rising edge11	**Channel number**	11
HwEventTypeRisingEdge	1				
Input 0 - 15\Inputs\Channel 8-15\Channel 11\Hardware interrupts					
Enable falling edge detection	0	**RidPrefixFallingEdgeEvent**	49291	**Event name**	
Hardware interrupt	0	**Falling edge11**	Falling edge11	**Channel number**	11
HwEventTypeFallingEdge	2				
Input 0 - 15\Inputs\Channel 8-15\Channel 12					
Parameter settings	From template				
Input 0 - 15\Inputs\Channel 8-15\Channel 12\Diagnostics					
No supply voltage L+	False	**Wire break**	False		
Input 0 - 15\Inputs\Channel 8-15\Channel 12\Input parameters					
Input delay	3.2ms				
Input 0 - 15\Inputs\Channel 8-15\Channel 12\Hardware interrupts					
Enable rising edge detection	0	**RidPrefixRisingEdgeEvent**	49164	**Event name**	
Hardware interrupt	0	**Rising edge12**	Rising edge12	**Channel number**	12
HwEventTypeRisingEdge	1				
Input 0 - 15\Inputs\Channel 8-15\Channel 12\Hardware interrupts					
Enable falling edge detection	0	**RidPrefixFallingEdgeEvent**	49292	**Event name**	
Hardware interrupt	0	**Falling edge12**	Falling edge12	**Channel number**	12
HwEventTypeFallingEdge	2				
Input 0 - 15\Inputs\Channel 8-15\Channel 13					
Parameter settings	From template				
Input 0 - 15\Inputs\Channel 8-15\Channel 13\Diagnostics					
No supply voltage L+	False	**Wire break**	False		
Input 0 - 15\Inputs\Channel 8-15\Channel 13\Input parameters					
Input delay	3.2ms				
Input 0 - 15\Inputs\Channel 8-15\Channel 13\Hardware interrupts					
Enable rising edge detection	0	**RidPrefixRisingEdgeEvent**	49165	**Event name**	
Hardware interrupt	0	**Rising edge13**	Rising edge13	**Channel number**	13
HwEventTypeRisingEdge	1				
Input 0 - 15\Inputs\Channel 8-15\Channel 13\Hardware interrupts					
Enable falling edge detection	0	**RidPrefixFallingEdgeEvent**	49293	**Event name**	
Hardware interrupt	0	**Falling edge13**	Falling edge13	**Channel number**	13
HwEventTypeFallingEdge	2				
Input 0 - 15\Inputs\Channel 8-15\Channel 14					
Parameter settings	From template				
Input 0 - 15\Inputs\Channel 8-15\Channel 14\Diagnostics					
No supply voltage L+	False	**Wire break**	False		
Input 0 - 15\Inputs\Channel 8-15\Channel 14\Input parameters					
Input delay	3.2ms				
Input 0 - 15\Inputs\Channel 8-15\Channel 14\Hardware interrupts					
Enable rising edge detection	0	**RidPrefixRisingEdgeEvent**	49166	**Event name**	
Hardware interrupt	0	**Rising edge14**	Rising edge14	**Channel number**	14
HwEventTypeRisingEdge	1				
Input 0 - 15\Inputs\Channel 8-15\Channel 14\Hardware interrupts					
Enable falling edge detection	0	**RidPrefixFallingEdgeEvent**	49294	**Event name**	
Hardware interrupt	0	**Falling edge14**	Falling edge14	**Channel number**	14
HwEventTypeFallingEdge	2				
Input 0 - 15\Inputs\Channel 8-15\Channel 15					
Parameter settings	From template				
Input 0 - 15\Inputs\Channel 8-15\Channel 15\Diagnostics					
No supply voltage L+	False	**Wire break**	False		
Input 0 - 15\Inputs\Channel 8-15\Channel 15\Input parameters					
Input delay	3.2ms				
Input 0 - 15\Inputs\Channel 8-15\Channel 15\Hardware interrupts					
Enable rising edge detection	0	**RidPrefixRisingEdgeEvent**	49167	**Event name**	
Hardware interrupt	0	**Rising edge15**	Rising edge15	**Channel number**	15
HwEventTypeRisingEdge	1				
Input 0 - 15\Inputs\Channel 8-15\Channel 15\Hardware interrupts					
Enable falling edge detection	0	**RidPrefixFallingEdgeEvent**	49295	**Event name**	
Hardware interrupt	0	**Falling edge15**	Falling edge15	**Channel number**	15
HwEventTypeFallingEdge	2				

Input 0 - 15\I/O addresses\Input addresses					
Start address	20.0	**End address**	21.7	**Isochronous mode**	False
Organization block	0	**Process image**	0		

Fabrica / PLC_1 [CPU 1511-1 PN] / Local modules

DQ 16x24VDC/0.5A ST_1

DQ 16x24VDC/0.5A ST_1					
General\Project information					
Name	DQ 16x24VDC/0.5A ST_1	**Author**	Administrator	**Comment**	
Rack	0	**Slot**	5		
General\Catalog information					
Short designation	DQ 16x24VDC/0.5A ST	**Description**	Digital output module DQ16 x 24VDC / 0.5A; grouping 8; 4A per group; configurable diagnostics; configurable substitute value for output; isochro-nous mode	**Article number**	6ES7 522-1BH00-0AB0
Firmware version	V2.0		False		
General\Identification & Maintenance					
Plant designation		**Location identifier**		**Installation date**	2026-07-21 07:38:59.902
Additional informa-tion					
Module parameters\General\Startup					
Comparison preset to actual module	From CPU				
Module parameters\Channel template\Outputs\Apply to all channels that use the template\Output parameters					
Reaction to CPU STOP	Shutdown				
Module parameters\DQ configuration\Configuration of submodules					
Module distribution	None				
Module parameters\DQ configuration\Value status (Quality Information)					
Value status	False				
Module parameters\DQ configuration\Copy of module for Shared Device (MSO)					
Copy of module:	None				
Output 0 - 15\General					
Name	DQ 16x24VDC/0.5A ST_1	**Comment**			
Output 0 - 15\Outputs\Channel 0 - 7\General\Channel group diagnostics					
No supply voltage L+	False	**Short circuit to ground**	False		
Output 0 - 15\Outputs\Channel 0 - 7\Channel 0					
Parameter settings	From template				
Output 0 - 15\Outputs\Channel 0 - 7\Channel 0\Output parameters					
Reaction to CPU STOP	Shutdown				
Output 0 - 15\Outputs\Channel 0 - 7\Channel 1					
Parameter settings	From template				
Output 0 - 15\Outputs\Channel 0 - 7\Channel 1\Output parameters					
Reaction to CPU STOP	Shutdown				
Output 0 - 15\Outputs\Channel 0 - 7\Channel 2					
Parameter settings	From template				
Output 0 - 15\Outputs\Channel 0 - 7\Channel 2\Output parameters					
Reaction to CPU STOP	Shutdown				
Output 0 - 15\Outputs\Channel 0 - 7\Channel 3					
Parameter settings	From template				
Output 0 - 15\Outputs\Channel 0 - 7\Channel 3\Output parameters					
Reaction to CPU STOP	Shutdown				
Output 0 - 15\Outputs\Channel 0 - 7\Channel 4					
Parameter settings	From template				
Output 0 - 15\Outputs\Channel 0 - 7\Channel 4\Output parameters					
Reaction to CPU STOP	Shutdown				
Output 0 - 15\Outputs\Channel 0 - 7\Channel 5					
Parameter settings	From template				
Output 0 - 15\Outputs\Channel 0 - 7\Channel 5\Output parameters					
Reaction to CPU STOP	Shutdown				
Output 0 - 15\Outputs\Channel 0 - 7\Channel 6					
Parameter settings	From template				
Output 0 - 15\Outputs\Channel 0 - 7\Channel 6\Output parameters					
Reaction to CPU STOP	Shutdown				
Output 0 - 15\Outputs\Channel 0 - 7\Channel 7					
Parameter settings	From template				
Output 0 - 15\Outputs\Channel 0 - 7\Channel 7\Output parameters					
Reaction to CPU STOP	Shutdown				
Output 0 - 15\Outputs\Channel 8 - 15\General\Channel group diagnostics					
No supply voltage L+	False	**Short circuit to ground**	False		
Output 0 - 15\Outputs\Channel 8 - 15\Channel 8					
Parameter settings	From template				
Output 0 - 15\Outputs\Channel 8 - 15\Channel 8\Output parameters					
Reaction to CPU STOP	Shutdown				
Output 0 - 15\Outputs\Channel 8 - 15\Channel 9					
Parameter settings	From template				
Output 0 - 15\Outputs\Channel 8 - 15\Channel 9\Output parameters					
Reaction to CPU STOP	Shutdown				
Output 0 - 15\Outputs\Channel 8 - 15\Channel 10					
Parameter settings	From template				
Output 0 - 15\Outputs\Channel 8 - 15\Channel 10\Output parameters					
Reaction to CPU STOP	Shutdown				
Output 0 - 15\Outputs\Channel 8 - 15\Channel 11					
Parameter settings	From template				
Output 0 - 15\Outputs\Channel 8 - 15\Channel 11\Output parameters					
Reaction to CPU STOP	Shutdown				

Output 0 - 15\Outputs\Channel 8 - 15\Channel 12					
Parameter settings	From template				
Output 0 - 15\Outputs\Channel 8 - 15\Channel 12\Output parameters					
Reaction to CPU STOP	Shutdown				
Output 0 - 15\Outputs\Channel 8 - 15\Channel 13					
Parameter settings	From template				
Output 0 - 15\Outputs\Channel 8 - 15\Channel 13\Output parameters					
Reaction to CPU STOP	Shutdown				
Output 0 - 15\Outputs\Channel 8 - 15\Channel 14					
Parameter settings	From template				
Output 0 - 15\Outputs\Channel 8 - 15\Channel 14\Output parameters					
Reaction to CPU STOP	Shutdown				
Output 0 - 15\Outputs\Channel 8 - 15\Channel 15					
Parameter settings	From template				
Output 0 - 15\Outputs\Channel 8 - 15\Channel 15\Output parameters					
Reaction to CPU STOP	Shutdown				
Output 0 - 15\I/O addresses\Output addresses					
Start address	0.0	**End address**	1.7	**Isochronous mode**	False
Organization block	0	**Process image**	0		

Fabrica / PLC_1 [CPU 1511-1 PN] / Local modules

AI 8xU/I HS_1

AI 8xU/I HS_1					
General\Project information					
Name	AI 8xU/I HS_1	**Author**	Administrator	**Comment**	
Rack	0	**Slot**	6		
General\Catalog information					
Short designation	AI 8xU/I HS	**Description**	Analog input module AI8 x U/I 16-bit; grouping 8; common mode voltage 10V; configurable diagnostics; hardware interrupts; High Speed with 8 channels in 62.5 µs; isochronous mode; oversampling	**Article number**	6ES7 531-7NF10-0AB0
Firmware version	V2.1		False		
General\Identification & Maintenance					
Plant designation		**Location identifier**		**Installation date**	2026-07-21 06:45:49.675
Additional information					
Module parameters\General\Startup					
Comparison preset to actual module	From CPU				
Module parameters\Channel template\Inputs\Apply to all channels that use the template\Diagnostics					
No supply voltage L+	False	**Overflow**	False	**Underflow**	False
Wire break	False	**Current limit for wire break diagnostics**			
Module parameters\Channel template\Inputs\Apply to all channels that use the template\Measuring					
Measurement type	Voltage	**Measuring range**	+/- 10V	**Smoothing**	None
Module parameters\AI configuration\Configuration of submodules					
Module distribution	None				
Module parameters\AI configuration\Value status (Quality Information)					
Value status	False				
Module parameters\AI configuration\Copy of module for Shared Device (MSI)					
Copy of module:	None				
Module parameters\AI configuration\Oversampling					
Sampling rate	1Samples/Cycle	**Sampling interval**	0.0µs		
Input 0 - 7\General					
Name	AI 8xU/I HS_1	**Comment**			
Input 0 - 7\Inputs\Channel 0					
Parameter settings	From template				
Input 0 - 7\Inputs\Channel 0\Diagnostics					
No supply voltage L+	False	**Overflow**	False	**Underflow**	False
Wire break	False	**Current limit for wire break diagnostics**			
Input 0 - 7\Inputs\Channel 0\Measuring					
Measurement type	Voltage	**Measuring range**	+/- 10V	**Smoothing**	None
Input 0 - 7\Inputs\Channel 0\Hardware interrupts					
High limit 1		**Low limit 1**		**High limit 2**	
Low limit 2					
Input 0 - 7\Inputs\Channel 0\Hardware interrupts\HW Interrupts					
Hardware interrupt high limit 1	False	**Event name:**	UpperLimitOne0	**Event Handler**	
Priority	16				
Input 0 - 7\Inputs\Channel 0\Hardware interrupts\HW Interrupts					
Hardware interrupt low limit 1	False	**Event name:**	LowerLimitOne0	**Event Handler**	
Priority	16				
Input 0 - 7\Inputs\Channel 0\Hardware interrupts\HW Interrupts					
Hardware interrupt high limit 2	False	**Event name:**	UpperLimitTwo0	**Event Handler**	
Priority	16				
Input 0 - 7\Inputs\Channel 0\Hardware interrupts\HW Interrupts					
Hardware interrupt low limit 2	False	**Event name:**	LowerLimitTwo0	**Event Handler**	
Priority	16				
Input 0 - 7\Inputs\Channel 1					
Parameter settings	From template				
Input 0 - 7\Inputs\Channel 1\Diagnostics					
No supply voltage L+	False	**Overflow**	False	**Underflow**	False
Wire break	False	**Current limit for wire break diagnostics**			
Input 0 - 7\Inputs\Channel 1\Measuring					
Measurement type	Voltage	**Measuring range**	+/- 10V	**Smoothing**	None
Input 0 - 7\Inputs\Channel 1\Hardware interrupts					
High limit 1		**Low limit 1**		**High limit 2**	
Low limit 2					
Input 0 - 7\Inputs\Channel 1\Hardware interrupts\HW Interrupts					
Hardware interrupt high limit 1	False	**Event name:**	UpperLimitOne1	**Event Handler**	
Priority	16				
Input 0 - 7\Inputs\Channel 1\Hardware interrupts\HW Interrupts					
Hardware interrupt low limit 1	False	**Event name:**	LowerLimitOne1	**Event Handler**	
Priority	16				

Input 0 - 7\Inputs\Channel 1\Hardware interrupts\HW Interrupts					
Hardware interrupt high limit 2	False	**Event name:**	UpperLimitTwo1	**Event Handler**	
Priority	16				
Input 0 - 7\Inputs\Channel 1\Hardware interrupts\HW Interrupts					
Hardware interrupt low limit 2	False	**Event name:**	LowerLimitTwo1	**Event Handler**	
Priority	16				
Input 0 - 7\Inputs\Channel 2					
Parameter settings	From template				
Input 0 - 7\Inputs\Channel 2\Diagnostics					
No supply voltage L+	False	**Overflow**	False	**Underflow**	False
Wire break	False	**Current limit for wire break diagnostics**			
Input 0 - 7\Inputs\Channel 2\Measuring					
Measurement type	Voltage	**Measuring range**	+/- 10V	**Smoothing**	None
Input 0 - 7\Inputs\Channel 2\Hardware interrupts					
High limit 1		**Low limit 1**		**High limit 2**	
Low limit 2					
Input 0 - 7\Inputs\Channel 2\Hardware interrupts\HW Interrupts					
Hardware interrupt high limit 1	False	**Event name:**	UpperLimitOne2	**Event Handler**	
Priority	16				
Input 0 - 7\Inputs\Channel 2\Hardware interrupts\HW Interrupts					
Hardware interrupt low limit 1	False	**Event name:**	LowerLimitOne2	**Event Handler**	
Priority	16				
Input 0 - 7\Inputs\Channel 2\Hardware interrupts\HW Interrupts					
Hardware interrupt high limit 2	False	**Event name:**	UpperLimitTwo2	**Event Handler**	
Priority	16				
Input 0 - 7\Inputs\Channel 2\Hardware interrupts\HW Interrupts					
Hardware interrupt low limit 2	False	**Event name:**	LowerLimitTwo2	**Event Handler**	
Priority	16				
Input 0 - 7\Inputs\Channel 3					
Parameter settings	From template				
Input 0 - 7\Inputs\Channel 3\Diagnostics					
No supply voltage L+	False	**Overflow**	False	**Underflow**	False
Wire break	False	**Current limit for wire break diagnostics**			
Input 0 - 7\Inputs\Channel 3\Measuring					
Measurement type	Voltage	**Measuring range**	+/- 10V	**Smoothing**	None
Input 0 - 7\Inputs\Channel 3\Hardware interrupts					
High limit 1		**Low limit 1**		**High limit 2**	
Low limit 2					
Input 0 - 7\Inputs\Channel 3\Hardware interrupts\HW Interrupts					
Hardware interrupt high limit 1	False	**Event name:**	UpperLimitOne3	**Event Handler**	
Priority	16				
Input 0 - 7\Inputs\Channel 3\Hardware interrupts\HW Interrupts					
Hardware interrupt low limit 1	False	**Event name:**	LowerLimitOne3	**Event Handler**	
Priority	16				
Input 0 - 7\Inputs\Channel 3\Hardware interrupts\HW Interrupts					
Hardware interrupt high limit 2	False	**Event name:**	UpperLimitTwo3	**Event Handler**	
Priority	16				
Input 0 - 7\Inputs\Channel 3\Hardware interrupts\HW Interrupts					
Hardware interrupt low limit 2	False	**Event name:**	LowerLimitTwo3	**Event Handler**	
Priority	16				
Input 0 - 7\Inputs\Channel 4					
Parameter settings	From template				
Input 0 - 7\Inputs\Channel 4\Diagnostics					
No supply voltage L+	False	**Overflow**	False	**Underflow**	False
Wire break	False	**Current limit for wire break diagnostics**			
Input 0 - 7\Inputs\Channel 4\Measuring					
Measurement type	Voltage	**Measuring range**	+/- 10V	**Smoothing**	None
Input 0 - 7\Inputs\Channel 4\Hardware interrupts					
High limit 1		**Low limit 1**		**High limit 2**	
Low limit 2					
Input 0 - 7\Inputs\Channel 4\Hardware interrupts\HW Interrupts					
Hardware interrupt high limit 1	False	**Event name:**	UpperLimitOne4	**Event Handler**	
Priority	16				
Input 0 - 7\Inputs\Channel 4\Hardware interrupts\HW Interrupts					
Hardware interrupt low limit 1	False	**Event name:**	LowerLimitOne4	**Event Handler**	
Priority	16				
Input 0 - 7\Inputs\Channel 4\Hardware interrupts\HW Interrupts					
Hardware interrupt high limit 2	False	**Event name:**	UpperLimitTwo4	**Event Handler**	
Priority	16				
Input 0 - 7\Inputs\Channel 4\Hardware interrupts\HW Interrupts					
Hardware interrupt low limit 2	False	**Event name:**	LowerLimitTwo4	**Event Handler**	

Priority	16				
Input 0 - 7\Inputs\Channel 5					
Parameter settings	From template				
Input 0 - 7\Inputs\Channel 5\Diagnostics					
No supply voltage L+	False	**Overflow**	False	**Underflow**	False
Wire break	False	**Current limit for wire break diagnostics**			
Input 0 - 7\Inputs\Channel 5\Measuring					
Measurement type	Voltage	**Measuring range**	+/- 10V	**Smoothing**	None
Input 0 - 7\Inputs\Channel 5\Hardware interrupts					
High limit 1		**Low limit 1**		**High limit 2**	
Low limit 2					
Input 0 - 7\Inputs\Channel 5\Hardware interrupts\HW Interrupts					
Hardware interrupt high limit 1	False	**Event name:**	UpperLimitOne5	**Event Handler**	
Priority	16				
Input 0 - 7\Inputs\Channel 5\Hardware interrupts\HW Interrupts					
Hardware interrupt low limit 1	False	**Event name:**	LowerLimitOne5	**Event Handler**	
Priority	16				
Input 0 - 7\Inputs\Channel 5\Hardware interrupts\HW Interrupts					
Hardware interrupt high limit 2	False	**Event name:**	UpperLimitTwo5	**Event Handler**	
Priority	16				
Input 0 - 7\Inputs\Channel 5\Hardware interrupts\HW Interrupts					
Hardware interrupt low limit 2	False	**Event name:**	LowerLimitTwo5	**Event Handler**	
Priority	16				
Input 0 - 7\Inputs\Channel 6					
Parameter settings	From template				
Input 0 - 7\Inputs\Channel 6\Diagnostics					
No supply voltage L+	False	**Overflow**	False	**Underflow**	False
Wire break	False	**Current limit for wire break diagnostics**			
Input 0 - 7\Inputs\Channel 6\Measuring					
Measurement type	Voltage	**Measuring range**	+/- 10V	**Smoothing**	None
Input 0 - 7\Inputs\Channel 6\Hardware interrupts					
High limit 1		**Low limit 1**		**High limit 2**	
Low limit 2					
Input 0 - 7\Inputs\Channel 6\Hardware interrupts\HW Interrupts					
Hardware interrupt high limit 1	False	**Event name:**	UpperLimitOne6	**Event Handler**	
Priority	16				
Input 0 - 7\Inputs\Channel 6\Hardware interrupts\HW Interrupts					
Hardware interrupt low limit 1	False	**Event name:**	LowerLimitOne6	**Event Handler**	
Priority	16				
Input 0 - 7\Inputs\Channel 6\Hardware interrupts\HW Interrupts					
Hardware interrupt high limit 2	False	**Event name:**	UpperLimitTwo6	**Event Handler**	
Priority	16				
Input 0 - 7\Inputs\Channel 6\Hardware interrupts\HW Interrupts					
Hardware interrupt low limit 2	False	**Event name:**	LowerLimitTwo6	**Event Handler**	
Priority	16				
Input 0 - 7\Inputs\Channel 7					
Parameter settings	From template				
Input 0 - 7\Inputs\Channel 7\Diagnostics					
No supply voltage L+	False	**Overflow**	False	**Underflow**	False
Wire break	False	**Current limit for wire break diagnostics**			
Input 0 - 7\Inputs\Channel 7\Measuring					
Measurement type	Voltage	**Measuring range**	+/- 10V	**Smoothing**	None
Input 0 - 7\Inputs\Channel 7\Hardware interrupts					
High limit 1		**Low limit 1**		**High limit 2**	
Low limit 2					
Input 0 - 7\Inputs\Channel 7\Hardware interrupts\HW Interrupts					
Hardware interrupt high limit 1	False	**Event name:**	UpperLimitOne7	**Event Handler**	
Priority	16				
Input 0 - 7\Inputs\Channel 7\Hardware interrupts\HW Interrupts					
Hardware interrupt low limit 1	False	**Event name:**	LowerLimitOne7	**Event Handler**	
Priority	16				
Input 0 - 7\Inputs\Channel 7\Hardware interrupts\HW Interrupts					
Hardware interrupt high limit 2	False	**Event name:**	UpperLimitTwo7	**Event Handler**	
Priority	16				
Input 0 - 7\Inputs\Channel 7\Hardware interrupts\HW Interrupts					
Hardware interrupt low limit 2	False	**Event name:**	LowerLimitTwo7	**Event Handler**	
Priority	16				
Input 0 - 7\I/O addresses\Input addresses					
Start address	0	**End address**	15	**Isochronous mode**	False
Organization block	0	**Process image**	0		

Fabrica / PLC_1 [CPU 1511-1 PN] / Local modules

AQ 2xU/I ST_1

AQ 2xU/I ST_1					
General\Project information					
Name	AQ 2xU/I ST_1	**Author**	Administrator	**Comment**	
Rack	0	**Slot**	7		
General\Catalog information					
Short designation	AQ 2xU/I ST	**Description**	Analog output module AQ2 x U/I 16-bit; grouping 2; configurable diagnostics; substitute value for output	**Article number**	6ES7 532-5NB00-0AB0
Firmware version	V1.0		False		
General\Identification & Maintenance					
Plant designation		**Location identifier**		**Installation date**	2026-07-21 11:24:55.468
Additional information					
Module parameters\General\Startup					
Comparison preset to actual module	From CPU				
Module parameters\Channel template\Outputs\Apply to all channels that use the template\Diagnostics					
No supply voltage L+	False	**Wire break**	False	**Short circuit to ground**	False
Overflow	False	**Underflow**	False		
Module parameters\Channel template\Outputs\Apply to all channels that use the template\Output parameters					
Output type	Voltage	**Output range**	+/- 10V	**Reaction to CPU STOP**	Shutdown
Substitute value					
Module parameters\AQ configuration\Configuration of submodules					
Module distribution	None				
Module parameters\AQ configuration\Value status (Quality Information)					
Value status	False				
Module parameters\AQ configuration\Copy of module for Shared Device (MSO)					
Copy of module:	None				
Output 0 - 1\General					
Name	AQ 2xU/I ST_1	**Comment**			
Output 0 - 1\Outputs\Channel 0					
Parameter settings	From template				
Output 0 - 1\Outputs\Channel 0\Diagnostics					
No supply voltage L+	False	**Wire break**	False	**Short circuit to ground**	False
Overflow	False	**Underflow**	False		
Output 0 - 1\Outputs\Channel 0\Output					
Output type	Voltage	**Output range**	+/- 10V	**Reaction to CPU STOP**	Shutdown
Substitute value					
Output 0 - 1\Outputs\Channel 1					
Parameter settings	From template				
Output 0 - 1\Outputs\Channel 1\Diagnostics					
No supply voltage L+	False	**Wire break**	False	**Short circuit to ground**	False
Overflow	False	**Underflow**	False		
Output 0 - 1\Outputs\Channel 1\Output					
Output type	Voltage	**Output range**	+/- 10V	**Reaction to CPU STOP**	Shutdown
Substitute value					
Output 0 - 1\I/O addresses\Output addresses					
Start address	2	**End address**	5	**Organization block**	0
Process image	0				

Fabrica / PLC_1 [CPU 1511-1 PN] / Distributed I/O


PROFINET IO-System (100): PN/IE_1


PROFINET IO-System					
General					
IO controller:	PLC_1	**Name:**	PROFINET IO-System	**Number:**	100
Multiple use IO system	False	**Use name as extension for the PROFINET device name.**	False		
Hardware identifier					
Hardware identifier	263				
Overview of addresses\Overview of addresses\Overview of addresses					
Inputs	True	**Outputs**	True	**Address gaps**	False
Slot	True				

Type	Addr. from	Addr. to	Module	PIP	OB	Device name	Device number	Size	Master / IO system	Rack	Slot
I	16	17	DI 16x24VDC HF_1	Automatic update	-	PLC_1 [CPU 1511-1 PN]	-	2 Bytes	-	0	2
I	18	19	DI 16x24VDC HF_2	Automatic update	-	PLC_1 [CPU 1511-1 PN]	-	2 Bytes	-	0	3
I	20	21	DI 16x24VDC HF_3	Automatic update	-	PLC_1 [CPU 1511-1 PN]	-	2 Bytes	-	0	4
O	0	1	DQ 16x24VDC/ 0.5A ST_1	Automatic update	-	PLC_1 [CPU 1511-1 PN]	-	2 Bytes	-	0	5
I	0	15	AI 8xU/I HS_1	Automatic update	-	PLC_1 [CPU 1511-1 PN]	-	16 Bytes	-	0	6
O	2	5	AQ 2xU/I ST_1	Automatic update	-	PLC_1 [CPU 1511-1 PN]	-	4 Bytes	-	0	7

Fabrica / PLC_1 [CPU 1511-1 PN] / Distributed I/O / PROFINET IO-System (100): PN/IE_1

IO device_1 [IM 155-6 PN ST]

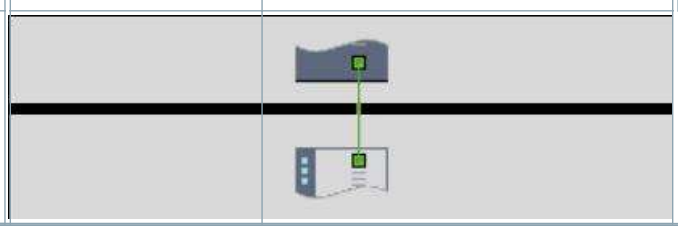IO device_1					
General\Project information					
Name	IO device_1	**Author**	Administrator	**Comment**	
Rack	0	**Slot**	0		
General\Catalog information					
Short designation	IM 155-6 PN ST	**Description**	Interface module with PROFINET interface V2.3 (RT/IRT) with cycle time from 250 µs, PN connection method selectable via BusAdapter; 32 I/O modules including F-modules plus 16 ET 200AL modules via ET connection; media redundancy (MRP); configuration control via PLC; module replacement during operation (multi hot swap); start with empty slots; supports PROFIenergy; shared device on up to 4 PROFINET controllers; PN Security Class 1; supports MSI/MSO; station extension via ET connection; user data up to max. 288 bytes per I/O module; supports module division; firmware V6.1	**Article number**	6ES7 155-6AU02-0BN0
Firmware version	V6.1		False		
General\Identification & Maintenance					
Plant designation		**Location identifier**		**Installation date**	2026-07-22 06:52:42.097
Additional information					
PROFINET interface [X1]\General					
Name	PROFINET interface	**Comment**			
PROFINET interface [X1]\Ethernet addresses\Interface networked with					
Subnet:	PN/IE_1				
PROFINET interface [X1]\Ethernet addresses\Internet protocol version 4 (IPv4)					
IP address:	192.168.1.3	**Subnet mask:**	255.255.255.0	**Synchronize router settings with IO controller**	True
Use router	False				
PROFINET interface [X1]\Ethernet addresses\PROFINET					
Generate PROFINET device name automatically	True	**PROFINET device name:**	io device_1	**Converted name:**	ioxadevicexb1652a
Device number:	1				
PROFINET interface [X1]\Advanced options\Interface options					
Prioritized startup	False	**Use IEC V2.2 LLDP mode**	False	**Optional IO-Device**	False
PROFINET interface [X1]\Advanced options\Real time settings\IO cycle\Shared Device					
IO controller outside project with access to this IO device	0				
PROFINET interface [X1]\Advanced options\Real time settings\IO cycle\Update time					
Calculate update time automatically	True	**Update time**	128.000ms	**Set update time manually**	False
PROFINET interface [X1]\Advanced options\Real time settings\IO cycle\Watchdog time					
Trigger watchdog after	3cycles of missing IO data.	**Watchdog time:**	384.000ms		
PROFINET interface [X1]\Advanced options\Real time settings\Synchronization					
Sync domain:	Sync-Domain_1	**RT class:**	Rt	**Synchronization role:**	NotSynchronized
PROFINET interface [X1]\Advanced options\Port [X1 P1 R]\General					
Name	Port_1	**Comment**			
PROFINET interface [X1]\Advanced options\Port [X1 P1 R]\Port interconnection\Local port:					
Local port:	IO device_1\PROFINET interface [X1]\Port_1 [X1 P1 R]	**Medium:**	Copper	**Cable name:**	---
					
PROFINET interface [X1]\Advanced options\Port [X1 P1 R]\Port interconnection\Partner port:					
	Monitoring of partner port is not possible	**Partner port:**	Any partner		
PROFINET interface [X1]\Advanced options\Port [X1 P1 R]\Port options\Activate					
Activate this port for use	True				
PROFINET interface [X1]\Advanced options\Port [X1 P1 R]\Port options\Connection					
Transmission rate / duplex:	Automatic	**Monitor**	False	**Enable autonegotiation**	True
PROFINET interface [X1]\Advanced options\Port [X1 P1 R]\Port options\Boundaries					
End of detection of accessible devices	False	**End of topology discovery**	False	**End of the sync domain**	False
PROFINET interface [X1]\Advanced options\Port [X1 P2 R]\General					
Name	Port_2	**Comment**			
PROFINET interface [X1]\Advanced options\Port [X1 P2 R]\Port interconnection\Local port:					
Local port:	IO device_1\PROFINET interface [X1]\Port_2 [X1 P2 R]	**Medium:**	Copper	**Cable name:**	---


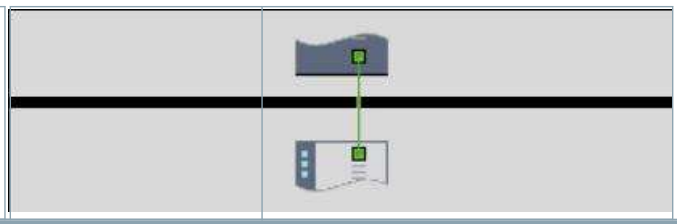


PROFINET interface [X1]\Advanced options\Port [X1 P2 R]\Port interconnection\Partner port:					
	Monitoring of partner port is not possible	**Partner port:**	Any partner		
PROFINET interface [X1]\Advanced options\Port [X1 P2 R]\Port options\Activate					
Activate this port for use	True				
PROFINET interface [X1]\Advanced options\Port [X1 P2 R]\Port options\Connection					
Transmission rate / duplex:	Automatic	**Monitor**	False	**Enable autonegotiation**	True
PROFINET interface [X1]\Advanced options\Port [X1 P2 R]\Port options\Boundaries					
End of detection of accessible devices	False	**End of topology discovery**	False	**End of the sync domain**	False
Module parameters\General\Startup					
Comparison preset to actual module	From CPU				
Module parameters\General\Configuration control\Configuration control for central configuration					
Allow to reconfigure the device via the user program	False				

Module parameters\Shared Device	
Name	**Access**
IO device_1	PLC_1
IO device_1 => PROFINET interface	PLC_1
IO device_1 => PROFINET interface => Port_1	PLC_1
IO device_1 => PROFINET interface => Port_2	PLC_1
Server module_1	PLC_1

AdvancedConfigurationMenu\Discovery and Basic Configuration Protocol (DCP) - interface [X1]					
Activate DCP write protection	True				
AdvancedConfigurationMenu\SNMP configuration (Simple Network Management Protocol).					
Activate SNMP	False	**Read-only community string:**	public	**Read-write community string:**	private

IO device_1					
Printing full menu\General\Project information					
Name	IO device_1	**Author**	Administrator	**Comment**	
Rack	0	**Slot**	0		
Printing full menu\General\Catalog information					
Short designation	IM 155-6 PN ST	**Description**	Interface module with PROFINET interface V2.3 (RT/IRT) with cycle time from 250 µs, PN connection method selectable via BusAdapter; 32 I/O modules including F-modules plus 16 ET 200AL modules via ET connection; media redundancy (MRP); configuration control via PLC; module replacement during operation (multi hot swap); start with empty slots; supports PROFIenergy; shared device on up to 4 PROFINET controllers; PN Security Class 1; supports MSI/MSO; station extension via ET connection; user data up to max. 288 bytes per I/O module; supports module division; firmware V6.1	**Article number**	6ES7 155-6AU02-0BN0
Firmware version	V6.1		False		
Printing full menu\General\Identification & Maintenance					
Plant designation		**Location identifier**		**Installation date**	2026-07-22 06:52:42.097
Additional information					
Printing full menu\PROFINET interface [X1]\General					
Name	PROFINET interface	**Comment**			
Printing full menu\PROFINET interface [X1]\Ethernet addresses\Interface networked with					
Subnet:	PN/IE_1				
Printing full menu\PROFINET interface [X1]\Ethernet addresses\Internet protocol version 4 (IPv4)					
IP address:	192.168.1.3	**Subnet mask:**	255.255.255.0	**Synchronize router settings with IO controller**	True
Use router	False				
Printing full menu\PROFINET interface [X1]\Ethernet addresses\PROFINET					
Generate PROFINET device name automatically	True	**PROFINET device name:**	io device_1	**Converted name:**	ioxadevicexb1652a
Device number:	1				
Printing full menu\PROFINET interface [X1]\Advanced options\Interface options					
Prioritized startup	False	**Use IEC V2.2 LLDP mode**	False	**Optional IO-Device**	False
Printing full menu\PROFINET interface [X1]\Advanced options\Real time settings\IO cycle\Shared Device					
IO controller outside project with access to this IO device	0				
Printing full menu\PROFINET interface [X1]\Advanced options\Real time settings\IO cycle\Update time					
Calculate update time automatically	True	**Update time**	128.000ms	**Set update time manually**	False

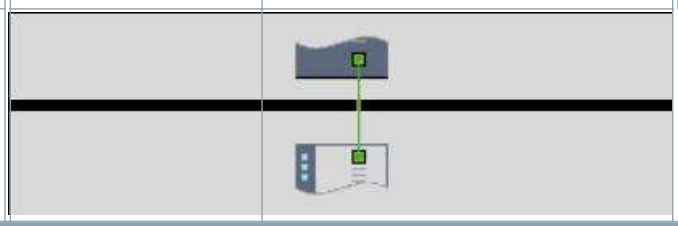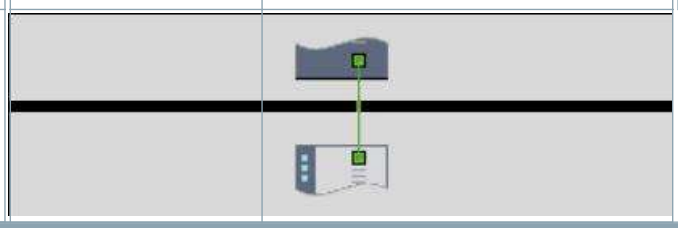Printing full menu\PROFINET interface [X1]\Advanced options\Real time settings\IO cycle\Watchdog time					
Trigger watchdog after	3cycles of missing IO data.	**Watchdog time:**	384.000ms		
Printing full menu\PROFINET interface [X1]\Advanced options\Real time settings\Synchronization					
Sync domain:	Sync-Domain_1	**RT class:**	Rt	**Synchronization role:**	NotSynchronized
Printing full menu\PROFINET interface [X1]\Advanced options\Port [X1 P1 R]\General					
Name	Port_1	**Comment**			
Printing full menu\PROFINET interface [X1]\Advanced options\Port [X1 P1 R]\Port interconnection\Local port:					
Local port:	IO device_1\PROFINET interface [X1]\Port_1 [X1 P1 R]	**Medium:**	Copper	**Cable name:**	---
					
Printing full menu\PROFINET interface [X1]\Advanced options\Port [X1 P1 R]\Port interconnection\Partner port:					
	Monitoring of partner port is not possible	**Partner port:**	Any partner		
Printing full menu\PROFINET interface [X1]\Advanced options\Port [X1 P1 R]\Port options\Activate					
Activate this port for use	True				
Printing full menu\PROFINET interface [X1]\Advanced options\Port [X1 P1 R]\Port options\Connection					
Transmission rate / duplex:	Automatic	**Monitor**	False	**Enable autonegotiation**	True
Printing full menu\PROFINET interface [X1]\Advanced options\Port [X1 P1 R]\Port options\Boundaries					
End of detection of accessible devices	False	**End of topology discovery**	False	**End of the sync domain**	False
Printing full menu\PROFINET interface [X1]\Advanced options\Port [X1 P2 R]\General					
Name	Port_2	**Comment**			
Printing full menu\PROFINET interface [X1]\Advanced options\Port [X1 P2 R]\Port interconnection\Local port:					
Local port:	IO device_1\PROFINET interface [X1]\Port_2 [X1 P2 R]	**Medium:**	Copper	**Cable name:**	---
					
Printing full menu\PROFINET interface [X1]\Advanced options\Port [X1 P2 R]\Port interconnection\Partner port:					
	Monitoring of partner port is not possible	**Partner port:**	Any partner		
Printing full menu\PROFINET interface [X1]\Advanced options\Port [X1 P2 R]\Port options\Activate					
Activate this port for use	True				
Printing full menu\PROFINET interface [X1]\Advanced options\Port [X1 P2 R]\Port options\Connection					
Transmission rate / duplex:	Automatic	**Monitor**	False	**Enable autonegotiation**	True
Printing full menu\PROFINET interface [X1]\Advanced options\Port [X1 P2 R]\Port options\Boundaries					
End of detection of accessible devices	False	**End of topology discovery**	False	**End of the sync domain**	False
Printing full menu\Module parameters\General\Startup					
Comparison preset to actual module	From CPU				
Printing full menu\Module parameters\General\Configuration control\Configuration control for central configuration					
Allow to reconfigure the device via the user program	False				
Printing full menu\Module parameters\Shared Device					

Name	Access
IO device_1	PLC_1
IO device_1 => PROFINET interface	PLC_1
IO device_1 => PROFINET interface => Port_1	PLC_1
IO device_1 => PROFINET interface => Port_2	PLC_1
Server module_1	PLC_1

Printing full menu\AdvancedConfigurationMenu\Discovery and Basic Configuration Protocol (DCP) - interface [X1]	
Activate DCP write protection	True

Fabrica

PC-System_1 [SIMATIC PC station]

PC-System_1					
General					
Name	PC-System_1	**Computer name identical to PC station name**	Yes	**Computer name**	PC-System_1
Author	Administrator	**Comment**			
XDB configuration					
S7RTM is installed (for example the SIMATIC NET PC software)	No	**Generate XDB file**	No	**XDB file storage path**	

Fabrica / PC-System_1 [SIMATIC PC station]

HMI_RT_2 [WinCC Unified PC RT]

HMI_RT_2					
General					
Name	HMI_RT_2	**Device/application type**	SIMATIC PC station - WinCC Unified PC RT	**Author**	Administrator
Comment					
General\Catalog information					
Short designation	SIMATIC WinCC Unified PC	**Description**	Runtime software for PC-based visualizations (requires SIMATIC Unified PC)	**Article number**	6AV2 155-xxxxx-xxxx
Version	19.0.0.0				
Information					
Number of used PowerTags	20	**Memory requirements in runtime**	6067265	**Compilation build number**	26
Date of last compilation	9/20/2026 10:58 PM	**Date of last download**	9/20/2026 10:58 PM		

Fabrica / PC-System_1 [SIMATIC PC station] / HMI_RT_2 [WinCC Unified PC RT]

Runtime settings

This folder is empty.

Fabrica / PC-System_1 [SIMATIC PC station] / HMI_RT_2 [WinCC Unified PC RT]

Screens

This folder is empty.

Fabrica / PC-System_1 [SIMATIC PC station] / HMI_RT_2 [WinCC Unified PC RT]

Screen management

This folder is empty.

Fabrica / PC-System_1 [SIMATIC PC station] / HMI_RT_2 [WinCC Unified PC RT] / HMI tags

Default tag table [16]

pls_xv51

General					
Name	pls_xv51	**Connection**	HMI_Connection	**Array elements**	0
Length	18	**Address**		**Access mode**	<symbolic access>
PLC tag	DB_Vane_HMI.PLS_XV51	**PLC name**	PLC_1		
Settings					
Acquisition cycle	T1s	**Acquisition mode**	Cyclic in operation	**Persistency**	Disabled
Scope	System-wide				
Limits					
Upper 2		**Lower 2**			
Linear scaling					
Linear scaling	Disabled	**PLC value range end value**	10	**PLC value range start value**	0
HMI device value range end value	100	**HMI device value range start value**	0		
Values					
ID tag		**Start value**		**Substitute value**	
Use substitute value	None				
Comment					
Comment					
GMP (Good Manufacturing Practice)					
Confirmation type	None	**Required function rights**		**GMP relevant**	Disabled
Comment required	Disabled				

clock_1Hz

General					
Name	clock_1Hz	**Connection**	HMI_Connection	**Data type**	Bool
HMI data type	Bool	**Array elements**	0	**Length**	1
Address		**Access mode**	<symbolic access>	**PLC name**	PLC_1
Settings					
Acquisition cycle	T100ms	**Acquisition mode**	Cyclic in operation	**Persistency**	Disabled
Scope	System-wide				
Limits					
Upper 2		**Lower 2**			
Linear scaling					
Linear scaling	Disabled	**PLC value range end value**	10	**PLC value range start value**	0
HMI device value range end value	100	**HMI device value range start value**	0		
Values					
ID tag		**Start value**		**Substitute value**	
Use substitute value	None				
Comment					
Comment					
GMP (Good Manufacturing Practice)					
Confirmation type	None	**Required function rights**		**GMP relevant**	Disabled
Comment required	Disabled				

Clock_1Hz

STEP_NUMBER_HMI

General					
Name	STEP_NUMBER_HMI	**Connection**	HMI_Connection	**Data type**	Int
HMI data type	Int	**Array elements**	0	**Length**	2
Address		**Access mode**	<symbolic access>	**PLC name**	PLC_1
Settings					
Acquisition cycle	T1s	**Acquisition mode**	Cyclic in operation	**Persistency**	Disabled
Scope	System-wide				
Limits					
Upper 2		**Lower 2**			
Linear scaling					
Linear scaling	Disabled	**PLC value range end value**	10	**PLC value range start value**	0
HMI device value range end value	100	**HMI device value range start value**	0		
Values					
ID tag		**Start value**		**Substitute value**	
Use substitute value	None				
Comment					
Comment					
GMP (Good Manufacturing Practice)					
Confirmation type	None	**Required function rights**		**GMP relevant**	Disabled
Comment required	Disabled				

STEP_NUMBER

IN_Selection_HMI

General					
Name	IN_Selection_HMI	**Connection**	HMI_Connection	**Data type**	Int
HMI data type	Int	**Array elements**	0	**Length**	2
Address		**Access mode**	<symbolic access>	**PLC name**	PLC_1
Settings					
Acquisition cycle	T1s	**Acquisition mode**	Cyclic in operation	**Persistency**	Disabled
Scope	System-wide				
Limits					
Upper 2		**Lower 2**			
Linear scaling					
Linear scaling	Disabled	**PLC value range end value**	10	**PLC value range start value**	0
HMI device value range end value	100	**HMI device value range start value**	0		
Values					
ID tag		**Start value**		**Substitute value**	
Use substitute value	None				
Comment					
Comment					
GMP (Good Manufacturing Practice)					
Confirmation type	None	**Required function rights**		**GMP relevant**	Disabled
Comment required	Disabled				

IN_Selection

OUT_Selection_HMI

General					
Name	OUT_Selection_HMI	**Connection**	HMI_Connection	**Data type**	Int
HMI data type	Int	**Array elements**	0	**Length**	2
Address		**Access mode**	<symbolic access>	**PLC name**	PLC_1
Settings					
Acquisition cycle	T1s	**Acquisition mode**	Cyclic in operation	**Persistency**	Disabled
Scope	System-wide				
Limits					
Upper 2		**Lower 2**			
Linear scaling					
Linear scaling	Disabled	**PLC value range end value**	10	**PLC value range start value**	0
HMI device value range end value	100	**HMI device value range start value**	0		
Values					
ID tag		**Start value**		**Substitute value**	
Use substitute value	None				
Comment					
Comment					
GMP (Good Manufacturing Practice)					
Confirmation type	None	**Required function rights**		**GMP relevant**	Disabled
Comment required	Disabled				

OUT_Selection

START_HMI

General					
Name	START_HMI	**Connection**	HMI_Connection	**Data type**	Bool
HMI data type	Bool	**Array elements**	0	**Length**	1
Address		**Access mode**	<symbolic access>	**PLC name**	PLC_1
Settings					
Acquisition cycle	T1s	**Acquisition mode**	Cyclic in operation	**Persistency**	Disabled
Scope	System-wide				
Limits					
Upper 2		**Lower 2**			
Linear scaling					
Linear scaling	Disabled	**PLC value range end value**	10	**PLC value range start value**	0
HMI device value range end value	100	**HMI device value range start value**	0		
Values					
ID tag		**Start value**		**Substitute value**	
Use substitute value	None				
Comment					
Comment					
GMP (Good Manufacturing Practice)					
Confirmation type	None	**Required function rights**		**GMP relevant**	Disabled
Comment required	Disabled				

HMI_Btn_Start

Fabrica / PC-System_1 [SIMATIC PC station] / HMI_RT_2 [WinCC Unified PC RT]

Connections

HMI_Connection

Name	HMI_Connection	**Communication driver**	SIMATIC S7 1200/1500	**Comment**	
Online	Enabled	**Station**	S7-1500/ET200MP station_1	**Partner**	PLC_1
Node	CPU 1511-1 PN, PROFINET interface (R0/S1)				

Parameter

HMI device					
Interface	Industrial Ethernet	**Address**	192.168.1.10	**Access point**	S7ONLINE
PLC					
Address	192.168.1.1				

Fabrica / PC-System_1 [SIMATIC PC station] / HMI_RT_2 [WinCC Unified PC RT] / HMI alarms

Discrete alarms

This folder is empty.

Fabrica / PC-System_1 [SIMATIC PC station] / HMI_RT_2 [WinCC Unified PC RT] / HMI alarms

Analog alarms

This folder is empty.

Fabrica / PC-System_1 [SIMATIC PC station] / HMI_RT_2 [WinCC Unified PC RT] / HMI alarms

Alarm classes

Acknowledgement

General					
Name	Acknowledgement	**ID**	33	**Common alarm class**	Acknowledgement
Acknowledgment					
State machine	Alarm with single-mode acknowledgment				
Colors					
Background "Incoming/Acknowledged"	255, 255, 255	**"Incoming/Acknowledged" flashing**	Disabled	**Background "Incoming"**	255, 0, 0
"Incoming" flashing	Disabled	**Text color "Incoming"**	0, 0, 0	**Background "Incoming/Outgoing/Acknowledged"**	255, 255, 255
"Incoming/Outgoing/Acknowledged" flashing	Disabled	**Background "Incoming/Outgoing"**	255, 0, 0	**"Incoming/Outgoing" flashing**	Disabled

Alarm

General					
Name	Alarm	**ID**	53	**Common alarm class**	<No alarm class>
Acknowledgment					
State machine	Alarm with single-mode acknowledgment				
Colors					
Background "Incoming/Acknowledged"	255, 0, 0	**"Incoming/Acknowledged" flashing**	Disabled	**Background "Incoming"**	255, 0, 0
"Incoming" flashing	Enabled	**Text color "Incoming"**	255, 255, 255	**Background "Incoming/Outgoing/Acknowledged"**	255, 0, 0
"Incoming/Outgoing/Acknowledged" flashing	Disabled	**Background "Incoming/Outgoing"**	255, 0, 0	**"Incoming/Outgoing" flashing**	Enabled

AlarmWithReset

General					
Name	AlarmWithReset	**ID**	56	**Common alarm class**	<No alarm class>
Acknowledgment					
State machine	Alarm with acknowledgment and confirmation				
Colors					
Background "Incoming/Acknowledged"	255, 0, 0	**"Incoming/Acknowledged" flashing**	Disabled	**Background "Incoming"**	255, 0, 0
"Incoming" flashing	Enabled	**Text color "Incoming"**	255, 255, 255	**Background "Incoming/Outgoing/Acknowledged"**	255, 0, 0
"Incoming/Outgoing/Acknowledged" flashing	Enabled	**Background "Incoming/Outgoing"**	255, 0, 0	**"Incoming/Outgoing" flashing**	Enabled

Critical

General					
Name	Critical	**ID**	54	**Common alarm class**	<No alarm class>
Acknowledgment					
State machine	Alarm with single-mode acknowledgment				
Colors					
Background "Incoming/Acknowledged"	139, 0, 0	**"Incoming/Acknowledged" flashing**	Disabled	**Background "Incoming"**	139, 0, 0
"Incoming" flashing	Enabled	**Text color "Incoming"**	255, 255, 255	**Background "Incoming/Outgoing/Acknowledged"**	139, 0, 0
"Incoming/Outgoing/Acknowledged" flashing	Disabled	**Background "Incoming/Outgoing"**	139, 0, 0	**"Incoming/Outgoing" flashing**	Enabled

CriticalWithReset

General					
Name	CriticalWithReset	**ID**	57	**Common alarm class**	<No alarm class>
Acknowledgment					
State machine	Alarm with acknowledgment and confirmation				
Colors					
Background "Incoming/Acknowledged"	139, 0, 0	**"Incoming/Acknowledged" flashing**	Disabled	**Background "Incoming"**	139, 0, 0
"Incoming" flashing	Enabled	**Text color "Incoming"**	255, 255, 255	**Background "Incoming/Outgoing/Acknowledged"**	139, 0, 0
"Incoming/Outgoing/Acknowledged" flashing	Enabled	**Background "Incoming/Outgoing"**	139, 0, 0	**"Incoming/Outgoing" flashing**	Enabled

Information

General					
Name	Information	**ID**	50	**Common alarm class**	<No alarm class>
Acknowledgment					
State machine	Alarm without outgoing without acknowledgment				
Colors					
Background "Incoming/Acknowledged"	220, 220, 220	**"Incoming/Acknowledged" flashing**	Disabled	**Background "Incoming"**	220, 220, 220
"Incoming" flashing	Disabled	**Text color "Incoming"**	0, 0, 0	**Background "Incoming/Outgoing/Acknowledged"**	220, 220, 220
"Incoming/Outgoing/Acknowledged" flashing	Disabled	**Background "Incoming/Outgoing"**	220, 220, 220	**"Incoming/Outgoing" flashing**	Disabled

No Acknowledgement

General					
Name	No Acknowledgement	**ID**	34	**Common alarm class**	No Acknowledgement
Acknowledgment					
State machine	Alarm without acknowledgment				
Colors					
Background "Incoming/Acknowledged"	255, 255, 255	**"Incoming/Acknowledged" flashing**	Disabled	**Background "Incoming"**	255, 0, 0
"Incoming" flashing	Disabled	**Text color "Incoming"**	0, 0, 0	**Background "Incoming/Outgoing/Acknowledged"**	255, 255, 255
"Incoming/Outgoing/Acknowledged" flashing	Disabled	**Background "Incoming/Outgoing"**	255, 0, 0	**"Incoming/Outgoing" flashing**	Disabled

Notification

General					
Name	Notification	**ID**	51	**Common alarm class**	<No alarm class>
Acknowledgment					
State machine	Alarm without acknowledgment				
Colors					
Background "Incoming/Acknowledged"	173, 216, 230	**"Incoming/Acknowledged" flashing**	Disabled	**Background "Incoming"**	173, 216, 230
"Incoming" flashing	Disabled	**Text color "Incoming"**	0, 0, 0	**Background "Incoming/Outgoing/Acknowledged"**	173, 216, 230
"Incoming/Outgoing/Acknowledged" flashing	Disabled	**Background "Incoming/Outgoing"**	173, 216, 230	**"Incoming/Outgoing" flashing**	Disabled

OperatorInputInformation

General					
Name	OperatorInputInformation	**ID**	30	**Common alarm class**	<No alarm class>
Acknowledgment					
State machine	Alarm without outgoing without acknowledgment				
Colors					
Background "Incoming/Acknowledged"	220, 220, 220	**"Incoming/Acknowledged" flashing**	Disabled	**Background "Incoming"**	220, 220, 220
"Incoming" flashing	Disabled	**Text color "Incoming"**	0, 0, 0	**Background "Incoming/Outgoing/Acknowledged"**	220, 220, 220
"Incoming/Outgoing/Acknowledged" flashing	Disabled	**Background "Incoming/Outgoing"**	220, 220, 220	**"Incoming/Outgoing" flashing**	Disabled

OperatorInputRequest

General					
Name	OperatorInputRequest	**ID**	31	**Common alarm class**	<No alarm class>
Acknowledgment					
State machine	Alarm with single-mode acknowledgment				
Colors					
Background "Incoming/Acknowledged"	0, 0, 205	**"Incoming/Acknowledged" flashing**	Disabled	**Background "Incoming"**	0, 0, 205
"Incoming" flashing	Enabled	**Text color "Incoming"**	255, 255, 255	**Background "Incoming/Outgoing/Acknowledged"**	0, 0, 205
"Incoming/Outgoing/Acknowledged" flashing	Disabled	**Background "Incoming/Outgoing"**	0, 0, 205	**"Incoming/Outgoing" flashing**	Enabled

SystemAlarm

General					
Name	SystemAlarm	**ID**	61	**Common alarm class**	<No alarm class>
Acknowledgment					
State machine	Alarm with single-mode acknowledgment				
Colors					
Background "Incoming/Acknowledged"	255, 0, 0	**"Incoming/Acknowledged" flashing**	Disabled	**Background "Incoming"**	255, 0, 0

"Incoming" flashing	Enabled	**Text color "Incoming"**	255, 255, 255	**Background "Incoming/Outgoing/Acknowledged"**	255, 0, 0
"Incoming/Outgoing/Acknowledged" flashing	Disabled	**Background "Incoming/Outgoing"**	255, 0, 0	**"Incoming/Outgoing" flashing**	Enabled

SystemAlarmWithoutClearEvent

General					
Name	SystemAlarmWithoutClearEvent	**ID**	29	**Common alarm class**	<No alarm class>
Acknowledgment					
State machine	Alarm without outgoing status with acknowledgment				
Colors					
Background "Incoming/Acknowledged"	255, 0, 0	**"Incoming/Acknowledged" flashing**	Disabled	**Background "Incoming"**	255, 0, 0
"Incoming" flashing	Enabled	**Text color "Incoming"**	255, 255, 255	**Background "Incoming/Outgoing/Acknowledged"**	255, 0, 0
"Incoming/Outgoing/Acknowledged" flashing	Disabled	**Background "Incoming/Outgoing"**	255, 0, 0	**"Incoming/Outgoing" flashing**	Enabled

SystemInformation

General					
Name	SystemInformation	**ID**	58	**Common alarm class**	<No alarm class>
Acknowledgment					
State machine	Alarm without outgoing without acknowledgment				
Colors					
Background "Incoming/Acknowledged"	220, 220, 220	**"Incoming/Acknowledged" flashing**	Disabled	**Background "Incoming"**	220, 220, 220
"Incoming" flashing	Disabled	**Text color "Incoming"**	0, 0, 0	**Background "Incoming/Outgoing/Acknowledged"**	220, 220, 220
"Incoming/Outgoing/Acknowledged" flashing	Disabled	**Background "Incoming/Outgoing"**	220, 220, 220	**"Incoming/Outgoing" flashing**	Disabled

SystemNotification

General					
Name	SystemNotification	**ID**	59	**Common alarm class**	<No alarm class>
Acknowledgment					
State machine	Alarm without acknowledgment				
Colors					
Background "Incoming/Acknowledged"	173, 216, 230	**"Incoming/Acknowledged" flashing**	Disabled	**Background "Incoming"**	173, 216, 230
"Incoming" flashing	Disabled	**Text color "Incoming"**	0, 0, 0	**Background "Incoming/Outgoing/Acknowledged"**	173, 216, 230
"Incoming/Outgoing/Acknowledged" flashing	Disabled	**Background "Incoming/Outgoing"**	173, 216, 230	**"Incoming/Outgoing" flashing**	Disabled

SystemWarning

General					
Name	SystemWarning	**ID**	60	**Common alarm class**	<No alarm class>
Acknowledgment					
State machine	Alarm with single-mode acknowledgment				
Colors					
Background "Incoming/Acknowledged"	255, 255, 0	**"Incoming/Acknowledged" flashing**	Disabled	**Background "Incoming"**	255, 255, 0
"Incoming" flashing	Enabled	**Text color "Incoming"**	0, 0, 0	**Background "Incoming/Outgoing/Acknowledged"**	255, 255, 0
"Incoming/Outgoing/Acknowledged" flashing	Disabled	**Background "Incoming/Outgoing"**	255, 255, 0	**"Incoming/Outgoing" flashing**	Enabled

SystemWarningWithoutClearEvent

General					
Name	SystemWarningWithoutClearEvent	**ID**	28	**Common alarm class**	<No alarm class>
Acknowledgment					
State machine	Alarm without outgoing status with acknowledgment				
Colors					
Background "Incoming/Acknowledged"	255, 255, 0	**"Incoming/Acknowledged" flashing**	Disabled	**Background "Incoming"**	255, 255, 0
"Incoming" flashing	Enabled	**Text color "Incoming"**	0, 0, 0	**Background "Incoming/Outgoing/Acknowledged"**	255, 255, 0
"Incoming/Outgoing/Acknowledged" flashing	Disabled	**Background "Incoming/Outgoing"**	255, 255, 0	**"Incoming/Outgoing" flashing**	Enabled

Warning

General					
Name	Warning	**ID**	52	**Common alarm class**	<No alarm class>
Acknowledgment					
State machine	Alarm with single-mode acknowledgment				
Colors					
Background "Incoming/Acknowledged"	255, 255, 0	**"Incoming/Acknowledged" flashing**	Disabled	**Background "Incoming"**	255, 255, 0
"Incoming" flashing	Enabled	**Text color "Incoming"**	0, 0, 0	**Background "Incoming/Outgoing/Acknowledged"**	255, 255, 0
"Incoming/Outgoing/Acknowledged" flashing	Disabled	**Background "Incoming/Outgoing"**	255, 255, 0	**"Incoming/Outgoing" flashing**	Enabled

WarningWithReset

General					
Name	WarningWithReset	**ID**	55	**Common alarm class**	<No alarm class>
Acknowledgment					
State machine	Alarm with acknowledgment and confirmation				
Colors					
Background "Incoming/Acknowledged"	255, 255, 0	**"Incoming/Acknowledged" flashing**	Disabled	**Background "Incoming"**	255, 255, 0
"Incoming" flashing	Enabled	**Text color "Incoming"**	0, 0, 0	**Background "Incoming/Outgoing/Acknowledged"**	255, 255, 0
"Incoming/Outgoing/Acknowledged" flashing	Enabled	**Background "Incoming/Outgoing"**	255, 255, 0	**"Incoming/Outgoing" flashing**	Enabled

Fabrica / PC-System_1 [SIMATIC PC station] / HMI_RT_2 [WinCC Unified PC RT] / HMI alarms

System events

ClientDisconnectedAlarm

General					
Name	ClientDisconnectedAlarm	**ID**	537264129	**Alarm text**	Computer1 (@2%s@): Manager (@1%s@) is not connected.
Alarm class	SystemAlarm				

ConfigurationDataChangeFailedAlarm

General					
Name	ConfigurationDataChangeFailedAlarm	**ID**	536870931	**Alarm text**	Computer1 (@S1%s@): Saving of configuration changes has failed.
Alarm class	SystemAlarmWithoutClearEvent				

ConfigurationDataConsolidationFailedAlarm

General					
Name	ConfigurationDataConsolidationFailedAlarm	**ID**	536870932	**Alarm text**	Computer1 (@S1%s@): Merging of the RDF files has failed: @2%s@
Alarm class	SystemAlarmWithoutClearEvent				

ConfigurationErrorInformation

General					
Name	ConfigurationErrorInformation	**ID**	536870928	**Alarm text**	Computer1 (@S1%s@): @5%t#4T@
Alarm class	SystemInformation				

DeltaActivationFailedAlarm

General					
Name	DeltaActivationFailedAlarm	**ID**	536870929	**Alarm text**	Computer1 (@S1%s@): Successful rollback after failed activation.
Alarm class	SystemAlarmWithoutClearEvent				

DeltaActivationNotification

General					
Name	DeltaActivationNotification	**ID**	536870915	**Alarm text**	Computer (@S1%s@):Delta activation in progress
Alarm class	SystemNotification				

DeltaCommitFailedAlarm

General					
Name	DeltaCommitFailedAlarm	**ID**	536870933	**Alarm text**	Computer1 (@S1%s@): Delta activation has failed. The file system is damaged.
Alarm class	SystemAlarmWithoutClearEvent				

DeltaRollbackFailedAlarm

General					
Name	DeltaRollbackFailedAlarm	**ID**	536870930	**Alarm text**	Computer1 (@S1%s@): Delta rollback failed
Alarm class	SystemAlarmWithoutClearEvent				

DeltaRollbackNotification

General					
Name	DeltaRollbackNotification	**ID**	536870916	**Alarm text**	Computer (@S1%s@):Delta rollback in progress
Alarm class	SystemNotification				

DiscSpaceAlarm

General					
Name	DiscSpaceAlarm	**ID**	536870920	**Alarm text**	Computer1 (@1%s@): Very low hard disk space
Alarm class	SystemAlarm				

DiscSpaceWarning

General					
Name	DiscSpaceWarning	**ID**	536870919	**Alarm text**	Computer1 (@1%s@): Low hard disk space
Alarm class	SystemWarning				

DistSystemConnectionFailedAlarm

General					
Name	DistSystemConnectionFailedAlarm	**ID**	536870935	**Alarm text**	Runtime Collaboration: @2%t#<RuntimeCollaborationFailureReason.1>@ during the connection of computer1 (@S1%s@) with system @5%u@ (@6%s@) to @4%s@.
Alarm class	SystemInformation				

DriverManagerAlarm

General					
Name	DriverManagerAlarm	**ID**	536870948	**Alarm text**	Connections: Cannot connect to PLC - @4%s@
Alarm class	SystemAlarm				

DriverManagerOverloadAlarm

General					
Name	DriverManagerOverloadAlarm	**ID**	536870946	**Alarm text**	Computer1 (@2%s@): Driver (@1%s@) Overload has occurred.
Alarm class	SystemAlarm				

DriverManagerOverloadWarning

General					
Name	DriverManagerOverloadWarning	**ID**	536870945	**Alarm text**	Computer1 (@2%s@): Driver (@1%s@) Overload warning.
Alarm class	SystemNotification				

ExpiredCertificateAlarm

General					
Name	ExpiredCertificateAlarm	**ID**	536870943	**Alarm text**	Computer1 (@S1%s@): Certificate for @2%s@ has expired, expiration date: @3%s@. Details: @4%s@
Alarm class	SystemAlarmWithoutClearEvent				

FTADisabledNotification

General					
Name	FTADisabledNotification	**ID**	537526275	**Alarm text**	PLC does not support Central alarm management
Alarm class	SystemNotification				

GoodRange

General					
Name	GoodRange	**ID**	600000	**Alarm text**	
Alarm class					

GoodRange_1

General					
Name	GoodRange_1	**ID**	600001	**Alarm text**	
Alarm class					

GoodRange_10

General					
Name	GoodRange_10	**ID**	600010	**Alarm text**	
Alarm class					

GoodRange_11

General					
Name	GoodRange_11	**ID**	600011	**Alarm text**	
Alarm class					

GoodRange_12

General					
Name	GoodRange_12	**ID**	600012	**Alarm text**	
Alarm class					

GoodRange_13

General					
Name	GoodRange_13	**ID**	600013	**Alarm text**	
Alarm class					

GoodRange_14

General					
Name	GoodRange_14	**ID**	600014	**Alarm text**	
Alarm class					

GoodRange_15

General					
Name	GoodRange_15	**ID**	600015	**Alarm text**	
Alarm class					

GoodRange_16

General					
Name	GoodRange_16	**ID**	600016	**Alarm text**	
Alarm class					

GoodRange_17

General					
Name	GoodRange_17	**ID**	600017	**Alarm text**	
Alarm class					

GoodRange_18

General					
Name	GoodRange_18	**ID**	600018	**Alarm text**	
Alarm class					

GoodRange_19

General					
Name	GoodRange_19	**ID**	600019	**Alarm text**	
Alarm class					

GoodRange_2

General					
Name	GoodRange_2	**ID**	600002	**Alarm text**	
Alarm class					

GoodRange_20

General					
Name	GoodRange_20	**ID**	600020	**Alarm text**	
Alarm class					

GoodRange_21

General					
Name	GoodRange_21	**ID**	600021	**Alarm text**	
Alarm class					

GoodRange_22

General					
Name	GoodRange_22	**ID**	600022	**Alarm text**	
Alarm class					

GoodRange_23

General					
Name	GoodRange_23	**ID**	600023	**Alarm text**	
Alarm class					

GoodRange_24

General					
Name	GoodRange_24	**ID**	600024	**Alarm text**	
Alarm class					

GoodRange_25

General					
Name	GoodRange_25	**ID**	600025	**Alarm text**	
Alarm class					

GoodRange_26

General					
Name	GoodRange_26	**ID**	600026	**Alarm text**	
Alarm class					

GoodRange_27

General					
Name	GoodRange_27	**ID**	600027	**Alarm text**	
Alarm class					

GoodRange_28

General					
Name	GoodRange_28	**ID**	600028	**Alarm text**	
Alarm class					

GoodRange_29

General					
Name	GoodRange_29	**ID**	600029	**Alarm text**	
Alarm class					

GoodRange_3

General					
Name	GoodRange_3	**ID**	600003	**Alarm text**	
Alarm class					

GoodRange_30

General					
Name	GoodRange_30	**ID**	600030	**Alarm text**	
Alarm class					

GoodRange_31

General					
Name	GoodRange_31	**ID**	600031	**Alarm text**	
Alarm class					

GoodRange_32

General					
Name	GoodRange_32	**ID**	600032	**Alarm text**	
Alarm class					

GoodRange_33

General					
Name	GoodRange_33	**ID**	600033	**Alarm text**	
Alarm class					

GoodRange_34

General					
Name	GoodRange_34	**ID**	600034	**Alarm text**	
Alarm class					

GoodRange_35

General					
Name	GoodRange_35	**ID**	600035	**Alarm text**	
Alarm class					

GoodRange_4

General					
Name	GoodRange_4	**ID**	600004	**Alarm text**	
Alarm class					

GoodRange_5

General					
Name	GoodRange_5	**ID**	600005	**Alarm text**	
Alarm class					

GoodRange_6

General					
Name	GoodRange_6	**ID**	600006	**Alarm text**	
Alarm class					

GoodRange_7

General					
Name	GoodRange_7	**ID**	600007	**Alarm text**	
Alarm class					

GoodRange_8

General					
Name	GoodRange_8	**ID**	600008	**Alarm text**	
Alarm class					

GoodRange_9

General					
Name	GoodRange_9	**ID**	600009	**Alarm text**	
Alarm class					

HighLimitViolationAlarm

General					
Name	HighLimitViolationAlarm	**ID**	536870952	**Alarm text**	High limit violated for tag @1%s@. Computer name: @S1%s@
Alarm class	Alarm				

HMI_Connection:CentralAlarm

General					
Name	HMI_Connection:CentralAlarm	**ID**	600036	**Alarm text**	##Text missing##
Alarm class	Notification				

LongtermStorageSystemDisconnectedAlarm

General					
Name	LongtermStorageSystemDisconnectedAlarm	**ID**	536872202	**Alarm text**	Computer1 (@3%s@) - @1%s@: (@2%s@) Connection to the long-term logging system is lost.
Alarm class	SystemAlarm				

LongtermStorageSystemDisconnectedAlarm_1

General					
Name	LongtermStorageSystemDisconnectedAlarm_1	**ID**	536872714	**Alarm text**	Computer1 (@3%s@) - @1%s@: (@2%s@) Connection to the long-term logging system is lost.
Alarm class	SystemAlarm				

LongtermStorageSystemFailoverFailedNotification

General					
Name	LongtermStorageSystemFailoverFailedNotification	**ID**	536872207	**Alarm text**	Computer1 (@2%s@) - @1%s@: Failover error in the long-term logging system.

Alarm class	SystemNotification

LongtermStorageSystemFailoverFailedNotification_1

General					
Name	LongtermStorageSystemFailoverFailedNotification_1	**ID**	536872719	**Alarm text**	Computer1 (@2%s@) - @1%s@: Failover error in the long-term logging system.
Alarm class	SystemNotification				

LongtermStorageSystemPassiveSynchronizingNotification

General					
Name	LongtermStorageSystemPassiveSynchronizingNotification	**ID**	536872206	**Alarm text**	Computer1 (@2%s@) - @1%s@: Synchronizing long-term logging system ...
Alarm class	SystemNotification				

LongtermStorageSystemPassiveSynchronizingNotification_1

General					
Name	LongtermStorageSystemPassiveSynchronizingNotification_1	**ID**	536872718	**Alarm text**	Computer1 (@2%s@) - @1%s@: Synchronizing long-term logging system ...
Alarm class	SystemNotification				

LongtermStorageSystemRedundancyLostNotification

General					
Name	LongtermStorageSystemRedundancyLostNotification	**ID**	536872205	**Alarm text**	Computer1 (@2%s@) - @1%s@: The passive and the active long-term logging system are no longer synchronized.
Alarm class	SystemNotification				

LongtermStorageSystemRedundancyLostNotification_1

General					
Name	LongtermStorageSystemRedundancyLostNotification_1	**ID**	536872717	**Alarm text**	Computer1 (@2%s@) - @1%s@: The passive and the active long-term logging system are no longer synchronized.
Alarm class	SystemNotification				

LongtermStorageSystemResourcesExceededNotification

General					
Name	LongtermStorageSystemResourcesExceededNotification	**ID**	536872204	**Alarm text**	Computer1 (@3%s@) - @1%s@: (@2%s@): Long-term logging system no longer has any system resources.
Alarm class	SystemNotification				

LongtermStorageSystemResourcesExceededNotification_1

General					
Name	LongtermStorageSystemResourcesExceededNotification_1	**ID**	536872716	**Alarm text**	Computer1 (@3%s@) - @1%s@: (@2%s@): Long-term logging system no longer has any system resources.
Alarm class	SystemNotification				

LongtermStorageSystemSpaceExceededNotification

General					
Name	LongtermStorageSystemSpaceExceededNotification	**ID**	536872203	**Alarm text**	Computer1 (@4%s@) - @1%s@ (@2%s@ - @3%s@): Long-term logging system is out of hard disk space.
Alarm class	SystemNotification				

LongtermStorageSystemSpaceExceededNotification_1

General					
Name	LongtermStorageSystemSpaceExceededNotification_1	**ID**	536872715	**Alarm text**	Computer1 (@4%s@) - @1%s@ (@2%s@ - @3%s@): Long-term logging system is out of hard disk space.
Alarm class	SystemNotification				

LowLimitViolationAlarm

General					
Name	LowLimitViolationAlarm	**ID**	536870953	**Alarm text**	Low limit violated for tag @1%s@. Computer name: @S1%s@
Alarm class	Alarm				

NoCertificateAlarm

General					
Name	NoCertificateAlarm	**ID**	536870941	**Alarm text**	Computer1 (@S1%s@): Certificate for @2%s@ was not found in the certificate store. Details: @3%s@
Alarm class	SystemAlarmWithoutClearEvent				

OnlineBackupFailed

General					
Name	OnlineBackupFailed	**ID**	536870940	**Alarm text**	Computer1 (@S1%s@): Online backup has failed

Alarm class	SystemAlarmWithoutClearEvent

OnlineBackupNotification

General					
Name	OnlineBackupNotification	**ID**	536870925	**Alarm text**	Online backup in progress
Alarm class	SystemNotification				

OperatorInputInformation

General					
Name	OperatorInputInformation	**ID**	537329667	**Alarm text**	@10%s@
Alarm class	OperatorInputInformation				

OperatorInputInformation_1

General					
Name	OperatorInputInformation_1	**ID**	537329670	**Alarm text**	@9%t#10T@
Alarm class	OperatorInputInformation				

PhysicalMemorySpaceAlarm

General					
Name	PhysicalMemorySpaceAlarm	**ID**	536870918	**Alarm text**	Computer1 (@1%s@): Very low work memory
Alarm class	SystemAlarm				

PhysicalMemorySpaceWarning

General					
Name	PhysicalMemorySpaceWarning	**ID**	536870917	**Alarm text**	Computer1 (@1%s@): Low work memory
Alarm class	SystemWarning				

PlcConnectionStateChangeInformation

General					
Name	PlcConnectionStateChangeInformation	**ID**	536870927	**Alarm text**	Computer1 (@S1%s@): Connection ID: @S7%u@, Connection status: @2%u@
Alarm class	SystemInformation				

PlcDisconnectedAlarm

General					
Name	PlcDisconnectedAlarm	**ID**	537526273	**Alarm text**	Computer1 (@5%s@): @3%t#2T@
Alarm class	SystemAlarm				

PlcInStopAlarm

General					
Name	PlcInStopAlarm	**ID**	537526274	**Alarm text**	Computer1 (@2%s@): Partner is not fully operational
Alarm class	SystemAlarm				

PlcResOverloadNotification

General					
Name	PlcResOverloadNotification	**ID**	537526276	**Alarm text**	Overload of PLC resources for monitoring HMITags. Maximum of PLC resources - @2%s@.
Alarm class	SystemNotification				

ScriptDebuggerEnabledNotification

General					
Name	ScriptDebuggerEnabledNotification	**ID**	537329666	**Alarm text**	Script Debugger is enabled
Alarm class	SystemNotification				

ScriptDebuggerEnabledNotification_1

General					
Name	ScriptDebuggerEnabledNotification_1	**ID**	537329665	**Alarm text**	Script Debugger is enabled
Alarm class	SystemNotification				

ServiceManagerAlarm

General					
Name	ServiceManagerAlarm	**ID**	536870921	**Alarm text**	Computer1 (@2%s@): Manager (@1%s@) is not connected.
Alarm class	SystemAlarm				

SoonExpireCertificateAlarm

General					
Name	SoonExpireCertificateAlarm	**ID**	536870942	**Alarm text**	Computer1 (@S1%s@): Certificate for @2%s@ will expire soon, expiration date: @3%s@. Details: @4%s@
Alarm class	SystemAlarmWithoutClearEvent				

StartupRuntimeRCDErrorAlarm

General					
Name	StartupRuntimeRCDErrorAlarm	**ID**	536870936	**Alarm text**	Computer1 (@S1%s@): Loading of the configuration data created in Runtime has failed: @2%s@ (@3%s@)
Alarm class	SystemAlarmWithoutClearEvent				

StorageApplicationSynchronizationFailure

General					
Name	StorageApplicationSynchronization-Failure	**ID**	536872212	**Alarm text**	Computer1 (@2%s@): @1%s@: Error during background synchronization. Check the traces for additional information.
Alarm class	SystemAlarm				

StorageApplicationSynchronizationFailure_1

General					
Name	StorageApplicationSynchronization-Failure_1	**ID**	536872724	**Alarm text**	Computer1 (@2%s@): @1%s@: Error during background synchronization. Check the traces for additional information.
Alarm class	SystemAlarm				

StorageApplicationSynchronizing

General					
Name	StorageApplicationSynchronizing	**ID**	536872211	**Alarm text**	Computer1 (@2%s@): @1%s@: Synchronizing the logging data of the redundant partners.
Alarm class	SystemNotification				

StorageApplicationSynchronizing_1

General					
Name	StorageApplicationSynchronizing_1	**ID**	536872723	**Alarm text**	Computer1 (@2%s@): @1%s@: Synchronizing the logging data of the redundant partners.
Alarm class	SystemNotification				

StorageSystemBackendDisconnectedAlarm

General					
Name	StorageSystemBackendDisconnectedAlarm	**ID**	536872200	**Alarm text**	Computer1 (@3%s@): @1%s@ (@2%s@) No connection to the logging system backend.
Alarm class	SystemAlarm				

StorageSystemBackendDisconnectedAlarm_1

General					
Name	StorageSystemBackendDisconnectedAlarm_1	**ID**	536872712	**Alarm text**	Computer1 (@3%s@): @1%s@ (@2%s@) No connection to the logging system backend.
Alarm class	SystemAlarm				

StorageSystemBackupFailed

General					
Name	StorageSystemBackupFailed	**ID**	536872213	**Alarm text**	Computer1 (@4%s@): @1%s@: Backup of a segment or consistency check on log @2%s@ has failed. Check if the backup path is available and permissions are provided. Backup path: @3%s@
Alarm class	SystemAlarm				

StorageSystemBackupFailed_1

General					
Name	StorageSystemBackupFailed_1	**ID**	536872725	**Alarm text**	Computer1 (@4%s@): @1%s@: Backup of a segment or consistency check on log @2%s@ has failed. Check if the backup path is available and permissions are provided. Backup path: @3%s@
Alarm class	SystemAlarm				

StorageSystemCorruptedStorage

General					
Name	StorageSystemCorruptedStorage	**ID**	536872214	**Alarm text**	Computer1 (@4%s@): @1%s@: Storage (@3%s@) is corrupted, therefore cannot be opened. Path: @2%s@
Alarm class	SystemAlarm				

StorageSystemCorruptedStorage_1

General					
Name	StorageSystemCorruptedStorage_1	**ID**	536872726	**Alarm text**	Computer1 (@4%s@): @1%s@: Storage (@3%s@) is corrupted, therefore cannot be opened. Path: @2%s@
Alarm class	SystemAlarm				

StorageSystemDisconnectedAlarm

General					
Name	StorageSystemDisconnectedAlarm	**ID**	536872193	**Alarm text**	Computer1 (@3%s@): @1%s@ (@2%s@): has no connection to the logging system.
Alarm class	SystemAlarm				

StorageSystemDisconnectedAlarm_1

General					
Name	StorageSystemDisconnectedAlarm_1	**ID**	536872705	**Alarm text**	Computer1 (@3%s@): @1%s@ (@2%s@): has no connection to the logging system.
Alarm class	SystemAlarm				

StorageSystemError

General					
Name	StorageSystemError	**ID**	536872208	**Alarm text**	Computer1 (@3%s@) - @1%s@: (@2%s@) A general error has occurred. Check the traces for additional information.
Alarm class	SystemAlarm				

StorageSystemError_1

General					
Name	StorageSystemError_1	**ID**	536872720	**Alarm text**	Computer1 (@3%s@) - @1%s@: (@2%s@) A general error has occurred. Check the traces for additional information.
Alarm class	SystemAlarm				

StorageSystemFailoverFailedAlarm

General					
Name	StorageSystemFailoverFailedAlarm	**ID**	536872199	**Alarm text**	Computer1 (@2%s@): @1%s@: Failover error
Alarm class	SystemAlarm				

StorageSystemFailoverFailedAlarm_1

General					
Name	StorageSystemFailoverFailedAlarm_1	**ID**	536872711	**Alarm text**	Computer1 (@2%s@): @1%s@: Failover error
Alarm class	SystemAlarm				

StorageSystemIncompatibleSchemaVersionAlarm

General					
Name	StorageSystemIncompatibleSchemaVersionAlarm	**ID**	536872210	**Alarm text**	Computer1 (@2%s@): The logging system @1%s@ has detected a more recent database version that is not compatible with the current runtime version. Update the runtime version on your device or use a device with the same runtime version as the database version.
Alarm class	SystemAlarm				

StorageSystemIncompatibleSchemaVersionAlarm_1

General					
Name	StorageSystemIncompatibleSchemaVersionAlarm_1	**ID**	536872722	**Alarm text**	Computer1 (@2%s@): The logging system @1%s@ has detected a more recent database version that is not compatible with the current runtime version. Update the runtime version on your device or use a device with the same runtime version as the database version.
Alarm class	SystemAlarm				

StorageSystemLocationUnavailableAlarm

General					
Name	StorageSystemLocationUnavailableAlarm	**ID**	536872209	**Alarm text**	Computer1 (@6%s@) - @1%s@ (@2%s@ - @3%s@): Logging medium cannot be reached. @5%t#4T@
Alarm class	SystemAlarm				

StorageSystemLocationUnavailableAlarm_1

General					
Name	StorageSystemLocationUnavailableAlarm_1	**ID**	536872721	**Alarm text**	Computer1 (@6%s@) - @1%s@ (@2%s@ - @3%s@): Logging medium cannot be reached. @5%t#4T@
Alarm class	SystemAlarm				

StorageSystemPassiveSynchronizingNotification

General					
Name	StorageSystemPassiveSynchronizingNotification	**ID**	536872198	**Alarm text**	Computer1 (@2%s@): @1%s@: Synchronizing data ...
Alarm class	SystemNotification				

StorageSystemPassiveSynchronizingNotification_1

General					
Name	StorageSystemPassiveSynchronizing-Notification_1	**ID**	536872710	**Alarm text**	Computer1 (@2%s@): @1%s@: Synchronizing data ...
Alarm class	SystemNotification				

StorageSystemRedundancyLostAlarm

General					
Name	StorageSystemRedundancyLostAlarm	**ID**	536872197	**Alarm text**	Computer1 (@2%s@): @1%s@: The passive logging system has lost the connection to the active logging system.
Alarm class	SystemAlarm				

StorageSystemRedundancyLostAlarm_1

General					
Name	StorageSystemRedundancyLostA-larm_1	**ID**	536872709	**Alarm text**	Computer1 (@2%s@): @1%s@: The passive logging system has lost the connection to the active logging system.
Alarm class	SystemAlarm				

StorageSystemResourcesExceededAlarm

General					
Name	StorageSystemResourcesExceededA-larm	**ID**	536872195	**Alarm text**	Computer1 (@4%s@): @1%s@ (@2%s@ - @3%s@): Insufficient resources of the logging system.
Alarm class	SystemAlarm				

StorageSystemResourcesExceededAlarm_1

General					
Name	StorageSystemResourcesExceededA-larm_1	**ID**	536872707	**Alarm text**	Computer1 (@4%s@): @1%s@ (@2%s@ - @3%s@): Insufficient resources of the logging system.
Alarm class	SystemAlarm				

StorageSystemSpaceExceededAlarm

General					
Name	StorageSystemSpaceExceededAlarm	**ID**	536872194	**Alarm text**	Computer1 (@4%s@): @1%s@ (@2%s@ - @3%s@): Log is full.
Alarm class	SystemAlarm				

StorageSystemSpaceExceededAlarm_1

General					
Name	StorageSystemSpaceExceededA-larm_1	**ID**	536872706	**Alarm text**	Computer1 (@4%s@): @1%s@ (@2%s@ - @3%s@): Log is full.
Alarm class	SystemAlarm				

StorageSystemWriteDataLostAlarm

General					
Name	StorageSystemWriteDataLostAlarm	**ID**	536872196	**Alarm text**	Computer1 (@3%s@): @1%s@: A write buffer overflow has occurred in log @2%s@. Data will be lost.
Alarm class	SystemAlarm				

StorageSystemWriteDataLostAlarm_1

General					
Name	StorageSystemWriteDataLostAlarm_1	**ID**	536872708	**Alarm text**	Computer1 (@3%s@): @1%s@: A write buffer overflow has occurred in log @2%s@. Data will be lost.
Alarm class	SystemAlarm				

StorageSystemWriteDataLostPassiveAlarm

General					
Name	StorageSystemWriteDataLostPassiveA-larm	**ID**	536872201	**Alarm text**	Computer1 (@3%s@) - @1%s@: An overflow of the transaction buffer and write buffer has occurred in log @2%s@ of the passive partner. Data may be lost. Avoid a manual failover of the redundancy partner while this message is active.
Alarm class	SystemAlarm				

StorageSystemWriteDataLostPassiveAlarm_1

General					
Name	StorageSystemWriteDataLostPassiveA-larm_1	**ID**	536872713	**Alarm text**	Computer1 (@3%s@) - @1%s@: An overflow of the transaction buffer and write buffer has occurred in log @2%s@ of the passive partner. Data may be lost. Avoid a manual failover of the redundancy partner while this message is active.
Alarm class	SystemAlarm				

SystemAlarmWithoutClearEvent

General					
Name	SystemAlarmWithoutClearEvent	**ID**	537329668	**Alarm text**	@10%s@
Alarm class	SystemAlarmWithoutClearEvent				

SystemAlarmWithoutClearEvent_1

General					
Name	SystemAlarmWithoutClearEvent_1	**ID**	537329671	**Alarm text**	@9%t#10T@
Alarm class	SystemAlarmWithoutClearEvent				

SystemInformation

General					
Name	SystemInformation	**ID**	537329669	**Alarm text**	@10%s@
Alarm class	SystemInformation				

SystemInformation_1

General					
Name	SystemInformation_1	**ID**	537329672	**Alarm text**	@9%t#10T@
Alarm class	SystemInformation				

SystemOverloadAlarm

General					
Name	SystemOverloadAlarm	**ID**	536870937	**Alarm text**	Computer1 (@S1%s@): 'LoggingOverloadError' event was activated.
Alarm class	SystemAlarm				

SystemServiceAlarm

General					
Name	SystemServiceAlarm	**ID**	536870922	**Alarm text**	Computer1 (@2%s@): Service (@1%s@) is not being executed.
Alarm class	SystemAlarm				

SystemServiceAlarm_1

General					
Name	SystemServiceAlarm_1	**ID**	536870923	**Alarm text**	Computer1 (@2%s@): Service (@1%s@) is not being executed.
Alarm class	SystemAlarm				

SystemServiceAlarm_2

General					
Name	SystemServiceAlarm_2	**ID**	536870924	**Alarm text**	Computer1 (@2%s@): Service (@1%s@) is not being executed.
Alarm class	SystemAlarm				

SystemShutdownNotification

General					
Name	SystemShutdownNotification	**ID**	536870914	**Alarm text**	Computer1 (@1%s@): System shutting down
Alarm class	SystemNotification				

SystemStartupNotification

General					
Name	SystemStartupNotification	**ID**	536870913	**Alarm text**	Computer1 (@1%s@): System starting
Alarm class	SystemNotification				

TimeCorrectionAlarm

General					
Name	TimeCorrectionAlarm	**ID**	537526277	**Alarm text**	Computer1 (@2%s@): Partner requires alarm time correction
Alarm class	SystemAlarm				

TimeLeapInformation

General					
Name	TimeLeapInformation	**ID**	536870934	**Alarm text**	Computer1 (@S1%s@): A leap in time of @2%1.3f@ seconds was determined.
Alarm class	SystemInformation				

UPSSMasterSyncingLargeSelectionsNotification

General					
Name	UPSSMasterSyncingLargeSelections-Notification	**ID**	538247171	**Alarm text**	Synchronizing @1%u@ selections from user profile settings of primary device with ID @2%u@ to user profile settings of secondary device with ID @3%u@.
Alarm class	SystemNotification				

UPSSPeerSyncFailureOnDBVersionMismatch

General					
Name	UPSSPeerSyncFailureOnDBVersionMismatch	**ID**	538247175	**Alarm text**	Synchronization of user profile settings between the devices with ID @1%u@ and @2%u@ failed. Database version mismatch.
Alarm class	SystemNotification				

UPSSReduRecoveryNotification

General					
Name	UPSSReduRecoveryNotification	**ID**	538247170	**Alarm text**	Recovery of user profile settings started
Alarm class	SystemNotification				

UPSSSlaveRegistrationFailureOnConnectionLossWithMasterNotification

General					
Name	UPSSSlaveRegistrationFailureOnConnectionLossWithMasterNotification	**ID**	538247174	**Alarm text**	The registration of user profile settings from the secondary device failed. The connection was lost between the devices with ID @1%u@ and ID @2%u@.
Alarm class	SystemNotification				

UPSSSlaveRegistrationFailureOnDbVersionMismatchNotification

General					
Name	UPSSSlaveRegistrationFailureOnDbVersionMismatchNotification	**ID**	538247173	**Alarm text**	The registration of user profile settings from the secondary device with the user profile settings of the primary device with ID @1%u@ failed. Database version mismatch.
Alarm class	SystemNotification				

UPSSSyncFailureOnConnectionLossWithSlaveNotification

General					
Name	UPSSSyncFailureOnConnectionLossWithSlaveNotification	**ID**	538247172	**Alarm text**	Synchronization of user profile settings failed. The connection was lost between secondary device with ID @1%u@ and the primary device with ID @2%u@.
Alarm class	SystemNotification				

ValueChangedInformation

General					
Name	ValueChangedInformation	**ID**	536870938	**Alarm text**	Computer1 (@S1%s@): User name: @S2%s@, Tag name: @2%s@, Old value: @3%v@, New value: @4%v@, Unit: @5%s@, Cause: @6%s@
Alarm class	OperatorInputInformation				

ValueChangeFailedInformation

General					
Name	ValueChangeFailedInformation	**ID**	536870939	**Alarm text**	Computer1 (@S1%s@): User name: @S2%s@, Tag name: @2%s@, Old value: @3%v@, New value: @4%v@, Unit: @5%s@, Cause: @6%s@
Alarm class	OperatorInputInformation				

Fabrica / PC-System_1 [SIMATIC PC station] / HMI_RT_2 [WinCC Unified PC RT]

Parameter set types

This folder is empty.

Fabrica / PC-System_1 [SIMATIC PC station] / HMI_RT_2 [WinCC Unified PC RT]

Scripts

This folder is empty.

Fabrica / PC-System_1 [SIMATIC PC station] / HMI_RT_2 [WinCC Unified PC RT]

Cycles

T100ms

General					
Name	T100ms	**Cycle time**	100	**Cycle unit**	milliseconds
Comment					
Comment					

T10s

General					
Name	T10s	**Cycle time**	10000	**Cycle unit**	milliseconds
Comment					
Comment					

T1s

General					
Name	T1s	**Cycle time**	1000	**Cycle unit**	milliseconds
Comment					
Comment					

T250ms

General					
Name	T250ms	**Cycle time**	250	**Cycle unit**	milliseconds
Comment					
Comment					

T2s

General					
Name	T2s	**Cycle time**	2000	**Cycle unit**	milliseconds
Comment					
Comment					

T500ms

General					
Name	T500ms	**Cycle time**	500	**Cycle unit**	milliseconds
Comment					
Comment					

T5s

General					
Name	T5s	**Cycle time**	5000	**Cycle unit**	milliseconds
Comment					
Comment					

Fabrica / PC-System_1 [SIMATIC PC station] / HMI_RT_2 [WinCC Unified PC RT] / Text and graphic lists

Text lists

SystemTextList_AllenBradleyEIPAlarmTextListCollection_7

Name	SystemTextList_AllenBradleyEIPAlarm-TextListCollection_7	List range	Value/Range	Comment	

Value: 4096

Entry type	Single value	Text	Connection lost on PLC side - @5%s@

Value: 4097

Entry type	Single value	Text	Connection lost on HMI side - @5%s@

Value: 4098

Entry type	Single value	Text	Maximum number of connections exceeded - @5%s@

Value: 4099

Entry type	Single value	Text	Out of resources on PLC - @5%s@

Value: 4100

Entry type	Single value	Text	Legitimation failed, invalid or missing password - @5%s@

Value: 4101

Entry type	Single value	Text	Open request failed - @5%s@

Value: 4102

Entry type	Single value	Text	Cannot connect to PLC - @5%s@

Value: 4103

Entry type	Single value	Text	Open request could not be sent

Value: 4104

Entry type	Single value	Text	root certificate expired for - @5%s@

Value: 4105

Entry type	Single value	Text	PLC certificate untrusted for - @5%s@

SystemTextList_ConfigErrorAlarmTextLibrary_1

Name	SystemTextList_ConfigErrorAlarmText-Library_1	List range	Value/Range	Comment	

Value: 1

Entry type	Single value	Text	NameService configuration error: Implicit deletion. Sub-element instance @6%s@ must be deleted explicitly.

Value: 2

Entry type	Single value	Text	NameService configuration error: Implicit deletion. Alias/Format/Unit instance @6%s@ must be deleted explicitly.

SystemTextList_ConfigErrorAlarmTextLibrary_10

Name	SystemTextList_ConfigErrorAlarmText-Library_10	List range	Value/Range	Comment	

Value: 1

Entry type	Single value	Text	CDS cache - Cache folder cannot be created or reached: @6%s@

Value: 2

Entry type	Single value	Text	LOC cache - Cache folder cannot be created or reached: @6%s@

SystemTextList_ConfigErrorAlarmTextLibrary_2

Name	SystemTextList_ConfigErrorAlarmText-Library_2	List range	Value/Range	Comment	

Value: 1

Entry type	Single value	Text	EvDpManager::cleanupDeletedDatapoint - alert handler config is deleted implicitly for deleted datapoint, @3%s@

Value: 2

Entry type	Single value	Text	EvDpManager::cleanupDeletedDatapoint - alert handler config is deleted implicitly but still has overrides, @3%s@

Value: 3

Entry type	Single value	**Text**	EvDpManager::cleanupDeletedDatapoint - default value config is deleted implicitly for deleted datapoint, @3%s@

Value: 4

Entry type	Single value	**Text**	EvDpManager::cleanupDeletedDatapoint - default value config is deleted implicitly but still has overrides, @3%s@

Value: 5

Entry type	Single value	**Text**	EvDpManager::cleanupDeletedDatapoint - initial value config is deleted implicitly for deleted datapoint, @3%s@

Value: 6

Entry type	Single value	**Text**	EvDpManager::cleanupDeletedDatapoint - initial value config is deleted implicitly but still has overrides, @3%s@

Value: 7

Entry type	Single value	**Text**	EvDpManager::cleanupDeletedDatapoint - distribution config is deleted implicitly for deleted datapoint, @3%s@

Value: 8

Entry type	Single value	**Text**	EvDpManager::cleanupDeletedDatapoint - distribution config is deleted implicitly but still has overrides, @3%s@

Value: 9

Entry type	Single value	**Text**	EvDpManager::cleanupDeletedDatapoint - rangeCheck config is deleted implicitly for deleted datapoint, @3%s@

Value: 10

Entry type	Single value	**Text**	EvDpManager::cleanupDeletedDatapoint - rangeCheck config is deleted implicitly but still has overrides, @3%s@

SystemTextList_ConfigErrorAlarmTextLibrary_3

Name	SystemTextList_ConfigErrorAlarmText-Library_3	**List range**	Value/Range	**Comment**	

Value: 1

Entry type	Single value	**Text**	The configured data point type was deleted, but a configured type is still defined for the node type: @3%s@.

Value: 2

Entry type	Single value	**Text**	The configured data point node type was deleted in the data point type, but a configured type is still defined for the element: @3%s@.

SystemTextList_ConfigErrorAlarmTextLibrary_4

Name	SystemTextList_ConfigErrorAlarmText-Library_4	**List range**	Value/Range	**Comment**	

Value: 2

Entry type	Single value	**Text**	Cycles: @6%s@ does not exist

Value: 3

Entry type	Single value	**Text**	Alarms: @6%s@ exists already

Value: 4

Entry type	Single value	**Text**	Tags: Address @6%s@ was rejected

Value: 1

Entry type	Single value	**Text**	Connections: @6%s@ does not exist

Value: 5

Entry type	Single value	**Text**	Tags: Acquisition mode @6%s@ is not supported.

Value: 6

Entry type	Single value	**Text**	Cycles: @6%s@ was deleted but associated tags exist.

Value: 7

Entry type	Single value	**Text**	Connections: @6%s@ was deleted but associated tags exist.

Value: 8

Entry type	Single value	**Text**	Tags: Tag @6%s@ was rejected.

Value: 9

Entry type	Single value	**Text**	Tags: Tag @6%s@ has an invalid value.

Value: 0

Entry type	Single value	**Text**	Connections: Connection to @6%s@ could not be established.

Value: 65638

Entry type	Single value	**Text**	Connections: Connection to @6%s@ could not be established.

Value: 65639

Entry type	Single value	**Text**	Connections: @6%s@ disconnected.

Value: 65640

Entry type	Single value	**Text**	Connections: Connection to the HMI device @6%s@ is lost.

Value: 65641

Entry type	Single value	**Text**	Connections: Connection to the PLC @6%s@ is lost.

Value: 65541

Entry type	Single value	**Text**	Connections: Timeout while establishing the connection to @6%s@.

Value: 65542

Entry type	Single value	**Text**	Connections: @6%s@ faulty.

Value: 65543

Entry type	Single value	**Text**	Connections: Connection to the HMI device disconnected. Connection @5%s@ was changed.

Value: 65544

Entry type	Single value	**Text**	Connections: Connection to the HMI device disconnected. Driver property was changed for connection @5%s@.

SystemTextList_ConfigErrorAlarmTextLibrary_5

Name	SystemTextList_ConfigErrorAlarmTextLibrary_5	**List range**	Value/Range	**Comment**	

Value: 1

Entry type	Single value	**Text**	Connections: Lifecycle monitoring cycle must be shorter than the response time.

Value: 2

Entry type	Single value	**Text**	Connections: Cyclic services are configured but not supported by the target device.

Value: 3

Entry type	Single value	**Text**	Connections: Change-controlled reading is configured but not supported by the target device.

Value: 4

Entry type	Single value	**Text**	Tags: The address @6%s@ does not exist in the PLC.

Value: 5

Entry type	Single value	**Text**	Tags: The default conversion type for the address @6%s@ could not be determined.

Value: 6

Entry type	Single value	**Text**	Tags: Invalid conversion type

Value: 7

Entry type	Single value	**Text**	Cycles: Invalid conversion type. Conversion is not supported at HmiCycle.

Value: 4096

Entry type	Single value	**Text**	Connections: Version of the address @6%s@ is not supported.

Value: 4097

Entry type	Single value	**Text**	Connections: PROFIBUS address is not supported.

Value: 4098

Entry type	Single value	**Text**	Connections: Softbus address is not supported.

Value: 4099

Entry type	Single value	**Text**	Connections: Address type @6%s@ is not supported.

Value: 4100

Entry type	Single value	**Text**	Connections: Invalid connection name @6%s@. Access point is being ignored.

Value: 4101

Entry type	Single value	**Text**	Connections: Routing is not supported. @6%s@ is not used.

Value: 4102

Entry type	Single value	**Text**	Connections: Routing is not supported. @6%s@ is not used.

Value: 4103

Entry type	Single value	**Text**	Connections: Invalid IP address @6%s@

Value: 4104

Entry type	Single value	**Text**	Connections: Invalid Named Connection @6%s@. Valid format: >VMD</>connection<

Value: 4105

Entry type	Single value	**Text**	Connections: Invalid Named Connection @6%s@. VMD connection name is too long. Only 24 characters are permitted.

Value: 4106

Entry type	Single value	**Text**	Connections: Invalid Named Connection @6%s@. Connection name is too long. Only 32 characters are permitted.

Value: 4107

Entry type	Single value	**Text**	Connections: Rack number @6%s@ is outside of the permitted range (0..7)

Value: 4108

Entry type	Single value	**Text**	Connections: Invalid Named Connection @6%s@. Rack is ignored.

Value: 4109

Entry type	Single value	**Text**	Connections: Slot number @6%s@ is outside of the permitted range (1..32)

Value: 4110

Entry type	Single value	**Text**	Connections: Invalid Named Connection @6%s@. Slot is ignored.

Value: 4111

Entry type	Single value	**Text**	Connection could not be established. Maximum number of available connections (@6%s@) has been exceeded.

Value: 4112

Entry type	Single value	**Text**	Connection aborted. No sign of life in the last @4%s@ ms.

Value: 4113

Entry type	Single value	**Text**	Connection could not be established - @4%s@

Value: 4114

Entry type	Single value	**Text**	Connection could not be established. The address @6%s@ cannot be used.

Value: 4115

Entry type	Single value	**Text**	Connection could not be established. Invalid address @6%s@

Value: 4116

Entry type	Single value	**Text**	Connection could not be established - @4%s@

SystemTextList_ConfigErrorAlarmTextLibrary_6

Name	SystemTextList_ConfigErrorAlarmText-Library_6	**List range**	Value/Range	**Comment**	

Value: 1

Entry type	Single value	**Text**	Connection could not be established. Application instance certificate is not configured.

Value: 2

Entry type	Single value	**Text**	Connection could not be established. Server has rejected the client certificate. OPC UA status code @4%s@.

Value: 3

Entry type	Single value	**Text**	Connection could not be established. Internal problem in the certificate store. OPC UA status code @4%s@

Value: 4

Entry type	Single value	**Text**	Connection could not be established. Application instance certificate could not be loaded. OPC UA status code @4%s@

Value: 5

Entry type	Single value	**Text**	Connection could not be established. Server has not provided a certificate. @4%s@

Value: 6

Entry type	Single value	**Text**	Connection could not be established. Validation of server certificate has failed. OPC UA status code @4%s@.

Value: 7

Entry type	Single value	**Text**	Connection was closed. Error during alarm synchronization. OPC UA status code @4%s@.

Value: 8

Entry type	Single value	**Text**	Connection was closed. Alarm/event subscription has failed. The number of operations on the server has been exceeded.

Value: 9

Entry type	Single value	**Text**	Connection was closed. Alarm/event subscription has failed. The number of alarm/event subscriptions on the server has been exceeded.

Value: 10

Entry type	Single value	**Text**	Connection could not be established. Server reports a license problem. OPC UA status code @4%s@.

Value: 11

Entry type	Single value	**Text**	Connection could not be established. Maximum number of server sessions has been exceeded.

Value: 12

Entry type	Single value	**Text**	Connection could not be established. Safety configuration is inconsistent. @4%s@

Value: 13

Entry type	Single value	**Text**	Connection could not be established. The address @4%s@ cannot be used.

Value: 14

Entry type	Single value	**Text**	Connection could not be established. OPC UA status code @4%s@

Value: 15

Entry type	Single value	**Text**	Connection aborted. OPC UA server was stopped.

Value: 16

Entry type	Single value	**Text**	Connection aborted. No sign of life in the last @4%s@ ms.

Value: 17

Entry type	Single value	**Text**	Connection was closed. OPC UA server maintenance.

Value: 18

Entry type	Single value	**Text**	Connection could not be established. Invalid configuration of the authentication mode - @4%s@

Value: 19

Entry type	Single value	**Text**	Connection could not be established. User could not be authenticated. OPC UA status code @4%s@

Value: 20

Entry type	Single value	**Text**	Connection could not be established. Server does not permit anonymous connection. OPC UA status code @4%s@

Value: 21			
Entry type	Single value	**Text**	Connection could not be established. Certificate problem: Error when writing the safety-relevant data to @4%s@.
Value: 22			
Entry type	Single value	**Text**	Connection could not be established. Certificate problem: Unexpected file in the folder @4%s@ cannot be removed.
Value: 23			
Entry type	Single value	**Text**	Connection could not be established. User could not be authenticated. No user or password configured.
Value: 24			
Entry type	Single value	**Text**	Connection could not be established. Unexpected length of the server certificate. @4%s@
Value: 25			
Entry type	Single value	**Text**	Connection could not be established. @4%s@ is empty.
Value: 26			
Entry type	Single value	**Text**	Connection could not be established. @4%s@ has an unexpected format.
Value: 27			
Entry type	Single value	**Text**	Connection could not be established. Server endpoints cannot be read. OPC UA status code @4%s@
Value: 28			
Entry type	Single value	**Text**	Connection could not be established. No server endpoints were found. @4%s@
Value: 29			
Entry type	Single value	**Text**	Connection could not be established. Application instance certificate could not be found.
Value: 30			
Entry type	Single value	**Text**	Connection could not be established. Unexpected format of the certificate @4%s@.
Value: 31			
Entry type	Single value	**Text**	Connection could not be established. Unexpected format of the certificate block list @4%s@.
Value: 32			
Entry type	Single value	**Text**	Connection could not be established. User could not be authenticated. An encryption detail is invalid. @4%s@
Value: 34			
Entry type	Single value	**Text**	Connection could not be established. - The configured non-transparent redundancy mode @4%s@ is not supported.
Value: 101			
Entry type	Single value	**Text**	Tags: Address @6%s@ does not exist on the server.
Value: 103			
Entry type	Single value	**Text**	Tags: Address @6%s@ cannot be accessed.
Value: 104			
Entry type	Single value	**Text**	Tags: Acquisition mode is not supported for address @6%s@.
Value: 201			
Entry type	Single value	**Text**	Alarms: Address @6%s@ does not exist on the server.
Value: 202			
Entry type	Single value	**Text**	Alarms: Address @6%s@ cannot be used. The specified range filter is not an OPC UA Event Notifier.
Value: 203			
Entry type	Single value	**Text**	Alarms: Address @6%s@ cannot be used. The specified range filter does not exist on the server.
Value: 204			
Entry type	Single value	**Text**	Alarms: Address @6%s@ cannot be used because it is not an OPC UA event type.

Value: 205

Entry type	Single value	**Text**	Alarms: Address @6%s@ cannot be used because the OPC UA condition type is not supported.

Value: 206

Entry type	Single value	**Text**	Alarms: Address @6%s@ cannot be used because the event type does not exist on the server.

Value: 207

Entry type	Single value	**Text**	Alarms: Acquisition type cannot be used for address @6%s@.

Value: 301

Entry type	Single value	**Text**	Address @6%s@ cannot be used because the version number is missing.

Value: 302

Entry type	Single value	**Text**	Address @6%s@ cannot be used because the version number is invalid.

Value: 303

Entry type	Single value	**Text**	Address @6%s@ cannot be used because the number of '$' delimiters is invalid.

Value: 304

Entry type	Single value	**Text**	Address @6%s@ cannot be used because the address type is invalid.

Value: 305

Entry type	Single value	**Text**	Unsupported version @6%s@ of the address

Value: 401

Entry type	Single value	**Text**	Unexpected OPC UA server response: @6%s@

SystemTextList_ConfigErrorAlarmTextLibrary_7

Name	SystemTextList_ConfigErrorAlarmText-Library_7	**List range**	Value/Range	**Comment**	

Value: 1

Entry type	Single value	**Text**	Messages: Invalid condition string for the alarm view @6%s@.

Value: 2

Entry type	Single value	**Text**	Messages: Invalid status tag and bit for the alarm view @6%s@.

Value: 3

Entry type	Single value	**Text**	Messages: Invalid control tag and bit for the alarm view @6%s@.

SystemTextList_ConfigErrorAlarmTextLibrary_8

Name	SystemTextList_ConfigErrorAlarmText-Library_8	**List range**	Value/Range	**Comment**	

Value: 1

Entry type	Single value	**Text**	Logs: Implicit deletion. Logging tag instance @6%s@ should be deleted but there are overloaded elements.

SystemTextList_ConfigErrorAlarmTextLibrary_9

Name	SystemTextList_ConfigErrorAlarmText-Library_9	**List range**	Value/Range	**Comment**	

Value: 1

Entry type	Single value	**Text**	

Value: 2

Entry type	Single value	**Text**	Restart of the runtime is required.

Value: 3

Entry type	Single value	**Text**	The correct storage medium must be ejected and inserted again.

SystemTextList_MitsubishiiQAlarmTextListCollection_3

Name	SystemTextList_MitsubishiiQAlarm-TextListCollection_3	**List range**	Value/Range	**Comment**	

Value: 4096			
Entry type	Single value	**Text**	Connection lost on PLC side - @5%s@
Value: 4097			
Entry type	Single value	**Text**	Connection lost on HMI side - @5%s@
Value: 4098			
Entry type	Single value	**Text**	Maximum number of connections exceeded - @5%s@
Value: 4099			
Entry type	Single value	**Text**	Out of resources on PLC - @5%s@
Value: 4100			
Entry type	Single value	**Text**	Legitimation failed, invalid or missing password - @5%s@
Value: 4101			
Entry type	Single value	**Text**	Open request failed - @5%s@
Value: 4102			
Entry type	Single value	**Text**	Cannot connect to PLC - @5%s@
Value: 4103			
Entry type	Single value	**Text**	Open request could not be sent
Value: 4104			
Entry type	Single value	**Text**	root certificate expired for - @5%s@
Value: 4105			
Entry type	Single value	**Text**	PLC certificate untrusted for - @5%s@

SystemTextList_MitsubishiMCAlarmTextListCollection_4

Name	SystemTextList_MitsubishiMCAlarm-TextListCollection_4	**List range**	Value/Range	**Comment**	
Value: 4096					
Entry type	Single value	**Text**	Connection lost on PLC side - @5%s@		
Value: 4097					
Entry type	Single value	**Text**	Connection lost on HMI side - @5%s@		
Value: 4098					
Entry type	Single value	**Text**	Maximum number of connections exceeded - @5%s@		
Value: 4099					
Entry type	Single value	**Text**	Out of resources on PLC - @5%s@		
Value: 4100					
Entry type	Single value	**Text**	Legitimation failed, invalid or missing password - @5%s@		
Value: 4101					
Entry type	Single value	**Text**	Open request failed - @5%s@		
Value: 4102					
Entry type	Single value	**Text**	Cannot connect to PLC - @5%s@		
Value: 4103					
Entry type	Single value	**Text**	Open request could not be sent		
Value: 4104					
Entry type	Single value	**Text**	root certificate expired for - @5%s@		
Value: 4105					
Entry type	Single value	**Text**	PLC certificate untrusted for - @5%s@		

SystemTextList_OmronEIPAlarmTextListCollection_6

Name	SystemTextList_OmronEIPAlarmText-ListCollection_6	**List range**	Value/Range	**Comment**	
Value: 4096					
Entry type	Single value	**Text**	Connection lost on PLC side - @5%s@		

Value: 4097			
Entry type	Single value	**Text**	Connection lost on HMI side - @5%s@
Value: 4098			
Entry type	Single value	**Text**	Maximum number of connections exceeded - @5%s@
Value: 4099			
Entry type	Single value	**Text**	Out of resources on PLC - @5%s@
Value: 4100			
Entry type	Single value	**Text**	Legitimation failed, invalid or missing password - @5%s@
Value: 4101			
Entry type	Single value	**Text**	Open request failed - @5%s@
Value: 4102			
Entry type	Single value	**Text**	Cannot connect to PLC - @5%s@
Value: 4103			
Entry type	Single value	**Text**	Open request could not be sent
Value: 4104			
Entry type	Single value	**Text**	root certificate expired for - @5%s@
Value: 4105			
Entry type	Single value	**Text**	PLC certificate untrusted for - @5%s@

SystemTextList_RuntimeCollaborationFailureReason_1

Name	SystemTextList_RuntimeCollaboration-FailureReason_1	**List range**	Value/Range	**Comment**	
Value: 0					
Entry type	Single value	**Text**	Unknown error (@3%s@)		
Value: 1					
Entry type	Single value	**Text**	The system is not running or there is a network problem		
Value: 2					
Entry type	Single value	**Text**	Runtime is not started on the target device.		
Value: 3					
Entry type	Single value	**Text**	The System ID does not match the expected System ID (@3%s@)		
Value: 4					
Entry type	Single value	**Text**	The Collaboration name does not match the expected Collaboration name '@3%s@'		
Value: 5					
Entry type	Single value	**Text**	Wrong or unknown certificate		
Value: 6					
Entry type	Single value	**Text**	Revoked certificate		
Value: 7					
Entry type	Single value	**Text**	The time difference is too big.		
Value: 8					
Entry type	Single value	**Text**	No common supported message version		
Value: 9					
Entry type	Single value	**Text**	System ID (@3%s@) already exists		
Value: 10					
Entry type	Single value	**Text**	System name (@3%s@) already exists		
Value: 11					
Entry type	Single value	**Text**	ID/Name in local configuration for Runtime Collaboration already exists		

SystemTextList_S7PlusAlarmTextListCollection_1

Name	SystemTextList_S7PlusAlarmTextList-Collection_1	**List range**	Value/Range	**Comment**	

Value: 4096			
Entry type	Single value	**Text**	Connections: Connection to the PLC @4%s@ is lost
Value: 4097			
Entry type	Single value	**Text**	Connections: Connection to the HMI device @4%s@ is lost
Value: 4098			
Entry type	Single value	**Text**	Connections: Maximum number of connections exceeded - @4%s@
Value: 4099			
Entry type	Single value	**Text**	Out of resources on PLC - @4%s@
Value: 4100			
Entry type	Single value	**Text**	Legitimation failed, invalid or missing password - @4%s@
Value: 4101			
Entry type	Single value	**Text**	Request to open the connection failed - @4%s@
Value: 4102			
Entry type	Single value	**Text**	Connections: Cannot connect to PLC - @4%s@
Value: 4103			
Entry type	Single value	**Text**	Request to open the connection could not be sent
Value: 4104			
Entry type	Single value	**Text**	General certificate error for PLC - @4%s@
Value: 4105			
Entry type	Single value	**Text**	PLC certificate expired for PLC - @4%s@
Value: 4106			
Entry type	Single value	**Text**	PLC certificate is revoked for PLC - @4%s@
Value: 4107			
Entry type	Single value	**Text**	PLC certificate is untrustworthy. Manual trust is possible for - @4%s@
Value: 4108			
Entry type	Single value	**Text**	PLC certificate is untrustworthy. Manual trust is not possible for - @4%s@

SystemTextList_StdModbusRTUAlarmTextListCollection_8

Name	SystemTextList_StdModbusRTUAlarm-TextListCollection_8	**List range**	Value/Range	**Comment**	
Value: 4096					
Entry type	Single value	**Text**	Connections: Connection to the PLC @5%s@ is lost		
Value: 4097					
Entry type	Single value	**Text**	Connections: Connection to the HMI device @5%s@ is lost		
Value: 4098					
Entry type	Single value	**Text**	Connections: Maximum number of connections exceeded - @5%s@		
Value: 4099					
Entry type	Single value	**Text**	Out of resources on PLC - @5%s@		
Value: 4100					
Entry type	Single value	**Text**	Legitimation failed, invalid or missing password - @5%s@		
Value: 4101					
Entry type	Single value	**Text**	Request to open the connection failed - @5%s@		
Value: 4102					
Entry type	Single value	**Text**	Connections: Cannot connect to PLC - @5%s@		
Value: 4103					
Entry type	Single value	**Text**	Request to open the connection could not be sent		
Value: 4104					
Entry type	Single value	**Text**	General certificate error for PLC - @5%s@		

Value: 4105			
Entry type	Single value	**Text**	PLC certificate expired for PLC - @5%s@
Value: 4106			
Entry type	Single value	**Text**	PLC certificate is revoked for PLC - @5%s@
Value: 4107			
Entry type	Single value	**Text**	PLC certificate is untrustworthy. Manual trust is possible for - @5%s@
Value: 4108			
Entry type	Single value	**Text**	PLC certificate is untrustworthy. Manual trust is not possible for - @5%s@

SystemTextList_StdModbusTCPAlarmTextListCollection_5

Name	SystemTextList_StdModbusTCPAlarm-TextListCollection_5	**List range**	Value/Range	**Comment**	
Value: 4096					
Entry type	Single value	**Text**	Connections: Connection to the PLC @5%s@ is lost		
Value: 4097					
Entry type	Single value	**Text**	Connections: Connection to the HMI device @5%s@ is lost		
Value: 4098					
Entry type	Single value	**Text**	Connections: Maximum number of connections exceeded - @5%s@		
Value: 4099					
Entry type	Single value	**Text**	Out of resources on PLC - @5%s@		
Value: 4100					
Entry type	Single value	**Text**	Legitimation failed, invalid or missing password - @5%s@		
Value: 4101					
Entry type	Single value	**Text**	Request to open the connection failed - @5%s@		
Value: 4102					
Entry type	Single value	**Text**	Connections: Cannot connect to PLC - @5%s@		
Value: 4103					
Entry type	Single value	**Text**	Request to open the connection could not be sent		
Value: 4104					
Entry type	Single value	**Text**	General certificate error for PLC - @5%s@		
Value: 4105					
Entry type	Single value	**Text**	PLC certificate expired for PLC - @5%s@		
Value: 4106					
Entry type	Single value	**Text**	PLC certificate is revoked for PLC - @5%s@		
Value: 4107					
Entry type	Single value	**Text**	PLC certificate is untrustworthy. Manual trust is possible for - @5%s@		
Value: 4108					
Entry type	Single value	**Text**	PLC certificate is untrustworthy. Manual trust is not possible for - @5%s@		


Fabrica / PC-System_1 [SIMATIC PC station] / HMI_RT_2 [WinCC Unified PC RT] / Text and graphic lists

Graphic lists

This folder is empty.


Fabrica / PC-System_1 [SIMATIC PC station] / Local modules


IE general_1

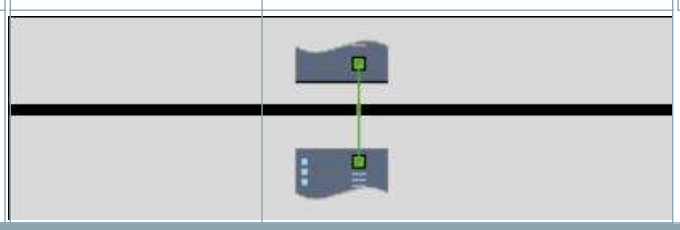IE general_1					
General					
Name	IE general_1	**Author**	Administrator	**Comment**	
Slot	1				
General\Catalog information					
Short designation	IE general	**Description**	Substitute for any Industrial Ethernet module, ISO, TCP/IP, S7 connections, PG functions, routing, PROFINET IO controller, prioritized startup, ... SIMATIC NET PC software V8.2	**Article number**	IE_CP
Software version	V8.2.0				
General\Identification & Maintenance					
Plant designation		**Location identifier**			
PROFINET interface [X1]\General					
Name	PROFINET interface	**Comment**			
PROFINET interface [X1]\Options\Connection establishment monitoring					
Timeout	10s				
PROFINET interface [X1]\Ethernet addresses\Interface networked with					
Subnet:	PN/IE_1				
PROFINET interface [X1]\Ethernet addresses\ISO protocol					
Use ISO protocol	False				
PROFINET interface [X1]\Ethernet addresses\Internet protocol version 4 (IPv4)					
Use IP protocol	True	**IP address:**	192.168.1.10	**Subnet mask:**	255.255.255.0
Use router	False				
PROFINET interface [X1]\Ethernet addresses\PROFINET					
Generate PROFINET device name automatically	True	**PROFINET device name:**	pc-system_1.ie general_1	**Converted name:**	pc-systemxb1.iexageneralxb1188f
Device number:	0				
PROFINET interface [X1]\Advanced options\Interface options					
Use IEC V2.2 LLDP mode	True	**Keep-Alive connection monitoring:**	30s		
PROFINET interface [X1]\Advanced options\Port [X1 P1]\General					
Name	Port_1	**Comment**			
PROFINET interface [X1]\Advanced options\Port [X1 P1]\Port interconnection\Local port:					
Local port:	IE general_1\PROFINET interface [X1]\Port_1 [X1 P1]	**Medium:**	Copper	**Cable name:**	---
					
PROFINET interface [X1]\Advanced options\Port [X1 P1]\Port interconnection\Partner port:					
	Monitoring of partner port is executed	**Partner port:**	PLC_1\PROFINET interface_1 [X1]\Port_1 [X1 P1 R]	**Medium:**	Copper
Cable length:	< 100 m				

Fabrica / Ungrouped devices

IO device_1 [IM 155-6 PN ST]

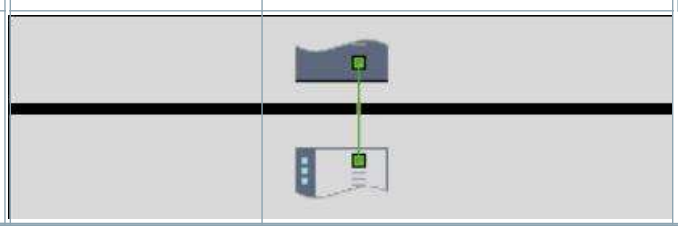IO device_1					
General\Project information					
Name	IO device_1	**Author**	Administrator	**Comment**	
Rack	0	**Slot**	0		
General\Catalog information					
Short designation	IM 155-6 PN ST	**Description**	Interface module with PROFINET interface V2.3 (RT/IRT) with cycle time from 250 µs, PN connection method selectable via BusAdapter; 32 I/O modules including F-modules plus 16 ET 200AL modules via ET connection; media redundancy (MRP); configuration control via PLC; module replacement during operation (multi hot swap); start with empty slots; supports PROFIenergy; shared device on up to 4 PROFINET controllers; PN Security Class 1; supports MSI/MSO; station extension via ET connection; user data up to max. 288 bytes per I/O module; supports module division; firmware V6.1	**Article number**	6ES7 155-6AU02-0BN0
Firmware version	V6.1		False		
General\Identification & Maintenance					
Plant designation		**Location identifier**		**Installation date**	2026-07-22 06:52:42.097
Additional information					
PROFINET interface [X1]\General					
Name	PROFINET interface	**Comment**			
PROFINET interface [X1]\Ethernet addresses\Interface networked with					
Subnet:	PN/IE_1				
PROFINET interface [X1]\Ethernet addresses\Internet protocol version 4 (IPv4)					
IP address:	192.168.1.3	**Subnet mask:**	255.255.255.0	**Synchronize router settings with IO controller**	True
Use router	False				
PROFINET interface [X1]\Ethernet addresses\PROFINET					
Generate PROFINET device name automatically	True	**PROFINET device name:**	io device_1	**Converted name:**	ioxadevicexb1652a
Device number:	1				
PROFINET interface [X1]\Advanced options\Interface options					
Prioritized startup	False	**Use IEC V2.2 LLDP mode**	False	**Optional IO-Device**	False
PROFINET interface [X1]\Advanced options\Real time settings\IO cycle\Shared Device					
IO controller outside project with access to this IO device	0				
PROFINET interface [X1]\Advanced options\Real time settings\IO cycle\Update time					
Calculate update time automatically	True	**Update time**	128.000ms	**Set update time manually**	False
PROFINET interface [X1]\Advanced options\Real time settings\IO cycle\Watchdog time					
Trigger watchdog after	3cycles of missing IO data.	**Watchdog time:**	384.000ms		
PROFINET interface [X1]\Advanced options\Real time settings\Synchronization					
Sync domain:	Sync-Domain_1	**RT class:**	Rt	**Synchronization role:**	NotSynchronized
PROFINET interface [X1]\Advanced options\Port [X1 P1 R]\General					
Name	Port_1	**Comment**			
PROFINET interface [X1]\Advanced options\Port [X1 P1 R]\Port interconnection\Local port:					
Local port:	IO device_1\PROFINET interface [X1]\Port_1 [X1 P1 R]	**Medium:**	Copper	**Cable name:**	---
					
PROFINET interface [X1]\Advanced options\Port [X1 P1 R]\Port interconnection\Partner port:					
	Monitoring of partner port is not possible	**Partner port:**	Any partner		
PROFINET interface [X1]\Advanced options\Port [X1 P1 R]\Port options\Activate					
Activate this port for use	True				
PROFINET interface [X1]\Advanced options\Port [X1 P1 R]\Port options\Connection					
Transmission rate / duplex:	Automatic	**Monitor**	False	**Enable autonegotiation**	True
PROFINET interface [X1]\Advanced options\Port [X1 P1 R]\Port options\Boundaries					
End of detection of accessible devices	False	**End of topology discovery**	False	**End of the sync domain**	False
PROFINET interface [X1]\Advanced options\Port [X1 P2 R]\General					
Name	Port_2	**Comment**			
PROFINET interface [X1]\Advanced options\Port [X1 P2 R]\Port interconnection\Local port:					
Local port:	IO device_1\PROFINET interface [X1]\Port_2 [X1 P2 R]	**Medium:**	Copper	**Cable name:**	---


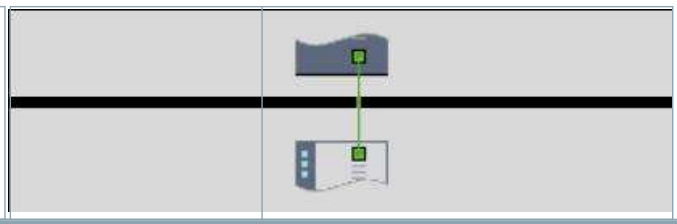


PROFINET interface [X1]\Advanced options\Port [X1 P2 R]\Port interconnection\Partner port:					
	Monitoring of partner port is not possible	**Partner port:**	Any partner		
PROFINET interface [X1]\Advanced options\Port [X1 P2 R]\Port options\Activate					
Activate this port for use	True				
PROFINET interface [X1]\Advanced options\Port [X1 P2 R]\Port options\Connection					
Transmission rate / duplex:	Automatic	**Monitor**	False	**Enable autonegotiation**	True
PROFINET interface [X1]\Advanced options\Port [X1 P2 R]\Port options\Boundaries					
End of detection of accessible devices	False	**End of topology discovery**	False	**End of the sync domain**	False
Module parameters\General\Startup					
Comparison preset to actual module	From CPU				
Module parameters\General\Configuration control\Configuration control for central configuration					
Allow to reconfigure the device via the user program	False				

Module parameters\Shared Device	
Name	**Access**
IO device_1	PLC_1
IO device_1 => PROFINET interface	PLC_1
IO device_1 => PROFINET interface => Port_1	PLC_1
IO device_1 => PROFINET interface => Port_2	PLC_1
Server module_1	PLC_1

AdvancedConfigurationMenu\Discovery and Basic Configuration Protocol (DCP) - interface [X1]					
Activate DCP write protection	True				
AdvancedConfigurationMenu\SNMP configuration (Simple Network Management Protocol).					
Activate SNMP	False	**Read-only community string:**	public	**Read-write community string:**	private

IO device_1					
Printing full menu\General\Project information					
Name	IO device_1	**Author**	Administrator	**Comment**	
Rack	0	**Slot**	0		
Printing full menu\General\Catalog information					
Short designation	IM 155-6 PN ST	**Description**	Interface module with PROFINET interface V2.3 (RT/IRT) with cycle time from 250 µs, PN connection method selectable via BusAdapter; 32 I/O modules including F-modules plus 16 ET 200AL modules via ET connection; media redundancy (MRP); configuration control via PLC; module replacement during operation (multi hot swap); start with empty slots; supports PROFIenergy; shared device on up to 4 PROFINET controllers; PN Security Class 1; supports MSI/MSO; station extension via ET connection; user data up to max. 288 bytes per I/O module; supports module division; firmware V6.1	**Article number**	6ES7 155-6AU02-0BN0
Firmware version	V6.1		False		
Printing full menu\General\Identification & Maintenance					
Plant designation		**Location identifier**		**Installation date**	2026-07-22 06:52:42.097
Additional information					
Printing full menu\PROFINET interface [X1]\General					
Name	PROFINET interface	**Comment**			
Printing full menu\PROFINET interface [X1]\Ethernet addresses\Interface networked with					
Subnet:	PN/IE_1				
Printing full menu\PROFINET interface [X1]\Ethernet addresses\Internet protocol version 4 (IPv4)					
IP address:	192.168.1.3	**Subnet mask:**	255.255.255.0	**Synchronize router settings with IO controller**	True
Use router	False				
Printing full menu\PROFINET interface [X1]\Ethernet addresses\PROFINET					
Generate PROFINET device name automatically	True	**PROFINET device name:**	io device_1	**Converted name:**	ioxadevicexb1652a
Device number:	1				
Printing full menu\PROFINET interface [X1]\Advanced options\Interface options					
Prioritized startup	False	**Use IEC V2.2 LLDP mode**	False	**Optional IO-Device**	False
Printing full menu\PROFINET interface [X1]\Advanced options\Real time settings\IO cycle\Shared Device					
IO controller outside project with access to this IO device	0				
Printing full menu\PROFINET interface [X1]\Advanced options\Real time settings\IO cycle\Update time					
Calculate update time automatically	True	**Update time**	128.000ms	**Set update time manually**	False

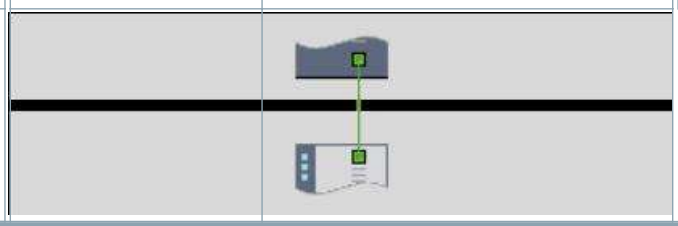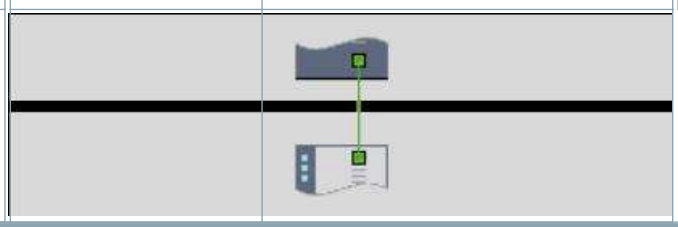
Printing full menu\PROFINET interface [X1]\Advanced options\Real time settings\IO cycle\Watchdog time					
Trigger watchdog after	3cycles of missing IO data.	**Watchdog time:**	384.000ms		
Printing full menu\PROFINET interface [X1]\Advanced options\Real time settings\Synchronization					
Sync domain:	Sync-Domain_1	**RT class:**	Rt	**Synchronization role:**	NotSynchronized
Printing full menu\PROFINET interface [X1]\Advanced options\Port [X1 P1 R]\General					
Name	Port_1	**Comment**			
Printing full menu\PROFINET interface [X1]\Advanced options\Port [X1 P1 R]\Port interconnection\Local port:					
Local port:	IO device_1\PROFINET interface [X1]\Port_1 [X1 P1 R]	**Medium:**	Copper	**Cable name:**	---
					
Printing full menu\PROFINET interface [X1]\Advanced options\Port [X1 P1 R]\Port interconnection\Partner port:					
	Monitoring of partner port is not possible	**Partner port:**	Any partner		
Printing full menu\PROFINET interface [X1]\Advanced options\Port [X1 P1 R]\Port options\Activate					
Activate this port for use	True				
Printing full menu\PROFINET interface [X1]\Advanced options\Port [X1 P1 R]\Port options\Connection					
Transmission rate / duplex:	Automatic	**Monitor**	False	**Enable autonegotiation**	True
Printing full menu\PROFINET interface [X1]\Advanced options\Port [X1 P1 R]\Port options\Boundaries					
End of detection of accessible devices	False	**End of topology discovery**	False	**End of the sync domain**	False
Printing full menu\PROFINET interface [X1]\Advanced options\Port [X1 P2 R]\General					
Name	Port_2	**Comment**			
Printing full menu\PROFINET interface [X1]\Advanced options\Port [X1 P2 R]\Port interconnection\Local port:					
Local port:	IO device_1\PROFINET interface [X1]\Port_2 [X1 P2 R]	**Medium:**	Copper	**Cable name:**	---
					
Printing full menu\PROFINET interface [X1]\Advanced options\Port [X1 P2 R]\Port interconnection\Partner port:					
	Monitoring of partner port is not possible	**Partner port:**	Any partner		
Printing full menu\PROFINET interface [X1]\Advanced options\Port [X1 P2 R]\Port options\Activate					
Activate this port for use	True				
Printing full menu\PROFINET interface [X1]\Advanced options\Port [X1 P2 R]\Port options\Connection					
Transmission rate / duplex:	Automatic	**Monitor**	False	**Enable autonegotiation**	True
Printing full menu\PROFINET interface [X1]\Advanced options\Port [X1 P2 R]\Port options\Boundaries					
End of detection of accessible devices	False	**End of topology discovery**	False	**End of the sync domain**	False
Printing full menu\Module parameters\General\Startup					
Comparison preset to actual module	From CPU				
Printing full menu\Module parameters\General\Configuration control\Configuration control for central configuration					
Allow to reconfigure the device via the user program	False				
Printing full menu\Module parameters\Shared Device					


Name	Access
IO device_1	PLC_1
IO device_1 => PROFINET interface	PLC_1
IO device_1 => PROFINET interface => Port_1	PLC_1
IO device_1 => PROFINET interface => Port_2	PLC_1
Server module_1	PLC_1

Printing full menu\AdvancedConfigurationMenu\Discovery and Basic Configuration Protocol (DCP) - interface [X1]	
Activate DCP write protection	True

Fabrica / Ungrouped devices / IO device_1 [IM 155-6 PN ST]

IO device_1 [IM 155-6 PN ST]

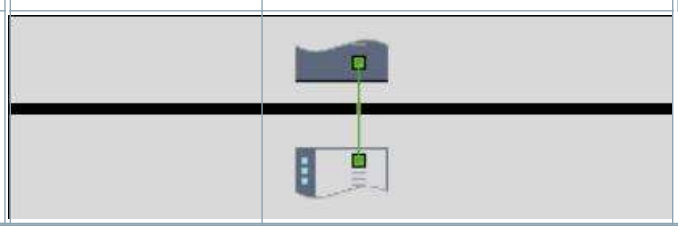IO device_1					
General\Project information					
Name	IO device_1	**Author**	Administrator	**Comment**	
Rack	0	**Slot**	0		
General\Catalog information					
Short designation	IM 155-6 PN ST	**Description**	Interface module with PROFINET interface V2.3 (RT/IRT) with cycle time from 250 µs, PN connection method selectable via BusAdapter; 32 I/O modules including F-modules plus 16 ET 200AL modules via ET connection; media redundancy (MRP); configuration control via PLC; module replacement during operation (multi hot swap); start with empty slots; supports PROFIenergy; shared device on up to 4 PROFINET controllers; PN Security Class 1; supports MSI/MSO; station extension via ET connection; user data up to max. 288 bytes per I/O module; supports module division; firmware V6.1	**Article number**	6ES7 155-6AU02-0BN0
Firmware version	V6.1		False		
General\Identification & Maintenance					
Plant designation		**Location identifier**		**Installation date**	2026-07-22 06:52:42.097
Additional information					
PROFINET interface [X1]\General					
Name	PROFINET interface	**Comment**			
PROFINET interface [X1]\Ethernet addresses\Interface networked with					
Subnet:	PN/IE_1				
PROFINET interface [X1]\Ethernet addresses\Internet protocol version 4 (IPv4)					
IP address:	192.168.1.3	**Subnet mask:**	255.255.255.0	**Synchronize router settings with IO controller**	True
Use router	False				
PROFINET interface [X1]\Ethernet addresses\PROFINET					
Generate PROFINET device name automatically	True	**PROFINET device name:**	io device_1	**Converted name:**	ioxadevicexb1652a
Device number:	1				
PROFINET interface [X1]\Advanced options\Interface options					
Prioritized startup	False	**Use IEC V2.2 LLDP mode**	False	**Optional IO-Device**	False
PROFINET interface [X1]\Advanced options\Real time settings\IO cycle\Shared Device					
IO controller outside project with access to this IO device	0				
PROFINET interface [X1]\Advanced options\Real time settings\IO cycle\Update time					
Calculate update time automatically	True	**Update time**	128.000ms	**Set update time manually**	False
PROFINET interface [X1]\Advanced options\Real time settings\IO cycle\Watchdog time					
Trigger watchdog after	3cycles of missing IO data.	**Watchdog time:**	384.000ms		
PROFINET interface [X1]\Advanced options\Real time settings\Synchronization					
Sync domain:	Sync-Domain_1	**RT class:**	Rt	**Synchronization role:**	NotSynchronized
PROFINET interface [X1]\Advanced options\Port [X1 P1 R]\General					
Name	Port_1	**Comment**			
PROFINET interface [X1]\Advanced options\Port [X1 P1 R]\Port interconnection\Local port:					
Local port:	IO device_1\PROFINET interface [X1]\Port_1 [X1 P1 R]	**Medium:**	Copper	**Cable name:**	---
					
PROFINET interface [X1]\Advanced options\Port [X1 P1 R]\Port interconnection\Partner port:					
	Monitoring of partner port is not possible	**Partner port:**	Any partner		
PROFINET interface [X1]\Advanced options\Port [X1 P1 R]\Port options\Activate					
Activate this port for use	True				
PROFINET interface [X1]\Advanced options\Port [X1 P1 R]\Port options\Connection					
Transmission rate / duplex:	Automatic	**Monitor**	False	**Enable autonegotiation**	True
PROFINET interface [X1]\Advanced options\Port [X1 P1 R]\Port options\Boundaries					
End of detection of accessible devices	False	**End of topology discovery**	False	**End of the sync domain**	False
PROFINET interface [X1]\Advanced options\Port [X1 P2 R]\General					
Name	Port_2	**Comment**			
PROFINET interface [X1]\Advanced options\Port [X1 P2 R]\Port interconnection\Local port:					
Local port:	IO device_1\PROFINET interface [X1]\Port_2 [X1 P2 R]	**Medium:**	Copper	**Cable name:**	---


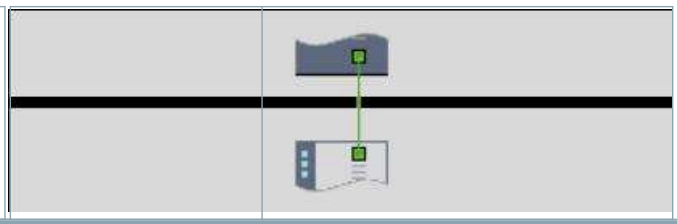


PROFINET interface [X1]\Advanced options\Port [X1 P2 R]\Port interconnection\Partner port:					
	Monitoring of partner port is not possible	**Partner port:**	Any partner		
PROFINET interface [X1]\Advanced options\Port [X1 P2 R]\Port options\Activate					
Activate this port for use	True				
PROFINET interface [X1]\Advanced options\Port [X1 P2 R]\Port options\Connection					
Transmission rate / duplex:	Automatic	**Monitor**	False	**Enable autonegotiation**	True
PROFINET interface [X1]\Advanced options\Port [X1 P2 R]\Port options\Boundaries					
End of detection of accessible devices	False	**End of topology discovery**	False	**End of the sync domain**	False
Module parameters\General\Startup					
Comparison preset to actual module	From CPU				
Module parameters\General\Configuration control\Configuration control for central configuration					
Allow to reconfigure the device via the user program	False				

Module parameters\Shared Device	
Name	**Access**
IO device_1	PLC_1
IO device_1 => PROFINET interface	PLC_1
IO device_1 => PROFINET interface => Port_1	PLC_1
IO device_1 => PROFINET interface => Port_2	PLC_1
Server module_1	PLC_1

AdvancedConfigurationMenu\Discovery and Basic Configuration Protocol (DCP) - interface [X1]					
Activate DCP write protection	True				
AdvancedConfigurationMenu\SNMP configuration (Simple Network Management Protocol).					
Activate SNMP	False	**Read-only community string:**	public	**Read-write community string:**	private

IO device_1					
Printing full menu\General\Project information					
Name	IO device_1	**Author**	Administrator	**Comment**	
Rack	0	**Slot**	0		
Printing full menu\General\Catalog information					
Short designation	IM 155-6 PN ST	**Description**	Interface module with PROFINET interface V2.3 (RT/IRT) with cycle time from 250 µs, PN connection method selectable via BusAdapter; 32 I/O modules including F-modules plus 16 ET 200AL modules via ET connection; media redundancy (MRP); configuration control via PLC; module replacement during operation (multi hot swap); start with empty slots; supports PROFIenergy; shared device on up to 4 PROFINET controllers; PN Security Class 1; supports MSI/MSO; station extension via ET connection; user data up to max. 288 bytes per I/O module; supports module division; firmware V6.1	**Article number**	6ES7 155-6AU02-0BN0
Firmware version	V6.1		False		
Printing full menu\General\Identification & Maintenance					
Plant designation		**Location identifier**		**Installation date**	2026-07-22 06:52:42.097
Additional information					
Printing full menu\PROFINET interface [X1]\General					
Name	PROFINET interface	**Comment**			
Printing full menu\PROFINET interface [X1]\Ethernet addresses\Interface networked with					
Subnet:	PN/IE_1				
Printing full menu\PROFINET interface [X1]\Ethernet addresses\Internet protocol version 4 (IPv4)					
IP address:	192.168.1.3	**Subnet mask:**	255.255.255.0	**Synchronize router settings with IO controller**	True
Use router	False				
Printing full menu\PROFINET interface [X1]\Ethernet addresses\PROFINET					
Generate PROFINET device name automatically	True	**PROFINET device name:**	io device_1	**Converted name:**	ioxadevicexb1652a
Device number:	1				
Printing full menu\PROFINET interface [X1]\Advanced options\Interface options					
Prioritized startup	False	**Use IEC V2.2 LLDP mode**	False	**Optional IO-Device**	False
Printing full menu\PROFINET interface [X1]\Advanced options\Real time settings\IO cycle\Shared Device					
IO controller outside project with access to this IO device	0				
Printing full menu\PROFINET interface [X1]\Advanced options\Real time settings\IO cycle\Update time					
Calculate update time automatically	True	**Update time**	128.000ms	**Set update time manually**	False

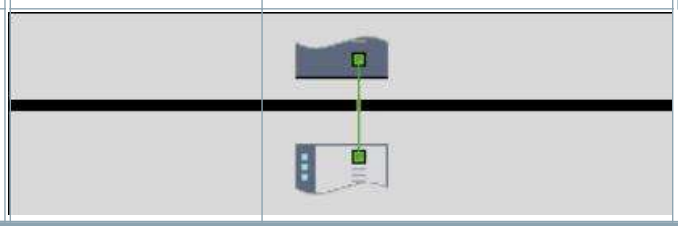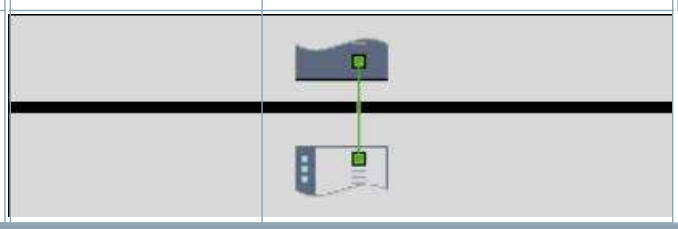Printing full menu\PROFINET interface [X1]\Advanced options\Real time settings\IO cycle\Watchdog time					
Trigger watchdog after	3cycles of missing IO data.	**Watchdog time:**	384.000ms		
Printing full menu\PROFINET interface [X1]\Advanced options\Real time settings\Synchronization					
Sync domain:	Sync-Domain_1	**RT class:**	Rt	**Synchronization role:**	NotSynchronized
Printing full menu\PROFINET interface [X1]\Advanced options\Port [X1 P1 R]\General					
Name	Port_1	**Comment**			
Printing full menu\PROFINET interface [X1]\Advanced options\Port [X1 P1 R]\Port interconnection\Local port:					
Local port:	IO device_1\PROFINET interface [X1]\Port_1 [X1 P1 R]	**Medium:**	Copper	**Cable name:**	---
					
Printing full menu\PROFINET interface [X1]\Advanced options\Port [X1 P1 R]\Port interconnection\Partner port:					
	Monitoring of partner port is not possible	**Partner port:**	Any partner		
Printing full menu\PROFINET interface [X1]\Advanced options\Port [X1 P1 R]\Port options\Activate					
Activate this port for use	True				
Printing full menu\PROFINET interface [X1]\Advanced options\Port [X1 P1 R]\Port options\Connection					
Transmission rate / duplex:	Automatic	**Monitor**	False	**Enable autonegotiation**	True
Printing full menu\PROFINET interface [X1]\Advanced options\Port [X1 P1 R]\Port options\Boundaries					
End of detection of accessible devices	False	**End of topology discovery**	False	**End of the sync domain**	False
Printing full menu\PROFINET interface [X1]\Advanced options\Port [X1 P2 R]\General					
Name	Port_2	**Comment**			
Printing full menu\PROFINET interface [X1]\Advanced options\Port [X1 P2 R]\Port interconnection\Local port:					
Local port:	IO device_1\PROFINET interface [X1]\Port_2 [X1 P2 R]	**Medium:**	Copper	**Cable name:**	---
					
Printing full menu\PROFINET interface [X1]\Advanced options\Port [X1 P2 R]\Port interconnection\Partner port:					
	Monitoring of partner port is not possible	**Partner port:**	Any partner		
Printing full menu\PROFINET interface [X1]\Advanced options\Port [X1 P2 R]\Port options\Activate					
Activate this port for use	True				
Printing full menu\PROFINET interface [X1]\Advanced options\Port [X1 P2 R]\Port options\Connection					
Transmission rate / duplex:	Automatic	**Monitor**	False	**Enable autonegotiation**	True
Printing full menu\PROFINET interface [X1]\Advanced options\Port [X1 P2 R]\Port options\Boundaries					
End of detection of accessible devices	False	**End of topology discovery**	False	**End of the sync domain**	False
Printing full menu\Module parameters\General\Startup					
Comparison preset to actual module	From CPU				
Printing full menu\Module parameters\General\Configuration control\Configuration control for central configuration					
Allow to reconfigure the device via the user program	False				
Printing full menu\Module parameters\Shared Device					

Name	Access
IO device_1	PLC_1
IO device_1 => PROFINET interface	PLC_1
IO device_1 => PROFINET interface => Port_1	PLC_1
IO device_1 => PROFINET interface => Port_2	PLC_1
Server module_1	PLC_1

Printing full menu\AdvancedConfigurationMenu\Discovery and Basic Configuration Protocol (DCP) - interface [X1]	
Activate DCP write protection	True

Fabrica / Ungrouped devices / IO device_1 [IM 155-6 PN ST]

Server module_1

Server module_1					
General\Project information					
Name	Server module_1	**Author**	Administrator	**Comment**	
Rack	0	**Slot**	1		
General\Catalog information					
Short designation	Server module	**Description**	Electrical and mechanical backplane bus terminator; supports diagnostics and status of the supply voltage L+ and feedback voltage; functional expansion (load voltage diagnostics of modules with the help of user data) and thus definition of module versions	**Article number**	6ES7 193-6PA00-0AA0
Firmware version	V1.1		False		
General\Identification & Maintenance					
Plant designation		**Location identifier**		**Installation date**	2026-07-29 11:36:29.036
Additional information					
Server module\General					
Name	Server module_1	**Comment**			
Server module\Diagnostics\Group diagnostics: Missing supply voltage L+					
Group diagnostics: Missing supply voltage L+	False				
Server module\Module parameters / I/O addresses\Status of voltages					
Status of voltages	No status available				

Fabrica

Security settings

This folder is empty.

Fabrica / Cross-device functions / Project traces

Measurements

This folder is empty.

Fabrica / Cross-device functions / Long-term project traces

Measurements

This folder is empty.

Fabrica / Common data / Alarm classes

Alarm classes

Alarm classes				
Name	**ID**	**Display name**	**Acknowledgment**	**Priority**
Acknowledgement	33	A	True	0
No Acknowledgement	34	NA	False	0

Fabrica / Common data / Logs

7/22/2026 8:32:32 AM - Instantiate multiple types

7/22/2026 8:32:32 AM - Instantiate multiple types				
!	Message	Date	Time	User
	Target device: 'PLC_1'	7/22/2026	8:32:51 AM	
	The instantiation of type 'udtHandshake V 3.0.0' has been completed.	7/22/2026	8:32:51 AM	
	The instantiation of type 'udtHandshakes V 3.0.0' has been completed.	7/22/2026	8:32:51 AM	
	The instantiation of type 'udtQueueItem V 3.0.0' has been completed.	7/22/2026	8:32:51 AM	
	The instantiation of type 'udtQueue V 3.0.0' has been completed.	7/22/2026	8:32:51 AM	
	The instantiation of type 'udtAnyPointer V 3.0.0' has been completed.	7/22/2026	8:32:51 AM	
	The instantiation of type 'udtContC_C V 3.0.0' has been completed.	7/22/2026	8:32:51 AM	
	The instantiation of type 'udtContC_S V 3.0.0' has been completed.	7/22/2026	8:32:51 AM	
	The instantiation of type 'udtContC V 3.0.0' has been completed.	7/22/2026	8:32:51 AM	
	The instantiation of type 'udtModbusTCPTransaction V 0.0.1' has been completed.	7/22/2026	8:32:51 AM	

Fabrica / Languages & resources

Project languages

Languages
Reference language
English (United States)

Editing language
English (United States)

Other project languages
Empty

Fabrica / Languages & resources / Project texts

Project texts

Project texts		
English (United States)	**Category**	**Reference**
	Block comment	Fabrica\PLC_1 [CPU 1511-1 PN]\Program blocks\Open Library V19\Devices\fbValve_Solenoid [FB110]\Network 6\Comment
	Block comment	Fabrica\PLC_1 [CPU 1511-1 PN]\Program blocks\Open Library V19\Devices\fbValve_Solenoid [FB110]\Network 10\Comment
	Block comment	Fabrica\PLC_1 [CPU 1511-1 PN]\Program blocks\Open Library V19\Devices\fbValve_Solenoid [FB110]\Network 19\Comment
	Block comment	Fabrica\PLC_1 [CPU 1511-1 PN]\Program blocks\Open Library V19\Devices\fbValve_Solenoid [FB110]\Network 27\Comment
	Block comment	Fabrica\PLC_1 [CPU 1511-1 PN]\Program blocks\Open Library V19\Devices\fbValve_Solenoid [FB110]\Network 28\Comment
	Block comment	Fabrica\PLC_1 [CPU 1511-1 PN]\Program blocks\Open Library V19\Devices\fbValve_Solenoid [FB110]\Network 32\Comment
	Alarm class text	Fabrica\PC-System_1 [SIMATIC PC station]\HMI_RT_2 [WinCC Unified PC RT]\HMI alarms\AlarmWithReset\\ShortName
	Alarm class text	Fabrica\PC-System_1 [SIMATIC PC station]\HMI_RT_2 [WinCC Unified PC RT]\HMI alarms\Information\\ShortName
	Alarm class text	Fabrica\PC-System_1 [SIMATIC PC station]\HMI_RT_2 [WinCC Unified PC RT]\HMI alarms\SystemWarning\\ShortName
	Alarm class text	Fabrica\PC-System_1 [SIMATIC PC station]\HMI_RT_2 [WinCC Unified PC RT]\HMI alarms\SystemAlarm\\ShortName
	Alarm class text	Fabrica\PC-System_1 [SIMATIC PC station]\HMI_RT_2 [WinCC Unified PC RT]\HMI alarms\SystemWarningWithoutClearEvent\\ShortName
	Alarm class text	Fabrica\PC-System_1 [SIMATIC PC station]\HMI_RT_2 [WinCC Unified PC RT]\HMI alarms\SystemAlarmWithoutClearEvent\\ShortName
	Alarm class text	Fabrica\PC-System_1 [SIMATIC PC station]\HMI_RT_2 [WinCC Unified PC RT]\HMI alarms\SystemAlarmWithoutClearEvent\\ShortName
	Alarm class text	Fabrica\PC-System_1 [SIMATIC PC station]\HMI_RT_2 [WinCC Unified PC RT]\HMI alarms\SystemInformation\\ShortName
	Alarm class text	Fabrica\PC-System_1 [SIMATIC PC station]\HMI_RT_2 [WinCC Unified PC RT]\HMI alarms\SystemNotification\\ShortName
	Alarm class text	Fabrica\PC-System_1 [SIMATIC PC station]\HMI_RT_2 [WinCC Unified PC RT]\HMI alarms\Critical\\ShortName
	Alarm class text	Fabrica\PC-System_1 [SIMATIC PC station]\HMI_RT_2 [WinCC Unified PC RT]\HMI alarms\WarningWithReset\\ShortName
	Alarm class text	Fabrica\PC-System_1 [SIMATIC PC station]\HMI_RT_2 [WinCC Unified PC RT]\HMI alarms\Warning\\ShortName
	Alarm class text	Fabrica\PC-System_1 [SIMATIC PC station]\HMI_RT_2 [WinCC Unified PC RT]\HMI alarms\Alarm\\ShortName
	Alarm class text	Fabrica\PC-System_1 [SIMATIC PC station]\HMI_RT_2 [WinCC Unified PC RT]\HMI alarms\CriticalWithReset\\ShortName
	Alarm class text	Fabrica\PC-System_1 [SIMATIC PC station]\HMI_RT_2 [WinCC Unified PC RT]\HMI alarms\OperatorInputInformation\\ShortName
	Alarm class text	Fabrica\PC-System_1 [SIMATIC PC station]\HMI_RT_2 [WinCC Unified PC RT]\HMI alarms\OperatorInputRequest\\ShortName
	Alarm class text	Fabrica\PC-System_1 [SIMATIC PC station]\HMI_RT_2 [WinCC Unified PC RT]\HMI alarms\Notification\\ShortName
	Alarm class text	Fabrica\PC-System_1 [SIMATIC PC station]\HMI_RT_2 [WinCC Unified PC RT]\HMI alarms\Acknowledgement\\ShortName
	Alarm class text	Fabrica\PC-System_1 [SIMATIC PC station]\HMI_RT_2 [WinCC Unified PC RT]\HMI alarms\NoAcknowledgement\\ShortName
	Text category tag comment	Fabrica\PLC_1 [CPU 1511-1 PN]\PLC tags\Open Library [88]\Simocode.Types.ReversingStarter\Comment
	Text category tag comment	Fabrica\PLC_1 [CPU 1511-1 PN]\PLC tags\Open Library [88]\TotalizerTimeUnits.SECONDS\Comment
	HMI runtime	Fabrica\PC-System_1 [SIMATIC PC station]\HMI_RT_2 [WinCC Unified PC RT]\Text and graphic lists\SystemTextList_ConfigErrorAlarmTextLibrary_9\Text_list_entry_1\Text
	Alarm text	Fabrica\PC-System_1 [SIMATIC PC station]\HMI_RT_2 [WinCC Unified PC RT]\HMI alarms\Acknowledgement\\AlarmClassData_IDisplayNaming_DisplayName
	Alarm text	Fabrica\PC-System_1 [SIMATIC PC station]\HMI_RT_2 [WinCC Unified PC RT]\HMI alarms\NoAcknowledgement\\AlarmClassData_IDisplayNaming_DisplayName
---------- Control Logic ----------	Block comment	Fabrica\PLC_1 [CPU 1511-1 PN]\Program blocks\Open Library V19\Devices\fbValve_Solenoid [FB110]\Network 5\Title
---------- Control Logic ----------	Block comment	Fabrica\PLC_1 [CPU 1511-1 PN]\Program blocks\Open Library V19\Devices\fbValve_Analog [FB111]\Network 4\Title
---------- Errors ----------	Block comment	Fabrica\PLC_1 [CPU 1511-1 PN]\Program blocks\Open Library V19\Devices\fbValve_Solenoid [FB110]\Network 17\Title
IF manual mode AND no estop AND not a new mode AND enabled => --if no cylinder errors, enable move to Home and Work --enable home and work HMI buttons only in manual mode	Block comment	Fabrica\PLC_1 [CPU 1511-1 PN]\Program blocks\Open Library V19\Devices\fbValve_Solenoid [FB110]\Network 11\Comment
---------- Inputs ----------	Block comment	Fabrica\PLC_1 [CPU 1511-1 PN]\Program blocks\Open Library V19\Devices\fbValve_Solenoid [FB110]\Network 1\Title
---------- Outputs ----------	Block comment	Fabrica\PLC_1 [CPU 1511-1 PN]\Program blocks\Open Library V19\Devices\fbValve_Solenoid [FB110]\Network 26\Title
---------- Outputs ----------	Block comment	Fabrica\PLC_1 [CPU 1511-1 PN]\Program blocks\Open Library V19\Devices\fbValve_Analog [FB111]\Network 20\Title
Restart of the runtime is required.	HMI runtime	Fabrica\PC-System_1 [SIMATIC PC station]\HMI_RT_2 [WinCC Unified PC RT]\Text and graphic lists\SystemTextList_ConfigErrorAlarmTextLibrary_9\Text_list_entry_2\Text
The correct storage medium must be ejected and inserted again.	HMI runtime	Fabrica\PC-System_1 [SIMATIC PC station]\HMI_RT_2 [WinCC Unified PC RT]\Text and graphic lists\SystemTextList_ConfigErrorAlarmTextLibrary_9\Text_list_entry_3\Text
	Block comment	Fabrica\PLC_1 [CPU 1511-1 PN]\Program blocks\Main [OB1]\Network 29\Comment

English (United States)	Category	Reference
"Main Program Sweep (Cycle)"	Block comment	Fabrica\PLC_1 [CPU 1511-1 PN]\Program blocks\Main [OB1]\Block title
##Text missing##	HMI system event	Fabrica\PC-System_1 [SIMATIC PC station]\HMI_RT_2 [WinCC Unified PC RT]\HMI alarms\HMI_Connection:CentralAlarm\Alarm text
##Text missing##	HMI system event	Fabrica\PC-System_1 [SIMATIC PC station]\HMI_RT_2 [WinCC Unified PC RT]\HMI alarms\HMI_Connection:CentralAlarm\Additional text 1
##Text missing##	HMI system event	Fabrica\PC-System_1 [SIMATIC PC station]\HMI_RT_2 [WinCC Unified PC RT]\HMI alarms\HMI_Connection:CentralAlarm\Additional text 2
##Text missing##	HMI system event	Fabrica\PC-System_1 [SIMATIC PC station]\HMI_RT_2 [WinCC Unified PC RT]\HMI alarms\HMI_Connection:CentralAlarm\Additional text 3
##Text missing##	HMI system event	Fabrica\PC-System_1 [SIMATIC PC station]\HMI_RT_2 [WinCC Unified PC RT]\HMI alarms\HMI_Connection:CentralAlarm\Additional text 4
##Text missing##	HMI system event	Fabrica\PC-System_1 [SIMATIC PC station]\HMI_RT_2 [WinCC Unified PC RT]\HMI alarms\HMI_Connection:CentralAlarm\Additional text 5
##Text missing##	HMI system event	Fabrica\PC-System_1 [SIMATIC PC station]\HMI_RT_2 [WinCC Unified PC RT]\HMI alarms\HMI_Connection:CentralAlarm\Additional text 6
##Text missing##	HMI system event	Fabrica\PC-System_1 [SIMATIC PC station]\HMI_RT_2 [WinCC Unified PC RT]\HMI alarms\HMI_Connection:CentralAlarm\Additional text 7
##Text missing##	HMI system event	Fabrica\PC-System_1 [SIMATIC PC station]\HMI_RT_2 [WinCC Unified PC RT]\HMI alarms\HMI_Connection:CentralAlarm\Additional text 8
##Text missing##	HMI system event	Fabrica\PC-System_1 [SIMATIC PC station]\HMI_RT_2 [WinCC Unified PC RT]\HMI alarms\HMI_Connection:CentralAlarm\Additional text 9
##Text missing##	HMI system event	Fabrica\PC-System_1 [SIMATIC PC station]\HMI_RT_2 [WinCC Unified PC RT]\HMI alarms\HMI_Connection:CentralAlarm\Info Text
@10%s@	HMI system event	Fabrica\PC-System_1 [SIMATIC PC station]\HMI_RT_2 [WinCC Unified PC RT]\HMI alarms\OperatorInputInformation\Alarm text
@10%s@	HMI system event	Fabrica\PC-System_1 [SIMATIC PC station]\HMI_RT_2 [WinCC Unified PC RT]\HMI alarms\SystemAlarmWithoutClearEvent\Alarm text
@10%s@	HMI system event	Fabrica\PC-System_1 [SIMATIC PC station]\HMI_RT_2 [WinCC Unified PC RT]\HMI alarms\SystemInformation\Alarm text
@9%t#10T@	HMI system event	Fabrica\PC-System_1 [SIMATIC PC station]\HMI_RT_2 [WinCC Unified PC RT]\HMI alarms\OperatorInputInformation_1\Alarm text
@9%t#10T@	HMI system event	Fabrica\PC-System_1 [SIMATIC PC station]\HMI_RT_2 [WinCC Unified PC RT]\HMI alarms\SystemAlarmWithoutClearEvent_1\Alarm text
@9%t#10T@	HMI system event	Fabrica\PC-System_1 [SIMATIC PC station]\HMI_RT_2 [WinCC Unified PC RT]\HMI alarms\SystemInformation_1\Alarm text
|----------	Block comment	Fabrica\PLC_1 [CPU 1511-1 PN]\Program blocks\Main [OB1]\Network 43\Title
|---------- PAS1	Block comment	Fabrica\PLC_1 [CPU 1511-1 PN]\Program blocks\Main [OB1]\Network 16\Title
|---------- PAS2	Block comment	Fabrica\PLC_1 [CPU 1511-1 PN]\Program blocks\Main [OB1]\Network 19\Title
|---------- PENTRU SIMULARE	Block comment	Fabrica\PLC_1 [CPU 1511-1 PN]\Program blocks\Main [OB1]\Network 49\Title
|----------PAS 0	Block comment	Fabrica\PLC_1 [CPU 1511-1 PN]\Program blocks\Main [OB1]\Network 3\Title
|----------PAS10	Block comment	Fabrica\PLC_1 [CPU 1511-1 PN]\Program blocks\Main [OB1]\Network 35\Title
|----------PAS11	Block comment	Fabrica\PLC_1 [CPU 1511-1 PN]\Program blocks\Main [OB1]\Network 37\Title
|----------PAS12	Block comment	Fabrica\PLC_1 [CPU 1511-1 PN]\Program blocks\Main [OB1]\Network 39\Title
|----------PAS13	Block comment	Fabrica\PLC_1 [CPU 1511-1 PN]\Program blocks\Main [OB1]\Network 41\Title
|----------PAS3	Block comment	Fabrica\PLC_1 [CPU 1511-1 PN]\Program blocks\Main [OB1]\Network 21\Title
|----------PAS4	Block comment	Fabrica\PLC_1 [CPU 1511-1 PN]\Program blocks\Main [OB1]\Network 23\Title
|----------PAS5	Block comment	Fabrica\PLC_1 [CPU 1511-1 PN]\Program blocks\Main [OB1]\Network 25\Title
|----------PAS6	Block comment	Fabrica\PLC_1 [CPU 1511-1 PN]\Program blocks\Main [OB1]\Network 27\Title
|----------PAS7	Block comment	Fabrica\PLC_1 [CPU 1511-1 PN]\Program blocks\Main [OB1]\Network 29\Title
|----------PAS8	Block comment	Fabrica\PLC_1 [CPU 1511-1 PN]\Program blocks\Main [OB1]\Network 31\Title
|----------PAS9	Block comment	Fabrica\PLC_1 [CPU 1511-1 PN]\Program blocks\Main [OB1]\Network 33\Title
Connections: Invalid Named Connection @6%s@. Valid format: >VMD</>connection<	HMI runtime	Fabrica\PC-System_1 [SIMATIC PC station]\HMI_RT_2 [WinCC Unified PC RT]\Text and graphic lists\SystemTextList_ConfigErrorAlarmTextLibrary_5\Text_list_entry_16\Text
========== Scroll errors on HMI ========== Timed delay	Block comment	Fabrica\PLC_1 [CPU 1511-1 PN]\Program blocks\Open Library V19\Resources\HMI\fbErrorScroller [FB330]\Network 3\Comment
0 = read; 1 = write	Block comment	Fabrica\PLC_1 [CPU 1511-1 PN]\PLC data types\Open Library V19\Data Types\Process\udtModbusTCPTransaction\usiMode
A	Alarm class text	Fabrica\Acknowledgement\AlarmClassData_IDisplayNaming_DisplayName
A	Alarm class text	Fabrica\Acknowledgement\ShortName
Activate device simulation	Block comment	Fabrica\PLC_1 [CPU 1511-1 PN]\Program blocks\Open Library V19\Devices\fbValve_Solenoid [FB110]\bInSimulate
Activate device simulation	Block comment	Fabrica\PLC_1 [CPU 1511-1 PN]\Program blocks\Open Library V19\Devices\fbValve_Analog [FB111]\bInSimulate
Actual % open from valve (-1 to disable)	Block comment	Fabrica\PLC_1 [CPU 1511-1 PN]\Program blocks\Open Library V19\Devices\fbValve_Analog [FB111]\rInSignalCommand
Actual value	Block comment	Fabrica\PLC_1 [CPU 1511-1 PN]\PLC data types\Open Library V19\Data Types\HMI\udtHMI_AnalogValveControl\rActual
Address @6%s@ cannot be used because the address type is invalid.	HMI runtime	Fabrica\PC-System_1 [SIMATIC PC station]\HMI_RT_2 [WinCC Unified PC RT]\Text and graphic lists\SystemTextList_ConfigErrorAlarmTextLibrary_6\Text_list_entry_47\Text
Address @6%s@ cannot be used because the number of '$' delimiters is invalid.	HMI runtime	Fabrica\PC-System_1 [SIMATIC PC station]\HMI_RT_2 [WinCC Unified PC RT]\Text and graphic lists\SystemTextList_ConfigErrorAlarmTextLibrary_6\Text_list_entry_46\Text
Address @6%s@ cannot be used because the version number is invalid.	HMI runtime	Fabrica\PC-System_1 [SIMATIC PC station]\HMI_RT_2 [WinCC Unified PC RT]\Text and graphic lists\SystemTextList_ConfigErrorAlarmTextLibrary_6\Text_list_entry_45\Text
Address @6%s@ cannot be used because the version number is missing.	HMI runtime	Fabrica\PC-System_1 [SIMATIC PC station]\HMI_RT_2 [WinCC Unified PC RT]\Text and graphic lists\SystemTextList_ConfigErrorAlarmTextLibrary_6\Text_list_entry_44\Text
Alarm	Alarm text	Fabrica\PC-System_1 [SIMATIC PC station]\HMI_RT_2 [WinCC Unified PC RT]\HMI alarms\Alarm\\AlarmClassData_IDisplayNaming_DisplayName
Alarm with reset	Alarm text	Fabrica\PC-System_1 [SIMATIC PC station]\HMI_RT_2 [WinCC Unified PC RT]\HMI alarms\AlarmWithReset\\AlarmClassData_IDisplayNaming_DisplayName
Alarms: @6%s@ exists already	HMI runtime	Fabrica\PC-System_1 [SIMATIC PC station]\HMI_RT_2 [WinCC Unified PC RT]\Text and graphic lists\SystemTextList_ConfigErrorAlarmTextLibrary_4\Text_list_entry_2\Text
Alarms: Acquisition type cannot be used for address @6%s@.	HMI runtime	Fabrica\PC-System_1 [SIMATIC PC station]\HMI_RT_2 [WinCC Unified PC RT]\Text and graphic lists\SystemTextList_ConfigErrorAlarmTextLibrary_6\Text_list_entry_43\Text
Alarms: Address @6%s@ cannot be used because it is not an OPC UA event type.	HMI runtime	Fabrica\PC-System_1 [SIMATIC PC station]\HMI_RT_2 [WinCC Unified PC RT]\Text and graphic lists\SystemTextList_ConfigErrorAlarmTextLibrary_6\Text_list_entry_40\Text
Alarms: Address @6%s@ cannot be used because the event type does not exist on the server.	HMI runtime	Fabrica\PC-System_1 [SIMATIC PC station]\HMI_RT_2 [WinCC Unified PC RT]\Text and graphic lists\SystemTextList_ConfigErrorAlarmTextLibrary_6\Text_list_entry_42\Text

English (United States)	Category	Reference
Alarms: Address @6%s@ cannot be used because the OPC UA condition type is not supported.	HMI runtime	Fabrica\PC-System_1 [SIMATIC PC station]\HMI_RT_2 [WinCC Unified PC RT]\Text and graphic lists\SystemTextList_ConfigErrorAlarmTextLibrary_6\Text_list_entry_41\Text
Alarms: Address @6%s@ cannot be used. The specified range filter does not exist on the server.	HMI runtime	Fabrica\PC-System_1 [SIMATIC PC station]\HMI_RT_2 [WinCC Unified PC RT]\Text and graphic lists\SystemTextList_ConfigErrorAlarmTextLibrary_6\Text_list_entry_39\Text
Alarms: Address @6%s@ cannot be used. The specified range filter is not an OPC UA Event Notifier.	HMI runtime	Fabrica\PC-System_1 [SIMATIC PC station]\HMI_RT_2 [WinCC Unified PC RT]\Text and graphic lists\SystemTextList_ConfigErrorAlarmTextLibrary_6\Text_list_entry_38\Text
Alarms: Address @6%s@ does not exist on the server.	HMI runtime	Fabrica\PC-System_1 [SIMATIC PC station]\HMI_RT_2 [WinCC Unified PC RT]\Text and graphic lists\SystemTextList_ConfigErrorAlarmTextLibrary_6\Text_list_entry_37\Text
Always 10 Hex	Block comment	Fabrica\PLC_1 [CPU 1511-1 PN]\PLC data types\Open Library V19\Data Types\Process\udtAnyPointer\bySyntaxID
An Error Exists	Block comment	Fabrica\PLC_1 [CPU 1511-1 PN]\Program blocks\Open Library V19\Resources\HMI\fbErrorScroller [FB330]\bOutErrorExists
Auto Mode command	Block comment	Fabrica\PLC_1 [CPU 1511-1 PN]\Program blocks\Open Library V19\Devices\fbValve_Analog [FB111]\rInAutoCommand
Auto Mode is active	Block comment	Fabrica\PLC_1 [CPU 1511-1 PN]\Program blocks\Open Library V19\Devices\fbValve_Solenoid [FB110]\bAutoMode
bInCommandWork = cererea ca vana să meargă în poziția Work. bOutCommandWork = comanda efectivă de ieșire dată de FB după ce verifică starea și erorile. În simulare folosim bInCommandWork, pentru că vrem să simulăm direct reacția vanei la cerere:	Block comment	Fabrica\PLC_1 [CPU 1511-1 PN]\Program blocks\Main [OB1]\Network 50\Comment
Block in auto mode	Block comment	Fabrica\PLC_1 [CPU 1511-1 PN]\Program blocks\Open Library V19\Devices\fbValve_Solenoid [FB110]\bOutAuto
Block in auto Mode	Block comment	Fabrica\PLC_1 [CPU 1511-1 PN]\Program blocks\Open Library V19\Devices\fbValve_Analog [FB111]\bOutAuto
Calculate Scaled output	Block comment	Fabrica\PLC_1 [CPU 1511-1 PN]\Program blocks\Open Library V19\Resources\IO\fcWriteOutput [FC355]\Network 3\Title
Calculate scaled range	Block comment	Fabrica\PLC_1 [CPU 1511-1 PN]\Program blocks\Open Library V19\Resources\IO\fcWriteOutput [FC355]\Network 2\Title
Calculate tolerance limits	Block comment	Fabrica\PLC_1 [CPU 1511-1 PN]\Program blocks\Open Library V19\Devices\fbValve_Analog [FB111]\Network 16\Title
Call the Error-Scroller which cyles through all possible errors and checks their state for display on the HMI	Block comment	Fabrica\PLC_1 [CPU 1511-1 PN]\Program blocks\Open Library V19\Devices\fbValve_Solenoid [FB110]\Network 23\Comment
Call the Error-Scroller which cyles through all possible errors and checks their state for display on the HMI	Block comment	Fabrica\PLC_1 [CPU 1511-1 PN]\Program blocks\Open Library V19\Devices\fbValve_Analog [FB111]\Network 18\Comment
Cannot connect to PLC - @5%s@	HMI runtime	Fabrica\PC-System_1 [SIMATIC PC station]\HMI_RT_2 [WinCC Unified PC RT]\Text and graphic lists\SystemTextList_AllenBradleyEIPAlarmTextListCollection_7\Text_list_entry_7\Text
Cannot connect to PLC - @5%s@	HMI runtime	Fabrica\PC-System_1 [SIMATIC PC station]\HMI_RT_2 [WinCC Unified PC RT]\Text and graphic lists\SystemTextList_OmronEIPAlarmTextListCollection_6\Text_list_entry_7\Text
Cannot connect to PLC - @5%s@	HMI runtime	Fabrica\PC-System_1 [SIMATIC PC station]\HMI_RT_2 [WinCC Unified PC RT]\Text and graphic lists\SystemTextList_MitsubishiMCAlarmTextListCollection_4\Text_list_entry_7\Text
Cannot connect to PLC - @5%s@	HMI runtime	Fabrica\PC-System_1 [SIMATIC PC station]\HMI_RT_2 [WinCC Unified PC RT]\Text and graphic lists\SystemTextList_MitsubishiiQAlarmTextListCollection_3\Text_list_entry_7\Text
CDS cache - Cache folder cannot be created or reached: @6%s@	HMI runtime	Fabrica\PC-System_1 [SIMATIC PC station]\HMI_RT_2 [WinCC Unified PC RT]\Text and graphic lists\SystemTextList_ConfigErrorAlarmTextLibrary_10\Text_list_entry_1\Text
Ceas puls 1s	Block comment	Fabrica\PLC_1 [CPU 1511-1 PN]\Program blocks\Main [OB1]\Network 54\Title
Check for valid array indexes	Block comment	Fabrica\PLC_1 [CPU 1511-1 PN]\Program blocks\Open Library V19\Resources\HMI\fbErrorScroller [FB330]\Network 1\Title
Check if error exists	Block comment	Fabrica\PLC_1 [CPU 1511-1 PN]\Program blocks\Open Library V19\Resources\HMI\fbErrorScroller [FB330]\Network 2\Title
Check if the next scroll number has an error	Block comment	Fabrica\PLC_1 [CPU 1511-1 PN]\Program blocks\Open Library V19\Resources\HMI\fbErrorScroller [FB330]\Network 6\Title
Check if valve is enabled	Block comment	Fabrica\PLC_1 [CPU 1511-1 PN]\Program blocks\Open Library V19\Devices\fbValve_Analog [FB111]\Network 9\Title
Clamp output	Block comment	Fabrica\PLC_1 [CPU 1511-1 PN]\Program blocks\Open Library V19\Resources\IO\fcWriteOutput [FC355]\Network 5\Title
Clamp output	Block comment	Fabrica\PLC_1 [CPU 1511-1 PN]\Program blocks\Open Library V19\Resources\IO\fcWriteOutput [FC355]\Network 6\Title
Clear all errors	Block comment	Fabrica\PLC_1 [CPU 1511-1 PN]\Program blocks\Open Library V19\Devices\fbValve_Solenoid [FB110]\Network 6\Title
Code for data type	Block comment	Fabrica\PLC_1 [CPU 1511-1 PN]\PLC data types\Open Library V19\Data Types\Process\udtAnyPointer\byDataTypeBasic
Color status for HMI	Block comment	Fabrica\PLC_1 [CPU 1511-1 PN]\PLC data types\Open Library V19\Data Types\HMI\udtHMI_AnalogValveControl\iStatus
Computer (@S1%s@):Delta activation in progress	HMI system event	Fabrica\PC-System_1 [SIMATIC PC station]\HMI_RT_2 [WinCC Unified PC RT]\HMI alarms\DeltaActivationNotification\Alarm text
Computer (@S1%s@):Delta rollback in progress	HMI system event	Fabrica\PC-System_1 [SIMATIC PC station]\HMI_RT_2 [WinCC Unified PC RT]\HMI alarms\DeltaRollbackNotification\Alarm text
Computer1 (@1%s@): Low hard disk space	HMI system event	Fabrica\PC-System_1 [SIMATIC PC station]\HMI_RT_2 [WinCC Unified PC RT]\HMI alarms\DiscSpaceWarning\Alarm text
Computer1 (@1%s@): Low work memory	HMI system event	Fabrica\PC-System_1 [SIMATIC PC station]\HMI_RT_2 [WinCC Unified PC RT]\HMI alarms\PhysicalMemorySpaceWarning\Alarm text
Computer1 (@1%s@): System shutting down	HMI system event	Fabrica\PC-System_1 [SIMATIC PC station]\HMI_RT_2 [WinCC Unified PC RT]\HMI alarms\SystemShutdownNotification\Alarm text
Computer1 (@1%s@): System starting	HMI system event	Fabrica\PC-System_1 [SIMATIC PC station]\HMI_RT_2 [WinCC Unified PC RT]\HMI alarms\SystemStartupNotification\Alarm text
Computer1 (@1%s@): Very low hard disk space	HMI system event	Fabrica\PC-System_1 [SIMATIC PC station]\HMI_RT_2 [WinCC Unified PC RT]\HMI alarms\DiscSpaceAlarm\Alarm text
Computer1 (@1%s@): Very low work memory	HMI system event	Fabrica\PC-System_1 [SIMATIC PC station]\HMI_RT_2 [WinCC Unified PC RT]\HMI alarms\PhysicalMemorySpaceAlarm\Alarm text
Computer1 (@2%s@) - @1%s@: Failover error in the long-term logging system.	HMI system event	Fabrica\PC-System_1 [SIMATIC PC station]\HMI_RT_2 [WinCC Unified PC RT]\HMI alarms\LongtermStorageSystemFailoverFailedNotification\Alarm text
Computer1 (@2%s@) - @1%s@: Failover error in the long-term logging system.	HMI system event	Fabrica\PC-System_1 [SIMATIC PC station]\HMI_RT_2 [WinCC Unified PC RT]\HMI alarms\LongtermStorageSystemFailoverFailedNotification_1\Alarm text

English (United States)	Category	Reference
Computer1 (@2%s@) - @1%s@: Synchronizing long-term logging system ...	HMI system event	Fabrica\PC-System_1 [SIMATIC PC station]\HMI_RT_2 [WinCC Unified PC RT]\HMI alarms\LongtermStorageSystemPassiveSynchronizingNotification\Alarm text
Computer1 (@2%s@) - @1%s@: Synchronizing long-term logging system ...	HMI system event	Fabrica\PC-System_1 [SIMATIC PC station]\HMI_RT_2 [WinCC Unified PC RT]\HMI alarms\LongtermStorageSystemPassiveSynchronizingNotification_1\Alarm text
Computer1 (@2%s@) - @1%s@: The passive and the active long-term logging system are no longer synchronized.	HMI system event	Fabrica\PC-System_1 [SIMATIC PC station]\HMI_RT_2 [WinCC Unified PC RT]\HMI alarms\LongtermStorageSystemRedundancyLostNotification\Alarm text
Computer1 (@2%s@) - @1%s@: The passive and the active long-term logging system are no longer synchronized.	HMI system event	Fabrica\PC-System_1 [SIMATIC PC station]\HMI_RT_2 [WinCC Unified PC RT]\HMI alarms\LongtermStorageSystemRedundancyLostNotification_1\Alarm text
Computer1 (@2%s@): @1%s@: Error during background synchronization. Check the traces for additional information.	HMI system event	Fabrica\PC-System_1 [SIMATIC PC station]\HMI_RT_2 [WinCC Unified PC RT]\HMI alarms\StorageApplicationSynchronizationFailure\Alarm text
Computer1 (@2%s@): @1%s@: Error during background synchronization. Check the traces for additional information.	HMI system event	Fabrica\PC-System_1 [SIMATIC PC station]\HMI_RT_2 [WinCC Unified PC RT]\HMI alarms\StorageApplicationSynchronizationFailure_1\Alarm text
Computer1 (@2%s@): @1%s@: Failover error	HMI system event	Fabrica\PC-System_1 [SIMATIC PC station]\HMI_RT_2 [WinCC Unified PC RT]\HMI alarms\StorageSystemFailoverFailedAlarm\Alarm text
Computer1 (@2%s@): @1%s@: Failover error	HMI system event	Fabrica\PC-System_1 [SIMATIC PC station]\HMI_RT_2 [WinCC Unified PC RT]\HMI alarms\StorageSystemFailoverFailedAlarm_1\Alarm text
Computer1 (@2%s@): @1%s@: Synchronizing data ...	HMI system event	Fabrica\PC-System_1 [SIMATIC PC station]\HMI_RT_2 [WinCC Unified PC RT]\HMI alarms\StorageSystemPassiveSynchronizingNotification\Alarm text
Computer1 (@2%s@): @1%s@: Synchronizing data ...	HMI system event	Fabrica\PC-System_1 [SIMATIC PC station]\HMI_RT_2 [WinCC Unified PC RT]\HMI alarms\StorageSystemPassiveSynchronizingNotification_1\Alarm text
Computer1 (@2%s@): @1%s@: Synchronizing the logging data of the redundant partners.	HMI system event	Fabrica\PC-System_1 [SIMATIC PC station]\HMI_RT_2 [WinCC Unified PC RT]\HMI alarms\StorageApplicationSynchronizing\Alarm text
Computer1 (@2%s@): @1%s@: Synchronizing the logging data of the redundant partners.	HMI system event	Fabrica\PC-System_1 [SIMATIC PC station]\HMI_RT_2 [WinCC Unified PC RT]\HMI alarms\StorageApplicationSynchronizing_1\Alarm text
Computer1 (@2%s@): @1%s@: The passive logging system has lost the connection to the active logging system.	HMI system event	Fabrica\PC-System_1 [SIMATIC PC station]\HMI_RT_2 [WinCC Unified PC RT]\HMI alarms\StorageSystemRedundancyLostAlarm\Alarm text
Computer1 (@2%s@): @1%s@: The passive logging system has lost the connection to the active logging system.	HMI system event	Fabrica\PC-System_1 [SIMATIC PC station]\HMI_RT_2 [WinCC Unified PC RT]\HMI alarms\StorageSystemRedundancyLostAlarm_1\Alarm text
Computer1 (@2%s@): Driver (@1%s@) Overload has occurred.	HMI system event	Fabrica\PC-System_1 [SIMATIC PC station]\HMI_RT_2 [WinCC Unified PC RT]\HMI alarms\DriverManagerOverloadAlarm\Alarm text
Computer1 (@2%s@): Driver (@1%s@) Overload warning.	HMI system event	Fabrica\PC-System_1 [SIMATIC PC station]\HMI_RT_2 [WinCC Unified PC RT]\HMI alarms\DriverManagerOverloadWarning\Alarm text
Computer1 (@2%s@): Manager (@1%s@) is not connected.	HMI system event	Fabrica\PC-System_1 [SIMATIC PC station]\HMI_RT_2 [WinCC Unified PC RT]\HMI alarms\ServiceManagerAlarm\Alarm text
Computer1 (@2%s@): Manager (@1%s@) is not connected.	HMI system event	Fabrica\PC-System_1 [SIMATIC PC station]\HMI_RT_2 [WinCC Unified PC RT]\HMI alarms\ClientDisconnectedAlarm\Alarm text
Computer1 (@2%s@): Partner is not fully operational	HMI system event	Fabrica\PC-System_1 [SIMATIC PC station]\HMI_RT_2 [WinCC Unified PC RT]\HMI alarms\PlcInStopAlarm\Alarm text
Computer1 (@2%s@): Partner requires alarm time correction	HMI system event	Fabrica\PC-System_1 [SIMATIC PC station]\HMI_RT_2 [WinCC Unified PC RT]\HMI alarms\TimeCorrectionAlarm\Alarm text
Computer1 (@2%s@): Service (@1%s@) is not being executed.	HMI system event	Fabrica\PC-System_1 [SIMATIC PC station]\HMI_RT_2 [WinCC Unified PC RT]\HMI alarms\SystemServiceAlarm\Alarm text
Computer1 (@2%s@): Service (@1%s@) is not being executed.	HMI system event	Fabrica\PC-System_1 [SIMATIC PC station]\HMI_RT_2 [WinCC Unified PC RT]\HMI alarms\SystemServiceAlarm_1\Alarm text
Computer1 (@2%s@): Service (@1%s@) is not being executed.	HMI system event	Fabrica\PC-System_1 [SIMATIC PC station]\HMI_RT_2 [WinCC Unified PC RT]\HMI alarms\SystemServiceAlarm_2\Alarm text
Computer1 (@2%s@): The logging system @1%s@ has detected a more recent database version that is not compatible with the current runtime version. Update the runtime version on your device or use a device with the same runtime version as the database version.	HMI system event	Fabrica\PC-System_1 [SIMATIC PC station]\HMI_RT_2 [WinCC Unified PC RT]\HMI alarms\StorageSystemIncompatibleSchemaVersionAlarm\Alarm text
Computer1 (@2%s@): The logging system @1%s@ has detected a more recent database version that is not compatible with the current runtime version. Update the runtime version on your device or use a device with the same runtime version as the database version.	HMI system event	Fabrica\PC-System_1 [SIMATIC PC station]\HMI_RT_2 [WinCC Unified PC RT]\HMI alarms\StorageSystemIncompatibleSchemaVersionAlarm_1\Alarm text
Computer1 (@3%s@) - @1%s@: (@2%s@) A general error has occurred. Check the traces for additional information.	HMI system event	Fabrica\PC-System_1 [SIMATIC PC station]\HMI_RT_2 [WinCC Unified PC RT]\HMI alarms\StorageSystemError\Alarm text
Computer1 (@3%s@) - @1%s@: (@2%s@) A general error has occurred. Check the traces for additional information.	HMI system event	Fabrica\PC-System_1 [SIMATIC PC station]\HMI_RT_2 [WinCC Unified PC RT]\HMI alarms\StorageSystemError_1\Alarm text
Computer1 (@3%s@) - @1%s@: (@2%s@) Connection to the long-term logging system is lost.	HMI system event	Fabrica\PC-System_1 [SIMATIC PC station]\HMI_RT_2 [WinCC Unified PC RT]\HMI alarms\LongtermStorageSystemDisconnectedAlarm\Alarm text
Computer1 (@3%s@) - @1%s@: (@2%s@) Connection to the long-term logging system is lost.	HMI system event	Fabrica\PC-System_1 [SIMATIC PC station]\HMI_RT_2 [WinCC Unified PC RT]\HMI alarms\LongtermStorageSystemDisconnectedAlarm_1\Alarm text
Computer1 (@3%s@) - @1%s@: (@2%s@): Long-term logging system no longer has any system resources.	HMI system event	Fabrica\PC-System_1 [SIMATIC PC station]\HMI_RT_2 [WinCC Unified PC RT]\HMI alarms\LongtermStorageSystemResourcesExceededNotification\Alarm text
Computer1 (@3%s@) - @1%s@: (@2%s@): Long-term logging system no longer has any system resources.	HMI system event	Fabrica\PC-System_1 [SIMATIC PC station]\HMI_RT_2 [WinCC Unified PC RT]\HMI alarms\LongtermStorageSystemResourcesExceededNotification_1\Alarm text
Computer1 (@3%s@) - @1%s@: An overflow of the transaction buffer and write buffer has occurred in log @2%s@ of the passive partner. Data may be lost. Avoid a manual failover of the redundancy partner while this message is active.	HMI system event	Fabrica\PC-System_1 [SIMATIC PC station]\HMI_RT_2 [WinCC Unified PC RT]\HMI alarms\StorageSystemWriteDataLostPassiveAlarm\Alarm text

English (United States)	Category	Reference
Computer1 (@3%s@) - @1%s@: An overflow of the transaction buffer and write buffer has occurred in log @2%s@ of the passive partner. Data may be lost. Avoid a manual failover of the redundancy partner while this message is active.	HMI system event	Fabrica\PC-System_1 [SIMATIC PC station]\HMI_RT_2 [WinCC Unified PC RT]\HMI alarms\StorageSystemWriteDataLostPassiveAlarm_1\Alarm text
Computer1 (@3%s@): @1%s@ (@2%s@) No connection to the logging system backend.	HMI system event	Fabrica\PC-System_1 [SIMATIC PC station]\HMI_RT_2 [WinCC Unified PC RT]\HMI alarms\StorageSystemBackendDisconnectedAlarm\Alarm text
Computer1 (@3%s@): @1%s@ (@2%s@) No connection to the logging system backend.	HMI system event	Fabrica\PC-System_1 [SIMATIC PC station]\HMI_RT_2 [WinCC Unified PC RT]\HMI alarms\StorageSystemBackendDisconnectedAlarm_1\Alarm text
Computer1 (@3%s@): @1%s@ (@2%s@): has no connection to the logging system.	HMI system event	Fabrica\PC-System_1 [SIMATIC PC station]\HMI_RT_2 [WinCC Unified PC RT]\HMI alarms\StorageSystemDisconnectedAlarm\Alarm text
Computer1 (@3%s@): @1%s@ (@2%s@): has no connection to the logging system.	HMI system event	Fabrica\PC-System_1 [SIMATIC PC station]\HMI_RT_2 [WinCC Unified PC RT]\HMI alarms\StorageSystemDisconnectedAlarm_1\Alarm text
Computer1 (@3%s@): @1%s@: A write buffer overflow has occurred in log @2%s@. Data will be lost.	HMI system event	Fabrica\PC-System_1 [SIMATIC PC station]\HMI_RT_2 [WinCC Unified PC RT]\HMI alarms\StorageSystemWriteDataLostAlarm\Alarm text
Computer1 (@3%s@): @1%s@: A write buffer overflow has occurred in log @2%s@. Data will be lost.	HMI system event	Fabrica\PC-System_1 [SIMATIC PC station]\HMI_RT_2 [WinCC Unified PC RT]\HMI alarms\StorageSystemWriteDataLostAlarm_1\Alarm text
Computer1 (@4%s@) - @1%s@ (@2%s@ - @3%s@): Long-term logging system is out of hard disk space.	HMI system event	Fabrica\PC-System_1 [SIMATIC PC station]\HMI_RT_2 [WinCC Unified PC RT]\HMI alarms\LongtermStorageSystemSpaceExceededNotification\Alarm text
Computer1 (@4%s@) - @1%s@ (@2%s@ - @3%s@): Long-term logging system is out of hard disk space.	HMI system event	Fabrica\PC-System_1 [SIMATIC PC station]\HMI_RT_2 [WinCC Unified PC RT]\HMI alarms\LongtermStorageSystemSpaceExceededNotification_1\Alarm text
Computer1 (@4%s@): @1%s@ (@2%s@ - @3%s@): Insufficient resources of the logging system.	HMI system event	Fabrica\PC-System_1 [SIMATIC PC station]\HMI_RT_2 [WinCC Unified PC RT]\HMI alarms\StorageSystemResourcesExceededAlarm\Alarm text
Computer1 (@4%s@): @1%s@ (@2%s@ - @3%s@): Insufficient resources of the logging system.	HMI system event	Fabrica\PC-System_1 [SIMATIC PC station]\HMI_RT_2 [WinCC Unified PC RT]\HMI alarms\StorageSystemResourcesExceededAlarm_1\Alarm text
Computer1 (@4%s@): @1%s@ (@2%s@ - @3%s@): Log is full.	HMI system event	Fabrica\PC-System_1 [SIMATIC PC station]\HMI_RT_2 [WinCC Unified PC RT]\HMI alarms\StorageSystemSpaceExceededAlarm\Alarm text
Computer1 (@4%s@): @1%s@ (@2%s@ - @3%s@): Log is full.	HMI system event	Fabrica\PC-System_1 [SIMATIC PC station]\HMI_RT_2 [WinCC Unified PC RT]\HMI alarms\StorageSystemSpaceExceededAlarm_1\Alarm text
Computer1 (@4%s@): @1%s@: Backup of a segment or consistency check on log @2%s@ has failed. Check if the backup path is available and permissions are provided. Backup path: @3%s@	HMI system event	Fabrica\PC-System_1 [SIMATIC PC station]\HMI_RT_2 [WinCC Unified PC RT]\HMI alarms\StorageSystemBackupFailed\Alarm text
Computer1 (@4%s@): @1%s@: Backup of a segment or consistency check on log @2%s@ has failed. Check if the backup path is available and permissions are provided. Backup path: @3%s@	HMI system event	Fabrica\PC-System_1 [SIMATIC PC station]\HMI_RT_2 [WinCC Unified PC RT]\HMI alarms\StorageSystemBackupFailed_1\Alarm text
Computer1 (@4%s@): @1%s@: Storage (@3%s@) is corrupted, therefore cannot be opened. Path: @2%s@	HMI system event	Fabrica\PC-System_1 [SIMATIC PC station]\HMI_RT_2 [WinCC Unified PC RT]\HMI alarms\StorageSystemCorruptedStorage\Alarm text
Computer1 (@4%s@): @1%s@: Storage (@3%s@) is corrupted, therefore cannot be opened. Path: @2%s@	HMI system event	Fabrica\PC-System_1 [SIMATIC PC station]\HMI_RT_2 [WinCC Unified PC RT]\HMI alarms\StorageSystemCorruptedStorage_1\Alarm text
Computer1 (@5%s@): @3%t#2T@	HMI system event	Fabrica\PC-System_1 [SIMATIC PC station]\HMI_RT_2 [WinCC Unified PC RT]\HMI alarms\PlcDisconnectedAlarm\Alarm text
Computer1 (@6%s@) - @1%s@ (@2%s@ - @3%s@): Logging medium cannot be reached. @5%t#4T@	HMI system event	Fabrica\PC-System_1 [SIMATIC PC station]\HMI_RT_2 [WinCC Unified PC RT]\HMI alarms\StorageSystemLocationUnavailableAlarm\Alarm text
Computer1 (@6%s@) - @1%s@ (@2%s@ - @3%s@): Logging medium cannot be reached. @5%t#4T@	HMI system event	Fabrica\PC-System_1 [SIMATIC PC station]\HMI_RT_2 [WinCC Unified PC RT]\HMI alarms\StorageSystemLocationUnavailableAlarm_1\Alarm text
Computer1 (@S1%s@): @5%t#4T@	HMI system event	Fabrica\PC-System_1 [SIMATIC PC station]\HMI_RT_2 [WinCC Unified PC RT]\HMI alarms\ConfigurationErrorInformation\Alarm text
Computer1 (@S1%s@): A leap in time of @2%1.3f@ seconds was determined.	HMI system event	Fabrica\PC-System_1 [SIMATIC PC station]\HMI_RT_2 [WinCC Unified PC RT]\HMI alarms\TimeLeapInformation\Alarm text
Computer1 (@S1%s@): Certificate for @2%s@ has expired, expiration date: @3%s@. Details: @4%s@	HMI system event	Fabrica\PC-System_1 [SIMATIC PC station]\HMI_RT_2 [WinCC Unified PC RT]\HMI alarms\ExpiredCertificateAlarm\Alarm text
Computer1 (@S1%s@): Certificate for @2%s@ was not found in the certificate store. Details: @3%s@	HMI system event	Fabrica\PC-System_1 [SIMATIC PC station]\HMI_RT_2 [WinCC Unified PC RT]\HMI alarms\NoCertificateAlarm\Alarm text
Computer1 (@S1%s@): Certificate for @2%s@ will expire soon, expiration date: @3%s@. Details: @4%s@	HMI system event	Fabrica\PC-System_1 [SIMATIC PC station]\HMI_RT_2 [WinCC Unified PC RT]\HMI alarms\SoonExpireCertificateAlarm\Alarm text
Computer1 (@S1%s@): Connection ID: @S7%u@, Connection status: @2%u@	HMI system event	Fabrica\PC-System_1 [SIMATIC PC station]\HMI_RT_2 [WinCC Unified PC RT]\HMI alarms\PlcConnectionStateChangeInformation\Alarm text
Computer1 (@S1%s@): Delta activation has failed. The file system is damaged.	HMI system event	Fabrica\PC-System_1 [SIMATIC PC station]\HMI_RT_2 [WinCC Unified PC RT]\HMI alarms\DeltaCommitFailedAlarm\Alarm text
Computer1 (@S1%s@): Delta rollback failed	HMI system event	Fabrica\PC-System_1 [SIMATIC PC station]\HMI_RT_2 [WinCC Unified PC RT]\HMI alarms\DeltaRollbackFailedAlarm\Alarm text
Computer1 (@S1%s@): Loading of the configuration data created in Runtime has failed: @2%s@ (@3%s@)	HMI system event	Fabrica\PC-System_1 [SIMATIC PC station]\HMI_RT_2 [WinCC Unified PC RT]\HMI alarms\StartupRuntimeRCDErrorAlarm\Alarm text
Computer1 (@S1%s@): 'LoggingOverloadError' event was activated.	HMI system event	Fabrica\PC-System_1 [SIMATIC PC station]\HMI_RT_2 [WinCC Unified PC RT]\HMI alarms\SystemOverloadAlarm\Alarm text
Computer1 (@S1%s@): Merging of the RDF files has failed: @2%s@	HMI system event	Fabrica\PC-System_1 [SIMATIC PC station]\HMI_RT_2 [WinCC Unified PC RT]\HMI alarms\ConfigurationDataConsolidationFailedAlarm\Alarm text
Computer1 (@S1%s@): Online backup has failed	HMI system event	Fabrica\PC-System_1 [SIMATIC PC station]\HMI_RT_2 [WinCC Unified PC RT]\HMI alarms\OnlineBackupFailed\Alarm text
Computer1 (@S1%s@): Saving of configuration changes has failed.	HMI system event	Fabrica\PC-System_1 [SIMATIC PC station]\HMI_RT_2 [WinCC Unified PC RT]\HMI alarms\ConfigurationDataChangeFailedAlarm\Alarm text
Computer1 (@S1%s@): Successful rollback after failed activation.	HMI system event	Fabrica\PC-System_1 [SIMATIC PC station]\HMI_RT_2 [WinCC Unified PC RT]\HMI alarms\DeltaActivationFailedAlarm\Alarm text

English (United States)	Category	Reference
Computer1 (@S1%s@): User name: @S2%s@, Tag name: @2%s@, Old value: @3%v@, New value: @4%v@, Unit: @5%s@, Cause: @6%s@	HMI system event	Fabrica\PC-System_1 [SIMATIC PC station]\HMI_RT_2 [WinCC Unified PC RT]\HMI alarms\ValueChangedInformation\Alarm text
Computer1 (@S1%s@): User name: @S2%s@, Tag name: @2%s@, Old value: @3%v@, New value: @4%v@, Unit: @5%s@, Cause: @6%s@	HMI system event	Fabrica\PC-System_1 [SIMATIC PC station]\HMI_RT_2 [WinCC Unified PC RT]\HMI alarms\ValueChangeFailedInformation\Alarm text
Conditii pornire VANE IN	Block comment	Fabrica\PLC_1 [CPU 1511-1 PN]\Program blocks\Main [OB1]\Network 44\Title
Conditii pornire VANE OUT	Block comment	Fabrica\PLC_1 [CPU 1511-1 PN]\Program blocks\Main [OB1]\Network 45\Title
Conditii pornire VANE PLS	Block comment	Fabrica\PLC_1 [CPU 1511-1 PN]\Program blocks\Main [OB1]\Network 46\Title
Conditii pornire VANE PRS	Block comment	Fabrica\PLC_1 [CPU 1511-1 PN]\Program blocks\Main [OB1]\Network 47\Title
Connect request	Block comment	Fabrica\PLC_1 [CPU 1511-1 PN]\PLC data types\Open Library V19\Data Types\Process\udtHandshake\bConnect
Connection aborted. No sign of life in the last @4%s@ ms.	HMI runtime	Fabrica\PC-System_1 [SIMATIC PC station]\HMI_RT_2 [WinCC Unified PC RT]\Text and graphic lists\SystemTextList_ConfigErrorAlarmTextLibrary_5\Text_list_entry_24\Text
Connection aborted. No sign of life in the last @4%s@ ms.	HMI runtime	Fabrica\PC-System_1 [SIMATIC PC station]\HMI_RT_2 [WinCC Unified PC RT]\Text and graphic lists\SystemTextList_ConfigErrorAlarmTextLibrary_6\Text_list_entry_16\Text
Connection aborted. OPC UA server was stopped.	HMI runtime	Fabrica\PC-System_1 [SIMATIC PC station]\HMI_RT_2 [WinCC Unified PC RT]\Text and graphic lists\SystemTextList_ConfigErrorAlarmTextLibrary_6\Text_list_entry_15\Text
Connection could not be established - @4%s@	HMI runtime	Fabrica\PC-System_1 [SIMATIC PC station]\HMI_RT_2 [WinCC Unified PC RT]\Text and graphic lists\SystemTextList_ConfigErrorAlarmTextLibrary_5\Text_list_entry_25\Text
Connection could not be established - @4%s@	HMI runtime	Fabrica\PC-System_1 [SIMATIC PC station]\HMI_RT_2 [WinCC Unified PC RT]\Text and graphic lists\SystemTextList_ConfigErrorAlarmTextLibrary_5\Text_list_entry_28\Text
Connection could not be established. - The configured non-transparent redundancy mode @4%s@ is not supported.	HMI runtime	Fabrica\PC-System_1 [SIMATIC PC station]\HMI_RT_2 [WinCC Unified PC RT]\Text and graphic lists\SystemTextList_ConfigErrorAlarmTextLibrary_6\Text_list_entry_33\Text
Connection could not be established. @4%s@ has an unexpected format.	HMI runtime	Fabrica\PC-System_1 [SIMATIC PC station]\HMI_RT_2 [WinCC Unified PC RT]\Text and graphic lists\SystemTextList_ConfigErrorAlarmTextLibrary_6\Text_list_entry_26\Text
Connection could not be established. @4%s@ is empty.	HMI runtime	Fabrica\PC-System_1 [SIMATIC PC station]\HMI_RT_2 [WinCC Unified PC RT]\Text and graphic lists\SystemTextList_ConfigErrorAlarmTextLibrary_6\Text_list_entry_25\Text
Connection could not be established. Application instance certificate could not be found.	HMI runtime	Fabrica\PC-System_1 [SIMATIC PC station]\HMI_RT_2 [WinCC Unified PC RT]\Text and graphic lists\SystemTextList_ConfigErrorAlarmTextLibrary_6\Text_list_entry_29\Text
Connection could not be established. Application instance certificate could not be loaded. OPC UA status code @4%s@	HMI runtime	Fabrica\PC-System_1 [SIMATIC PC station]\HMI_RT_2 [WinCC Unified PC RT]\Text and graphic lists\SystemTextList_ConfigErrorAlarmTextLibrary_6\Text_list_entry_4\Text
Connection could not be established. Application instance certificate is not configured.	HMI runtime	Fabrica\PC-System_1 [SIMATIC PC station]\HMI_RT_2 [WinCC Unified PC RT]\Text and graphic lists\SystemTextList_ConfigErrorAlarmTextLibrary_6\Text_list_entry_1\Text
Connection could not be established. Certificate problem: Error when writing the safety-relevant data to @4%s@.	HMI runtime	Fabrica\PC-System_1 [SIMATIC PC station]\HMI_RT_2 [WinCC Unified PC RT]\Text and graphic lists\SystemTextList_ConfigErrorAlarmTextLibrary_6\Text_list_entry_21\Text
Connection could not be established. Certificate problem: Unexpected file in the folder @4%s@ cannot be removed.	HMI runtime	Fabrica\PC-System_1 [SIMATIC PC station]\HMI_RT_2 [WinCC Unified PC RT]\Text and graphic lists\SystemTextList_ConfigErrorAlarmTextLibrary_6\Text_list_entry_22\Text
Connection could not be established. Internal problem in the certificate store. OPC UA status code @4%s@	HMI runtime	Fabrica\PC-System_1 [SIMATIC PC station]\HMI_RT_2 [WinCC Unified PC RT]\Text and graphic lists\SystemTextList_ConfigErrorAlarmTextLibrary_6\Text_list_entry_3\Text
Connection could not be established. Invalid address @6%s@	HMI runtime	Fabrica\PC-System_1 [SIMATIC PC station]\HMI_RT_2 [WinCC Unified PC RT]\Text and graphic lists\SystemTextList_ConfigErrorAlarmTextLibrary_5\Text_list_entry_27\Text
Connection could not be established. Invalid configuration of the authentication mode - @4%s@	HMI runtime	Fabrica\PC-System_1 [SIMATIC PC station]\HMI_RT_2 [WinCC Unified PC RT]\Text and graphic lists\SystemTextList_ConfigErrorAlarmTextLibrary_6\Text_list_entry_18\Text
Connection could not be established. Maximum number of available connections (@6%s@) has been exceeded.	HMI runtime	Fabrica\PC-System_1 [SIMATIC PC station]\HMI_RT_2 [WinCC Unified PC RT]\Text and graphic lists\SystemTextList_ConfigErrorAlarmTextLibrary_5\Text_list_entry_23\Text
Connection could not be established. Maximum number of server sessions has been exceeded.	HMI runtime	Fabrica\PC-System_1 [SIMATIC PC station]\HMI_RT_2 [WinCC Unified PC RT]\Text and graphic lists\SystemTextList_ConfigErrorAlarmTextLibrary_6\Text_list_entry_11\Text
Connection could not be established. No server endpoints were found. @4%s@	HMI runtime	Fabrica\PC-System_1 [SIMATIC PC station]\HMI_RT_2 [WinCC Unified PC RT]\Text and graphic lists\SystemTextList_ConfigErrorAlarmTextLibrary_6\Text_list_entry_28\Text
Connection could not be established. OPC UA status code @4%s@	HMI runtime	Fabrica\PC-System_1 [SIMATIC PC station]\HMI_RT_2 [WinCC Unified PC RT]\Text and graphic lists\SystemTextList_ConfigErrorAlarmTextLibrary_6\Text_list_entry_14\Text
Connection could not be established. Safety configuration is inconsistent. @4%s@	HMI runtime	Fabrica\PC-System_1 [SIMATIC PC station]\HMI_RT_2 [WinCC Unified PC RT]\Text and graphic lists\SystemTextList_ConfigErrorAlarmTextLibrary_6\Text_list_entry_12\Text
Connection could not be established. Server does not permit anonymous connection. OPC UA status code @4%s@	HMI runtime	Fabrica\PC-System_1 [SIMATIC PC station]\HMI_RT_2 [WinCC Unified PC RT]\Text and graphic lists\SystemTextList_ConfigErrorAlarmTextLibrary_6\Text_list_entry_20\Text
Connection could not be established. Server endpoints cannot be read. OPC UA status code @4%s@	HMI runtime	Fabrica\PC-System_1 [SIMATIC PC station]\HMI_RT_2 [WinCC Unified PC RT]\Text and graphic lists\SystemTextList_ConfigErrorAlarmTextLibrary_6\Text_list_entry_27\Text
Connection could not be established. Server has not provided a certificate. @4%s@	HMI runtime	Fabrica\PC-System_1 [SIMATIC PC station]\HMI_RT_2 [WinCC Unified PC RT]\Text and graphic lists\SystemTextList_ConfigErrorAlarmTextLibrary_6\Text_list_entry_5\Text
Connection could not be established. Server has rejected the client certificate. OPC UA status code @4%s@.	HMI runtime	Fabrica\PC-System_1 [SIMATIC PC station]\HMI_RT_2 [WinCC Unified PC RT]\Text and graphic lists\SystemTextList_ConfigErrorAlarmTextLibrary_6\Text_list_entry_2\Text
Connection could not be established. Server reports a license problem. OPC UA status code @4%s@.	HMI runtime	Fabrica\PC-System_1 [SIMATIC PC station]\HMI_RT_2 [WinCC Unified PC RT]\Text and graphic lists\SystemTextList_ConfigErrorAlarmTextLibrary_6\Text_list_entry_10\Text
Connection could not be established. The address @4%s@ cannot be used.	HMI runtime	Fabrica\PC-System_1 [SIMATIC PC station]\HMI_RT_2 [WinCC Unified PC RT]\Text and graphic lists\SystemTextList_ConfigErrorAlarmTextLibrary_6\Text_list_entry_13\Text
Connection could not be established. The address @6%s@ cannot be used.	HMI runtime	Fabrica\PC-System_1 [SIMATIC PC station]\HMI_RT_2 [WinCC Unified PC RT]\Text and graphic lists\SystemTextList_ConfigErrorAlarmTextLibrary_5\Text_list_entry_26\Text
Connection could not be established. Unexpected format of the certificate @4%s@.	HMI runtime	Fabrica\PC-System_1 [SIMATIC PC station]\HMI_RT_2 [WinCC Unified PC RT]\Text and graphic lists\SystemTextList_ConfigErrorAlarmTextLibrary_6\Text_list_entry_30\Text
Connection could not be established. Unexpected format of the certificate block list @4%s@.	HMI runtime	Fabrica\PC-System_1 [SIMATIC PC station]\HMI_RT_2 [WinCC Unified PC RT]\Text and graphic lists\SystemTextList_ConfigErrorAlarmTextLibrary_6\Text_list_entry_31\Text
Connection could not be established. Unexpected length of the server certificate. @4%s@	HMI runtime	Fabrica\PC-System_1 [SIMATIC PC station]\HMI_RT_2 [WinCC Unified PC RT]\Text and graphic lists\SystemTextList_ConfigErrorAlarmTextLibrary_6\Text_list_entry_24\Text
Connection could not be established. User could not be authenticated. An encryption detail is invalid. @4%s@	HMI runtime	Fabrica\PC-System_1 [SIMATIC PC station]\HMI_RT_2 [WinCC Unified PC RT]\Text and graphic lists\SystemTextList_ConfigErrorAlarmTextLibrary_6\Text_list_entry_32\Text

English (United States)	Category	Reference
Connection could not be established. User could not be authenticated. No user or password configured.	HMI runtime	Fabrica\PC-System_1 [SIMATIC PC station]\HMI_RT_2 [WinCC Unified PC RT]\Text and graphic lists\SystemTextList_ConfigErrorAlarmTextLibrary_6\Text_list_entry_23\Text
Connection could not be established. User could not be authenticated. OPC UA status code @4%s@	HMI runtime	Fabrica\PC-System_1 [SIMATIC PC station]\HMI_RT_2 [WinCC Unified PC RT]\Text and graphic lists\SystemTextList_ConfigErrorAlarmTextLibrary_6\Text_list_entry_19\Text
Connection could not be established. Validation of server certificate has failed. OPC UA status code @4%s@.	HMI runtime	Fabrica\PC-System_1 [SIMATIC PC station]\HMI_RT_2 [WinCC Unified PC RT]\Text and graphic lists\SystemTextList_ConfigErrorAlarmTextLibrary_6\Text_list_entry_6\Text
Connection lost on HMI side - @5%s@	HMI runtime	Fabrica\PC-System_1 [SIMATIC PC station]\HMI_RT_2 [WinCC Unified PC RT]\Text and graphic lists\SystemTextList_AllenBradleyEIPAlarmTextListCollection_7\Text_list_entry_2\Text
Connection lost on HMI side - @5%s@	HMI runtime	Fabrica\PC-System_1 [SIMATIC PC station]\HMI_RT_2 [WinCC Unified PC RT]\Text and graphic lists\SystemTextList_OmronEIPAlarmTextListCollection_6\Text_list_entry_2\Text
Connection lost on HMI side - @5%s@	HMI runtime	Fabrica\PC-System_1 [SIMATIC PC station]\HMI_RT_2 [WinCC Unified PC RT]\Text and graphic lists\SystemTextList_MitsubishiMCAlarmTextListCollection_4\Text_list_entry_2\Text
Connection lost on HMI side - @5%s@	HMI runtime	Fabrica\PC-System_1 [SIMATIC PC station]\HMI_RT_2 [WinCC Unified PC RT]\Text and graphic lists\SystemTextList_MitsubishiiQAlarmTextListCollection_3\Text_list_entry_2\Text
Connection lost on PLC side - @5%s@	HMI runtime	Fabrica\PC-System_1 [SIMATIC PC station]\HMI_RT_2 [WinCC Unified PC RT]\Text and graphic lists\SystemTextList_AllenBradleyEIPAlarmTextListCollection_7\Text_list_entry_1\Text
Connection lost on PLC side - @5%s@	HMI runtime	Fabrica\PC-System_1 [SIMATIC PC station]\HMI_RT_2 [WinCC Unified PC RT]\Text and graphic lists\SystemTextList_OmronEIPAlarmTextListCollection_6\Text_list_entry_1\Text
Connection lost on PLC side - @5%s@	HMI runtime	Fabrica\PC-System_1 [SIMATIC PC station]\HMI_RT_2 [WinCC Unified PC RT]\Text and graphic lists\SystemTextList_MitsubishiMCAlarmTextListCollection_4\Text_list_entry_1\Text
Connection lost on PLC side - @5%s@	HMI runtime	Fabrica\PC-System_1 [SIMATIC PC station]\HMI_RT_2 [WinCC Unified PC RT]\Text and graphic lists\SystemTextList_MitsubishiiQAlarmTextListCollection_3\Text_list_entry_1\Text
Connection was closed. Alarm/event subscription has failed. The number of alarm/event subscriptions on the server has been exceeded.	HMI runtime	Fabrica\PC-System_1 [SIMATIC PC station]\HMI_RT_2 [WinCC Unified PC RT]\Text and graphic lists\SystemTextList_ConfigErrorAlarmTextLibrary_6\Text_list_entry_9\Text
Connection was closed. Alarm/event subscription has failed. The number of operations on the server has been exceeded.	HMI runtime	Fabrica\PC-System_1 [SIMATIC PC station]\HMI_RT_2 [WinCC Unified PC RT]\Text and graphic lists\SystemTextList_ConfigErrorAlarmTextLibrary_6\Text_list_entry_8\Text
Connection was closed. Error during alarm synchronization. OPC UA status code @4%s@.	HMI runtime	Fabrica\PC-System_1 [SIMATIC PC station]\HMI_RT_2 [WinCC Unified PC RT]\Text and graphic lists\SystemTextList_ConfigErrorAlarmTextLibrary_6\Text_list_entry_7\Text
Connection was closed. OPC UA server maintenance.	HMI runtime	Fabrica\PC-System_1 [SIMATIC PC station]\HMI_RT_2 [WinCC Unified PC RT]\Text and graphic lists\SystemTextList_ConfigErrorAlarmTextLibrary_6\Text_list_entry_17\Text
Connections: @6%s@ disconnected.	HMI runtime	Fabrica\PC-System_1 [SIMATIC PC station]\HMI_RT_2 [WinCC Unified PC RT]\Text and graphic lists\SystemTextList_ConfigErrorAlarmTextLibrary_4\Text_list_entry_12\Text
Connections: @6%s@ does not exist	HMI runtime	Fabrica\PC-System_1 [SIMATIC PC station]\HMI_RT_2 [WinCC Unified PC RT]\Text and graphic lists\SystemTextList_ConfigErrorAlarmTextLibrary_4\Text_list_entry_4\Text
Connections: @6%s@ faulty.	HMI runtime	Fabrica\PC-System_1 [SIMATIC PC station]\HMI_RT_2 [WinCC Unified PC RT]\Text and graphic lists\SystemTextList_ConfigErrorAlarmTextLibrary_4\Text_list_entry_16\Text
Connections: @6%s@ was deleted but associated tags exist.	HMI runtime	Fabrica\PC-System_1 [SIMATIC PC station]\HMI_RT_2 [WinCC Unified PC RT]\Text and graphic lists\SystemTextList_ConfigErrorAlarmTextLibrary_4\Text_list_entry_7\Text
Connections: Address type @6%s@ is not supported.	HMI runtime	Fabrica\PC-System_1 [SIMATIC PC station]\HMI_RT_2 [WinCC Unified PC RT]\Text and graphic lists\SystemTextList_ConfigErrorAlarmTextLibrary_5\Text_list_entry_11\Text
Connections: Cannot connect to PLC - @4%s@	HMI runtime	Fabrica\PC-System_1 [SIMATIC PC station]\HMI_RT_2 [WinCC Unified PC RT]\Text and graphic lists\SystemTextList_S7PlusAlarmTextListCollection_1\Text_list_entry_7\Text
Connections: Cannot connect to PLC - @4%s@	HMI system event	Fabrica\PC-System_1 [SIMATIC PC station]\HMI_RT_2 [WinCC Unified PC RT]\HMI alarms\DriverManagerAlarm\Alarm text
Connections: Cannot connect to PLC - @5%s@	HMI runtime	Fabrica\PC-System_1 [SIMATIC PC station]\HMI_RT_2 [WinCC Unified PC RT]\Text and graphic lists\SystemTextList_StdModbusTCPAlarmTextListCollection_5\Text_list_entry_7\Text
Connections: Cannot connect to PLC - @5%s@	HMI runtime	Fabrica\PC-System_1 [SIMATIC PC station]\HMI_RT_2 [WinCC Unified PC RT]\Text and graphic lists\SystemTextList_StdModbusRTUAlarmTextListCollection_8\Text_list_entry_7\Text
Connections: Change-controlled reading is configured but not supported by the target device.	HMI runtime	Fabrica\PC-System_1 [SIMATIC PC station]\HMI_RT_2 [WinCC Unified PC RT]\Text and graphic lists\SystemTextList_ConfigErrorAlarmTextLibrary_5\Text_list_entry_3\Text
Connections: Connection to @6%s@ could not be established.	HMI runtime	Fabrica\PC-System_1 [SIMATIC PC station]\HMI_RT_2 [WinCC Unified PC RT]\Text and graphic lists\SystemTextList_ConfigErrorAlarmTextLibrary_4\Text_list_entry_10\Text
Connections: Connection to @6%s@ could not be established.	HMI runtime	Fabrica\PC-System_1 [SIMATIC PC station]\HMI_RT_2 [WinCC Unified PC RT]\Text and graphic lists\SystemTextList_ConfigErrorAlarmTextLibrary_4\Text_list_entry_11\Text
Connections: Connection to the HMI device @4%s@ is lost	HMI runtime	Fabrica\PC-System_1 [SIMATIC PC station]\HMI_RT_2 [WinCC Unified PC RT]\Text and graphic lists\SystemTextList_S7PlusAlarmTextListCollection_1\Text_list_entry_2\Text
Connections: Connection to the HMI device @5%s@ is lost	HMI runtime	Fabrica\PC-System_1 [SIMATIC PC station]\HMI_RT_2 [WinCC Unified PC RT]\Text and graphic lists\SystemTextList_StdModbusTCPAlarmTextListCollection_5\Text_list_entry_2\Text
Connections: Connection to the HMI device @5%s@ is lost	HMI runtime	Fabrica\PC-System_1 [SIMATIC PC station]\HMI_RT_2 [WinCC Unified PC RT]\Text and graphic lists\SystemTextList_StdModbusRTUAlarmTextListCollection_8\Text_list_entry_2\Text
Connections: Connection to the HMI device @6%s@ is lost.	HMI runtime	Fabrica\PC-System_1 [SIMATIC PC station]\HMI_RT_2 [WinCC Unified PC RT]\Text and graphic lists\SystemTextList_ConfigErrorAlarmTextLibrary_4\Text_list_entry_13\Text
Connections: Connection to the HMI device disconnected. Connection @5%s@ was changed.	HMI runtime	Fabrica\PC-System_1 [SIMATIC PC station]\HMI_RT_2 [WinCC Unified PC RT]\Text and graphic lists\SystemTextList_ConfigErrorAlarmTextLibrary_4\Text_list_entry_17\Text
Connections: Connection to the HMI device disconnected. Driver property was changed for connection @5%s@.	HMI runtime	Fabrica\PC-System_1 [SIMATIC PC station]\HMI_RT_2 [WinCC Unified PC RT]\Text and graphic lists\SystemTextList_ConfigErrorAlarmTextLibrary_4\Text_list_entry_18\Text
Connections: Connection to the PLC @4%s@ is lost	HMI runtime	Fabrica\PC-System_1 [SIMATIC PC station]\HMI_RT_2 [WinCC Unified PC RT]\Text and graphic lists\SystemTextList_S7PlusAlarmTextListCollection_1\Text_list_entry_1\Text
Connections: Connection to the PLC @5%s@ is lost	HMI runtime	Fabrica\PC-System_1 [SIMATIC PC station]\HMI_RT_2 [WinCC Unified PC RT]\Text and graphic lists\SystemTextList_StdModbusTCPAlarmTextListCollection_5\Text_list_entry_1\Text
Connections: Connection to the PLC @5%s@ is lost	HMI runtime	Fabrica\PC-System_1 [SIMATIC PC station]\HMI_RT_2 [WinCC Unified PC RT]\Text and graphic lists\SystemTextList_StdModbusRTUAlarmTextListCollection_8\Text_list_entry_1\Text
Connections: Connection to the PLC @6%s@ is lost.	HMI runtime	Fabrica\PC-System_1 [SIMATIC PC station]\HMI_RT_2 [WinCC Unified PC RT]\Text and graphic lists\SystemTextList_ConfigErrorAlarmTextLibrary_4\Text_list_entry_14\Text
Connections: Cyclic services are configured but not supported by the target device.	HMI runtime	Fabrica\PC-System_1 [SIMATIC PC station]\HMI_RT_2 [WinCC Unified PC RT]\Text and graphic lists\SystemTextList_ConfigErrorAlarmTextLibrary_5\Text_list_entry_2\Text
Connections: Invalid connection name @6%s@. Access point is being ignored.	HMI runtime	Fabrica\PC-System_1 [SIMATIC PC station]\HMI_RT_2 [WinCC Unified PC RT]\Text and graphic lists\SystemTextList_ConfigErrorAlarmTextLibrary_5\Text_list_entry_12\Text
Connections: Invalid IP address @6%s@	HMI runtime	Fabrica\PC-System_1 [SIMATIC PC station]\HMI_RT_2 [WinCC Unified PC RT]\Text and graphic lists\SystemTextList_ConfigErrorAlarmTextLibrary_5\Text_list_entry_15\Text

English (United States)	Category	Reference
Connections: Invalid Named Connection @6%s@. Connection name is too long. Only 32 characters are permitted.	HMI runtime	Fabrica\PC-System_1 [SIMATIC PC station]\HMI_RT_2 [WinCC Unified PC RT]\Text and graphic lists\SystemTextList_ConfigErrorAlarmTextLibrary_5\Text_list_entry_18\Text
Connections: Invalid Named Connection @6%s@. Rack is ignored.	HMI runtime	Fabrica\PC-System_1 [SIMATIC PC station]\HMI_RT_2 [WinCC Unified PC RT]\Text and graphic lists\SystemTextList_ConfigErrorAlarmTextLibrary_5\Text_list_entry_20\Text
Connections: Invalid Named Connection @6%s@. Slot is ignored.	HMI runtime	Fabrica\PC-System_1 [SIMATIC PC station]\HMI_RT_2 [WinCC Unified PC RT]\Text and graphic lists\SystemTextList_ConfigErrorAlarmTextLibrary_5\Text_list_entry_22\Text
Connections: Invalid Named Connection @6%s@. VMD connection name is too long. Only 24 characters are permitted.	HMI runtime	Fabrica\PC-System_1 [SIMATIC PC station]\HMI_RT_2 [WinCC Unified PC RT]\Text and graphic lists\SystemTextList_ConfigErrorAlarmTextLibrary_5\Text_list_entry_17\Text
Connections: Lifecycle monitoring cycle must be shorter than the response time.	HMI runtime	Fabrica\PC-System_1 [SIMATIC PC station]\HMI_RT_2 [WinCC Unified PC RT]\Text and graphic lists\SystemTextList_ConfigErrorAlarmTextLibrary_5\Text_list_entry_1\Text
Connections: Maximum number of connections exceeded - @4%s@	HMI runtime	Fabrica\PC-System_1 [SIMATIC PC station]\HMI_RT_2 [WinCC Unified PC RT]\Text and graphic lists\SystemTextList_S7PlusAlarmTextListCollection_1\Text_list_entry_3\Text
Connections: Maximum number of connections exceeded - @5%s@	HMI runtime	Fabrica\PC-System_1 [SIMATIC PC station]\HMI_RT_2 [WinCC Unified PC RT]\Text and graphic lists\SystemTextList_StdModbusTCPAlarmTextListCollection_5\Text_list_entry_3\Text
Connections: Maximum number of connections exceeded - @5%s@	HMI runtime	Fabrica\PC-System_1 [SIMATIC PC station]\HMI_RT_2 [WinCC Unified PC RT]\Text and graphic lists\SystemTextList_StdModbusRTUAlarmTextListCollection_8\Text_list_entry_3\Text
Connections: PROFIBUS address is not supported.	HMI runtime	Fabrica\PC-System_1 [SIMATIC PC station]\HMI_RT_2 [WinCC Unified PC RT]\Text and graphic lists\SystemTextList_ConfigErrorAlarmTextLibrary_5\Text_list_entry_9\Text
Connections: Rack number @6%s@ is outside of the permitted range (0..7)	HMI runtime	Fabrica\PC-System_1 [SIMATIC PC station]\HMI_RT_2 [WinCC Unified PC RT]\Text and graphic lists\SystemTextList_ConfigErrorAlarmTextLibrary_5\Text_list_entry_19\Text
Connections: Routing is not supported. @6%s@ is not used.	HMI runtime	Fabrica\PC-System_1 [SIMATIC PC station]\HMI_RT_2 [WinCC Unified PC RT]\Text and graphic lists\SystemTextList_ConfigErrorAlarmTextLibrary_5\Text_list_entry_13\Text
Connections: Routing is not supported. @6%s@ is not used.	HMI runtime	Fabrica\PC-System_1 [SIMATIC PC station]\HMI_RT_2 [WinCC Unified PC RT]\Text and graphic lists\SystemTextList_ConfigErrorAlarmTextLibrary_5\Text_list_entry_14\Text
Connections: Slot number @6%s@ is outside of the permitted range (1..32)	HMI runtime	Fabrica\PC-System_1 [SIMATIC PC station]\HMI_RT_2 [WinCC Unified PC RT]\Text and graphic lists\SystemTextList_ConfigErrorAlarmTextLibrary_5\Text_list_entry_21\Text
Connections: Softbus address is not supported.	HMI runtime	Fabrica\PC-System_1 [SIMATIC PC station]\HMI_RT_2 [WinCC Unified PC RT]\Text and graphic lists\SystemTextList_ConfigErrorAlarmTextLibrary_5\Text_list_entry_10\Text
Connections: Timeout while establishing the connection to @6%s@.	HMI runtime	Fabrica\PC-System_1 [SIMATIC PC station]\HMI_RT_2 [WinCC Unified PC RT]\Text and graphic lists\SystemTextList_ConfigErrorAlarmTextLibrary_4\Text_list_entry_15\Text
Connections: Version of the address @6%s@ is not supported.	HMI runtime	Fabrica\PC-System_1 [SIMATIC PC station]\HMI_RT_2 [WinCC Unified PC RT]\Text and graphic lists\SystemTextList_ConfigErrorAlarmTextLibrary_5\Text_list_entry_8\Text
Control Vane	Block comment	Fabrica\PLC_1 [CPU 1511-1 PN]\Program blocks\Main [OB1]\Network 48\Title
Controls a double- or single-acting valve	Block comment	Fabrica\PLC_1 [CPU 1511-1 PN]\Program blocks\Open Library V19\Devices\fbValve_Solenoid [FB110]\Block title
Controls an analog valve	Block comment	Fabrica\PLC_1 [CPU 1511-1 PN]\Program blocks\Open Library V19\Devices\fbValve_Analog [FB111]\Block title
Convert output to word	Block comment	Fabrica\PLC_1 [CPU 1511-1 PN]\Program blocks\Open Library V19\Resources\IO\fcWriteOutput [FC355]\Network 4\Title
Convert output to word	Block comment	Fabrica\PLC_1 [CPU 1511-1 PN]\Program blocks\Open Library V19\Resources\IO\fcWriteOutput [FC355]\Network 7\Title
Convert raw min and max to real	Block comment	Fabrica\PLC_1 [CPU 1511-1 PN]\Program blocks\Open Library V19\Resources\IO\fcWriteOutput [FC355]\Network 1\Title
Crestere presiune tevi cand porcusorii sunt la OUT	Block comment	Fabrica\PLC_1 [CPU 1511-1 PN]\Program blocks\Main [OB1]\Network 22\Title
Critical	Alarm text	Fabrica\PC-System_1 [SIMATIC PC station]\HMI_RT_2 [WinCC Unified PC RT]\HMI alarms\Critical\\AlarmClassData_IDisplayNaming_DisplayName
Critical with reset	Alarm text	Fabrica\PC-System_1 [SIMATIC PC station]\HMI_RT_2 [WinCC Unified PC RT]\HMI alarms\CriticalWithReset\\AlarmClassData_IDisplayNaming_DisplayName
Current Index when scrolling through errors	Block comment	Fabrica\PLC_1 [CPU 1511-1 PN]\Program blocks\Open Library V19\Resources\HMI\fbErrorScroller [FB330]\iOutScrollingErrorNumber
Current mode	Block comment	Fabrica\PLC_1 [CPU 1511-1 PN]\PLC data types\Open Library V19\Data Types\HMI\udtHMI_ValveControl\iMode
Current mode	Block comment	Fabrica\PLC_1 [CPU 1511-1 PN]\PLC data types\Open Library V19\Data Types\HMI\udtHMI_AnalogValveControl\iMode
Currently selected queue item	Block comment	Fabrica\PLC_1 [CPU 1511-1 PN]\PLC data types\Open Library V19\Data Types\Process\udtHandshakes\iSelected
Currently selected queue item	Block comment	Fabrica\PLC_1 [CPU 1511-1 PN]\PLC data types\Open Library V19\Data Types\Process\udtQueue\iSelectedItem
Cycles: @6%s@ does not exist	HMI runtime	Fabrica\PC-System_1 [SIMATIC PC station]\HMI_RT_2 [WinCC Unified PC RT]\Text and graphic lists\SystemTextList_ConfigErrorAlarmTextLibrary_4\Text_list_entry_1\Text
Cycles: @6%s@ was deleted but associated tags exist.	HMI runtime	Fabrica\PC-System_1 [SIMATIC PC station]\HMI_RT_2 [WinCC Unified PC RT]\Text and graphic lists\SystemTextList_ConfigErrorAlarmTextLibrary_4\Text_list_entry_6\Text
Cycles: Invalid conversion type. Conversion is not supported at HmiCycle.	HMI runtime	Fabrica\PC-System_1 [SIMATIC PC station]\HMI_RT_2 [WinCC Unified PC RT]\Text and graphic lists\SystemTextList_ConfigErrorAlarmTextLibrary_5\Text_list_entry_7\Text
Delay between each scroll for a new error	Block comment	Fabrica\PLC_1 [CPU 1511-1 PN]\Program blocks\Open Library V19\Resources\HMI\fbErrorScroller [FB330]\TON_ErrorDelay
Delivered actual value	Block comment	Fabrica\PLC_1 [CPU 1511-1 PN]\PLC data types\Open Library V19\Data Types\Process\udtHandshakes\rActual
Delivery fast request	Block comment	Fabrica\PLC_1 [CPU 1511-1 PN]\PLC data types\Open Library V19\Data Types\Process\udtHandshake\bRequestFast
Delivery in progress	Block comment	Fabrica\PLC_1 [CPU 1511-1 PN]\PLC data types\Open Library V19\Data Types\Process\udtHandshakes\bDelivering
Delivery request	Block comment	Fabrica\PLC_1 [CPU 1511-1 PN]\PLC data types\Open Library V19\Data Types\Process\udtHandshake\bRequest
Deplasare porcusor catre PRS	Block comment	Fabrica\PLC_1 [CPU 1511-1 PN]\Program blocks\Main [OB1]\Network 40\Title
Depresurizare porcusori	Block comment	Fabrica\PLC_1 [CPU 1511-1 PN]\Program blocks\Main [OB1]\Network 42\Title
Depresurizare teava porcusori PLS	Block comment	Fabrica\PLC_1 [CPU 1511-1 PN]\Program blocks\Main [OB1]\Network 38\Title
Detect change in mode	Block comment	Fabrica\PLC_1 [CPU 1511-1 PN]\Program blocks\Open Library V19\Devices\fbValve_Solenoid [FB110]\Network 8\Title
Determine E-Stop set point	Block comment	Fabrica\PLC_1 [CPU 1511-1 PN]\Program blocks\Open Library V19\Devices\fbValve_Analog [FB111]\Network 13\Title
Determine if auto or manual mode is active	Block comment	Fabrica\PLC_1 [CPU 1511-1 PN]\Program blocks\Open Library V19\Devices\fbValve_Solenoid [FB110]\Network 10\Title
Echilibrare nivel tevi + inchidere vana OUT	Block comment	Fabrica\PLC_1 [CPU 1511-1 PN]\Program blocks\Main [OB1]\Network 24\Title
Elapsed time for TON_Timeout	Block comment	Fabrica\PLC_1 [CPU 1511-1 PN]\Program blocks\Open Library V19\Devices\fbValve_Solenoid [FB110]\tTimeoutElapsed
Enable Home & Work Positions	Block comment	Fabrica\PLC_1 [CPU 1511-1 PN]\Program blocks\Open Library V19\Devices\fbValve_Solenoid [FB110]\Network 11\Title

English (United States)	Category	Reference
Engineering units range max	Block comment	Fabrica\PLC_1 [CPU 1511-1 PN]\Program blocks\Open Library V19\Resources\IO\fcWriteOutput [FC355]\rInScaledMax
Engineering units range min	Block comment	Fabrica\PLC_1 [CPU 1511-1 PN]\Program blocks\Open Library V19\Resources\IO\fcWriteOutput [FC355]\rInScaledMin
Enum of E-Stop repsonse (Estop.xxx)	Block comment	Fabrica\PLC_1 [CPU 1511-1 PN]\PLC data types\Open Library V19\Data Types\HMI\udtHMI_AnalogValveControl\iEstopFunction
Enum of E-Stop repsonse (Estop.xxx)	Block comment	Fabrica\PLC_1 [CPU 1511-1 PN]\Program blocks\Open Library V19\Devices\fbValve_Analog [FB111]\iInEstopFunction
Error 1 In Error Array	Block comment	Fabrica\PLC_1 [CPU 1511-1 PN]\Program blocks\Open Library V19\Resources\HMI\fbErrorScroller [FB330]\bInError01
Error 10 In Error Array	Block comment	Fabrica\PLC_1 [CPU 1511-1 PN]\Program blocks\Open Library V19\Resources\HMI\fbErrorScroller [FB330]\bInError10
Error 11 In Error Array	Block comment	Fabrica\PLC_1 [CPU 1511-1 PN]\Program blocks\Open Library V19\Resources\HMI\fbErrorScroller [FB330]\bInError11
Error 12 In Error Array	Block comment	Fabrica\PLC_1 [CPU 1511-1 PN]\Program blocks\Open Library V19\Resources\HMI\fbErrorScroller [FB330]\bInError12
Error 13 In Error Array	Block comment	Fabrica\PLC_1 [CPU 1511-1 PN]\Program blocks\Open Library V19\Resources\HMI\fbErrorScroller [FB330]\bInError13
Error 14 In Error Array	Block comment	Fabrica\PLC_1 [CPU 1511-1 PN]\Program blocks\Open Library V19\Resources\HMI\fbErrorScroller [FB330]\bInError14
Error 15 In Error Array	Block comment	Fabrica\PLC_1 [CPU 1511-1 PN]\Program blocks\Open Library V19\Resources\HMI\fbErrorScroller [FB330]\bInError15
Error 16 In Error Array	Block comment	Fabrica\PLC_1 [CPU 1511-1 PN]\Program blocks\Open Library V19\Resources\HMI\fbErrorScroller [FB330]\bInError16
Error 17 In Error Array	Block comment	Fabrica\PLC_1 [CPU 1511-1 PN]\Program blocks\Open Library V19\Resources\HMI\fbErrorScroller [FB330]\bInError17
Error 18 In Error Array	Block comment	Fabrica\PLC_1 [CPU 1511-1 PN]\Program blocks\Open Library V19\Resources\HMI\fbErrorScroller [FB330]\bInError18
Error 19 In Error Array	Block comment	Fabrica\PLC_1 [CPU 1511-1 PN]\Program blocks\Open Library V19\Resources\HMI\fbErrorScroller [FB330]\bInError19
Error 2 In Error Array	Block comment	Fabrica\PLC_1 [CPU 1511-1 PN]\Program blocks\Open Library V19\Resources\HMI\fbErrorScroller [FB330]\bInError02
Error 20 In Error Array	Block comment	Fabrica\PLC_1 [CPU 1511-1 PN]\Program blocks\Open Library V19\Resources\HMI\fbErrorScroller [FB330]\bInError20
Error 21 In Error Array	Block comment	Fabrica\PLC_1 [CPU 1511-1 PN]\Program blocks\Open Library V19\Resources\HMI\fbErrorScroller [FB330]\bInError21
Error 22 In Error Array	Block comment	Fabrica\PLC_1 [CPU 1511-1 PN]\Program blocks\Open Library V19\Resources\HMI\fbErrorScroller [FB330]\bInError22
Error 23 In Error Array	Block comment	Fabrica\PLC_1 [CPU 1511-1 PN]\Program blocks\Open Library V19\Resources\HMI\fbErrorScroller [FB330]\bInError23
Error 24 In Error Array	Block comment	Fabrica\PLC_1 [CPU 1511-1 PN]\Program blocks\Open Library V19\Resources\HMI\fbErrorScroller [FB330]\bInError24
Error 25 In Error Array	Block comment	Fabrica\PLC_1 [CPU 1511-1 PN]\Program blocks\Open Library V19\Resources\HMI\fbErrorScroller [FB330]\bInError25
Error 26 In Error Array	Block comment	Fabrica\PLC_1 [CPU 1511-1 PN]\Program blocks\Open Library V19\Resources\HMI\fbErrorScroller [FB330]\bInError26
Error 27 In Error Array	Block comment	Fabrica\PLC_1 [CPU 1511-1 PN]\Program blocks\Open Library V19\Resources\HMI\fbErrorScroller [FB330]\bInError27
Error 28 In Error Array	Block comment	Fabrica\PLC_1 [CPU 1511-1 PN]\Program blocks\Open Library V19\Resources\HMI\fbErrorScroller [FB330]\bInError28
Error 29 In Error Array	Block comment	Fabrica\PLC_1 [CPU 1511-1 PN]\Program blocks\Open Library V19\Resources\HMI\fbErrorScroller [FB330]\bInError29
Error 3 In Error Array	Block comment	Fabrica\PLC_1 [CPU 1511-1 PN]\Program blocks\Open Library V19\Resources\HMI\fbErrorScroller [FB330]\bInError03
Error 30 In Error Array	Block comment	Fabrica\PLC_1 [CPU 1511-1 PN]\Program blocks\Open Library V19\Resources\HMI\fbErrorScroller [FB330]\bInError30
Error 4 In Error Array	Block comment	Fabrica\PLC_1 [CPU 1511-1 PN]\Program blocks\Open Library V19\Resources\HMI\fbErrorScroller [FB330]\bInError04
Error 5 In Error Array	Block comment	Fabrica\PLC_1 [CPU 1511-1 PN]\Program blocks\Open Library V19\Resources\HMI\fbErrorScroller [FB330]\bInError05
Error 6 In Error Array	Block comment	Fabrica\PLC_1 [CPU 1511-1 PN]\Program blocks\Open Library V19\Resources\HMI\fbErrorScroller [FB330]\bInError06
Error 7 In Error Array	Block comment	Fabrica\PLC_1 [CPU 1511-1 PN]\Program blocks\Open Library V19\Resources\HMI\fbErrorScroller [FB330]\bInError07
Error 8 In Error Array	Block comment	Fabrica\PLC_1 [CPU 1511-1 PN]\Program blocks\Open Library V19\Resources\HMI\fbErrorScroller [FB330]\bInError08
Error 9 In Error Array	Block comment	Fabrica\PLC_1 [CPU 1511-1 PN]\Program blocks\Open Library V19\Resources\HMI\fbErrorScroller [FB330]\bInError09
Error code	Block comment	Fabrica\PLC_1 [CPU 1511-1 PN]\PLC data types\Open Library V19\Data Types\HMI\udtHMI_ValveControl\iErrorCode
Error code	Block comment	Fabrica\PLC_1 [CPU 1511-1 PN]\PLC data types\Open Library V19\Data Types\HMI\udtHMI_AnalogValveControl\iErrorCode
Error exists	Block comment	Fabrica\PLC_1 [CPU 1511-1 PN]\Program blocks\Open Library V19\Devices\fbValve_Solenoid [FB110]\bOutError
Error exists	Block comment	Fabrica\PLC_1 [CPU 1511-1 PN]\Program blocks\Open Library V19\Devices\fbValve_Analog [FB111]\bOutError
Error Exists	Block comment	Fabrica\PLC_1 [CPU 1511-1 PN]\Program blocks\Open Library V19\Resources\HMI\fbErrorScroller [FB330]\bErrorExists
Error scroller	Block comment	Fabrica\PLC_1 [CPU 1511-1 PN]\Program blocks\Open Library V19\Devices\fbValve_Solenoid [FB110]\Network 23\Title
Error status	Block comment	Fabrica\PLC_1 [CPU 1511-1 PN]\PLC data types\Open Library V19\Data Types\HMI\udtHMI_ValveControl\bError
Error structure for analog valve	Block comment	Fabrica\PLC_1 [CPU 1511-1 PN]\Program blocks\Open Library V19\Devices\fbValve_Analog [FB111]\ERROR_AnalogValve
Error timeout timer	Block comment	Fabrica\PLC_1 [CPU 1511-1 PN]\Program blocks\Open Library V19\Devices\fbValve_Analog [FB111]\Network 15\Title
Error: Home position feedback not active	Block comment	Fabrica\PLC_1 [CPU 1511-1 PN]\Program blocks\Open Library V19\Devices\fbValve_Solenoid [FB110]\Network 19\Title
Error: Home position feedback still active	Block comment	Fabrica\PLC_1 [CPU 1511-1 PN]\Program blocks\Open Library V19\Devices\fbValve_Solenoid [FB110]\Network 21\Title

English (United States)	Category	Reference
Error: Signal out of tolerance	Block comment	Fabrica\PLC_1 [CPU 1511-1 PN]\Program blocks\Open Library V19\Devices\fbValve_Analog [FB111]\Network 17\Title
Error: Work position feedback not active	Block comment	Fabrica\PLC_1 [CPU 1511-1 PN]\Program blocks\Open Library V19\Devices\fbValve_Solenoid [FB110]\Network 20\Title
Error: Work position feedback still active	Block comment	Fabrica\PLC_1 [CPU 1511-1 PN]\Program blocks\Open Library V19\Devices\fbValve_Solenoid [FB110]\Network 22\Title
Estop	Block comment	Fabrica\PLC_1 [CPU 1511-1 PN]\Program blocks\Open Library V19\Devices\fbValve_Solenoid [FB110]\bInEstop
Estop	Block comment	Fabrica\PLC_1 [CPU 1511-1 PN]\Program blocks\Open Library V19\Devices\fbValve_Analog [FB111]\bInEstop
EvDpManager::cleanupDeletedDatapoint - alert handler config is deleted implicitly but still has overrides, @3%s@	HMI runtime	Fabrica\PC-System_1 [SIMATIC PC station]\HMI_RT_2 [WinCC Unified PC RT]\Text and graphic lists\SystemTextList_ConfigErrorAlarmTextLibrary_2\Text_list_entry_2\Text
EvDpManager::cleanupDeletedDatapoint - alert handler config is deleted implicitly for deleted datapoint, @3%s@	HMI runtime	Fabrica\PC-System_1 [SIMATIC PC station]\HMI_RT_2 [WinCC Unified PC RT]\Text and graphic lists\SystemTextList_ConfigErrorAlarmTextLibrary_2\Text_list_entry_1\Text
EvDpManager::cleanupDeletedDatapoint - default value config is deleted implicitly but still has overrides, @3%s@	HMI runtime	Fabrica\PC-System_1 [SIMATIC PC station]\HMI_RT_2 [WinCC Unified PC RT]\Text and graphic lists\SystemTextList_ConfigErrorAlarmTextLibrary_2\Text_list_entry_4\Text
EvDpManager::cleanupDeletedDatapoint - default value config is deleted implicitly for deleted datapoint, @3%s@	HMI runtime	Fabrica\PC-System_1 [SIMATIC PC station]\HMI_RT_2 [WinCC Unified PC RT]\Text and graphic lists\SystemTextList_ConfigErrorAlarmTextLibrary_2\Text_list_entry_3\Text
EvDpManager::cleanupDeletedDatapoint - distribution config is deleted implicitly but still has overrides, @3%s@	HMI runtime	Fabrica\PC-System_1 [SIMATIC PC station]\HMI_RT_2 [WinCC Unified PC RT]\Text and graphic lists\SystemTextList_ConfigErrorAlarmTextLibrary_2\Text_list_entry_8\Text
EvDpManager::cleanupDeletedDatapoint - distribution config is deleted implicitly for deleted datapoint, @3%s@	HMI runtime	Fabrica\PC-System_1 [SIMATIC PC station]\HMI_RT_2 [WinCC Unified PC RT]\Text and graphic lists\SystemTextList_ConfigErrorAlarmTextLibrary_2\Text_list_entry_7\Text
EvDpManager::cleanupDeletedDatapoint - initial value config is deleted implicitly but still has overrides, @3%s@	HMI runtime	Fabrica\PC-System_1 [SIMATIC PC station]\HMI_RT_2 [WinCC Unified PC RT]\Text and graphic lists\SystemTextList_ConfigErrorAlarmTextLibrary_2\Text_list_entry_6\Text
EvDpManager::cleanupDeletedDatapoint - initial value config is deleted implicitly for deleted datapoint, @3%s@	HMI runtime	Fabrica\PC-System_1 [SIMATIC PC station]\HMI_RT_2 [WinCC Unified PC RT]\Text and graphic lists\SystemTextList_ConfigErrorAlarmTextLibrary_2\Text_list_entry_5\Text
EvDpManager::cleanupDeletedDatapoint - rangeCheck config is deleted implicitly but still has overrides, @3%s@	HMI runtime	Fabrica\PC-System_1 [SIMATIC PC station]\HMI_RT_2 [WinCC Unified PC RT]\Text and graphic lists\SystemTextList_ConfigErrorAlarmTextLibrary_2\Text_list_entry_10\Text
EvDpManager::cleanupDeletedDatapoint - rangeCheck config is deleted implicitly for deleted datapoint, @3%s@	HMI runtime	Fabrica\PC-System_1 [SIMATIC PC station]\HMI_RT_2 [WinCC Unified PC RT]\Text and graphic lists\SystemTextList_ConfigErrorAlarmTextLibrary_2\Text_list_entry_9\Text
Fara reset, TONR ar alimenta move 9 chiar si daca nu am fi in pasul 8 S-a folosit TONR in loc de TON deoarece vreau ca pompa sa umple cu apa 5s cumulativ, chiar daca se opreste dupa un timp mai scurt	Block comment	Fabrica\PLC_1 [CPU 1511-1 PN]\Program blocks\Main [OB1]\Network 32\Comment
Feedback error timeout	Block comment	Fabrica\PLC_1 [CPU 1511-1 PN]\Program blocks\Open Library V19\Devices\fbValve_Analog [FB111]\tInTimeout
General certificate error for PLC - @4%s@	HMI runtime	Fabrica\PC-System_1 [SIMATIC PC station]\HMI_RT_2 [WinCC Unified PC RT]\Text and graphic lists\SystemTextList_S7PlusAlarmTextListCollection_1\Text_list_entry_9\Text
General certificate error for PLC - @5%s@	HMI runtime	Fabrica\PC-System_1 [SIMATIC PC station]\HMI_RT_2 [WinCC Unified PC RT]\Text and graphic lists\SystemTextList_StdModbusTCPAlarmTextListCollection_5\Text_list_entry_9\Text
General certificate error for PLC - @5%s@	HMI runtime	Fabrica\PC-System_1 [SIMATIC PC station]\HMI_RT_2 [WinCC Unified PC RT]\Text and graphic lists\SystemTextList_StdModbusRTUAlarmTextListCollection_8\Text_list_entry_9\Text
Handles an async reading of an HMI bit to avoid race conditions, includes an enable bit	Block comment	Fabrica\PLC_1 [CPU 1511-1 PN]\Program blocks\Open Library V19\Resources\HMI\fcHMIBitEnable [FC329]\Block title
High byte and Low Byte are swapped	Block comment	Fabrica\PLC_1 [CPU 1511-1 PN]\Program blocks\Open Library V19\Resources\Conversion\fcSwapBytes [FC304]\Network 1\Comment
High byte and Low Byte are swapped	Block comment	Fabrica\PLC_1 [CPU 1511-1 PN]\Program blocks\Open Library V19\Resources\Conversion\fcSwapBytes [FC304]\Block comment
High limit violated for tag @1%s@. Computer name: @S1%s@	HMI system event	Fabrica\PC-System_1 [SIMATIC PC station]\HMI_RT_2 [WinCC Unified PC RT]\HMI alarms\HighLimitViolationAlarm\Alarm text
HMI control structure for analog valve	Block comment	Fabrica\PLC_1 [CPU 1511-1 PN]\Program blocks\Open Library V19\Devices\fbValve_Analog [FB111]\HMI_AnalogValveControl
HMI valve control	Block comment	Fabrica\PLC_1 [CPU 1511-1 PN]\Program blocks\Open Library V19\Devices\fbValve_Solenoid [FB110]\HMI_ValveControl
Home and Work Enabled	Block comment	Fabrica\PLC_1 [CPU 1511-1 PN]\Program blocks\Open Library V19\Devices\fbValve_Solenoid [FB110]\bInEnable
Home command is on	Block comment	Fabrica\PLC_1 [CPU 1511-1 PN]\PLC data types\Open Library V19\Data Types\HMI\udtHMI_ValveControl\bHomeOn
Home feedback	Block comment	Fabrica\PLC_1 [CPU 1511-1 PN]\PLC data types\Open Library V19\Data Types\HMI\udtHMI_ValveControl\bSignalHome
Home position command	Block comment	Fabrica\PLC_1 [CPU 1511-1 PN]\Program blocks\Open Library V19\Devices\fbValve_Solenoid [FB110]\bOutCommandHome
Home position enabled	Block comment	Fabrica\PLC_1 [CPU 1511-1 PN]\Program blocks\Open Library V19\Devices\fbValve_Solenoid [FB110]\bEnableHome
Home position feedback	Block comment	Fabrica\PLC_1 [CPU 1511-1 PN]\Program blocks\Open Library V19\Devices\fbValve_Solenoid [FB110]\bInSignalHome
Home position feedback not active	Block comment	Fabrica\PLC_1 [CPU 1511-1 PN]\PLC data types\Open Library V19\Data Types\Error\udtError_Valve\NoHomeFeedback
Home position feedback still active	Block comment	Fabrica\PLC_1 [CPU 1511-1 PN]\PLC data types\Open Library V19\Data Types\Error\udtError_Valve\HomeFeedbackStillActive
Home position still active	Block comment	Fabrica\PLC_1 [CPU 1511-1 PN]\Program blocks\Open Library V19\Devices\fbValve_Solenoid [FB110]\Network 21\Comment
ID/Name in local configuration for Runtime Collaboration already exists	HMI runtime	Fabrica\PC-System_1 [SIMATIC PC station]\HMI_RT_2 [WinCC Unified PC RT]\Text and graphic lists\SystemTextList_RuntimeCollaborationFailureReason_1\Text_list_entry_12\Text
IF in auto AND home is not enabled => RESET home command	Block comment	Fabrica\PLC_1 [CPU 1511-1 PN]\Program blocks\Open Library V19\Devices\fbValve_Solenoid [FB110]\Network 14\Comment
IF in auto AND work is not enabled => RESET work command	Block comment	Fabrica\PLC_1 [CPU 1511-1 PN]\Program blocks\Open Library V19\Devices\fbValve_Solenoid [FB110]\Network 15\Comment
IF manual mode and home button is pressed => --Set close cylinder	Block comment	Fabrica\PLC_1 [CPU 1511-1 PN]\Program blocks\Open Library V19\Devices\fbValve_Solenoid [FB110]\Network 12\Comment

English (United States)	Category	Reference
IF manual mode and work button button is pressed => --Set open cylinder	Block comment	Fabrica\PLC_1 [CPU 1511-1 PN]\Program blocks\Open Library V19\Devices\fbValve_Solenoid [FB110]\Network 13\Comment
IF not in auto AND not in manual => RESET home and work commands	Block comment	Fabrica\PLC_1 [CPU 1511-1 PN]\Program blocks\Open Library V19\Devices\fbValve_Solenoid [FB110]\Network 16\Comment
If not latching or toggling, reset the PLC bit every scan	Block comment	Fabrica\PLC_1 [CPU 1511-1 PN]\Program blocks\Open Library V19\Resources\HMI\fcHMIBitEnable [FC329]\Network 1\Title
If not toggling, set PLC bit	Block comment	Fabrica\PLC_1 [CPU 1511-1 PN]\Program blocks\Open Library V19\Resources\HMI\fcHMIBitEnable [FC329]\Network 4\Title
If we found an error, stop scrolling.	Block comment	Fabrica\PLC_1 [CPU 1511-1 PN]\Program blocks\Open Library V19\Resources\HMI\fbErrorScroller [FB330]\Network 6\Comment
IN + OUT	Block comment	Fabrica\PLC_1 [CPU 1511-1 PN]\Program blocks\FB_Control_Vane [FB1]\Network 1\Title
<?xml version="1.0" encoding="utf-8"?><ProjectText xmlns="http://www.siemens.com/Industry/2009/10/01/Automation/FormattedText"><body> IN 1 </body></ProjectText>	HMI screen	Text
<?xml version="1.0" encoding="utf-8"?><ProjectText xmlns="http://www.siemens.com/Industry/2009/10/01/Automation/FormattedText"><body> IN 2 </body></ProjectText>	HMI screen	Text
Inceperea procesului	Block comment	Fabrica\PLC_1 [CPU 1511-1 PN]\Program blocks\Main [OB1]\Network 17\Title
Inchidere vana IN dupa 10s	Block comment	Fabrica\PLC_1 [CPU 1511-1 PN]\Program blocks\Main [OB1]\Network 18\Title
Incoming	Alarm text	Fabrica\PC-System_1 [SIMATIC PC station]\HMI_RT_2 [WinCC Unified PC RT]\Runtime settings\Alarm_settings_1\ComingText
Incoming/Acknowledged	Alarm text	Fabrica\PC-System_1 [SIMATIC PC station]\HMI_RT_2 [WinCC Unified PC RT]\Runtime settings\Alarm_settings_1\ComingAcknowledgedText
Incoming/Acknowledged/Outgoing	Alarm text	Fabrica\PC-System_1 [SIMATIC PC station]\HMI_RT_2 [WinCC Unified PC RT]\Runtime settings\Alarm_settings_1\ComingAcknowledgedGoingText
Incoming/Outgoing	Alarm text	Fabrica\PC-System_1 [SIMATIC PC station]\HMI_RT_2 [WinCC Unified PC RT]\Runtime settings\Alarm_settings_1\ComingGoingText
Incoming/Outgoing/Acknowledged	Alarm text	Fabrica\PC-System_1 [SIMATIC PC station]\HMI_RT_2 [WinCC Unified PC RT]\Runtime settings\Alarm_settings_1\ComingGoingAcknowledgedText
Increment the error index checked	Block comment	Fabrica\PLC_1 [CPU 1511-1 PN]\Program blocks\Open Library V19\Resources\HMI\fbErrorScroller [FB330]\Network 5\Title
Index of current error position	Block comment	Fabrica\PLC_1 [CPU 1511-1 PN]\Program blocks\Open Library V19\Resources\HMI\fbErrorScroller [FB330]\iErrorsScrollNum
Index of next error position	Block comment	Fabrica\PLC_1 [CPU 1511-1 PN]\Program blocks\Open Library V19\Resources\HMI\fbErrorScroller [FB330]\iNextScrollNum
Indicates we are scrolling	Block comment	Fabrica\PLC_1 [CPU 1511-1 PN]\Program blocks\Open Library V19\Resources\HMI\fbErrorScroller [FB330]\bScrolling
Information	Alarm text	Fabrica\PC-System_1 [SIMATIC PC station]\HMI_RT_2 [WinCC Unified PC RT]\HMI alarms\Information\\AlarmClassData_IDisplayNaming_DisplayName
Input value	Block comment	Fabrica\PLC_1 [CPU 1511-1 PN]\Program blocks\Open Library V19\Resources\IO\fcWriteOutput [FC355]\rInValue
Interlock	Block comment	Fabrica\PLC_1 [CPU 1511-1 PN]\Program blocks\Open Library V19\Devices\fbValve_Solenoid [FB110]\Network 24\Title
Keep track of last mode	Block comment	Fabrica\PLC_1 [CPU 1511-1 PN]\Program blocks\Open Library V19\Devices\fbValve_Solenoid [FB110]\Network 9\Title
Last mode code	Block comment	Fabrica\PLC_1 [CPU 1511-1 PN]\Program blocks\Open Library V19\Devices\fbValve_Solenoid [FB110]\iLastMode
Legitimation failed, invalid or missing password - @4%s@	HMI runtime	Fabrica\PC-System_1 [SIMATIC PC station]\HMI_RT_2 [WinCC Unified PC RT]\Text and graphic lists\SystemTextList_S7PlusAlarmTextListCollection_1\Text_list_entry_5\Text
Legitimation failed, invalid or missing password - @5%s@	HMI runtime	Fabrica\PC-System_1 [SIMATIC PC station]\HMI_RT_2 [WinCC Unified PC RT]\Text and graphic lists\SystemTextList_AllenBradleyEIPAlarmTextListCollection_7\Text_list_entry_5\Text
Legitimation failed, invalid or missing password - @5%s@	HMI runtime	Fabrica\PC-System_1 [SIMATIC PC station]\HMI_RT_2 [WinCC Unified PC RT]\Text and graphic lists\SystemTextList_OmronEIPAlarmTextListCollection_6\Text_list_entry_5\Text
Legitimation failed, invalid or missing password - @5%s@	HMI runtime	Fabrica\PC-System_1 [SIMATIC PC station]\HMI_RT_2 [WinCC Unified PC RT]\Text and graphic lists\SystemTextList_StdModbusTCPAlarmTextListCollection_5\Text_list_entry_5\Text
Legitimation failed, invalid or missing password - @5%s@	HMI runtime	Fabrica\PC-System_1 [SIMATIC PC station]\HMI_RT_2 [WinCC Unified PC RT]\Text and graphic lists\SystemTextList_MitsubishiMCAlarmTextListCollection_4\Text_list_entry_5\Text
Legitimation failed, invalid or missing password - @5%s@	HMI runtime	Fabrica\PC-System_1 [SIMATIC PC station]\HMI_RT_2 [WinCC Unified PC RT]\Text and graphic lists\SystemTextList_MitsubishiiQAlarmTextListCollection_3\Text_list_entry_5\Text
Legitimation failed, invalid or missing password - @5%s@	HMI runtime	Fabrica\PC-System_1 [SIMATIC PC station]\HMI_RT_2 [WinCC Unified PC RT]\Text and graphic lists\SystemTextList_StdModbusRTUAlarmTextListCollection_8\Text_list_entry_5\Text
Limit manual and auto set points to the max and min constants	Block comment	Fabrica\PLC_1 [CPU 1511-1 PN]\Program blocks\Open Library V19\Devices\fbValve_Analog [FB111]\Network 5\Title
LOC cache - Cache folder cannot be created or reached: @6%s@	HMI runtime	Fabrica\PC-System_1 [SIMATIC PC station]\HMI_RT_2 [WinCC Unified PC RT]\Text and graphic lists\SystemTextList_ConfigErrorAlarmTextLibrary_10\Text_list_entry_2\Text
Logs: Implicit deletion. Logging tag instance @6%s@ should be deleted but there are overloaded elements.	HMI runtime	Fabrica\PC-System_1 [SIMATIC PC station]\HMI_RT_2 [WinCC Unified PC RT]\Text and graphic lists\SystemTextList_ConfigErrorAlarmTextLibrary_8\Text_list_entry_1\Text
Low limit violated for tag @1%s@. Computer name: @S1%s@	HMI system event	Fabrica\PC-System_1 [SIMATIC PC station]\HMI_RT_2 [WinCC Unified PC RT]\HMI alarms\LowLimitViolationAlarm\Alarm text
Manual Mode is active	Block comment	Fabrica\PLC_1 [CPU 1511-1 PN]\Program blocks\Open Library V19\Devices\fbValve_Solenoid [FB110]\bManualMode
Maximum number of connections exceeded - @5%s@	HMI runtime	Fabrica\PC-System_1 [SIMATIC PC station]\HMI_RT_2 [WinCC Unified PC RT]\Text and graphic lists\SystemTextList_AllenBradleyEIPAlarmTextListCollection_7\Text_list_entry_3\Text
Maximum number of connections exceeded - @5%s@	HMI runtime	Fabrica\PC-System_1 [SIMATIC PC station]\HMI_RT_2 [WinCC Unified PC RT]\Text and graphic lists\SystemTextList_OmronEIPAlarmTextListCollection_6\Text_list_entry_3\Text
Maximum number of connections exceeded - @5%s@	HMI runtime	Fabrica\PC-System_1 [SIMATIC PC station]\HMI_RT_2 [WinCC Unified PC RT]\Text and graphic lists\SystemTextList_MitsubishiMCAlarmTextListCollection_4\Text_list_entry_3\Text
Maximum number of connections exceeded - @5%s@	HMI runtime	Fabrica\PC-System_1 [SIMATIC PC station]\HMI_RT_2 [WinCC Unified PC RT]\Text and graphic lists\SystemTextList_MitsubishiiQAlarmTextListCollection_3\Text_list_entry_3\Text
Maximum set point range	Block comment	Fabrica\PLC_1 [CPU 1511-1 PN]\Program blocks\Open Library V19\Devices\fbValve_Analog [FB111]\crMaxSetPoint
Messages: Invalid condition string for the alarm view @6%s@.	HMI runtime	Fabrica\PC-System_1 [SIMATIC PC station]\HMI_RT_2 [WinCC Unified PC RT]\Text and graphic lists\SystemTextList_ConfigErrorAlarmTextLibrary_7\Text_list_entry_1\Text
Messages: Invalid control tag and bit for the alarm view @6%s@.	HMI runtime	Fabrica\PC-System_1 [SIMATIC PC station]\HMI_RT_2 [WinCC Unified PC RT]\Text and graphic lists\SystemTextList_ConfigErrorAlarmTextLibrary_7\Text_list_entry_3\Text

English (United States)	Category	Reference
Messages: Invalid status tag and bit for the alarm view @6%s@.	HMI runtime	Fabrica\PC-System_1 [SIMATIC PC station]\HMI_RT_2 [WinCC Unified PC RT]\Text and graphic lists\SystemTextList_ConfigErrorAlarmTextLibrary_7\Text_list_entry_2\Text
Minimum set point range	Block comment	Fabrica\PLC_1 [CPU 1511-1 PN]\Program blocks\Open Library V19\Devices\fbValve_Analog [FB111]\crMinSetPoint
Mode Selection	Block comment	Fabrica\PLC_1 [CPU 1511-1 PN]\Program blocks\Open Library V19\Devices\fbValve_Solenoid [FB110]\iInMode
Mode Selection	Block comment	Fabrica\PLC_1 [CPU 1511-1 PN]\Program blocks\Open Library V19\Devices\fbValve_Analog [FB111]\iInMode
Move to Home Position (Retracted)	Block comment	Fabrica\PLC_1 [CPU 1511-1 PN]\Program blocks\Open Library V19\Devices\fbValve_Solenoid [FB110]\Network 12\Title
Move to Work Position (Extended)	Block comment	Fabrica\PLC_1 [CPU 1511-1 PN]\Program blocks\Open Library V19\Devices\fbValve_Solenoid [FB110]\Network 13\Title
Move to work position in automatic mode	Block comment	Fabrica\PLC_1 [CPU 1511-1 PN]\Program blocks\Open Library V19\Devices\fbValve_Solenoid [FB110]\bInCommandWork
Mutare porcusori pana la VANA OUT	Block comment	Fabrica\PLC_1 [CPU 1511-1 PN]\Program blocks\Main [OB1]\Network 20\Title
NA	Alarm class text	Fabrica\No Acknowledgement\AlarmClassData_IDisplayNaming_DisplayName
NA	Alarm class text	Fabrica\No Acknowledgement\ShortName
NameService configuration error: Implicit deletion. Alias/Format/Unit instance @6%s@ must be deleted explicitly.	HMI runtime	Fabrica\PC-System_1 [SIMATIC PC station]\HMI_RT_2 [WinCC Unified PC RT]\Text and graphic lists\SystemTextList_ConfigErrorAlarmTextLibrary_1\Text_list_entry_2\Text
NameService configuration error: Implicit deletion. Subelement instance @6%s@ must be deleted explicitly.	HMI runtime	Fabrica\PC-System_1 [SIMATIC PC station]\HMI_RT_2 [WinCC Unified PC RT]\Text and graphic lists\SystemTextList_ConfigErrorAlarmTextLibrary_1\Text_list_entry_1\Text
New mode selected	Block comment	Fabrica\PLC_1 [CPU 1511-1 PN]\Program blocks\Open Library V19\Devices\fbValve_Solenoid [FB110]\bNewMode
No common supported message version	HMI runtime	Fabrica\PC-System_1 [SIMATIC PC station]\HMI_RT_2 [WinCC Unified PC RT]\Text and graphic lists\SystemTextList_RuntimeCollaborationFailureReason_1\Text_list_entry_9\Text
NO pentru Home: contactul se închide (lasă curentul să treacă) când vana este fizic închisă (Home = TRUE). sau NC pentru Work: contactul se deschide (întrerupe curentul) când începe să se deschidă/este deschisă(Work = TRUE). "FB_Control_Vane_DB".PLS_XV21.bInSignalHome este echivalent cu intrarea %I19.2	Block comment	Fabrica\PLC_1 [CPU 1511-1 PN]\Program blocks\Main [OB1]\Network 5\Comment
Normal	Alarm text	Fabrica\PC-System_1 [SIMATIC PC station]\HMI_RT_2 [WinCC Unified PC RT]\Runtime settings\Alarm_settings_1\NormalText
Not reach work position	Block comment	Fabrica\PLC_1 [CPU 1511-1 PN]\Program blocks\Open Library V19\Devices\fbValve_Solenoid [FB110]\Network 20\Comment
Notification	Alarm text	Fabrica\PC-System_1 [SIMATIC PC station]\HMI_RT_2 [WinCC Unified PC RT]\HMI alarms\Notification\\AlarmClassData_IDisplayNaming_DisplayName
Number in queue	Block comment	Fabrica\PLC_1 [CPU 1511-1 PN]\PLC data types\Open Library V19\Data Types\Process\udtHandshake\iQueue
Number of Byte	Block comment	Fabrica\PLC_1 [CPU 1511-1 PN]\PLC data types\Open Library V19\Data Types\Process\udtAnyPointer\wLength
Number of DB	Block comment	Fabrica\PLC_1 [CPU 1511-1 PN]\PLC data types\Open Library V19\Data Types\Process\udtAnyPointer\wDBNumber
Number of items in the queue	Block comment	Fabrica\PLC_1 [CPU 1511-1 PN]\PLC data types\Open Library V19\Data Types\Process\udtQueue\iQueuedCount
Online backup in progress	HMI system event	Fabrica\PC-System_1 [SIMATIC PC station]\HMI_RT_2 [WinCC Unified PC RT]\HMI alarms\OnlineBackupNotification\Alarm text
Open request could not be sent	HMI runtime	Fabrica\PC-System_1 [SIMATIC PC station]\HMI_RT_2 [WinCC Unified PC RT]\Text and graphic lists\SystemTextList_AllenBradleyEIPAlarmTextListCollection_7\Text_list_entry_8\Text
Open request could not be sent	HMI runtime	Fabrica\PC-System_1 [SIMATIC PC station]\HMI_RT_2 [WinCC Unified PC RT]\Text and graphic lists\SystemTextList_OmronEIPAlarmTextListCollection_6\Text_list_entry_8\Text
Open request could not be sent	HMI runtime	Fabrica\PC-System_1 [SIMATIC PC station]\HMI_RT_2 [WinCC Unified PC RT]\Text and graphic lists\SystemTextList_MitsubishiMCAlarmTextListCollection_4\Text_list_entry_8\Text
Open request could not be sent	HMI runtime	Fabrica\PC-System_1 [SIMATIC PC station]\HMI_RT_2 [WinCC Unified PC RT]\Text and graphic lists\SystemTextList_MitsubishiiQAlarmTextListCollection_3\Text_list_entry_8\Text
Open request failed - @5%s@	HMI runtime	Fabrica\PC-System_1 [SIMATIC PC station]\HMI_RT_2 [WinCC Unified PC RT]\Text and graphic lists\SystemTextList_AllenBradleyEIPAlarmTextListCollection_7\Text_list_entry_6\Text
Open request failed - @5%s@	HMI runtime	Fabrica\PC-System_1 [SIMATIC PC station]\HMI_RT_2 [WinCC Unified PC RT]\Text and graphic lists\SystemTextList_OmronEIPAlarmTextListCollection_6\Text_list_entry_6\Text
Open request failed - @5%s@	HMI runtime	Fabrica\PC-System_1 [SIMATIC PC station]\HMI_RT_2 [WinCC Unified PC RT]\Text and graphic lists\SystemTextList_MitsubishiMCAlarmTextListCollection_4\Text_list_entry_6\Text
Open request failed - @5%s@	HMI runtime	Fabrica\PC-System_1 [SIMATIC PC station]\HMI_RT_2 [WinCC Unified PC RT]\Text and graphic lists\SystemTextList_MitsubishiiQAlarmTextListCollection_3\Text_list_entry_6\Text
Operator input information	Alarm text	Fabrica\PC-System_1 [SIMATIC PC station]\HMI_RT_2 [WinCC Unified PC RT]\HMI alarms\OperatorInputInformation\\AlarmClassData_IDisplayNaming_DisplayName
Operator input request	Alarm text	Fabrica\PC-System_1 [SIMATIC PC station]\HMI_RT_2 [WinCC Unified PC RT]\HMI alarms\OperatorInputRequest\\AlarmClassData_IDisplayNaming_DisplayName
OR all of the possible errors. If any error Exists, SET bErrorExists	Block comment	Fabrica\PLC_1 [CPU 1511-1 PN]\Program blocks\Open Library V19\Resources\HMI\fbErrorScroller [FB330]\Network 2\Comment
<?xml version="1.0" encoding="utf-8"?><ProjectText xmlns="http://www.siemens.com/Industry/2009/10/01/Automation/FormattedText"><body> OUT 1 </body></ProjectText>	HMI screen	Text
<?xml version="1.0" encoding="utf-8"?><ProjectText xmlns="http://www.siemens.com/Industry/2009/10/01/Automation/FormattedText"><body> OUT 2 </body></ProjectText>	HMI screen	Text
<?xml version="1.0" encoding="utf-8"?><ProjectText xmlns="http://www.siemens.com/Industry/2009/10/01/Automation/FormattedText"><body> OUT 3 </body></ProjectText>	HMI screen	Text
Out of resources on PLC - @5%s@	HMI runtime	Fabrica\PC-System_1 [SIMATIC PC station]\HMI_RT_2 [WinCC Unified PC RT]\Text and graphic lists\SystemTextList_AllenBradleyEIPAlarmTextListCollection_7\Text_list_entry_4\Text
Out of resources on PLC - @5%s@	HMI runtime	Fabrica\PC-System_1 [SIMATIC PC station]\HMI_RT_2 [WinCC Unified PC RT]\Text and graphic lists\SystemTextList_OmronEIPAlarmTextListCollection_6\Text_list_entry_4\Text

English (United States)	Category	Reference
Out of resources on PLC - @5%s@	HMI runtime	Fabrica\PC-System_1 [SIMATIC PC station]\HMI_RT_2 [WinCC Unified PC RT]\Text and graphic lists\SystemTextList_MitsubishiMCAlarmTextListCollection_4\Text_list_entry_4\Text
Out of resources on PLC - @5%s@	HMI runtime	Fabrica\PC-System_1 [SIMATIC PC station]\HMI_RT_2 [WinCC Unified PC RT]\Text and graphic lists\SystemTextList_MitsubishiiQAlarmTextListCollection_3\Text_list_entry_4\Text
Out of resources on PLC - @4%s@	HMI runtime	Fabrica\PC-System_1 [SIMATIC PC station]\HMI_RT_2 [WinCC Unified PC RT]\Text and graphic lists\SystemTextList_S7PlusAlarmTextListCollection_1\Text_list_entry_4\Text
Out of resources on PLC - @5%s@	HMI runtime	Fabrica\PC-System_1 [SIMATIC PC station]\HMI_RT_2 [WinCC Unified PC RT]\Text and graphic lists\SystemTextList_StdModbusTCPAlarmTextListCollection_5\Text_list_entry_4\Text
Out of resources on PLC - @5%s@	HMI runtime	Fabrica\PC-System_1 [SIMATIC PC station]\HMI_RT_2 [WinCC Unified PC RT]\Text and graphic lists\SystemTextList_StdModbusRTUAlarmTextListCollection_8\Text_list_entry_4\Text
Output = ((ScaledIn - ScaledMin)/ScaledRange)*RawRange + RawMin	Block comment	Fabrica\PLC_1 [CPU 1511-1 PN]\Program blocks\Open Library V19\Resources\IO\fcWriteOutput [FC355]\Network 3\Comment
Output the index of the error that exists.	Block comment	Fabrica\PLC_1 [CPU 1511-1 PN]\Program blocks\Open Library V19\Resources\HMI\fbErrorScroller [FB330]\Network 7\Comment
Output value	Block comment	Fabrica\PLC_1 [CPU 1511-1 PN]\Program blocks\Open Library V19\Devices\fbValve_Analog [FB111]\rOutCommand
Output value for analog write	Block comment	Fabrica\PLC_1 [CPU 1511-1 PN]\Program blocks\Open Library V19\Devices\fbValve_Analog [FB111]\wOutCommand
Output: Auto	Block comment	Fabrica\PLC_1 [CPU 1511-1 PN]\Program blocks\Open Library V19\Devices\fbValve_Solenoid [FB110]\Network 31\Title
Output: Auto	Block comment	Fabrica\PLC_1 [CPU 1511-1 PN]\Program blocks\Open Library V19\Devices\fbValve_Analog [FB111]\Network 23\Title
Output: Command	Block comment	Fabrica\PLC_1 [CPU 1511-1 PN]\Program blocks\Open Library V19\Devices\fbValve_Analog [FB111]\Network 22\Title
Output: Command for analog	Block comment	Fabrica\PLC_1 [CPU 1511-1 PN]\Program blocks\Open Library V19\Devices\fbValve_Analog [FB111]\Network 21\Title
Output: Error	Block comment	Fabrica\PLC_1 [CPU 1511-1 PN]\Program blocks\Open Library V19\Resources\HMI\fbErrorScroller [FB330]\Network 7\Title
Output: Error	Block comment	Fabrica\PLC_1 [CPU 1511-1 PN]\Program blocks\Open Library V19\Devices\fbValve_Solenoid [FB110]\Network 32\Title
Output: Error	Block comment	Fabrica\PLC_1 [CPU 1511-1 PN]\Program blocks\Open Library V19\Devices\fbValve_Analog [FB111]\Network 24\Title
Output: Home Active	Block comment	Fabrica\PLC_1 [CPU 1511-1 PN]\Program blocks\Open Library V19\Devices\fbValve_Solenoid [FB110]\Network 29\Title
Output: Home Command	Block comment	Fabrica\PLC_1 [CPU 1511-1 PN]\Program blocks\Open Library V19\Devices\fbValve_Solenoid [FB110]\Network 27\Title
Output: Work Active	Block comment	Fabrica\PLC_1 [CPU 1511-1 PN]\Program blocks\Open Library V19\Devices\fbValve_Solenoid [FB110]\Network 30\Title
Output: Work Command	Block comment	Fabrica\PLC_1 [CPU 1511-1 PN]\Program blocks\Open Library V19\Devices\fbValve_Solenoid [FB110]\Network 28\Title
Overall error	Block comment	Fabrica\PLC_1 [CPU 1511-1 PN]\PLC data types\Open Library V19\Data Types\HMI\udtHMI_AnalogValveControl\bError
Overload of PLC resources for monitoring HMI-Tags. Maximum of PLC resources - @2%s@.	HMI system event	Fabrica\PC-System_1 [SIMATIC PC station]\HMI_RT_2 [WinCC Unified PC RT]\HMI alarms\PlcResOverloadNotification\Alarm text
Override HMI mode selection	Block comment	Fabrica\PLC_1 [CPU 1511-1 PN]\Program blocks\Open Library V19\Devices\fbValve_Solenoid [FB110]\Network 7\Title
Parameter: 1	Alarm text	Fabrica\PC-System_1 [SIMATIC PC station]\HMI_RT_2 [WinCC Unified PC RT]\HMI alarms\Parameter 1\DisplayName
Parameter: 10	Alarm text	Fabrica\PC-System_1 [SIMATIC PC station]\HMI_RT_2 [WinCC Unified PC RT]\HMI alarms\Parameter 10\DisplayName
Parameter: 2	Alarm text	Fabrica\PC-System_1 [SIMATIC PC station]\HMI_RT_2 [WinCC Unified PC RT]\HMI alarms\Parameter 2\DisplayName
Parameter: 3	Alarm text	Fabrica\PC-System_1 [SIMATIC PC station]\HMI_RT_2 [WinCC Unified PC RT]\HMI alarms\Parameter 3\DisplayName
Parameter: 4	Alarm text	Fabrica\PC-System_1 [SIMATIC PC station]\HMI_RT_2 [WinCC Unified PC RT]\HMI alarms\Parameter 4\DisplayName
Parameter: 5	Alarm text	Fabrica\PC-System_1 [SIMATIC PC station]\HMI_RT_2 [WinCC Unified PC RT]\HMI alarms\Parameter 5\DisplayName
Parameter: 6	Alarm text	Fabrica\PC-System_1 [SIMATIC PC station]\HMI_RT_2 [WinCC Unified PC RT]\HMI alarms\Parameter 6\DisplayName
Parameter: 7	Alarm text	Fabrica\PC-System_1 [SIMATIC PC station]\HMI_RT_2 [WinCC Unified PC RT]\HMI alarms\Parameter 7\DisplayName
Parameter: 8	Alarm text	Fabrica\PC-System_1 [SIMATIC PC station]\HMI_RT_2 [WinCC Unified PC RT]\HMI alarms\Parameter 8\DisplayName
Parameter: 9	Alarm text	Fabrica\PC-System_1 [SIMATIC PC station]\HMI_RT_2 [WinCC Unified PC RT]\HMI alarms\Parameter 9\DisplayName
Pass through enable	Block comment	Fabrica\PLC_1 [CPU 1511-1 PN]\Program blocks\Open Library V19\Resources\HMI\fcHMIBitEnable [FC329]\Network 5\Title
PB Home enabled	Block comment	Fabrica\PLC_1 [CPU 1511-1 PN]\PLC data types\Open Library V19\Data Types\HMI\udtHMI_ValveControl\bPBEN_Home
PB Move to home in manual mode	Block comment	Fabrica\PLC_1 [CPU 1511-1 PN]\PLC data types\Open Library V19\Data Types\HMI\udtHMI_ValveControl\bPB_Home
PB Move to work in manual mode	Block comment	Fabrica\PLC_1 [CPU 1511-1 PN]\PLC data types\Open Library V19\Data Types\HMI\udtHMI_ValveControl\bPB_Work
PB Reset block errors	Block comment	Fabrica\PLC_1 [CPU 1511-1 PN]\PLC data types\Open Library V19\Data Types\HMI\udtHMI_ValveControl\bPB_ResetError
PB Reset error enabled	Block comment	Fabrica\PLC_1 [CPU 1511-1 PN]\PLC data types\Open Library V19\Data Types\HMI\udtHMI_ValveControl\bPBEN_ResetError
PB Reset errors	Block comment	Fabrica\PLC_1 [CPU 1511-1 PN]\PLC data types\Open Library V19\Data Types\HMI\udtHMI_AnalogValveControl\bPB_ResetError
PB reset errors enable	Block comment	Fabrica\PLC_1 [CPU 1511-1 PN]\PLC data types\Open Library V19\Data Types\HMI\udtHMI_AnalogValveControl\bPBEN_ResetError
PB Work enabled	Block comment	Fabrica\PLC_1 [CPU 1511-1 PN]\PLC data types\Open Library V19\Data Types\HMI\udtHMI_ValveControl\bPBEN_Work
PLC certificate expired for PLC - @4%s@	HMI runtime	Fabrica\PC-System_1 [SIMATIC PC station]\HMI_RT_2 [WinCC Unified PC RT]\Text and graphic lists\SystemTextList_S7PlusAlarmTextListCollection_1\Text_list_entry_10\Text
PLC certificate expired for PLC - @5%s@	HMI runtime	Fabrica\PC-System_1 [SIMATIC PC station]\HMI_RT_2 [WinCC Unified PC RT]\Text and graphic lists\SystemTextList_StdModbusTCPAlarmTextListCollection_5\Text_list_entry_10\Text
PLC certificate expired for PLC - @5%s@	HMI runtime	Fabrica\PC-System_1 [SIMATIC PC station]\HMI_RT_2 [WinCC Unified PC RT]\Text and graphic lists\SystemTextList_StdModbusRTUAlarmTextListCollection_8\Text_list_entry_10\Text

English (United States)	Category	Reference
PLC certificate is revoked for PLC - @4%s@	HMI runtime	Fabrica\PC-System_1 [SIMATIC PC station]\HMI_RT_2 [WinCC Unified PC RT]\Text and graphic lists\SystemTextList_S7PlusAlarmTextListCollection_1\Text_list_entry_11\Text
PLC certificate is revoked for PLC - @5%s@	HMI runtime	Fabrica\PC-System_1 [SIMATIC PC station]\HMI_RT_2 [WinCC Unified PC RT]\Text and graphic lists\SystemTextList_StdModbusTCPAlarmTextListCollection_5\Text_list_entry_11\Text
PLC certificate is revoked for PLC - @5%s@	HMI runtime	Fabrica\PC-System_1 [SIMATIC PC station]\HMI_RT_2 [WinCC Unified PC RT]\Text and graphic lists\SystemTextList_StdModbusRTUAlarmTextListCollection_8\Text_list_entry_11\Text
PLC certificate is untrustworthy. Manual trust is not possible for - @4%s@	HMI runtime	Fabrica\PC-System_1 [SIMATIC PC station]\HMI_RT_2 [WinCC Unified PC RT]\Text and graphic lists\SystemTextList_S7PlusAlarmTextListCollection_1\Text_list_entry_13\Text
PLC certificate is untrustworthy. Manual trust is not possible for - @5%s@	HMI runtime	Fabrica\PC-System_1 [SIMATIC PC station]\HMI_RT_2 [WinCC Unified PC RT]\Text and graphic lists\SystemTextList_StdModbusTCPAlarmTextListCollection_5\Text_list_entry_13\Text
PLC certificate is untrustworthy. Manual trust is not possible for - @5%s@	HMI runtime	Fabrica\PC-System_1 [SIMATIC PC station]\HMI_RT_2 [WinCC Unified PC RT]\Text and graphic lists\SystemTextList_StdModbusRTUAlarmTextListCollection_8\Text_list_entry_13\Text
PLC certificate is untrustworthy. Manual trust is possible for - @4%s@	HMI runtime	Fabrica\PC-System_1 [SIMATIC PC station]\HMI_RT_2 [WinCC Unified PC RT]\Text and graphic lists\SystemTextList_S7PlusAlarmTextListCollection_1\Text_list_entry_12\Text
PLC certificate is untrustworthy. Manual trust is possible for - @5%s@	HMI runtime	Fabrica\PC-System_1 [SIMATIC PC station]\HMI_RT_2 [WinCC Unified PC RT]\Text and graphic lists\SystemTextList_StdModbusTCPAlarmTextListCollection_5\Text_list_entry_12\Text
PLC certificate is untrustworthy. Manual trust is possible for - @5%s@	HMI runtime	Fabrica\PC-System_1 [SIMATIC PC station]\HMI_RT_2 [WinCC Unified PC RT]\Text and graphic lists\SystemTextList_StdModbusRTUAlarmTextListCollection_8\Text_list_entry_12\Text
PLC certificate untrusted for - @5%s@	HMI runtime	Fabrica\PC-System_1 [SIMATIC PC station]\HMI_RT_2 [WinCC Unified PC RT]\Text and graphic lists\SystemTextList_AllenBradleyEIPAlarmTextListCollection_7\Text_list_entry_10\Text
PLC certificate untrusted for - @5%s@	HMI runtime	Fabrica\PC-System_1 [SIMATIC PC station]\HMI_RT_2 [WinCC Unified PC RT]\Text and graphic lists\SystemTextList_OmronEIPAlarmTextListCollection_6\Text_list_entry_10\Text
PLC certificate untrusted for - @5%s@	HMI runtime	Fabrica\PC-System_1 [SIMATIC PC station]\HMI_RT_2 [WinCC Unified PC RT]\Text and graphic lists\SystemTextList_MitsubishiMCAlarmTextListCollection_4\Text_list_entry_10\Text
PLC certificate untrusted for - @5%s@	HMI runtime	Fabrica\PC-System_1 [SIMATIC PC station]\HMI_RT_2 [WinCC Unified PC RT]\Text and graphic lists\SystemTextList_MitsubishiiQAlarmTextListCollection_3\Text_list_entry_10\Text
PLC does not support Central alarm management	HMI system event	Fabrica\PC-System_1 [SIMATIC PC station]\HMI_RT_2 [WinCC Unified PC RT]\HMI alarms\FTADisabledNotification\Alarm text
PLS	Block comment	Fabrica\PLC_1 [CPU 1511-1 PN]\Program blocks\FB_Control_Vane [FB1]\Network 2\Title
Pointer to bit and byte address	Block comment	Fabrica\PLC_1 [CPU 1511-1 PN]\PLC data types\Open Library V19\Data Types\Process\udtAnyPointer\dwAddress
Position in the queue	Block comment	Fabrica\PLC_1 [CPU 1511-1 PN]\PLC data types\Open Library V19\Data Types\Process\udtQueueItem\iQueuePosition
Pozitie porcusori initiala	Block comment	Fabrica\PLC_1 [CPU 1511-1 PN]\Program blocks\Main [OB1]\Network 4\Title
Priority number, 0 = default	Block comment	Fabrica\PLC_1 [CPU 1511-1 PN]\PLC data types\Open Library V19\Data Types\Process\udtHandshake\iPriority
Priority number, 0 = default/none	Block comment	Fabrica\PLC_1 [CPU 1511-1 PN]\PLC data types\Open Library V19\Data Types\Process\udtQueueItem\iPriority
PRS	Block comment	Fabrica\PLC_1 [CPU 1511-1 PN]\Program blocks\FB_Control_Vane [FB1]\Network 3\Title
Queue is enabled for dequeuing	Block comment	Fabrica\PLC_1 [CPU 1511-1 PN]\PLC data types\Open Library V19\Data Types\Process\udtQueue\bEnabled
Raw maximum - overflow limit	Block comment	Fabrica\PLC_1 [CPU 1511-1 PN]\Program blocks\Open Library V19\Resources\IO\fcWriteOutput [FC355]\iInRawMax
Raw minimum - underflow limit	Block comment	Fabrica\PLC_1 [CPU 1511-1 PN]\Program blocks\Open Library V19\Resources\IO\fcWriteOutput [FC355]\iInRawMin
Read HMI input buttons	Block comment	Fabrica\PLC_1 [CPU 1511-1 PN]\Program blocks\Open Library V19\Devices\fbValve_Solenoid [FB110]\Network 2\Title
Read HMI input buttons	Block comment	Fabrica\PLC_1 [CPU 1511-1 PN]\Program blocks\Open Library V19\Devices\fbValve_Analog [FB111]\Network 1\Title
Read in actual value	Block comment	Fabrica\PLC_1 [CPU 1511-1 PN]\Program blocks\Open Library V19\Devices\fbValve_Analog [FB111]\Network 3\Title
Recovery of user profile settings started	HMI system event	Fabrica\PC-System_1 [SIMATIC PC station]\HMI_RT_2 [WinCC Unified PC RT]\HMI alarms\UPSSReduRecoveryNotification\Alarm text
Removed	Alarm text	Fabrica\PC-System_1 [SIMATIC PC station]\HMI_RT_2 [WinCC Unified PC RT]\Runtime settings\Alarm_settings_1\RemovedText
Request to be queued	Block comment	Fabrica\PLC_1 [CPU 1511-1 PN]\PLC data types\Open Library V19\Data Types\Process\udtQueueItem\bQueueRequest
Request to open the connection could not be sent	HMI runtime	Fabrica\PC-System_1 [SIMATIC PC station]\HMI_RT_2 [WinCC Unified PC RT]\Text and graphic lists\SystemTextList_S7PlusAlarmTextListCollection_1\Text_list_entry_8\Text
Request to open the connection could not be sent	HMI runtime	Fabrica\PC-System_1 [SIMATIC PC station]\HMI_RT_2 [WinCC Unified PC RT]\Text and graphic lists\SystemTextList_StdModbusTCPAlarmTextListCollection_5\Text_list_entry_8\Text
Request to open the connection could not be sent	HMI runtime	Fabrica\PC-System_1 [SIMATIC PC station]\HMI_RT_2 [WinCC Unified PC RT]\Text and graphic lists\SystemTextList_StdModbusRTUAlarmTextListCollection_8\Text_list_entry_8\Text
Request to open the connection failed - @4%s@	HMI runtime	Fabrica\PC-System_1 [SIMATIC PC station]\HMI_RT_2 [WinCC Unified PC RT]\Text and graphic lists\SystemTextList_S7PlusAlarmTextListCollection_1\Text_list_entry_6\Text
Request to open the connection failed - @5%s@	HMI runtime	Fabrica\PC-System_1 [SIMATIC PC station]\HMI_RT_2 [WinCC Unified PC RT]\Text and graphic lists\SystemTextList_StdModbusTCPAlarmTextListCollection_5\Text_list_entry_6\Text
Request to open the connection failed - @5%s@	HMI runtime	Fabrica\PC-System_1 [SIMATIC PC station]\HMI_RT_2 [WinCC Unified PC RT]\Text and graphic lists\SystemTextList_StdModbusRTUAlarmTextListCollection_8\Text_list_entry_6\Text
Requested amount	Block comment	Fabrica\PLC_1 [CPU 1511-1 PN]\PLC data types\Open Library V19\Data Types\Process\udtHandshake\rSetPoint
Requests array	Block comment	Fabrica\PLC_1 [CPU 1511-1 PN]\PLC data types\Open Library V19\Data Types\Process\udtHandshakes\Handshake
Reset both home and work if not in auto or manual	Block comment	Fabrica\PLC_1 [CPU 1511-1 PN]\Program blocks\Open Library V19\Devices\fbValve_Solenoid [FB110]\Network 16\Title
Reset Error	Block comment	Fabrica\PLC_1 [CPU 1511-1 PN]\Program blocks\Open Library V19\Devices\fbValve_Solenoid [FB110]\bInResetError
Reset errors	Block comment	Fabrica\PLC_1 [CPU 1511-1 PN]\Program blocks\Open Library V19\Devices\fbValve_Analog [FB111]\bInResetError
Reset Errors	Block comment	Fabrica\PLC_1 [CPU 1511-1 PN]\Program blocks\Open Library V19\Devices\fbValve_Analog [FB111]\Network 6\Title
Reset HMI Bit	Block comment	Fabrica\PLC_1 [CPU 1511-1 PN]\Program blocks\Open Library V19\Resources\HMI\fcHMIBitEnable [FC329]\Network 6\Title
Reset home on if not enabled	Block comment	Fabrica\PLC_1 [CPU 1511-1 PN]\Program blocks\Open Library V19\Devices\fbValve_Solenoid [FB110]\Network 14\Title
Reset PLC bit if on and toggling	Block comment	Fabrica\PLC_1 [CPU 1511-1 PN]\Program blocks\Open Library V19\Resources\HMI\fcHMIBitEnable [FC329]\Network 2\Title
Reset work on if not enabled	Block comment	Fabrica\PLC_1 [CPU 1511-1 PN]\Program blocks\Open Library V19\Devices\fbValve_Solenoid [FB110]\Network 15\Title
Revenire din simulare ON / OFF	Block comment	Fabrica\PLC_1 [CPU 1511-1 PN]\Program blocks\Main [OB1]\Network 2\Title

English (United States)	Category	Reference
Revoked certificate	HMI runtime	Fabrica\PC-System_1 [SIMATIC PC station]\HMI_RT_2 [WinCC Unified PC RT]\Text and graphic lists\SystemTextList_RuntimeCollaborationFailureReason_1\Text_list_entry_7\Text
root certificate expired for - @5%s@	HMI runtime	Fabrica\PC-System_1 [SIMATIC PC station]\HMI_RT_2 [WinCC Unified PC RT]\Text and graphic lists\SystemTextList_AllenBradleyEIPAlarmTextListCollection_7\Text_list_entry_9\Text
root certificate expired for - @5%s@	HMI runtime	Fabrica\PC-System_1 [SIMATIC PC station]\HMI_RT_2 [WinCC Unified PC RT]\Text and graphic lists\SystemTextList_OmronEIPAlarmTextListCollection_6\Text_list_entry_9\Text
root certificate expired for - @5%s@	HMI runtime	Fabrica\PC-System_1 [SIMATIC PC station]\HMI_RT_2 [WinCC Unified PC RT]\Text and graphic lists\SystemTextList_MitsubishiMCAlarmTextListCollection_4\Text_list_entry_9\Text
root certificate expired for - @5%s@	HMI runtime	Fabrica\PC-System_1 [SIMATIC PC station]\HMI_RT_2 [WinCC Unified PC RT]\Text and graphic lists\SystemTextList_MitsubishiiQAlarmTextListCollection_3\Text_list_entry_9\Text
Runtime Collaboration: @2%t#<RuntimeCollaborationFailureReason.1>@ during the connection of computer1 (@S1%s@) with system @5%u@ (@6%s@) to @4%s@.	HMI system event	Fabrica\PC-System_1 [SIMATIC PC station]\HMI_RT_2 [WinCC Unified PC RT]\HMI alarms\DistSystemConnectionFailedAlarm\Alarm text
Runtime is not started on the target device.	HMI runtime	Fabrica\PC-System_1 [SIMATIC PC station]\HMI_RT_2 [WinCC Unified PC RT]\Text and graphic lists\SystemTextList_RuntimeCollaborationFailureReason_1\Text_list_entry_3\Text
Scalare senzor presiune PLS	Block comment	Fabrica\PLC_1 [CPU 1511-1 PN]\Program blocks\Main [OB1]\Network 8\Title
Scalare senzor presiune PRS	Block comment	Fabrica\PLC_1 [CPU 1511-1 PN]\Program blocks\Main [OB1]\Network 9\Title
Script Debugger is enabled	HMI system event	Fabrica\PC-System_1 [SIMATIC PC station]\HMI_RT_2 [WinCC Unified PC RT]\HMI alarms\ScriptDebuggerEnabledNotification\Alarm text
Script Debugger is enabled	HMI system event	Fabrica\PC-System_1 [SIMATIC PC station]\HMI_RT_2 [WinCC Unified PC RT]\HMI alarms\ScriptDebuggerEnabledNotification_1\Alarm text
Scroll errors on the HMI	Block comment	Fabrica\PLC_1 [CPU 1511-1 PN]\Program blocks\Open Library V19\Devices\fbValve_Analog [FB111]\Network 18\Title
Scrolls through the error codes for display on the HMI	Block comment	Fabrica\PLC_1 [CPU 1511-1 PN]\Program blocks\Open Library V19\Resources\HMI\fbErrorScroller [FB330]\Block title
Selectie Iesire (OUT1 / OUT2 / OUT3)	Block comment	Fabrica\PLC_1 [CPU 1511-1 PN]\Program blocks\Main [OB1]\Network 14\Title
Selectie Intrare (IN1 / IN2)	Block comment	Fabrica\PLC_1 [CPU 1511-1 PN]\Program blocks\Main [OB1]\Network 13\Title
Set a static bit indicating that we are scrolling. Each pass cycle through the function, we will increment. If there is no error, set the scroll num to 0 and turn off scrolling. It scrolls to an error immediately when an error occurs.	Block comment	Fabrica\PLC_1 [CPU 1511-1 PN]\Program blocks\Open Library V19\Resources\HMI\fbErrorScroller [FB330]\Network 4\Comment
Set actual value based on mode	Block comment	Fabrica\PLC_1 [CPU 1511-1 PN]\Program blocks\Open Library V19\Devices\fbValve_Analog [FB111]\Network 8\Title
Set actual value on e-stop	Block comment	Fabrica\PLC_1 [CPU 1511-1 PN]\Program blocks\Open Library V19\Devices\fbValve_Analog [FB111]\Network 14\Title
Set actual value to 0 on bad mode	Block comment	Fabrica\PLC_1 [CPU 1511-1 PN]\Program blocks\Open Library V19\Devices\fbValve_Analog [FB111]\Network 11\Title
Set actual value to 0 on bad mode or not enabled	Block comment	Fabrica\PLC_1 [CPU 1511-1 PN]\Program blocks\Open Library V19\Devices\fbValve_Analog [FB111]\Network 10\Title
Set bit to scroll for the next error	Block comment	Fabrica\PLC_1 [CPU 1511-1 PN]\Program blocks\Open Library V19\Resources\HMI\fbErrorScroller [FB330]\Network 4\Title
Set ENO	Block comment	Fabrica\PLC_1 [CPU 1511-1 PN]\Program blocks\Open Library V19\Resources\HMI\fbErrorScroller [FB330]\Network 8\Title
Set ENO	Block comment	Fabrica\PLC_1 [CPU 1511-1 PN]\Program blocks\Open Library V19\Resources\HMI\fcHMIBitEnable [FC329]\Network 7\Title
Set ENO	Block comment	Fabrica\PLC_1 [CPU 1511-1 PN]\Program blocks\Open Library V19\Resources\HMI\fcSetHMIStatusSimulation [FC333]\Network 8\Title
Set ENO	Block comment	Fabrica\PLC_1 [CPU 1511-1 PN]\Program blocks\Open Library V19\Devices\fbValve_Solenoid [FB110]\Network 33\Title
Set ENO	Block comment	Fabrica\PLC_1 [CPU 1511-1 PN]\Program blocks\Open Library V19\Resources\Conversion\fcSwapBytes [FC304]\Network 2\Title
Set ENO	Block comment	Fabrica\PLC_1 [CPU 1511-1 PN]\Program blocks\Open Library V19\Resources\IO\fcWriteOutput [FC355]\Network 10\Title
Set ENO	Block comment	Fabrica\PLC_1 [CPU 1511-1 PN]\Program blocks\Open Library V19\Devices\fbValve_Analog [FB111]\Network 25\Title
Set Error	Block comment	Fabrica\PLC_1 [CPU 1511-1 PN]\Program blocks\Open Library V19\Resources\HMI\fcSetHMIStatusSimulation [FC333]\Network 5\Title
Set Estop	Block comment	Fabrica\PLC_1 [CPU 1511-1 PN]\Program blocks\Open Library V19\Resources\HMI\fcSetHMIStatusSimulation [FC333]\Network 6\Title
Set Forward/Work On	Block comment	Fabrica\PLC_1 [CPU 1511-1 PN]\Program blocks\Open Library V19\Resources\HMI\fcSetHMIStatusSimulation [FC333]\Network 2\Title
Set Forward/Work Position	Block comment	Fabrica\PLC_1 [CPU 1511-1 PN]\Program blocks\Open Library V19\Resources\HMI\fcSetHMIStatusSimulation [FC333]\Network 4\Title
Set HMI Estop function	Block comment	Fabrica\PLC_1 [CPU 1511-1 PN]\Program blocks\Open Library V19\Devices\fbValve_Analog [FB111]\Network 12\Title
Set HMI status	Block comment	Fabrica\PLC_1 [CPU 1511-1 PN]\Program blocks\Open Library V19\Devices\fbValve_Solenoid [FB110]\Network 25\Title
Set HMI status	Block comment	Fabrica\PLC_1 [CPU 1511-1 PN]\Program blocks\Open Library V19\Devices\fbValve_Analog [FB111]\Network 19\Title
Set mode override if neccesary	Block comment	Fabrica\PLC_1 [CPU 1511-1 PN]\Program blocks\Open Library V19\Devices\fbValve_Analog [FB111]\Network 7\Title
Set PLC bit if off and toggling	Block comment	Fabrica\PLC_1 [CPU 1511-1 PN]\Program blocks\Open Library V19\Resources\HMI\fcHMIBitEnable [FC329]\Network 3\Title
Set point for an e-stop condition, if selected	Block comment	Fabrica\PLC_1 [CPU 1511-1 PN]\PLC data types\Open Library V19\Data Types\HMI\udtHMI_AnalogValveControl\rEstopSP
Set point for automatic mode	Block comment	Fabrica\PLC_1 [CPU 1511-1 PN]\PLC data types\Open Library V19\Data Types\HMI\udtHMI_AnalogValveControl\rAutoSP
Set point for manual mode	Block comment	Fabrica\PLC_1 [CPU 1511-1 PN]\PLC data types\Open Library V19\Data Types\HMI\udtHMI_AnalogValveControl\rManualSP
Set Reverse/Home On	Block comment	Fabrica\PLC_1 [CPU 1511-1 PN]\Program blocks\Open Library V19\Resources\HMI\fcSetHMIStatusSimulation [FC333]\Network 1\Title
Set Reverse/Home Position	Block comment	Fabrica\PLC_1 [CPU 1511-1 PN]\Program blocks\Open Library V19\Resources\HMI\fcSetHMIStatusSimulation [FC333]\Network 3\Title
Set the automatic mode speed set point	Block comment	Fabrica\PLC_1 [CPU 1511-1 PN]\Program blocks\Open Library V19\Devices\fbValve_Analog [FB111]\Network 2\Title
Set to none/stopped if nothing is selected	Block comment	Fabrica\PLC_1 [CPU 1511-1 PN]\Program blocks\Open Library V19\Resources\HMI\fcSetHMIStatusSimulation [FC333]\Network 7\Title
Sets HMI Status	Block comment	Fabrica\PLC_1 [CPU 1511-1 PN]\Program blocks\Open Library V19\Resources\HMI\fcSetHMIStatusSimulation [FC333]\Block title

English (United States)	Category	Reference
Simulae Vane PRS	Block comment	Fabrica\PLC_1 [CPU 1511-1 PN]\Program blocks\Main [OB1]\Network 52\Title
Simulare ON/OFF	Block comment	Fabrica\PLC_1 [CPU 1511-1 PN]\Program blocks\Main [OB1]\Network 1\Title
Simulare senzori PLS + PRS	Block comment	Fabrica\PLC_1 [CPU 1511-1 PN]\Program blocks\Main [OB1]\Network 53\Title
Simulare trecere 3-4 si 6-7 si 10-11 si 12-13	Block comment	Fabrica\PLC_1 [CPU 1511-1 PN]\Program blocks\Main [OB1]\Network 55\Title
Simulare trecere 4-5	Block comment	Fabrica\PLC_1 [CPU 1511-1 PN]\Program blocks\Main [OB1]\Network 56\Title
Simulare trecere 5-6 si 7-8 si 11-12	Block comment	Fabrica\PLC_1 [CPU 1511-1 PN]\Program blocks\Main [OB1]\Network 57\Title
Simulare vane IN si OUT	Block comment	Fabrica\PLC_1 [CPU 1511-1 PN]\Program blocks\Main [OB1]\Network 50\Title
Simulare vane PLS	Block comment	Fabrica\PLC_1 [CPU 1511-1 PN]\Program blocks\Main [OB1]\Network 51\Title
<?xml version="1.0" encoding="utf-8"?><ProjectText xmlns="http://www.siemens.com/Industry/2009/10/01/Automation/FormattedText"><body> Start </body></ProjectText>	HMI screen	Text
Status for HMI display	Block comment	Fabrica\PLC_1 [CPU 1511-1 PN]\PLC data types\Open Library V19\Data Types\HMI\udtHMI_ValveControl\iStatus
Sub-block to handle error scroller	Block comment	Fabrica\PLC_1 [CPU 1511-1 PN]\Program blocks\Open Library V19\Devices\fbValve_Solenoid [FB110]\ErrorScroller
Swap bytes if necessary	Block comment	Fabrica\PLC_1 [CPU 1511-1 PN]\Program blocks\Open Library V19\Resources\IO\fcWriteOutput [FC355]\Network 8\Title
Swap the bytes	Block comment	Fabrica\PLC_1 [CPU 1511-1 PN]\Program blocks\Open Library V19\Resources\Conversion\fcSwapBytes [FC304]\Network 1\Title
Swap the bytes in a word	Block comment	Fabrica\PLC_1 [CPU 1511-1 PN]\Program blocks\Open Library V19\Resources\Conversion\fcSwapBytes [FC304]\Block title
Synchronization of user profile settings between the devices with ID @1%u@ and @2%u@ failed. Database version mismatch.	HMI system event	Fabrica\PC-System_1 [SIMATIC PC station]\HMI_RT_2 [WinCC Unified PC RT]\HMI alarms\UPSSPeerSyncFailureOnDBVersionMismatch\Alarm text
Synchronization of user profile settings failed. The connection was lost between secondary device with ID @1%u@ and the primary device with ID @2%u@.	HMI system event	Fabrica\PC-System_1 [SIMATIC PC station]\HMI_RT_2 [WinCC Unified PC RT]\HMI alarms\UPSSSyncFailureOnConnectionLossWithSlaveNotification\Alarm text
Synchronizing @1%u@ selections from user profile settings of primary device with ID @2%u@ to user profile settings of secondary device with ID @3%u@.	HMI system event	Fabrica\PC-System_1 [SIMATIC PC station]\HMI_RT_2 [WinCC Unified PC RT]\HMI alarms\UPSSMasterSyncingLargeSelectionsNotification\Alarm text
System alarm	Alarm text	Fabrica\PC-System_1 [SIMATIC PC station]\HMI_RT_2 [WinCC Unified PC RT]\HMI alarms\SystemAlarm\\AlarmClassData_IDisplayNaming_DisplayName
System alarm without clear event	Alarm text	Fabrica\PC-System_1 [SIMATIC PC station]\HMI_RT_2 [WinCC Unified PC RT]\HMI alarms\SystemAlarmWithoutClearEvent\\AlarmClassData_IDisplayNaming_DisplayName
System ID (@3%s@) already exists	HMI runtime	Fabrica\PC-System_1 [SIMATIC PC station]\HMI_RT_2 [WinCC Unified PC RT]\Text and graphic lists\SystemTextList_RuntimeCollaborationFailureReason_1\Text_list_entry_10\Text
System information	Alarm text	Fabrica\PC-System_1 [SIMATIC PC station]\HMI_RT_2 [WinCC Unified PC RT]\HMI alarms\SystemInformation\\AlarmClassData_IDisplayNaming_DisplayName
System name (@3%s@) already exists	HMI runtime	Fabrica\PC-System_1 [SIMATIC PC station]\HMI_RT_2 [WinCC Unified PC RT]\Text and graphic lists\SystemTextList_RuntimeCollaborationFailureReason_1\Text_list_entry_11\Text
System not ready for selection	Block comment	Fabrica\PLC_1 [CPU 1511-1 PN]\PLC data types\Open Library V19\Data Types\Process\udtHandshakes\bSystemReady
System notification	Alarm text	Fabrica\PC-System_1 [SIMATIC PC station]\HMI_RT_2 [WinCC Unified PC RT]\HMI alarms\SystemNotification\\AlarmClassData_IDisplayNaming_DisplayName
System warning	Alarm text	Fabrica\PC-System_1 [SIMATIC PC station]\HMI_RT_2 [WinCC Unified PC RT]\HMI alarms\SystemWarning\\AlarmClassData_IDisplayNaming_DisplayName
System warning without clear event	Alarm text	Fabrica\PC-System_1 [SIMATIC PC station]\HMI_RT_2 [WinCC Unified PC RT]\HMI alarms\SystemWarningWithoutClearEvent\\AlarmClassData_IDisplayNaming_DisplayName
Tags: Acquisition mode @6%s@ is not supported.	HMI runtime	Fabrica\PC-System_1 [SIMATIC PC station]\HMI_RT_2 [WinCC Unified PC RT]\Text and graphic lists\SystemTextList_ConfigErrorAlarmTextLibrary_4\Text_list_entry_5\Text
Tags: Acquisition mode is not supported for address @6%s@.	HMI runtime	Fabrica\PC-System_1 [SIMATIC PC station]\HMI_RT_2 [WinCC Unified PC RT]\Text and graphic lists\SystemTextList_ConfigErrorAlarmTextLibrary_6\Text_list_entry_36\Text
Tags: Address @6%s@ cannot be accessed.	HMI runtime	Fabrica\PC-System_1 [SIMATIC PC station]\HMI_RT_2 [WinCC Unified PC RT]\Text and graphic lists\SystemTextList_ConfigErrorAlarmTextLibrary_6\Text_list_entry_35\Text
Tags: Address @6%s@ does not exist on the server.	HMI runtime	Fabrica\PC-System_1 [SIMATIC PC station]\HMI_RT_2 [WinCC Unified PC RT]\Text and graphic lists\SystemTextList_ConfigErrorAlarmTextLibrary_6\Text_list_entry_34\Text
Tags: Address @6%s@ was rejected	HMI runtime	Fabrica\PC-System_1 [SIMATIC PC station]\HMI_RT_2 [WinCC Unified PC RT]\Text and graphic lists\SystemTextList_ConfigErrorAlarmTextLibrary_4\Text_list_entry_3\Text
Tags: Invalid conversion type	HMI runtime	Fabrica\PC-System_1 [SIMATIC PC station]\HMI_RT_2 [WinCC Unified PC RT]\Text and graphic lists\SystemTextList_ConfigErrorAlarmTextLibrary_5\Text_list_entry_6\Text
Tags: Tag @6%s@ has an invalid value.	HMI runtime	Fabrica\PC-System_1 [SIMATIC PC station]\HMI_RT_2 [WinCC Unified PC RT]\Text and graphic lists\SystemTextList_ConfigErrorAlarmTextLibrary_4\Text_list_entry_9\Text
Tags: Tag @6%s@ was rejected.	HMI runtime	Fabrica\PC-System_1 [SIMATIC PC station]\HMI_RT_2 [WinCC Unified PC RT]\Text and graphic lists\SystemTextList_ConfigErrorAlarmTextLibrary_4\Text_list_entry_8\Text
Tags: The address @6%s@ does not exist in the PLC.	HMI runtime	Fabrica\PC-System_1 [SIMATIC PC station]\HMI_RT_2 [WinCC Unified PC RT]\Text and graphic lists\SystemTextList_ConfigErrorAlarmTextLibrary_5\Text_list_entry_4\Text
Tags: The default conversion type for the address @6%s@ could not be determined.	HMI runtime	Fabrica\PC-System_1 [SIMATIC PC station]\HMI_RT_2 [WinCC Unified PC RT]\Text and graphic lists\SystemTextList_ConfigErrorAlarmTextLibrary_5\Text_list_entry_5\Text
The Collaboration name does not match the expected Collaboration name '@3%s@'	HMI runtime	Fabrica\PC-System_1 [SIMATIC PC station]\HMI_RT_2 [WinCC Unified PC RT]\Text and graphic lists\SystemTextList_RuntimeCollaborationFailureReason_1\Text_list_entry_5\Text
The configured data point node type was deleted in the data point type, but a configured type is still defined for the element: @3%s@.	HMI runtime	Fabrica\PC-System_1 [SIMATIC PC station]\HMI_RT_2 [WinCC Unified PC RT]\Text and graphic lists\SystemTextList_ConfigErrorAlarmTextLibrary_3\Text_list_entry_2\Text
The configured data point type was deleted, but a configured type is still defined for the node type: @3%s@.	HMI runtime	Fabrica\PC-System_1 [SIMATIC PC station]\HMI_RT_2 [WinCC Unified PC RT]\Text and graphic lists\SystemTextList_ConfigErrorAlarmTextLibrary_3\Text_list_entry_1\Text
The function will only increment the scroll num one value per scan. It will scroll until it finds the next active error, then stop scrolling. Roll iNextScrollNum to 0 if it exceeds 30.	Block comment	Fabrica\PLC_1 [CPU 1511-1 PN]\Program blocks\Open Library V19\Resources\HMI\fbErrorScroller [FB330]\Network 5\Comment
The queue	Block comment	Fabrica\PLC_1 [CPU 1511-1 PN]\PLC data types\Open Library V19\Data Types\Process\udtQueue\Item
The registration of user profile settings from the secondary device failed. The connection was lost between the devices with ID @1%u@ and ID @2%u@.	HMI system event	Fabrica\PC-System_1 [SIMATIC PC station]\HMI_RT_2 [WinCC Unified PC RT]\HMI alarms\UPSSSlaveRegistrationFailureOnConnectionLossWithMasterNotification\Alarm text



English (United States)	Category	Reference
The registration of user profile settings from the secondary device with the user profile settings of the primary device with ID @1%u@ failed. Database version mismatch.	HMI system event	Fabrica\PC-System_1 [SIMATIC PC station]\HMI_RT_2 [WinCC Unified PC RT]\HMI alarms\UPSSSlaveRegistrationFailureOnDbVersionMismatchNotification\Alarm text
The System ID does not match the expected System ID (@3%s@)	HMI runtime	Fabrica\PC-System_1 [SIMATIC PC station]\HMI_RT_2 [WinCC Unified PC RT]\Text and graphic lists\SystemTextList_RuntimeCollaborationFailureReason_1\Text_list_entry_4\Text
The system is not running or there is a network problem	HMI runtime	Fabrica\PC-System_1 [SIMATIC PC station]\HMI_RT_2 [WinCC Unified PC RT]\Text and graphic lists\SystemTextList_RuntimeCollaborationFailureReason_1\Text_list_entry_2\Text
The time difference is too big.	HMI runtime	Fabrica\PC-System_1 [SIMATIC PC station]\HMI_RT_2 [WinCC Unified PC RT]\Text and graphic lists\SystemTextList_RuntimeCollaborationFailureReason_1\Text_list_entry_8\Text
Time delay for errors	Block comment	Fabrica\PLC_1 [CPU 1511-1 PN]\Program blocks\Open Library V19\Devices\fbValve_Solenoid [FB110]\Network 18\Comment
Timeout time for an actuator's feedback to activate before giving a fault	Block comment	Fabrica\PLC_1 [CPU 1511-1 PN]\Program blocks\Open Library V19\Devices\fbValve_Solenoid [FB110]\tInTimeout
Timeout timer	Block comment	Fabrica\PLC_1 [CPU 1511-1 PN]\Program blocks\Open Library V19\Devices\fbValve_Solenoid [FB110]\Network 18\Title
Timer for Error Timeout	Block comment	Fabrica\PLC_1 [CPU 1511-1 PN]\Program blocks\Open Library V19\Devices\fbValve_Solenoid [FB110]\TON_TimeOut
Timer to change displayed error	Block comment	Fabrica\PLC_1 [CPU 1511-1 PN]\Program blocks\Open Library V19\Resources\HMI\fbErrorScroller [FB330]\Network 3\Title
Tolerance for actual value	Block comment	Fabrica\PLC_1 [CPU 1511-1 PN]\Program blocks\Open Library V19\Devices\fbValve_Analog [FB111]\crTolerance
Umplere cu apa intre porcusori	Block comment	Fabrica\PLC_1 [CPU 1511-1 PN]\Program blocks\Main [OB1]\Network 32\Title
Unexpected OPC UA server response: @6%s@	HMI runtime	Fabrica\PC-System_1 [SIMATIC PC station]\HMI_RT_2 [WinCC Unified PC RT]\Text and graphic lists\SystemTextList_ConfigErrorAlarmTextLibrary_6\Text_list_entry_49\Text
Unknown error (@3%s@)	HMI runtime	Fabrica\PC-System_1 [SIMATIC PC station]\HMI_RT_2 [WinCC Unified PC RT]\Text and graphic lists\SystemTextList_RuntimeCollaborationFailureReason_1\Text_list_entry_1\Text
Unsupported version @6%s@ of the address	HMI runtime	Fabrica\PC-System_1 [SIMATIC PC station]\HMI_RT_2 [WinCC Unified PC RT]\Text and graphic lists\SystemTextList_ConfigErrorAlarmTextLibrary_6\Text_list_entry_48\Text
Update the signal home bit	Block comment	Fabrica\PLC_1 [CPU 1511-1 PN]\Program blocks\Open Library V19\Devices\fbValve_Solenoid [FB110]\Network 3\Title
Update the signal work bit	Block comment	Fabrica\PLC_1 [CPU 1511-1 PN]\Program blocks\Open Library V19\Devices\fbValve_Solenoid [FB110]\Network 4\Title
Valve error structure	Block comment	Fabrica\PLC_1 [CPU 1511-1 PN]\Program blocks\Open Library V19\Devices\fbValve_Solenoid [FB110]\ERROR_Valve
Valve feedback is not within command tolerance	Block comment	Fabrica\PLC_1 [CPU 1511-1 PN]\PLC data types\Open Library V19\Data Types\Error\udtError_AnalogValve\InvalidFeedback
Valve interlocked	Block comment	Fabrica\PLC_1 [CPU 1511-1 PN]\PLC data types\Open Library V19\Data Types\HMI\udtHMI_ValveControl\bInterlock
Valve Interlocked	Block comment	Fabrica\PLC_1 [CPU 1511-1 PN]\PLC data types\Open Library V19\Data Types\HMI\udtHMI_AnalogValveControl\bInterlock
Valve is Enabled to Operate	Block comment	Fabrica\PLC_1 [CPU 1511-1 PN]\Program blocks\Open Library V19\Devices\fbValve_Analog [FB111]\bInEnable
Valve is in home position	Block comment	Fabrica\PLC_1 [CPU 1511-1 PN]\Program blocks\Open Library V19\Devices\fbValve_Solenoid [FB110]\bOutActiveHome
Valve is in work position	Block comment	Fabrica\PLC_1 [CPU 1511-1 PN]\Program blocks\Open Library V19\Devices\fbValve_Solenoid [FB110]\bOutActiveWork
Verificare finala parametrii pozitie start	Block comment	Fabrica\PLC_1 [CPU 1511-1 PN]\Program blocks\Main [OB1]\Network 12\Title
Verificare incheiere proces umplere apa	Block comment	Fabrica\PLC_1 [CPU 1511-1 PN]\Program blocks\Main [OB1]\Network 34\Title
Verificare porci PLS	Block comment	Fabrica\PLC_1 [CPU 1511-1 PN]\Program blocks\Main [OB1]\Network 36\Title
Verificare porcusori PRS si senzori presiune etapa 1	Block comment	Fabrica\PLC_1 [CPU 1511-1 PN]\Program blocks\Main [OB1]\Network 28\Title
Verificare porcusori PRS si senzori presiune etapa 2	Block comment	Fabrica\PLC_1 [CPU 1511-1 PN]\Program blocks\Main [OB1]\Network 30\Title
Verificare poz initiala vane IN + OUT	Block comment	Fabrica\PLC_1 [CPU 1511-1 PN]\Program blocks\Main [OB1]\Network 7\Title
Verificare senzor presiune PLS	Block comment	Fabrica\PLC_1 [CPU 1511-1 PN]\Program blocks\Main [OB1]\Network 10\Title
Verificare senzor presiune PRS	Block comment	Fabrica\PLC_1 [CPU 1511-1 PN]\Program blocks\Main [OB1]\Network 11\Title
Verificare teava libera (vane IN + OUT inchise)	Block comment	Fabrica\PLC_1 [CPU 1511-1 PN]\Program blocks\Main [OB1]\Network 26\Title
Verificare traseu valid	Block comment	Fabrica\PLC_1 [CPU 1511-1 PN]\Program blocks\Main [OB1]\Network 15\Title
Verificare vane inchise Receiver pozitie initiala	Block comment	Fabrica\PLC_1 [CPU 1511-1 PN]\Program blocks\Main [OB1]\Network 6\Title
Verificare vane inchise Sender pozitie initiala	Block comment	Fabrica\PLC_1 [CPU 1511-1 PN]\Program blocks\Main [OB1]\Network 5\Title
Warning	Alarm text	Fabrica\PC-System_1 [SIMATIC PC station]\HMI_RT_2 [WinCC Unified PC RT]\HMI alarms\Warning\\AlarmClassData_IDisplayNaming_DisplayName
Warning with reset	Alarm text	Fabrica\PC-System_1 [SIMATIC PC station]\HMI_RT_2 [WinCC Unified PC RT]\HMI alarms\WarningWithReset\\AlarmClassData_IDisplayNaming_DisplayName
Word to be swapped	Block comment	Fabrica\PLC_1 [CPU 1511-1 PN]\Program blocks\Open Library V19\Resources\Conversion\fcSwapBytes [FC304]\wInWord
Work command is on	Block comment	Fabrica\PLC_1 [CPU 1511-1 PN]\PLC data types\Open Library V19\Data Types\HMI\udtHMI_ValveControl\bWorkOn
Work feedback	Block comment	Fabrica\PLC_1 [CPU 1511-1 PN]\PLC data types\Open Library V19\Data Types\HMI\udtHMI_ValveControl\bSignalWork
Work position command	Block comment	Fabrica\PLC_1 [CPU 1511-1 PN]\Program blocks\Open Library V19\Devices\fbValve_Solenoid [FB110]\bOutCommandWork
Work position enabled	Block comment	Fabrica\PLC_1 [CPU 1511-1 PN]\Program blocks\Open Library V19\Devices\fbValve_Solenoid [FB110]\bEnableWork
Work position feedback	Block comment	Fabrica\PLC_1 [CPU 1511-1 PN]\Program blocks\Open Library V19\Devices\fbValve_Solenoid [FB110]\bInSignalWork
Work position feedback not active	Block comment	Fabrica\PLC_1 [CPU 1511-1 PN]\PLC data types\Open Library V19\Data Types\Error\udtError_Valve\NoWorkFeedback
Work position feedback still active	Block comment	Fabrica\PLC_1 [CPU 1511-1 PN]\PLC data types\Open Library V19\Data Types\Error\udtError_Valve\WorkFeedbackStillActive
Work position still active	Block comment	Fabrica\PLC_1 [CPU 1511-1 PN]\Program blocks\Open Library V19\Devices\fbValve_Solenoid [FB110]\Network 22\Comment
Wrapper function for setting the HMI status of a device In order of priority: 1. E-stop 2. Error 3. Forward/Work Position 4. Reverse/Home Position 5. Forward/Work On 6. Reverse/Home On 7. None	Block comment	Fabrica\PLC_1 [CPU 1511-1 PN]\Program blocks\Open Library V19\Resources\HMI\fcSetHMIStatusSimulation [FC333]\Block comment
Write output	Block comment	Fabrica\PLC_1 [CPU 1511-1 PN]\Program blocks\Open Library V19\Resources\IO\fcWriteOutput [FC355]\Network 9\Title

English (United States)	Category	Reference
Writes a scaled output	Block comment	Fabrica\PLC_1 [CPU 1511-1 PN]\Program blocks\Open Library V19\Resources\IO\fcWriteOutput [FC355]\Block title
Wrong or unknown certificate	HMI runtime	Fabrica\PC-System_1 [SIMATIC PC station]\HMI_RT_2 [WinCC Unified PC RT]\Text and graphic lists\SystemTextList_RuntimeCollaborationFailureReason_1\Text_list_entry_6\Text


Fabrica / Languages & resources

Project graphics



Down_Arrow

Standard graphic	English (United States)
	
Dithering mode	
Same color	Same color
Smoothing	
Disabled	Disabled


Home

Standard graphic	English (United States)
	
Dithering mode	
Same color	Same color
Smoothing	
Disabled	Disabled


Left_Arrow

Standard graphic	English (United States)
	
Dithering mode	
Same color	Same color
Smoothing	
Disabled	Disabled

Right_Arrow

Standard graphic	English (United States)
	
Dithering mode	
Same color	Same color
Smoothing	
Disabled	Disabled

Up_Arrow

Standard graphic	English (United States)
	
Dithering mode	
Same color	Same color
Smoothing	
Disabled	Disabled