# **Specification of Make files for Modules** and **Applications**

Version 0.08 draft

## Specification of Make files for Modules and Applications

Introduction	3
•	
How common make files work?	
<b>C</b> 11	
	D. Identifiers

#### 1. Introduction

This document outlines the specification of make build system used by SDK. This is meant for module/component developers and integrators of these modules. The document gives details of module and application make files.

#### 2. Structure

The following figure gives a high level view of the structure of the make files.

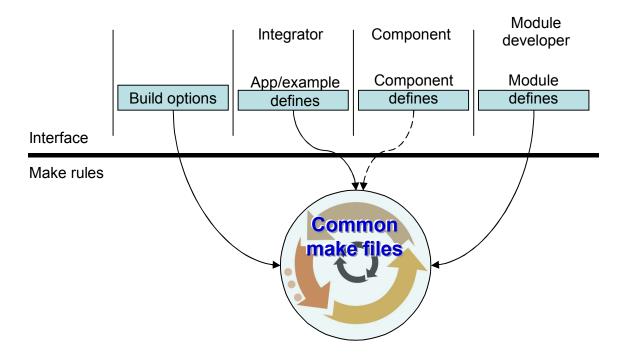


Figure 2.1

The make rules are implemented in a common set of make files that are used by module/component developers, middle-ware developers, sub-system integrators and high level app developers/integrators.

#### a. Makerules:

The complex part of make files is usually the rules – targets, dependencies and recipes. These are created as a template and shared and re-used across all levels of software stack. For example, rules to compile, archive and link for each of the ISAs are implemented as a part of these common make files. Other common build steps that are typically required to

build TI's software, eg. XDC specific build steps, are also a part of these common make files.

#### b. Interfaces:

- These common make rules are "configured" to work in a specific way. These would come from the "build options" that are defined by those who run the build. The option could be, for example, to build the complete stack for "little" endian-ness or build for ELF binary format, etc.
- Going from the highest level of the software stack, the integrators would integrate components and modules, add system/sub-system application/framework source code and would build an application or sub-system. They would specify app/example defines in the application's makefile to specify things like list of components/modules that are needed by the application, etc.
- In the next level, we have components. The definition of a component here is, it is just a collection of modules. Hence, in the strict sense it does not "use" common make files. The component's makefile would call other makefiles that of modules and examples/apps that consume the modules. It would define several characteristics of the component and its modules. For example, relative path of each of the modules from the packages repository are defined. This makefile would also iterate the build process for multiple cores or platforms, etc. as needed.
- The lowest level is a module. The makefiles of the modules specify the source files that would need to be compiled and archived in module's library, location of source files and the external interfaces (header files) that it includes, etc.

The defines in all these above levels of software stack are used by the common make files to build the required targets.

## 3. Specification

This section describes the specification of make files. Name of identifiers and variable names are specified here.

#### a. Make variables

The following table lists all the make variables that are set from either application makefiles or module makefiles. These variables are used by the common make files. It is important to maintain the case of the variables.

	Variables in both application and module makefiles		
Sl	Make variable	Description	
1	SRCDIR	List of directories (each space separated) where the source files are located. These directories would be relative to the directory where "makefile" for the app/module is located (top-level directory of the app/module).	
2	INCDIR	List of directories (each space separated) where the local header files are located. These directories would be relative to the directory where "makefile" for the app/module is located (top-level directory of the app/module).	
3	INCLUDE_EXTERNAL_INTERFACES	List of names of components whose interface header files the app/module includes in the source code.	
4	SRCS_COMMON	List of all C files (each space separated) which are common across platforms, cores, ISAs and SoCs.	
5	SRCS_ <identifier></identifier>	List of C files (each space separated) which are specific to the <identifier>. Here, <identifier> could be:</identifier></identifier>	

only for ti816x-evm (Netra EVM)
<soc> eg: SRCS_ti816x lists C</soc>
source files that are specific only
for ti816x (Netra SOC, but any
platform based on Netra – EVM or
simulator, etc).
NOTE: List of all core names,
platform names, etc are listed later
in the document

Table 3.1

The following table lists the variables that are required to be set by the module makefile (other than what is mentioned in *Table 3.1*).

Variables required to be defined by module makefiles		
Sl Make variable Description		
1	MODULE_NAME	A unique single word that identifies the module. This name is used everywhere else in the make build system to identify the module.

*Table 3.2* 

The following table lists the variables that are required to be set by the application/example makefile (other than what is mentioned in *Table 3.1*).

Variables required to be defined by application makefiles		defined by application makefiles
SI	Make variable	Description
1	APP_NAME	A unique single word that identifies
		the application/example. This name is
		used everywhere else in the make
		build system to identify the
		application
2	COMP_LIST_ <core></core>	List of name of components/modules
		(each space separated) that are
		required by the application to build the
		executable for <core>. Each <core></core></core>
		used by the application should have
		this entry separately.
3	XDC_CFG_FILE_ <core></core>	If the application uses XDC
		packages//components, then this has
		the file name of the configuration file
		name of the CFG file (this is parsed
		and used by the XDC's configuro

		command.
4	EXTLIB_LIST_ <core></core>	List of names of components/modules whose libraries have to be linked into the executable for <core></core>

Table 3.3

The following table lists the variables that are required to be set by the component's make files, typically "component.mk" file that is found at the top-level directory of the component.

	Variables required to be defined by component make files (typically		
Sl	component Make variable	Description	
1	<mod>_RELPATH</mod>	Relative path (from the packages repository of the component) of the module <mod>. Each of the modules that are in the component have to have a separate entry.</mod>	
2	<mod>_PATH</mod>	This has the absolute path of the module <mod>. This has to be set by appending <mod>_RELPATH to <comp>_PATH (<comp> is the name of the component) which would be set in the environment.</comp></comp></mod></mod>	
3	<mod>_INCLUDE</mod>	List of directories (each space separated) that contains the interface header files that are required to be included by other modules and applications that use this module	
4	<mod>_PLATFORM_DEPENDENCY</mod>	Specifies if the module <mod> is dependent on platforms or not. If set to "yes" (note: all lower case), then the object files and libraries are created under <platform> directory, so that each platform for which it is built, we'd have a separate copy of the libraries/objs. If it is set to "no" or blank or not defined at all, then it signifies that this module does not change based on platforms.</platform></mod>	
5	<mod>_CORE_DEPENDENCY</mod>	Specifies if the module <mod> is dependent on core or not. If set to "yes" (note: all lower case), then the</mod>	

		object files and libraries are created under <core> directory, so that each core for which it is built, we'd have a separate copy of the libraries/objs. If it is set to "no" or blank or not defined at all, then it signifies that this module does not change based on core.</core>
6	<mod>_APP_STAGE_FILES</mod>	List of names of source files (each space separated) belonging to the module <mod> that have to be compiled as a part of the application stage make build step. The file path should be relative to the makefile of the module (ot top-level of the module). This could be link time configuration of the module or any other source that has to be built in the context of an application (typically, if it is app-dependent). If it is blank or not defined at all, then it is taken that there are no source files of the module that have to be compiled in the context of the application</mod>
7	<mod>_PKG_LIST</mod>	List of names of sub-modules that are in the module. Note that each of these sub-modules has to have separate variables described above (1-6). If this is blank or not defined at all, then there are no sub-modules.
8	<comp>_LIB_LIST</comp>	List of names of modules that are a part of the component <comp> whose libraries have to be linked when the component is supplied as a pre-built component.</comp>

Table 3.4

## b. Identifiers

All other identifiers used in the make files are listed in the table below.

Identifiers used in the make files
------------------------------------

Sl	identifier	Description	
1	<pre><place <pre=""><place <pre=""><pre><pre><pre><pre><pre><pre><pre></pre></pre></pre></pre></pre></pre></pre></place></place></pre>	Valid values are:	
		ti816x-evm (Netra EVM)	
		ti814x-evm (Centaurus EVM)	
		ti816x-sim (Netra Simulator)	
		Note: These can be extended in future to	
		add similar platforms	
2	<soc></soc>	Valid values are:	
		ti816x (Netra)	
		ti814x (Centaurus)	
		These values are not directly set by the	
		user. These are derived from the	
		<platform></platform>	
3	<core></core>	Valid values are:	
		c6xdsp (c6x DSP core)	
		m3video (ARM® Cortex <sup>TM</sup> M3 core 0	
		of Ducati)	
		m3vpss (ARM® Cortex <sup>TM</sup> M3 core 1	
		of Ducati)	
		a8host (ARM® Cortex <sup>TM</sup> A8 – Host	
		processor)	
4	<isa></isa>	Valid values are:	
		C674x (ISA value for DSP core on	
		Netra and Centaurus)	
		m3 (ISA value for ARM® Cortex <sup>TM</sup> M3)	
		a8 (ISA value for ARM® Cortex <sup>TM</sup> A8)	

Table 3.5

NOTE: Please note that the values for the identifiers above maybe extended further as we support more platforms, SOCs and applications scenarios.

## c. Build options

The following table are lists the build time options that can be either set in build\_config.mk or at the command line. The command line settings would take precedence over the ones set in build\_config.mk.

Build options that are used in common make files			
Sl	Sl Make variable Description		
1	ENDIAN	This specifies the endian-ness of the objects and binaries to be built. Valid values are: big (big-endian)	

		little (little-endian)
		======================================
	TODA (A.E.	
2	FORMAT	This specifies the format of the binaries
		to be built. Valid values are:
		COFF (COFF format)
		ELF (ELF format)
3	PLATFORM	Platform for which the object and
		binaries are being built for. The value
		set here would be same that is
		translated to <platform> identifier in</platform>
		the rest of the make files. Valid values:
		Valid values are:
		ti816x-evm (Netra EVM)
		ti814x-evm (Centaurus EVM)
		ti816x-sim (Netra Simulator)
4	PLATFORM_MEM	The external (DDR) memory available
		on the platform. Valid values:
		1024M (1 gigabytes)
		512M (512 megabytes)
		Note: The setting here is used to select
		the memory map and linker command
		files. The supported values can change
		based on the feasibility of fitting all
		required objects into the available
	CELACE CLODAL Silentifica	space.
5	CFLAGS_GLOBAL_ <identifier></identifier>	C compiler switches that are global in
		nature (applies to everything that is
		built) for the given <identifier>. Here <identifier> can be <pre><ple><pre>classian</pre></ple></pre></identifier></identifier>
		<pre><core>, <isa> or <soc></soc></isa></core></pre>
6	LNKFLAGS_GLOBAL_ <identifier></identifier>	Linker switches that are global in
0	LINKI LAGS_GLOBAL_\identifici>	nature (similar to CFLAGS)
		nature (similar to C1 E7 105)
7	PROFILE_ <core></core>	The profile for which the build is being
		done for. Valid values:
		debug (debug profile)
		whole_program_debug
		(Whole_program_debug profile)
		The debug profile is typically used
		during development and debugging.
		However, the performance may not be
		good.
		The whole pressure debug is tomically
		The whole_program_debug is typically

used after the "debug" build is functionally working. This profile might improve the performance to a great extent, as it optimizes to the highest possible level.
Please note the comments in the build_config.mk while setting, as toolchain for some of the cores (ISAs) don't support whole_program_debug profile. Also note that more such profiles could be added in the future.

Table 3.6

#### 4. How these make files work?

Now that all the necessary variables and identifiers are familiar, this chapter describes how the common make files work on these variables. This section gives a brief overview of the flow

#### a. Building modules

The module level makefile is typically called either while building the application that consumes it or by the release process of the component to which the module belongs.

The make for the module is invoked something like

```
make -C $(<mod> PATH)
```

which tells make to look out for a "makefile" under <mod>\_PATH and build the default target specified. The module makefile sets MODULE\_NAME (refer table 3.2) and other required variables in table 3.1. It then "includes" a common make file "common.mk". This file has some of the common make rules and also includes other necessary common make files. The default make target is specified in common.mk, which is to compile and create an archive (library) for the module.

The common make files uses the variables that are set in the module makefile appropriately. For example, the INCLUDE\_EXTERNAL\_INTERFACES variable is acted upon in the following manner:

A loop iterates for each of the "word"s (component/module name) in this variable and value of <"word">\_INCLUDE variable (which has the absolute path of the directories that has the interface header files for the module "word") is used to specify the include search path (for example, prefixing each directory with "-I" switch).

## b. Building applications

The application makefile is typically called from a top-level make file. This is required because the same makefile needs to be iterated for each of the cores for which the binaries have to be built. Something like this:

```
make -C $(<app>_EXAMPLE_PATH) CORE=m3video
make -C $(<app>_EXAMPLE_PATH) CORE=m3vpss
make -C $(<app> EXAMPLE PATH) CORE=a8host
```

Each of the above lines would generate an executable for the core specified. This too, like module makefile, includes "common.mk", which specifies the targets required to build the application. It goes about doing it in the following steps:

- It uses the value of COMP\_LIST\_<core> to get a list of dependent modules for the application on <core>. It iterates a through a loop for each of these modules and calls the module's makefile (in the same fashion as described in section 4.a and ensures that the libraries for the module is up-to-date.
- Builds the source files of the application
- Builds those source files of the modules that are marked to be compiled at application stage (via <mod>\_APP\_STAGE\_FILES).
- Links all the module's libraries and the objects generated in the last two steps and creates an executable

# 5. Appendix

List of common make files:

This is the common make file that
defines rules that are common across
platforms/cores/ISAs. This also includes
other common make files
Rules make file for each of the
supported ISAs. Example: rules m3.mk,
rules_a8.mk
This make file has all the platform
specific defines that are commonly used
This file has build options that are
typically changed during the build time
This file sets paths for various
components, modules and tools that are
used within the make files

The last two files – build\_config.mk and env.mk are only required to be changed by the end-user who wants to run make to build.