

A MULTI-SENSOR LOCKSTEP SIMULATION ENVIRONMENT FOR DEVELOPING GNSS-DENIED UAS NAVIGATION

Pedro Henrique Blatt Machado

Instituto Tecnológico de Aeronáutica (ITA), São José dos Campos, SP, BRAZIL

pedro.blatt@ita.br

André Kuroswiski

Instituto de Controle do Espaço Aéreo (ICEA), São José dos Campos, SP, BRAZIL

andre.kuroswiski@icea.gov.br

ABSTRACT

Developing navigation for GNSS-denied urban flight needs an environment that can withhold GNSS on demand, expose every remaining sensor, and still provide exact ground truth. We present such an environment: a high-fidelity urban scene in Cosys-AirSim coupled in lockstep to an unmodified PX4 autopilot, where GNSS aiding is revoked *during flight* through a single estimator parameter while inertial, barometric, magnetic, ranging, and visual streams are logged against simulator truth at 20 Hz. Because the autopilot is the real flight stack and the coupling is MAVLink throughout, the same scenario definition drives software- and hardware-in-the-loop without modification. We demonstrate the environment with an inertial drift baseline ($|e| \approx 0.15t^{1.92}$ over 3 runs) and by replaying a factor-graph smoother on the identical denied windows, reducing median terminal error from 88 m to 3.1 m. The environment, not any single estimator, is the contribution; absolute values are simulator-specific.

1 INTRODUCTION

Estimators that fuse inertial, visual, and ranging measurements in a factor-graph formulation (Dellaert and Kaess 2017) are a leading route to urban flight where GNSS is unreliable. Developing them is limited less by estimator theory than by obtaining synchronized multi-modal measurements during a controlled GNSS outage, with position truth accurate enough to grade the result. Flight tests supply realism but no truth and no repeatability; replayed public datasets supply neither a controllable outage nor a closed loop through a real autopilot.

This abstract contributes a simulation environment that closes that gap. Its properties are: (i) lockstep coupling between a photorealistic urban scene and an unmodified PX4 flight stack; (ii) GNSS revocation as a scenario variable applied in flight, leaving the sensor model untouched; (iii) synchronized logging of the remaining sensor suite against ground truth, in the form a factor-graph smoother consumes; and (iv) a MAVLink-only interface, so scenarios migrate to hardware-in-the-loop unchanged.

2 SIMULATION ENVIRONMENT

Vehicle dynamics, sensors, and the urban scene (Figure 1) come from Cosys-AirSim (Jansen, Verreycken, Schouten, Simon, Cornelis, and Hellinckx 2023). State estimation and control come from PX4 SITL, coupled over TCP in lockstep so simulator and autopilot never free-run relative to each other. A MAVSDK client commands the profile—arm, climb to 250 m, then a straight 250 m leg—and logs the EKF2 estimate against simulator truth. Estimate and truth are time-aligned with a measured transport delay before errors are formed.

GNSS revocation as a scenario variable. Outages clear the estimator’s GNSS fusion mask at a configured ground-truth point, without restarting the autopilot or altering the simulated receiver, so only the

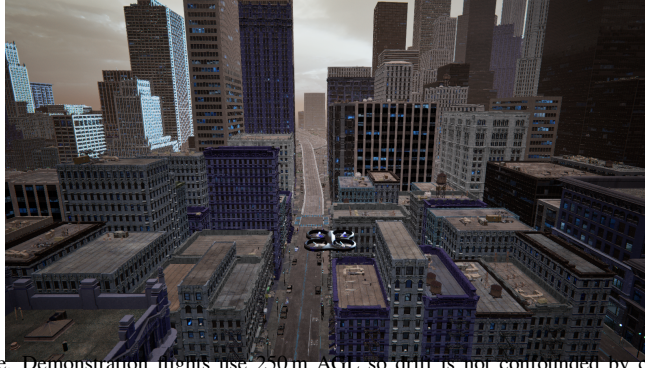


Figure 1: Simulated urban scene. Demonstration flights use 250m AGL so drift is not confounded by collisions with the high-rise canopy.

estimator is perturbed. The height reference is moved to barometric before flight (reboot-scoped), because leaving it at its GNSS default removes every altitude source when GNSS is cut.

Recorded streams. Each run logs local position, truth, raw inertial, barometric and magnetic measurements, and per-sweep LiDAR structure on one time base. Repetitions reuse a warm estimator that has reconverged with GNSS aiding before each outage; fusion is restored between flights so denied windows remain independent even when the autopilot process is not restarted.

3 DEMONSTRATION

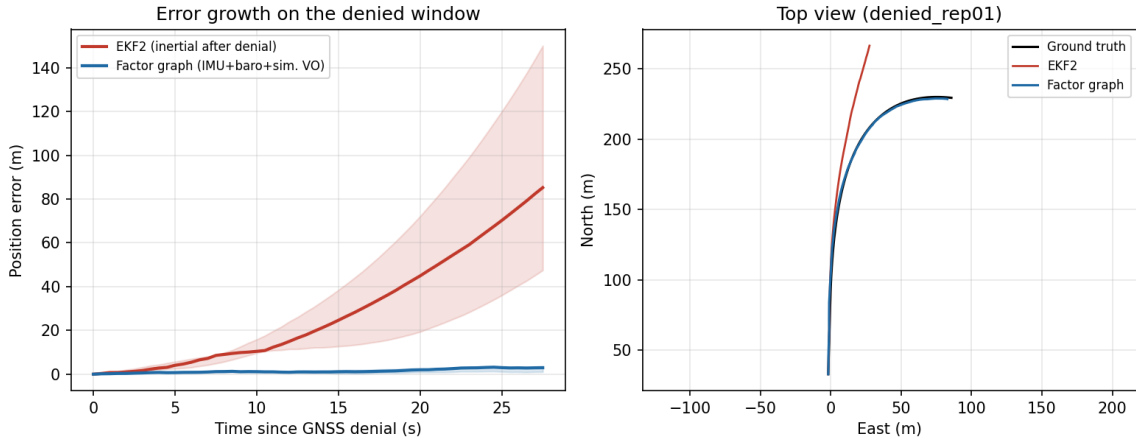


Figure 2: Left: position error after GNSS denial—EKF2 inertial baseline versus a factor-graph smoother on the same logs (median and p05–p95, $N=3$). Right: top view for a representative run.

Over 3 repetitions, EKF2 position error during the outage grows as $|e| \approx 0.15t^{1.92}$, reaching 86 m median (66–308) after about 33 s—the inertial reference a navigation estimator must beat. As a first consumer of the logged streams, we replay a batch factor-graph smoother with IMU and barometric factors from the CSV plus simulated visual relative-pose factors (ground truth with 0.12 m noise), standing in for a VIO front-end until camera logs are wired. On the same denied windows the smoother cuts median terminal error from 88 m to 3.1 m (about 28 $\times$; Figure 2), showing that the environment supports graded comparison of estimator structure under a controlled outage.

4 CONCLUSIONS AND ONGOING WORK

The environment supplies controllable outages, synchronized sensing, exact truth, and repeatability with a real autopilot in the loop. Absolute drift reflects the simulator’s inertial noise model rather than a specific airframe. Ongoing work replaces the simulated visual factors with a real image front-end on the same scenarios, extends revocation toward receiver-level urban multipath, and moves the profiles to hardware-in-the-loop unchanged over MAVLink.

REFERENCES

- Dellaert, F., and M. Kaess. 2017. “Factor Graphs for Robot Perception”. *Foundations and Trends in Robotics* 6(1–2):1–139.
- Jansen, W., E. Verreycken, A. Schouten, D. Simon, C. Cornelis, and P. Hellinckx. 2023. “Cosys-AirSim: A Simulation Framework for Multi-Modal Sensing in UAV Applications”. In *Proc. International Conference on Unmanned Aircraft Systems (ICUAS)*, 1–8.