


Coupled-Line BPF 5000 MHz Design Variables

Parameter	Value
Substrate	RO4003C
ϵ_r	3.55
h	0.508 mm
$\tan \delta$	0.0029
W50	1.100 mm
L1	8.930 mm
W1	0.760 mm
S1	0.103 mm
L2	8.780 mm
W2	1.080 mm
S2	0.520 mm
Lfeed	5.0 mm
f_0	5000 MHz
Sweep	2500 – 7500 MHz
Simulation time	0.93 min

Coupled-Line BPF 5000 MHz - S-parameters

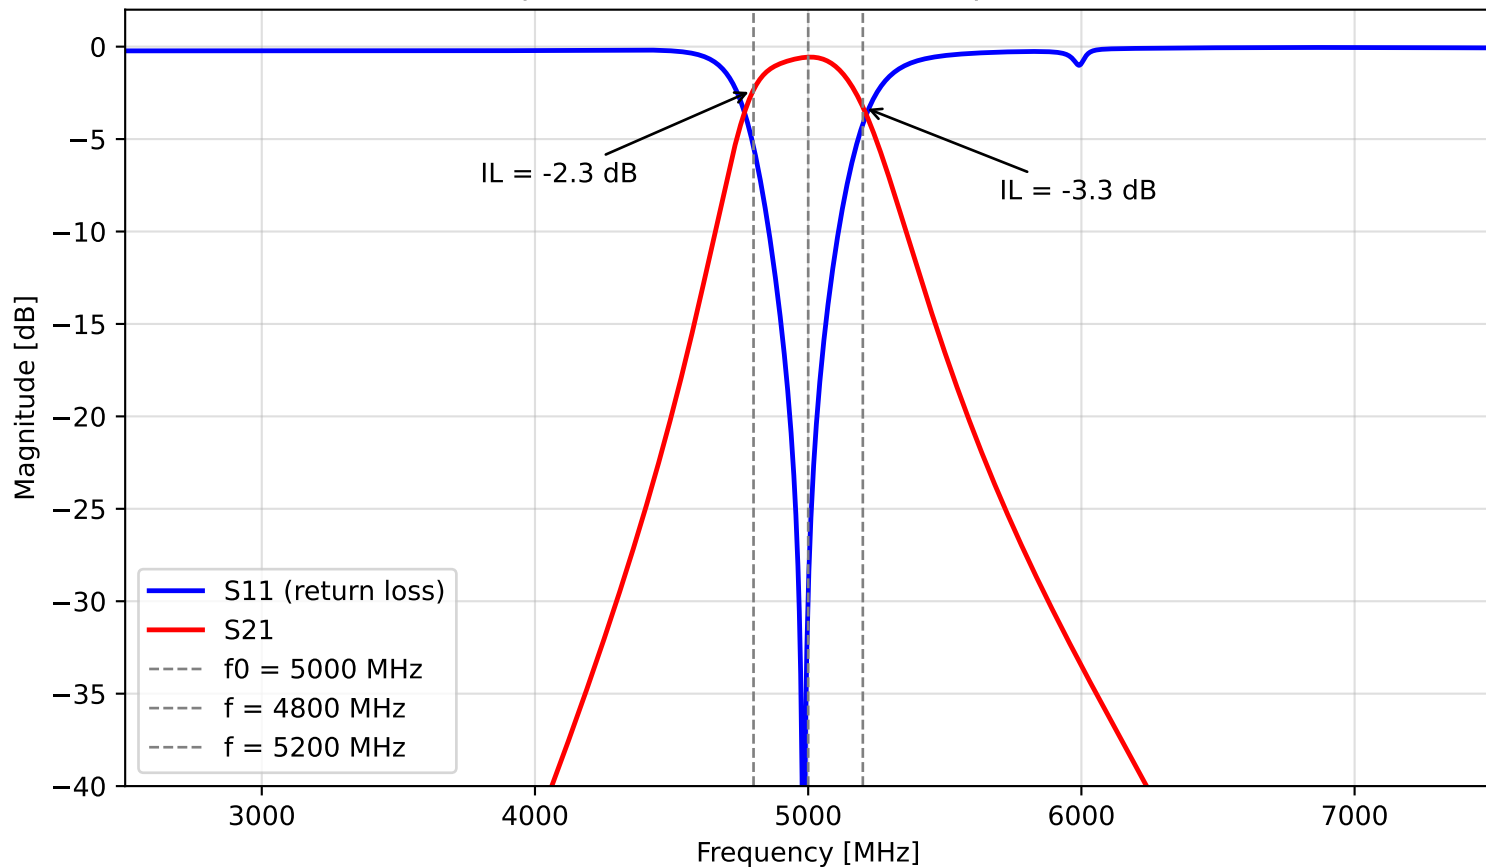

Coupled-Line BPF 5000 MHz - S-parameters

