


## Coupled-Line BPF 5000 MHz Design Variables

| Parameter       | Value           |
|-----------------|-----------------|
| Substrate       | RO4003C         |
| $\epsilon_r$    | 3.55            |
| h               | 0.508 mm        |
| $\tan \delta$   | 0.0029          |
| W50             | 1.100 mm        |
| L1              | 8.930 mm        |
| W1              | 0.760 mm        |
| S1              | 0.103 mm        |
| L2              | 8.780 mm        |
| W2              | 1.080 mm        |
| S2              | 0.520 mm        |
| Lfeed           | 5.0 mm          |
| $f_0$           | 5000 MHz        |
| Sweep           | 2500 – 7500 MHz |
| Simulation time | 2.12 min        |

Coupled-Line BPF 5000 MHz - S-parameters

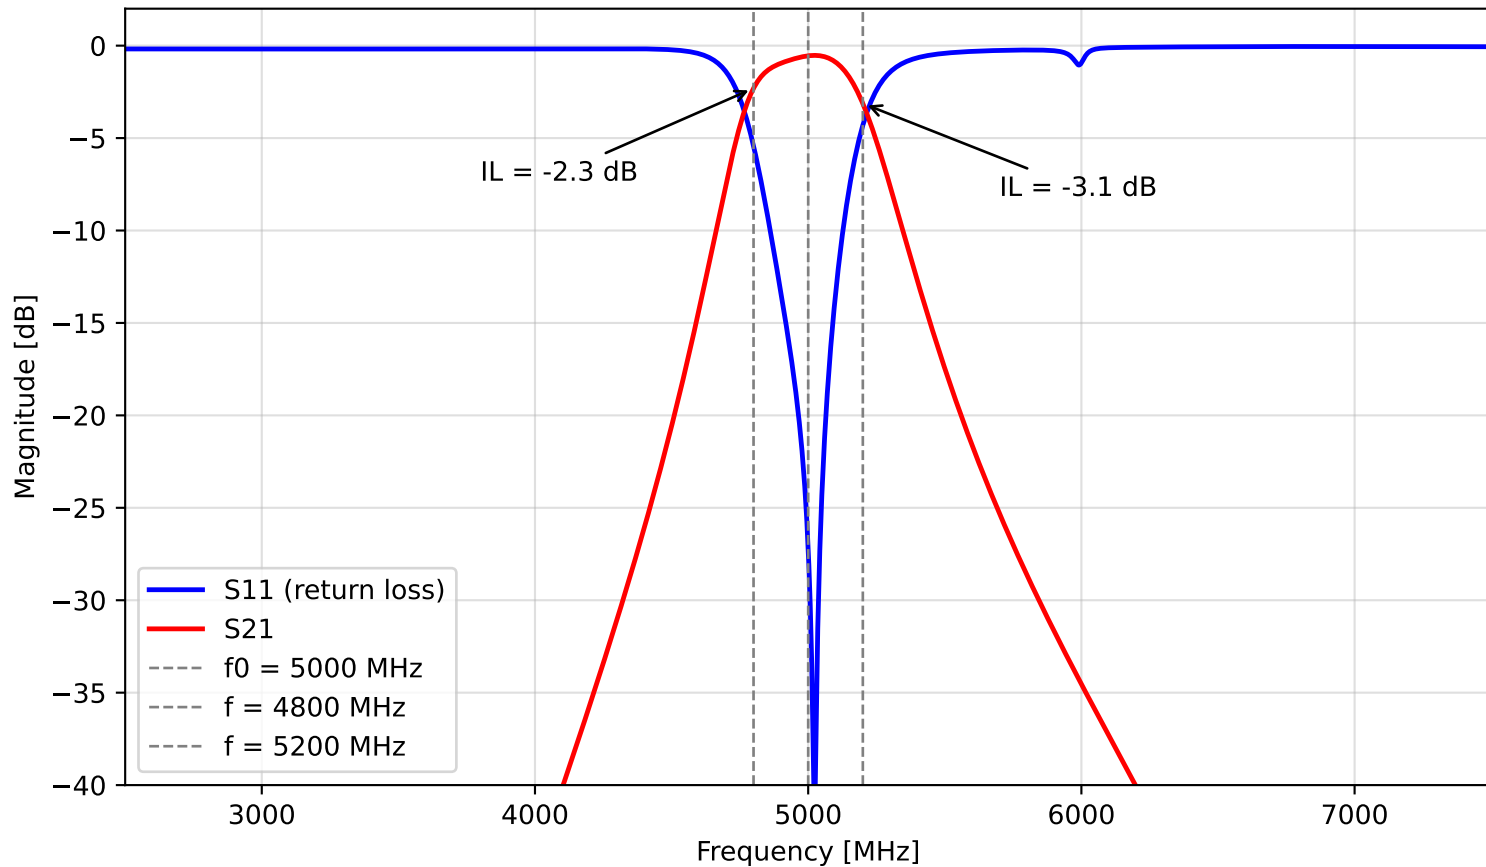

Coupled-Line BPF 5000 MHz - S-parameters

