


**Double-Box Branch-Line Coupler 2000 MHz
Design Variables**

Parameter	Value
Substrate	RO4003C
ϵ_r	3.55
h	0.508 mm
$\tan \delta$	0.0029
W50	1.100 mm
W35	1.900 mm
W121	0.100 mm
L_x ($\lambda/4$)	22.2 mm
L_y ($\lambda/4$)	22.2 mm
L_{feed}	5.0 mm
f_0	2000 MHz
Sweep	10 – 4000 MHz
Simulation time	2.35 min

Double-Box Branch-Line Coupler 2000 MHz - S-parameters

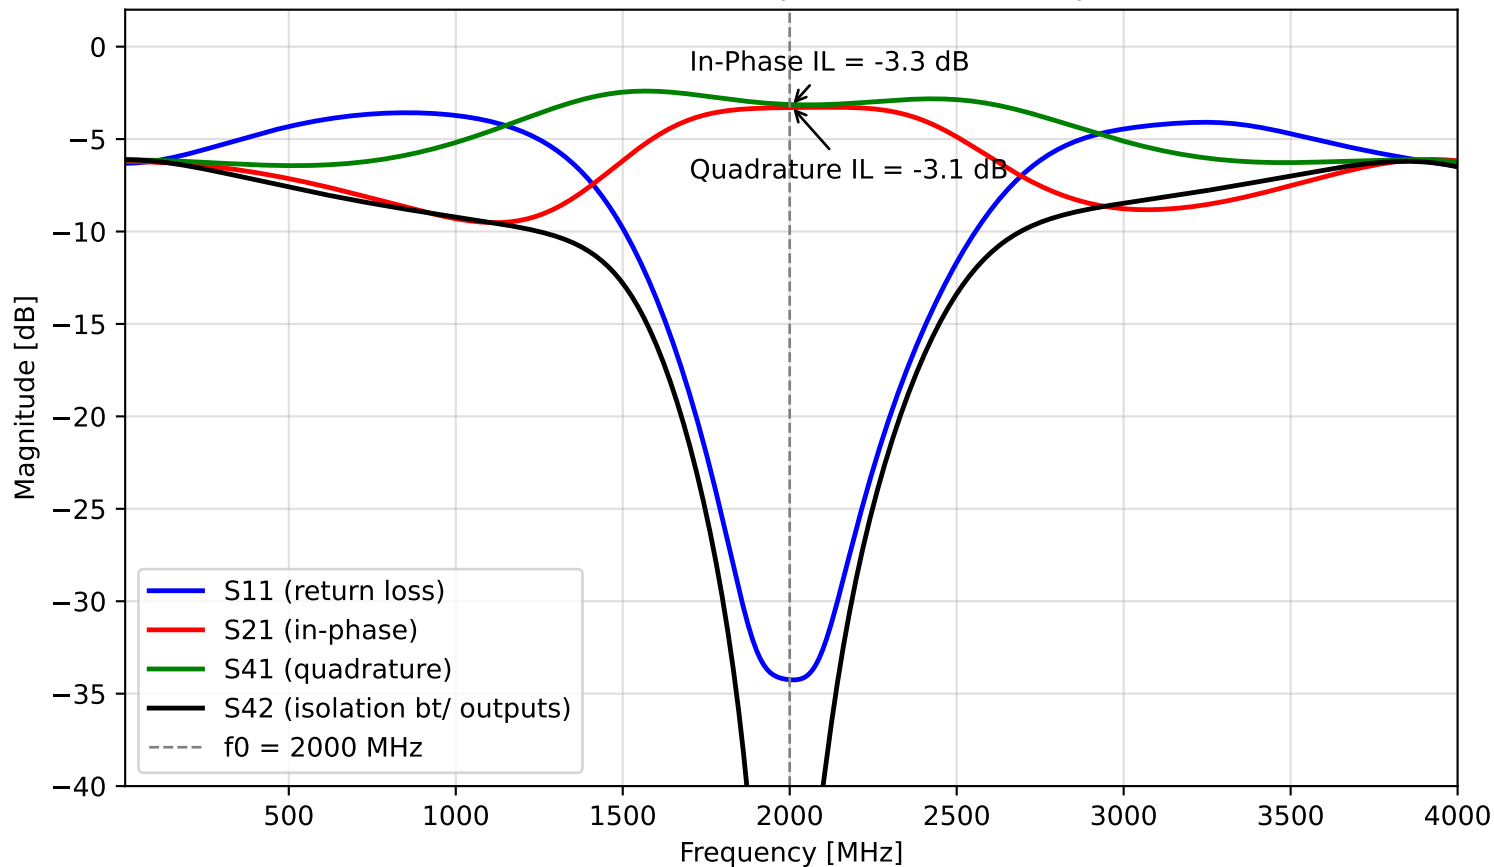

Double-Box Branch-Line Coupler 2000 MHz - Phase difference (I vs Q)

