

# Contents

<b>1</b>	<b>A motivation for studying fluid-structure interaction</b>	<b>3</b>
<b>2</b>	<b>Governing equations</b>	<b>5</b>
2.1	Continuum Mechanics . . . . .	5
2.2	The Lagrangian and Eulerian description of motion . . . . .	6
2.3	The deformation gradient . . . . .	8
2.4	The solid problem . . . . .	9
2.5	The Fluid problem . . . . .	11
<b>3</b>	<b>Fluid Structure Interaction</b>	<b>13</b>
3.1	Choice of coordinate system . . . . .	13
3.2	Fully Eulerian . . . . .	15
3.3	Arbitrary Lagrangian Eulerian formulation . . . . .	15
3.4	Discretization of the FSI problem . . . . .	21
3.4.1	Finite Element method . . . . .	21
3.4.2	Variational Formulation . . . . .	22
<b>4</b>	<b>Verification and Validation</b>	<b>25</b>
4.1	Verification of Code . . . . .	26
4.1.1	Method of manufactured solution . . . . .	27
4.1.2	Verification of the fluid-structure interaction solver by MMS	29
4.2	Validation . . . . .	29
<b>5</b>	<b>Implementation of a Fluid-Structure Interaction solver</b>	<b>31</b>
5.1	Black-box solvers versus a self-made implementation . . . . .	31
5.2	FEniCS . . . . .	32
5.2.1	DOLFIN . . . . .	32
5.2.2	Poission Equation, hello world . . . . .	33
5.3	implemented code . . . . .	34
<b>6</b>	<b>Time discretization and optimalization</b>	<b>37</b>
6.1	Implementation of a one-step $\theta$ scheme . . . . .	38
<b>7</b>	<b>Numerical Results</b>	<b>41</b>
7.1	Verification . . . . .	41
7.1.1	Fluid Problem . . . . .	41
7.2	Validation of a One-step $\theta$ scheme . . . . .	43

7.2.1	Validation of fluid solver . . . . .	45
7.2.2	Discussion of results . . . . .	47
7.2.3	Validation of solid solver . . . . .	49
7.2.4	Discussion of results . . . . .	49
7.2.5	Validation of fluid structure interaction solver . . . . .	51
7.2.6	Discussion of results . . . . .	56
7.3	Investigation of temporal stability . . . . .	57
7.4	Optimization of Newtonsolver . . . . .	59
7.5	Consistent methods . . . . .	59
7.5.1	Jacobi buffering . . . . .	59
7.6	Non-consisten methods . . . . .	60
7.6.1	Reuse of Jacobian . . . . .	60
7.6.2	Quadrature reduce . . . . .	60



# Chapter 1

## Governing equations

**Computational** fluid-structure interaction (**CFSI**) is a multi-physics field of science, combining two separate fields of computational mechanics, computational fluid dynamics (CFD), and computational structure dynamics (CSM). While CFD and CSM traditionally have been considered as two distinct fields of science, the goal of CFSI is to combine the separate fluid and structure problems, and their interaction or *coupling* to one another. Therefore, the study CFSI demands understanding of each separate field. This chapter presents the governing equations of the individual fluid and structure problem. Balance laws for each separate problem, together with auxiliary kinematic, dynamic and material relations will be described briefly.

### 1.1 Continuum Mechanics

To interpret nature, mathematical models are needed to describe how object around us reacts to external and/or internal stimuli. ~~The mathematical models forms a basis for establishing elementary conservation laws and partial differential equations (PDE's);~~ making scientist and engineers not only able to understand physical phenomena, but also predict them.

~~Fluid and solids are both materials~~ built up by a sequence of atoms, meaning on a microscopic level, an observer will locate discontinuties and space within the material. Evaluating each atom, or *material point*, is not impossible from a mathematical point of view. However, for mathematical modeling and applications, the evaluation of each material point remains unpractical. In ~~Continuum mechanics~~, first formulated by Augustin-Louis Cauchy [17], the microscopic structure of materials are ignored, assuming the material of interest is *continuously distributed* in **space**.

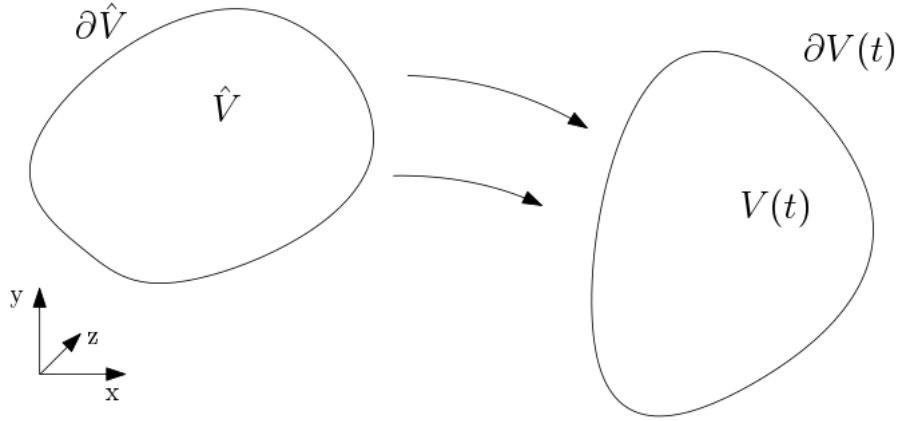


Figure 1.1: Unitpotato

A *continuum* is defined as a *volume*  $V(t) \subset \mathbb{R}^d$   $d \in (2, 3)$ , continuously distributed throughout its own volume. The initial shape of the continuum, the *reference configuration*  $V(t = t_0) = \hat{V}$ , is assumed to be stress free. When the *continuum* undergoes deformation due to applied internal or external forces, the new configuration  $V(t)$  for  $t \geq t_0$ , deviates from its *reference configuration*. The new configuration  $V(t) \neq \hat{V}$ , is defined as the *current configuration*. If the continuum undergoes no deformation, the *reference* and *current* configuration simply coincide.

## 1.2 The Lagrangian and Eulerian description of motion

~~A fundamental difference between fluid and structure mechanics is the description of motion, the Lagrangian and Eulerian description.~~ Within structure mechanics, deformation of a continuum due to internal/external forces are of primary interest. When the continuum undergoes deformation, it will deviate from its *reference configuration*  $\hat{V}$ . To measure the deformation, one must know the relative position of some particle  $x(t) \in V(t)$ , from its original configuration  $\hat{\mathbf{x}} \in \hat{V}$ .

Let  $\hat{\mathbf{x}}$  be a particle in the reference  $\hat{\mathbf{x}} \in \hat{V}$ . Further let  $x(\hat{\mathbf{x}}, t)$  be the new location of a particle  $\hat{\mathbf{x}}$  for some time  $t$  such that  $x \in V(t)$ . Assume ~~no two particles~~  $\hat{\mathbf{x}}_a, \hat{\mathbf{x}}_b \in \hat{V}$  occupy the same location for some time  $V(t)$ . Then the transformation  $\hat{T}(\hat{\mathbf{x}}, t) = x(\hat{\mathbf{x}}, t)$  maps a particle  $\hat{\mathbf{x}}$  from the *reference configuration*  $\hat{V}$ , to the *current configuration*  $V(t)$ . Assuming that the path for some  $\hat{\mathbf{x}}$  is continuous in time, the inverse mapping  $\hat{T}^{-1}(x, t) = \hat{\mathbf{x}}(x, t)$ , maps  $x(\hat{\mathbf{x}}, t)$  back to its initial location at time  $t = t_0$ .

These mappings lets us track each particle from some *reference configuration* to some deformed state at time  $t$ . Tracking each particle  $\hat{\mathbf{x}} \in \hat{V}$  is often denoted the *Lagrangian Framework* and is a natural choice of describing structure mechanics.

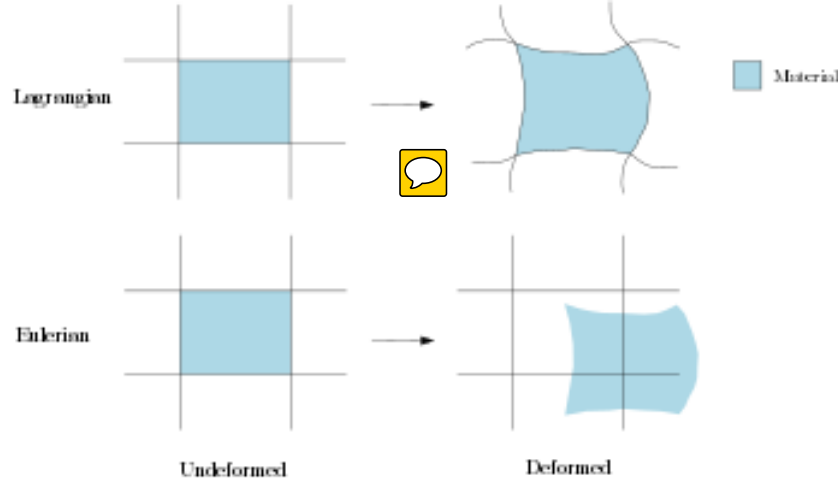


Figure 1.2: Comparison of the Lagrangian and Eulerian description of motion

By some particle  $\mathbf{x} \in \hat{\mathbf{V}}$ , the *deformation*  $\hat{\mathbf{u}}(\hat{\mathbf{x}}, t)$  is given by the relation

$$\hat{\mathbf{u}}(\hat{\mathbf{x}}, t) = \mathbf{x}(\hat{\mathbf{x}}, t) - \hat{\mathbf{x}} = \hat{\mathbf{T}}(\hat{\mathbf{x}}, t) \quad (1.1)$$

and the *deformation velocity* is given by the time derivative of *deformation* such that

$$\hat{\mathbf{v}}(\hat{\mathbf{x}}, t) = d_t \mathbf{x}(\hat{\mathbf{x}}, t) = d_t \hat{\mathbf{u}}(\hat{\mathbf{x}}, t) = \frac{\partial \hat{\mathbf{T}}(\hat{\mathbf{x}}, t)}{\partial t} \quad (1.2)$$

Considering a flow of fluid particles in a river, a *Lagrangian* description of the particles would be tedious as the number of particles entering and leaving the domain quickly rise to a immense number. Instead consider defining a view-point  $V$  fixed in time, and monitor every fluid particle passing the coordinate  $x \in V(t)$  as time elapses. Such a description is defined as the *Eulerian framework*. Therefore the Eulerian formulation is natural for describing fluid dynamics.

We can describe the particles occupying the *current configuration*  $V(t)$  for some time  $t \geq t_0$

$$\mathbf{x} = \hat{\mathbf{x}} + \hat{\mathbf{u}}(\hat{\mathbf{x}}, t)$$

Since our domain is fixed we can define the deformation for a particle occupying position  $\mathbf{x} = \mathbf{x}(\hat{\mathbf{x}}, t)$  as

$$\mathbf{u}(\mathbf{x}, t) = \hat{\mathbf{u}}(\hat{\mathbf{x}}, t) = \mathbf{x} - \hat{\mathbf{x}}$$

and its velocity

$$\mathbf{v}(\mathbf{x}, t) = \partial_t \mathbf{u}(\mathbf{x}, t) = \partial_t \hat{\mathbf{u}}(\hat{\mathbf{x}}, t) = \hat{\mathbf{v}}(\hat{\mathbf{x}}, t)$$

It is important to mention that the we are not interested in which particle is occupying a certain point in our domain, but only its properties.

### 1.3 The deformation gradient

Deformation is a major property of interest when a continuum is influenced by external and internal forces. The deformation results in relative change of position of material particles, called *strain*. and is the primary property that causes and describe *stress*.

Strain is purely an observation, and it is not dependent on the material of interest. However one expects that a material undergoing strain, will give forces within a continuum due to neighboring material particles interacting with one another. Therefore one derive material specific models to describe how a certain material will react to a certain amount of strain. These strain measures are used to define models for *stress*, which is responsible for the deformation in materials [10]. Stress is defined as the internal forces that particles within a continuous material exert on each other, with dimension force per unit area.

The equations of continuum mechanics can be derived with respect to either a deformed or undeformed configuration. The choice of referring our equations to the current or reference configuration is indifferent from a theoretical point of view. In practice however this choice can have a severe impact on our strategy of solution methods and physical of modelling. [43]. Regardless of configuration, the *deformation gradient* and *determinant of the deformation gradient* are essential measurement in structure mechanics. By [23], both configurations are considered.

#### Reference configuration

**Definition 1.1.** Let  $\hat{\mathbf{u}}$  be a differential deformation field in the *reference* configuration,  $I$  be the Identity matrix and the gradient  $\hat{\nabla} = (\frac{\partial}{\partial x}, \frac{\partial}{\partial y}, \frac{\partial}{\partial z})$ . Then the *deformation gradient* is given by,

$$\hat{\mathbf{F}} = I + \hat{\nabla} \hat{\mathbf{u}} \quad (1.3)$$

*expressing the local change of relative position under deformation.*

**Definition 1.2.** Let  $\hat{\mathbf{u}}$  be a differential deformation field in the *reference* configuration,  $I$  be the Identity matrix and the gradient  $\hat{\nabla} = (\frac{\partial}{\partial x}, \frac{\partial}{\partial y}, \frac{\partial}{\partial z})$ . Then the *determinant of the deformation gradient* is given by,

$$J = \det(\hat{\mathbf{F}}) = \det(I + \hat{\nabla} \hat{\mathbf{u}}) \quad (1.4)$$

*expressing the local change of volume the configuration.*

From the assumption of linear operator  $\mathbf{F}$ , and no two particles  $\hat{\mathbf{x}}_a, \hat{\mathbf{x}}_b \in \hat{V}$  occupy the same location for some time  $V(t)$ ,  $J$  to be greater than 0 [43].

## Current configuration

**Definition 1.3.** Let  $\mathbf{u}$  be a differential deformation field in the *reference* configuration,  $I$  be the Identity matrix and the gradient  $\nabla = (\frac{\partial}{\partial x}, \frac{\partial}{\partial y}, \frac{\partial}{\partial z})$ . Then the *deformation gradient* is given by,

$$\mathbf{F} = I - \nabla \mathbf{u} \quad (1.5)$$

*expressing the local change of relative position under deformation.*

**Definition 1.4.** Let  $\mathbf{u}$  be a differential deformation field in the *reference* configuration,  $I$  be the Identity matrix and the gradient  $\nabla = (\frac{\partial}{\partial x}, \frac{\partial}{\partial y}, \frac{\partial}{\partial z})$ . Then the *determinant of the deformation gradient* is given by,

$$J = \det(\mathbf{F}) = \det(I - \nabla \mathbf{u}) \quad (1.6)$$

*expressing the local change of volume the configuration.*

## 1.4 The solid problem

The governing equations for the solid mechanics are given by **the balance law**,

**Equation 1.4.1.** *Solid momentum*

$$\rho_s \frac{\partial \hat{\mathbf{v}}_s}{\partial t} = \nabla \cdot \hat{\mathbf{S}} + \rho_s \mathbf{f}_s \quad \text{in } \hat{\Omega}_s \quad (1.7)$$

$$\frac{\partial \hat{\mathbf{v}}_s}{\partial t} = \hat{\mathbf{u}}_s \quad \text{in } \hat{\Omega}_s \quad (1.8)$$

defined in a Lagrangian coordinate system, with respect to an initial reference configuration  $\hat{\Omega}_s$ . The structure configuration is given by the displacement  $\hat{\mathbf{u}}_s$ , with the relation  $\frac{\partial \hat{\mathbf{v}}}{\partial t} = \hat{\mathbf{u}}_s$  to the solid velocity. The density of the structure is given by  $\rho_s$ , and  $\hat{\mathbf{f}}_s$  express any exterior body forces acting. Finally,  $\hat{\mathbf{S}}$  is the **second** Piola-Kirchhoff stress tensor, related to the Cauchy-stress tensor by,

$$\hat{\mathbf{S}}_s = J \hat{\mathbf{F}}^{-1} \sigma_s \hat{\mathbf{F}}^{-T}$$

The elasticity of the material is expressed by the **Poisson ratio**  $\nu_s$ , **Young modulus**  $E$ , or Lamé coefficients  $\lambda_s$  and  $\mu_s$ . Their relation is given by,

$$E_y = \frac{\mu_s(\lambda_s + 2\mu_s)}{(\lambda_s + \mu_s)} \quad \nu_s = \frac{\lambda_s}{2(\lambda_s + \mu_s)}$$

$$\lambda_s = \frac{\nu E_y}{(1 + \nu_s)(1 - 2\nu_s)} \quad \mu_s = \frac{E_y}{2(1 + \nu_s)}$$

~~Material models express the dependency between strain tensors and stress.~~ The validity of material models is often limited by their ability to handle deformation and strain to some extent, before it breaks down or yields ~~nonphysical~~ observations of the material. For ~~small deformations~~, **Hooke's law** assumes a linear relation between strain and stress,



**Definition 1.5.** Let  $\hat{u}$  be a differential deformation field in the *reference* configuration,  $I$  be the Identity matrix and the gradient  $\hat{\nabla} = (\frac{\partial}{\partial x}, \frac{\partial}{\partial y}, \frac{\partial}{\partial z})$ . Hooke's law is then given by,

$$\begin{aligned}\sigma_s &= \frac{1}{\hat{J}} \hat{\mathbf{F}} (\lambda_s (Tr(\epsilon)I + 2\mu\epsilon) \hat{\mathbf{F}}^{-T}) \\ \hat{\mathbf{S}}_s &= \lambda_s (Tr(\epsilon)I + 2\mu\epsilon) \\ \epsilon &= \frac{1}{2} (\hat{\nabla} \hat{\mathbf{u}} + (\hat{\nabla} \hat{\mathbf{u}})^T)\end{aligned}$$

Hooke's law is however limited to a small-deformation regime, and is not applicable for larger deformations encountered in this thesis. A valid model for larger deformations is the hyper-elastic *St. Venant-Kirchhoff model* (STVK), extending Hooke's law into a non-linear regime.

**Definition 1.6.** Let  $\hat{u}$  be a differential deformation field in the *reference* configuration,  $I$  be the Identity matrix and the gradient  $\hat{\nabla} = (\frac{\partial}{\partial x}, \frac{\partial}{\partial y}, \frac{\partial}{\partial z})$ . The *St. Venant-Kirchhoff model* is then given by the relation,

$$\begin{aligned}\sigma_s &= \frac{1}{\hat{J}} \hat{\mathbf{F}} (\lambda_s (Tr(\hat{\mathbf{E}})I + 2\mu\hat{\mathbf{E}}) \hat{\mathbf{F}}^{-T}) \\ \hat{\mathbf{S}}_s &= \lambda_s (Tr(\hat{\mathbf{E}})I + 2\mu\hat{\mathbf{E}}) \\ \hat{\mathbf{E}} &= \frac{1}{2} (\hat{\mathbf{C}} - I) \quad \hat{\mathbf{C}} = \hat{\mathbf{F}} \hat{\mathbf{F}}^{-T}\end{aligned}$$

where  $\hat{\mathbf{C}}$  is the right Cauchy-Green strain tensor and  $\hat{\mathbf{E}}$  is the Green Lagrangian strain tensor <sup>1</sup>

Though STVK can handle large deformations, it is not valid for large strain [21]. However since the strain considered in this thesis are small, it will remain our primary choice of strain-stress relation. STVK describes materials of compressible nature, but it should be mentioned that for large deformation models describing incompressible materials can be considered. Specially the Incompressible Neo-Hooke (INH) model is considered in several publications (see [41], [22]), sharing the same hyperelastic properties as the STVK model. While both models are valid for large deformations, the INH is superior compared to STVK in the sense that it holds for large strains aswell [21].

---

<sup>1</sup>See appendix A for definition

As for the fluid problem we define Dirichlet and Neumann boundary conditions on the form

$$\begin{aligned} \mathbf{v}_s &= \mathbf{v}_s^D & \text{on } \Gamma_s^D \subset \partial\Omega_s \\ \sigma_s \cdot \mathbf{n} &= \mathbf{g} & \text{on } \Gamma_s^N \subset \partial\Omega_s \end{aligned}$$

## 1.5 The Fluid problem

The fluid is assumed to be express by the incompressible Navier-Stokes equations,

**Equation 1.5.1.** *Navier-Stokes equation*

$$\rho \frac{\partial \mathbf{v}_f}{\partial t} + \rho \mathbf{v}_f \cdot \nabla \mathbf{v}_f = \nabla \cdot \sigma + \rho \mathbf{f}_f \quad \text{in } \Omega_f \quad (1.9)$$

$$\nabla \cdot \mathbf{v}_f = 0 \quad \text{in } \Omega_f \quad (1.10)$$

defined in an Eulerian description of motion. The fluid density  $\rho_f$  and fluid viscosity  $\nu_f$  are assumed to be constant in time, and  $\mathbf{f}_f$  represents any body force. The fluid is assumed Newtonian, where *Cauchy stress tensor* follows Hooke's law

$$\sigma = -p_f I + \mu_f (\nabla \mathbf{v}_f + (\nabla \mathbf{v}_f)^T)$$

Additional appropriate boundary conditions are supplemented to the equation for a given problem. The first type of boundary conditions are Dirichlet boundary conditions,

$$\mathbf{v}_f = \mathbf{v}_f^D \quad \text{on } \Gamma_f^D \subset \partial\Omega_f \quad (1.11)$$

The second type of boundary condition are Neumann boundary conditions

$$\sigma_f \cdot \mathbf{n} = \mathbf{g} \quad \text{on } \Gamma_f^N \subset \partial\Omega_f \quad (1.12)$$



# Bibliography

- [1] Robert T Biedron and Elizabeth M Lee-Rausch. Rotor Airloads Prediction Using Unstructured Meshes and Loose CFD/CSD Coupling.
- [2] J Donea, A Huerta, J-Ph Ponthot, and A Rodríguez-Ferran. Arbitrary Lagrangian-Eulerian methods. (1969):1–38, 2004.
- [3] Th Dunne. An Eulerian approach to uid – structure interaction and goal-oriented mesh adaptation. *International Journal for Numerical Methods in Fluids*, (December 2005):1017–1039, 2006.
- [4] Thomas Dunne and Rolf Rannacher. Adaptive Finite Element Approximation of Fluid-Structure Interaction Based on an Eulerian Variational Formulation. *Fluid-Structure Interaction*, 53:110–145, 2006.
- [5] Richard P Dwight. Robust Mesh Deformation using the Linear Elasticity Equations.
- [6] Stéphane Étienne, D Tremblay, and Dominique Pelletier. Code Verification and the Method of Manufactured Solutions for Fluid-Structure Interaction Problems. *36th AIAA Fluid Dynamics Conference and Exhibit*, (June):1–11, 2006.
- [7] Miguel A Fernández and Jean-Frédéric Gerbeau. Algorithms for fluid-structure interaction problems. 2009.
- [8] Philippe Geuzaine. Numerical Simulations of Fluid-Structure Interaction Problems using MpCCI. (1):1–5.
- [9] Brian T. Helenbrook. Mesh deformation using the biharmonic operator. *International Journal for Numerical Methods in Engineering*, 2003.
- [10] Gerhard A. Holzapfel. *Nonlinear Solid Mechanics: A Continuum Approach for Engineering*. 2000.
- [11] Jaroslav Hron and Stefan Turek. Proposal for numerical benchmarking of fluid-structure interaction between an elastic object and laminar incompressible flow. *Fluid-Structure Interaction*, 53:371–385, 2006.
- [12] Ming-Chen Hsu and Yuri Bazilevs. Fluid–structure interaction modeling of wind turbines: simulating the full machine. *Computational Mechanics*, 50(6):821–833, dec 2012.

- [13] Su-Yuen Hsu, Chau-Lyan Chang, and Jamshid Samareh. A Simplified Mesh Deformation Method Using Commercial Structural Analysis Software.
- [14] Hrvoje Jasak and Željko Tuković. Automatic mesh motion for the unstructured Finite Volume Method. *Transactions of Famena*, 30(2):1–20, 2006.
- [15] Jae-Hyun Kim and Hyung-Cheol Shin. Application of the ALE technique for underwater explosion analysis of a submarine liquefied oxygen tank. *Ocean Engineering*, 35(8-9):812–822, jun 2008.
- [16] V V Meleshko. Bending of an Elastic Rectangular Clamped Plate: Exact Versus 'Engineering' Solutions. *Journal of Elasticity*, 48(1):1–50, 1997.
- [17] José Merodio and Giuseppe Saccomandi. Continuum Mechanics - Volume I. In *Volume 1*, chapter 3, pages 82–84. EOLSS, 2011.
- [18] Selim MM and Koomullil RP. Mesh Deformation Approaches – A Survey. *Journal of Physical Mathematics*, 7(2), 2016.
- [19] William L. Oberkampf and Christopher J. Roy. *Verification and Validation in Scientific Computing*. Cambridge University Press, Cambridge, 2010.
- [20] **Fenics Project**. Unified Form Language (UFL) Documentation. 2016.
- [21] M Razzaq, Stefan Turek, Jaroslav Hron, J F Acker, F Weichert, I Grunwald, C Roth, M Wagner, and B Romeike. Numerical simulation and benchmarking of fluid-structure interaction with application to Hemodynamics. *Fundamental Trends in Fluid-Structure Interaction*, 1:171–199, 2010.
- [22] T. Richter and T. Wick. Finite elements for fluid-structure interaction in ALE and fully Eulerian coordinates. *Computer Methods in Applied Mechanics and Engineering*, 199(41-44):2633–2642, 2010.
- [23] Thomas Richter. Fluid Structure Interactions. 2016.
- [24] Thomas Richter and Thomas Wick. On Time Discretizations of Fluid-Structure Interactions. pages 377–400. 2015.
- [25] Patrick J. Roache. Code Verification by the Method of Manufactured Solutions. *Journal of Fluids Engineering*, 124(1):4, 2002.
- [26] P.J. Roache. *Verification and Validation in Computational Science and Engineering*. Computing in Science Engineering, Hermosa Publishers, 1998, 8-9, 1998.
- [27] Edward J. Rykiel. Testing ecological models: The meaning of validation. *Ecological Modelling*, 90(3):229–244, 1996.
- [28] Kambiz Salari and Patrick Knupp. Code Verification by the Method of Manufactured Solution. Technical report, Sandia National Laboratories, 2000.

- [29] LE Schwer. Guide for verification and validation in computational solid mechanics. *American Society of Mechanical Engineers*, PTC 60(V&V 10):1–15, 2006.
- [30] J.C. Simo and F. Armero. Unconditional stability and long-term behavior of transient algorithms for the incompressible Navier-Stokes and Euler equations. *Computer Methods in Applied Mechanics and Engineering*, 111(1-2):111–154, jan 1994.
- [31] Ian Sommerville. Verification and Validation. Technical Report February, 2006.
- [32] K Stein, T Tezduyar, and R Benney. Mesh Moving Techniques for Fluid-Structure Interactions With Large Displacements.
- [33] Keith Stein, Richard Benney, Tayfun Tezduyar, and Jean Potvin. Fluid–structure interactions of a cross parachute: numerical simulation. *Computer Methods in Applied Mechanics and Engineering*, 191(6-7):673–687, dec 2001.
- [34] T E Tezduyar, M Behr, S Mittal, and A A Johnson. COMPUTATION OF UNSTEADY INCOMPRESSIBLE FLOWS WITH THE STABILIZED FINITE ELEMENT METHODS: SPACE-TIME FORMULATIONS, ITERATIVE STRATEGIES AND MASSIVELY PARALLEL IMPLEMENTATIONSt. *New Methods in Transient Analysis ASME*, 246(143), 1992.
- [35] Ryo Torii, Marie Oshima, Toshio Kobayashi, Kiyoshi Takagi, and Tayfun E. Tezduyar. Fluid–structure interaction modeling of a patient-specific cerebral aneurysm: influence of structural modeling. *Computational Mechanics*, 43(1):151–159, dec 2008.
- [36] Jan Vierendeels. Comparison of the Hemodynamic and Thrombogenic Performance of Two Bileaflet Mechanical Heart Valves Using a CFD/FSI Model. *Journal of Biomechanical Engineering*, 129(4):558, jan 2007.
- [37] Wolfgang A. Wall, Axel , Gerstenberger, Peter , Gamnitzer, Christiane , Förster, and Ekkehard , Ramm. Large Deformation Fluid-Structure Interaction – Advances in ALE Methods and New Fixed Grid Approaches. In *Fluid-Structure Interaction: Modelling, Simulation, Optimisation*, pages 195—232. Springer Berlin Heidelberg, 2006.
- [38] T. Wick. Stability Estimates and Numerical Comparison of Second Order Time-Stepping Schemes for Fluid-Structure Interactions. In *Numerical Mathematics and Advanced Applications 2011*, pages 625–632. Springer Berlin Heidelberg, Berlin, Heidelberg, 2013.
- [39] Thomas Wick. *Adaptive Finite Element Simulation of Fluid-Structure Interaction with Application to Heart-Valve*. PhD thesis, Heidelberg.
- [40] Thomas Wick. Solving Monolithic Fluid-Structure Interaction Problems in Arbitrary Lagrangian Eulerian Coordinates with the deal.II Library.

- [41] Thomas Wick. Fully Eulerian fluid-structure interaction for time-dependent problems. *Computer Methods in Applied Mechanics and Engineering*, 255:14–26, 2013.
- [42] Klaus Wolf, Schloss Birlinghoven, Code Coupling Interface, Open Programming Interface, and Distributed Simulation. Mpcci – the General Code Coupling Interface. 6. *LS-DYNA Anwenderforum, Frankenthal 2007 IT*, pages 1–8, 2007.
- [43] P. Wriggers. *Computational contact mechanics, second ed.*, Springer. 2006.
- [44] Hou Zhang, Xiaoli Zhang, Shanhong Ji, Yanhu Guo, Gustavo Ledezma, Nagi Elabbasi, and Hugues DeCougny. Recent development of fluid-structure interaction capabilities in the ADINA system. *Computers and Structures*, 81(8-11):1071–1085, 2003.