


Antenna conection: Single ended operation

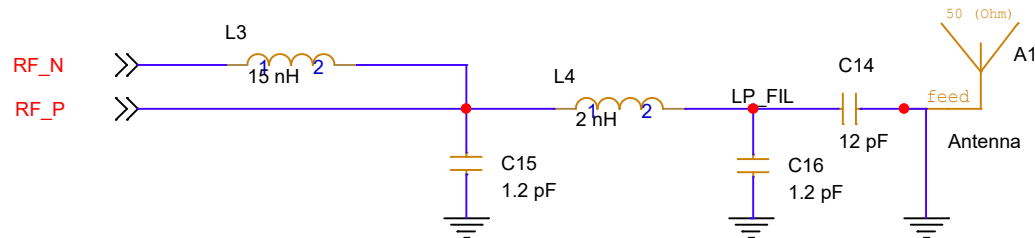

Active-Mode RX: 5.9 mA

Active-Mode TX at 0 dBm: 6.1 mA

Active-Mode TX at +5 dBm: 9.1 mA

Active-Mode MCU: 61  $\mu$ A/MHz

Active-Mode MCU: 48.5 CoreMark/mA

Active-Mode Sensor Controller: 0.4mA + 8.2  $\mu$ A/MHz

Standby: 1.1  $\mu$ A (RTC Running and RAM/CPU Retention)




Shutdown: 100 nA (Wake Up on External Events)

No traces should be routed below RF front-end

Place RF passives close to RF\_N and RF\_P

ANTENNA trace should be 50 Ohm impedance if longer than 10mm

Jtag interface

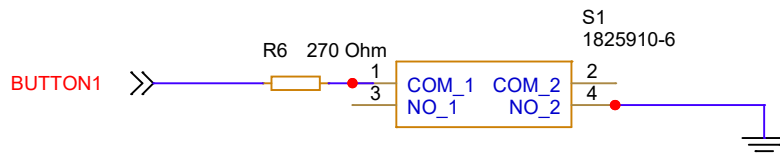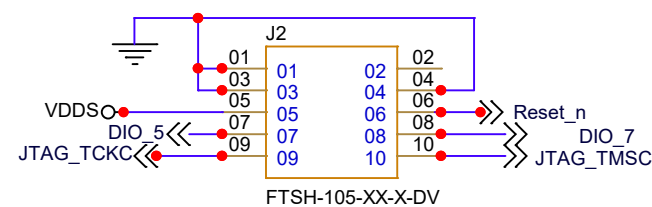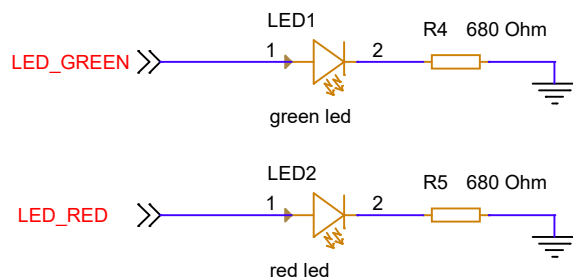

|                                      |                       |              |
|--------------------------------------|-----------------------|--------------|
| Politecnico di Torino                |                       |              |
| Corso Duca degli Abruzzi, 24         |                       |              |
| Andrea Mugnaini                      |                       |              |
| Title                                |                       |              |
| Project 18 - MCU Peripherals Section |                       |              |
| Size                                 | Document Number       | Rev          |
| A                                    | P18_PERIPH            | 2            |
| Date:                                | Monday, June 01, 2026 | Sheet 2 of 4 |