


Antenna connection: Single ended operation

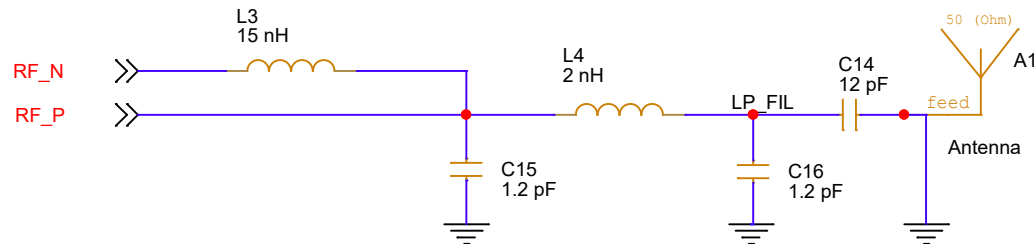

Active-Mode RX: 5.9 mA

Active-Mode TX at 0 dBm: 6.1 mA

Active-Mode TX at +5 dBm: 9.1 mA

Active-Mode MCU: 61 μ A/MHz

Active-Mode MCU: 48.5 CoreMark/mA

Active-Mode Sensor Controller: 0.4mA + 8.2 μ A/MHz

Standby: 1.1 μ A (RTC Running and RAM/CPU Retention)



Shutdown: 100 nA (Wake Up on External Events)

No traces should be routed below RF front-end

Place RF passives close to RF_N and RF_P

ANTENNA trace should be 50 Ohm impedance if longer than 10mm

Jtag interface

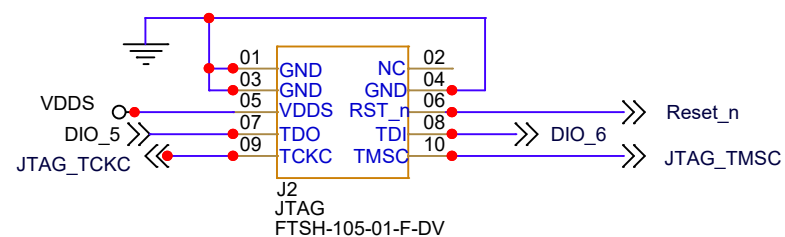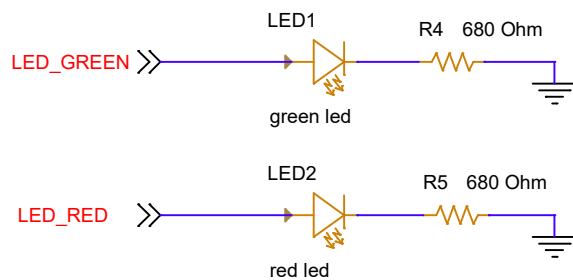

RST pushdown button: on press, MCU firmware resets.

Politecnico di Torino		
Corso Duca degli Abruzzi, 24		
Andrea Mugnaini		
Title		
Project 18 - MCU Peripherals Section		
Size	Document Number	Rev
A	P18_PERIPH	2
Date:	Friday, August 28, 2026	Sheet 2 of 4