



DC 44 with its unique design provides the optimum functionality, comfort, and flexibility for patients during the dialysis process. **DC 44** rises to the challenge of making the long hemodialysis sessions more comfortable, thanks to its variety of electrical functions and the viscoelastic upholstery.

**OPTIUM MEDIKAL LTD. STI.**

📍 Airport Industrial Zone Hidayet Street No:23 Oguzeli / Gaziantep / TURKEY
☎ +90 850 807 6284 ✉ info@optium.com.tr 🌐 www.optium.com.tr





Height Adjustment



Backrest Adjustment



Trendelenburg Position



Relax-Position / Zero-Gravity






Bed Position



Sitting Position

- 4 DC motors.
- Suitable for Hemodialysis sessions.
- Electronic adjustments of backrest, legrest, height, and Trendelenburg functions by hand control unit.
- Anti-microbial, water proof, flame retardant, air permeable and easy cleanable cushion and not effected to skin.
- The chair is upholstered by viscoelastic foam which is known as memory foam, is a type of open cell, flexible polyurethane foam. It is body heat and weight sensitive material. It contours to the body shape, distributes the body pressure over a wide area and besides comfortable seating, allows for good blood circulation.
- Foam's capacity let the patient redistribute weight and surface pressure, potentially reducing decubitus ulcers.
- ABS covering designed to keep itself in the upholstery and it blocks the dust which goes into the upholstery.
- During the back rest movement, arm rests moves with the back rest simultaneously and the arm rests are easy removable.
- Easy adjustable and removable upholstered arm rests
- Chassis is made by 14 mm. sheet metal and lifting system fixed onto the 20 mm. steel llama holder.
- 360° swivel, diagonal lockable castors of 125 mm diameter.
- Height adjustable IV pole with 2 hooks.
- Monitor Holder (optional).
- Rechargeable Back-up battery (optional).
- Weighing Scale (optional).



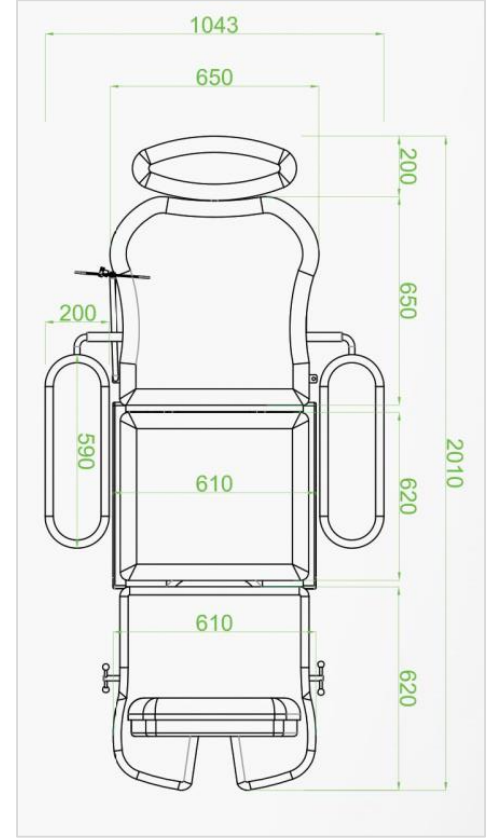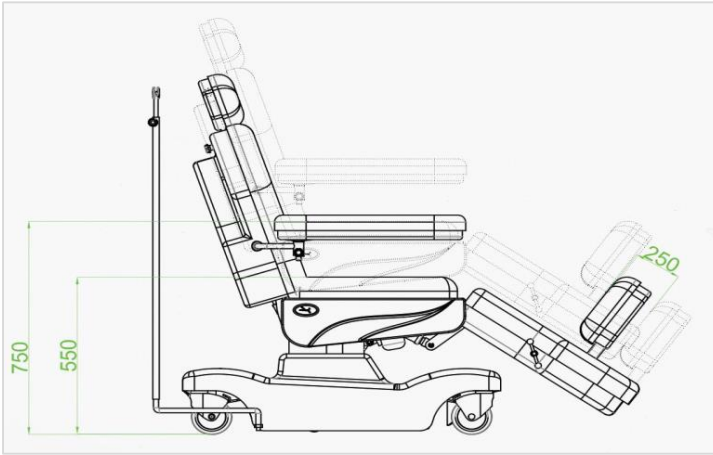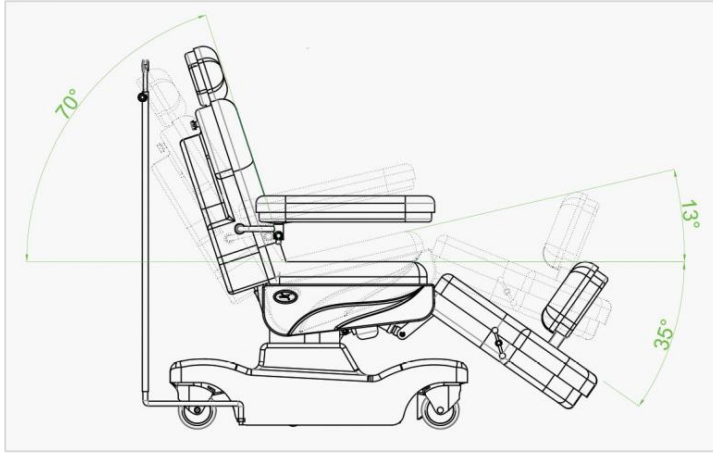

www.optium.com.tr

TECHNICAL DETAILS

Backrest angle:	0°-70°
Trendelenburg angle:	0°-13°
Reverse Trendelenburg angle:	0°-(-5)°
Legrest angle:	0°-35°
Safe working load capacity:	180 kg
Weight:	115 kg
External dimensions(with armrest):	201x105cm
Bed surface:	201x65 cm
Height :	55 – 75 cm
Castor Diameter	125 mm

ELECTRICAL DATA

Power in	max. 3,15A 100V – 240V ~ 50/60 Hz
Electrical Shock Protection	Class I, Type B
Liquid ingress protection	IPX4

OPTIUM MEDIKAL LTD. STI.

📍 Airport Industrial Zone Hidayet Street No:23 Oguzeli / Gaziantep / TURKEY

☎ +90 850 807 6284 ✉ info@optium.com.tr 🌐 www.optium.com.tr



Optional Accessories



Rechargeable Battery Backup



Monitor Holder



Weighing Scale

Color Options



No1 White



No2 Beige



No3 Milky Brown



No4 Dark Brown



No5 Pistachio Green



No6 Light Green



No7 Yellow



No8 Orange



No9 Claret Red



No10 Pink



No11 Lilac



No12 Light Blue



No13 Navy Blue



No14 Gray



No15 Dark Green



No16 Black

OPTIUM MEDIKAL LTD. STI.

📍 Airport Industrial Zone Hidayet Street No:23 Oguzeli / Gaziantep / TURKEY

☎ +90 850 807 6284 ✉ info@optium.com.tr 🌐 www.optium.com.tr

