



LITERAY® | F.O MRI LARYNGOSCOPE HANDLE

MRI Conditional Fiber Optic handles are built to last with a chrome plated finish to ensure durability and long life. Grooved & Knurled surface provides a comfortable grip to prevent slippage for enhanced safety in the MRI Suite. German LED & XENON 3.5V lamp provides ultra-bright & high intensity with reliable light output. Certified MRI Conditional up to 3.0 Tesla.

FEATURES

- 2.5V / 3.5V LED & Xenon is constructed with advance German technology.
- Polished metal cap around Lamp gives maximum supply of illumination.
- Lamp can be easily supersede with help of fingers.
- 10+ hours life of Xenon & 50000 hours with LED.
- More than 11,000 Lux with Xenon & 110000 with LED.
- Grooved & Knurled handle design provides excellent grip.
- Closed battery cover prevent liquids penetration inside the battery compartment.
- Yellow color ring indicate that the Product is MR Conditional.
- Green color coding indicate universal fitting & standard of ISO 7376/3.
- Premium chrome plating finishing.
- Certified to strength the 3.0 Tesla as marked on Handle.

⚠ Can only be operated with MRI Conditional Battery (3.5V – Size: 1 x C)



XENON


REF	SIZE	LENGHT X WIDTH
90.100.502	MEDIUM 2.5V	153mm x 29mm
90.100.552	MEDIUM 3.5V	153mm x 29mm

LED (HIGH POWER)

REF	SIZE	LENGHT X WIDTH
90.100.602	MEDIUM 2.5V	153mm x 29mm
90.100.652	MEDIUM 3.5V	153mm x 29mm



XENON ILLUMINATION



LED ILLUMINATION



YEARS
WARRANTY



MAINTAINANCE
FREE



EASY TO
USE



EXLITE[®] | F.O MRI MACINTOSH BLADE

AUG[®] has presented a solution for safe intubations within the magnetic resonance (MR) environment, EXLITE[®] MRI Conditional laryngoscopes blades are specially manufactured with nonferrous stainless steel for MR Suite safety, durability and long life. Each blade is satin finished to reduce glare and enhance ease of intubation. Exchangeable Fiber Optic light guide delivers superior illumination for safer intubations. Field Strengths up to 3.0 Tesla - Tested to comply with ASTM Standards for "MR Conditional" devices in up to a 3.0 Tesla environments.

FEATURES


- Gold plated replaceable light guide.
- 4.00 diameter fiber optic bundle.
- 5500 plus fiber strands.
- High quality fiber ensuring brilliant light transmission.
- 4200 lux with 2.5V Xenon/Halogen bulb.
- 12500 lux with 3.5V Xenon/Halogen bulb.
- No sharp edges. Curved blades.
- Maintenance free.
- Autoclavable up to 134°C approximately 4000 times.
- No adverse effect in using ETO, steam autoclaving.
- Yellow color block indicates that the blade is MR conditional.
- Certified to strength the 3.0 Tesla as marked on blade.
- Green color coding indicate universal fitting & standard of ISO 7376/3.

REF	SIZE	LENGTH X WIDTH
70.400.100	0	80mm x 13mm
70.400.101	1	92mm x 18mm
70.400.102	2	116mm x 15mm
70.400.103	3	131mm x 14mm
70.400.104	4	156mm x 17mm
70.400.105	5	175mm x 22mm





Quality. Defined

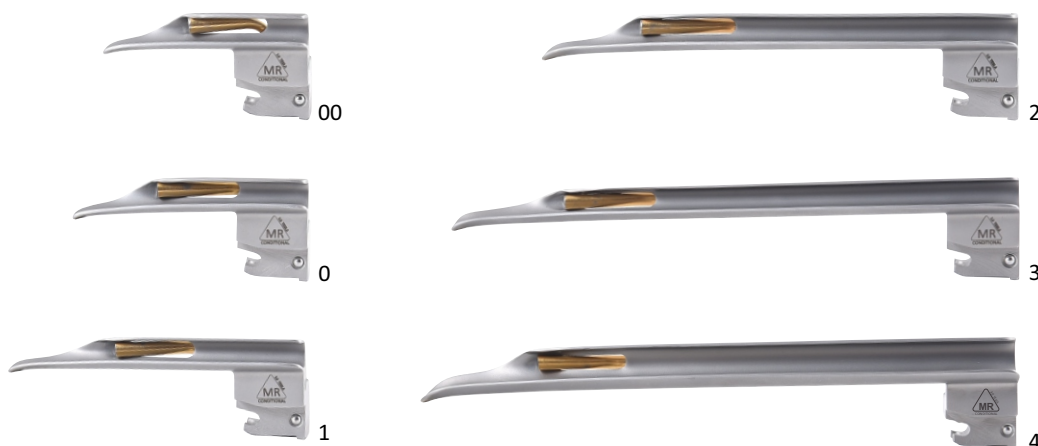

EXLITE® | F.O MRI MILLER BLADE

AUG® has presented a solution for safe intubations within the magnetic resonance (MR) environment, EXLITE® MRI Conditional laryngoscopes blades are specially manufactured with nonferrous stainless steel for MR Suite safety, durability and long life. Each blade is satin finished to reduce glare and enhance ease of intubation. Exchangeable Fiber Optic ligh guide delivers superior illumination for safer intubations. Field Strengths up to 3.0 Tesla - Tested to comply with ASTM Standards for "MR Conditional" devices in up to a 3.0 Tesla environments.

FEATURES

- Gold plated replaceable light guide.
- 4.00 diameter fiber optic bundle.
- 5500 plus fiber strands.
- High quality fiber ensuring brilliant light transmission.
- 4200 lux with 2.5V Xenon/Halogen bulb.
- 12500 lux with 3.5V Xenon/Halogen bulb.
- No sharp edges. Straight blades.
- Maintenance free.
- Autoclavable up to 134°C approximately 4000 times.
- No adverse effect in using ETO, steam autoclaving.
- Yellow color block indicates that the blade is MR conditional.
- Certified to strength the 3.0 Tesla as marked on blade.
- Green color coding indicate universal fitting & standard of ISO 7376/3.

REF	SIZE	LENGHT X WIDTH
70.400.199	00	65mm x 10mm
70.400.200	0	75mm x 11mm
70.400.201	1	102mm x 11mm
70.400.202	2	153mm x 14mm
70.400.203	3	195mm x 14mm
70.400.204	4	205mm x 18mm



YEARS
WARRANTY








MAINTAINANCE
FREE



EASY TO
USE

MECHANISM OF LARYNGOSCOPE

HANDLE CONNECTION

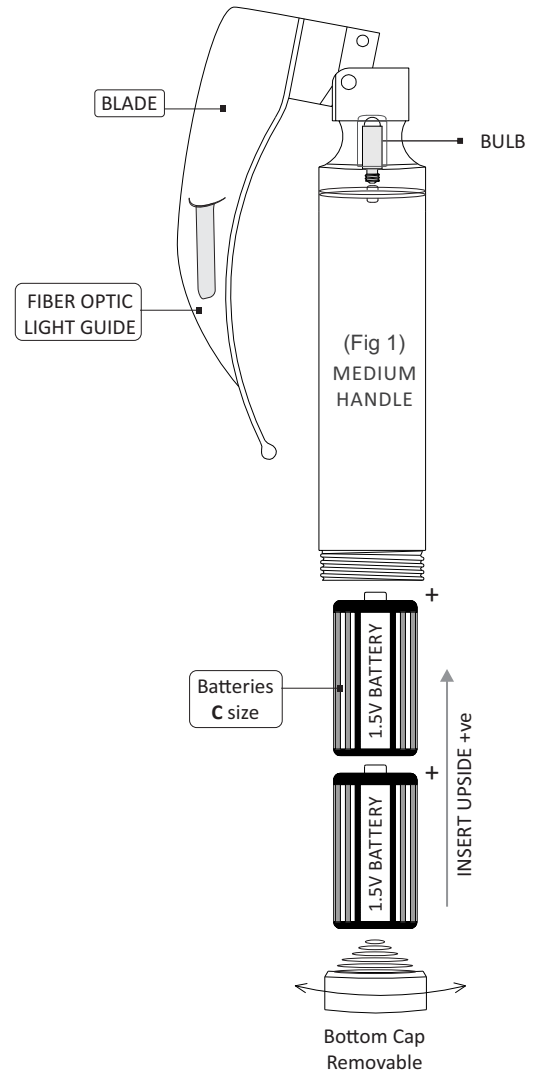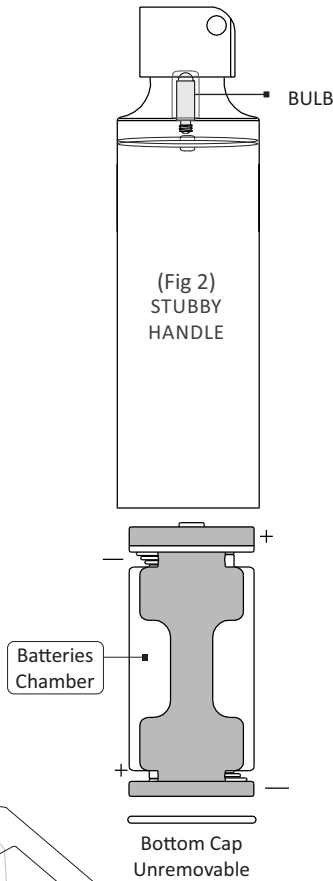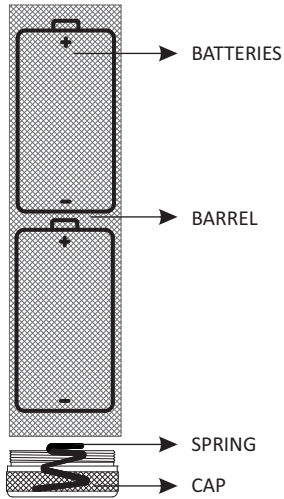

BLADE CONNECTION WITH HANDLE

