


A

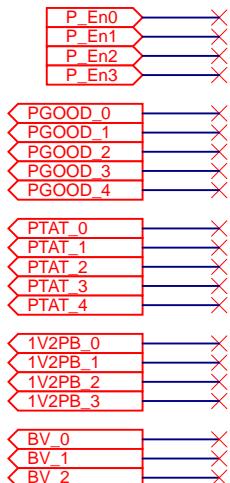

Placeholder until RB interface is finalized

A

B



B

C

C


D


D

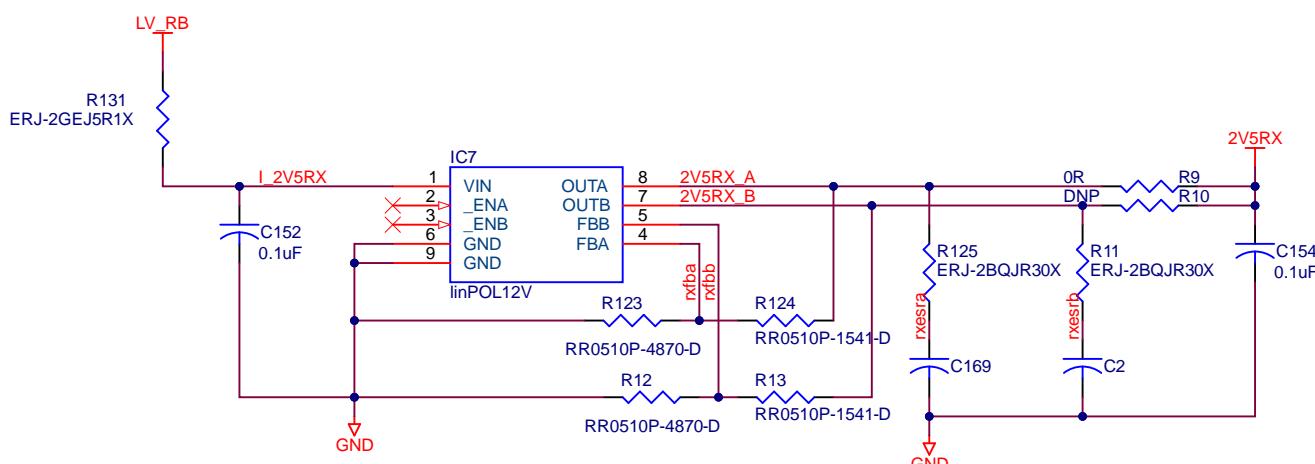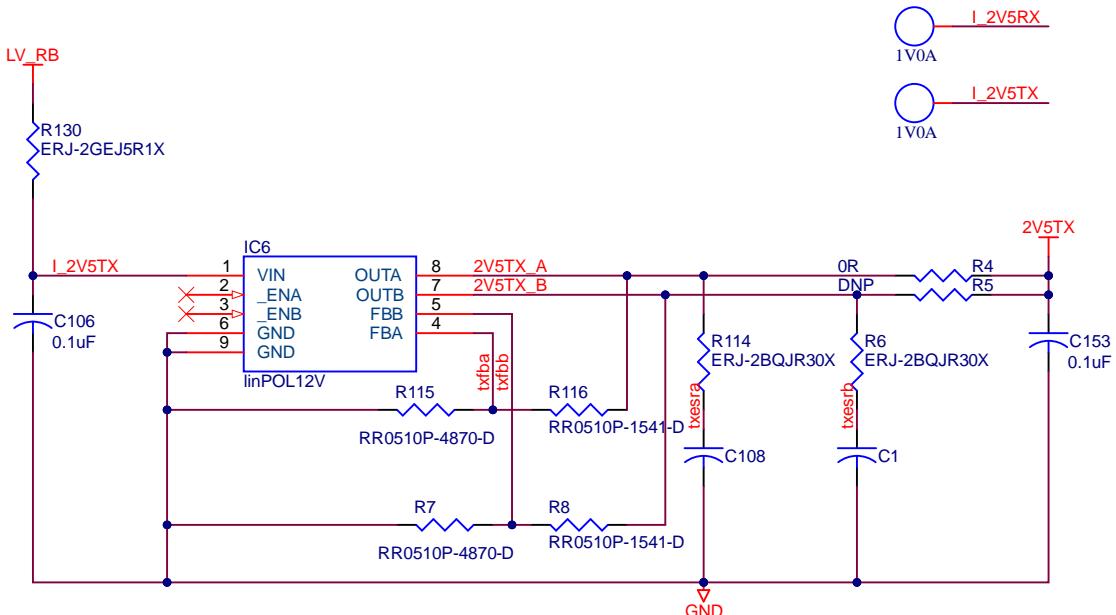

A resistance towards ground must be placed to avoid a TID-induced peak at 1-2Mrad. The value of the resistance must be set to have at least 1.1mA always flowing in the regulator.

Between this pin and ground a series of a resistor of 300mOhm and a capacitor of 10uF has to be placed for stability purpose.

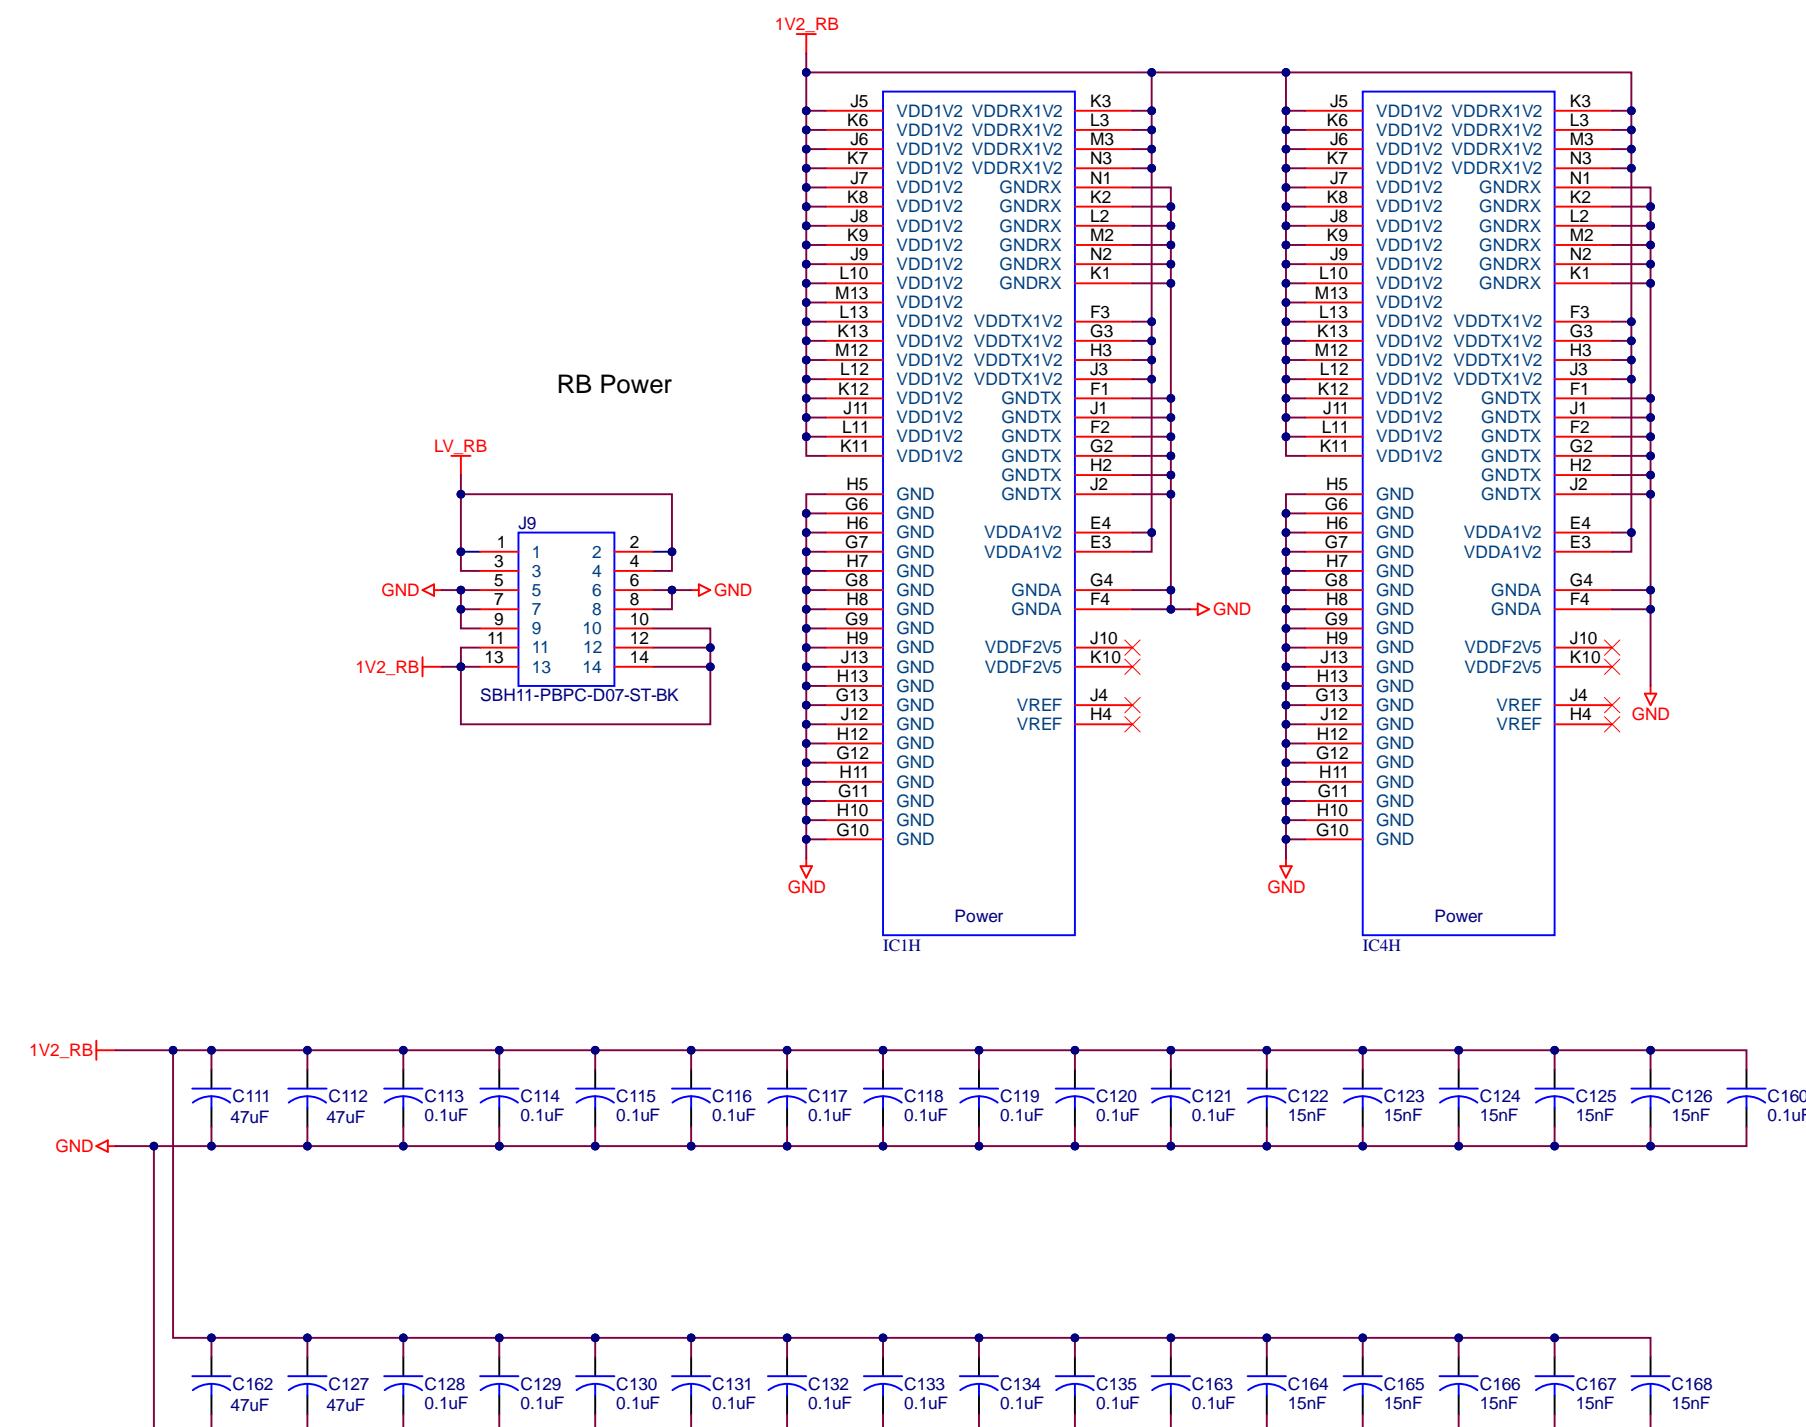

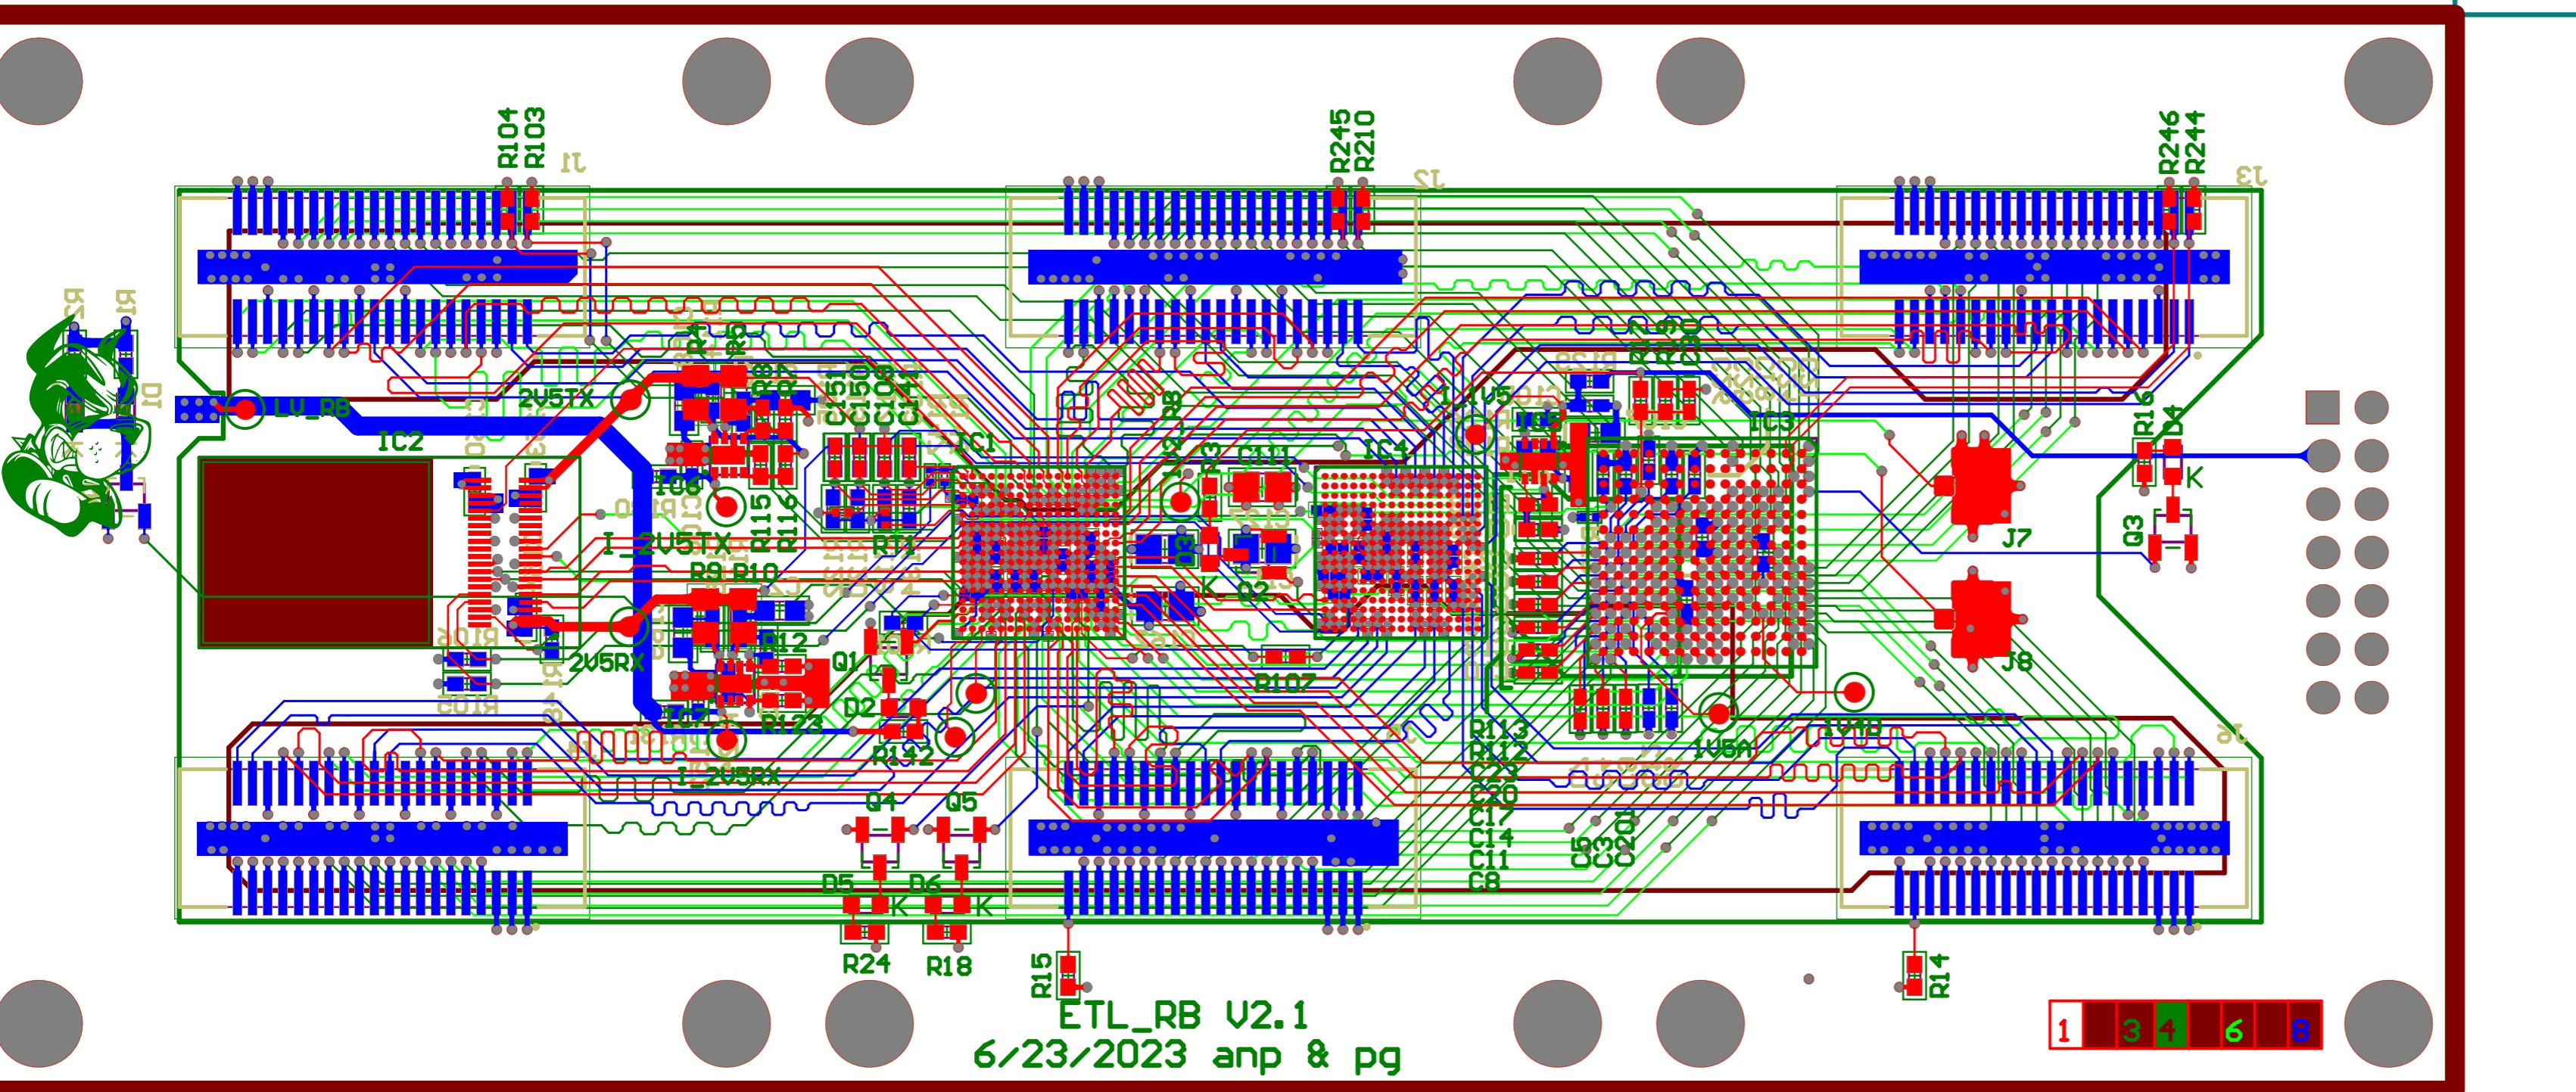

ETL\_RB V2.1  
6/23/2023 amp & pg

1 3 4 6 8