



A



B

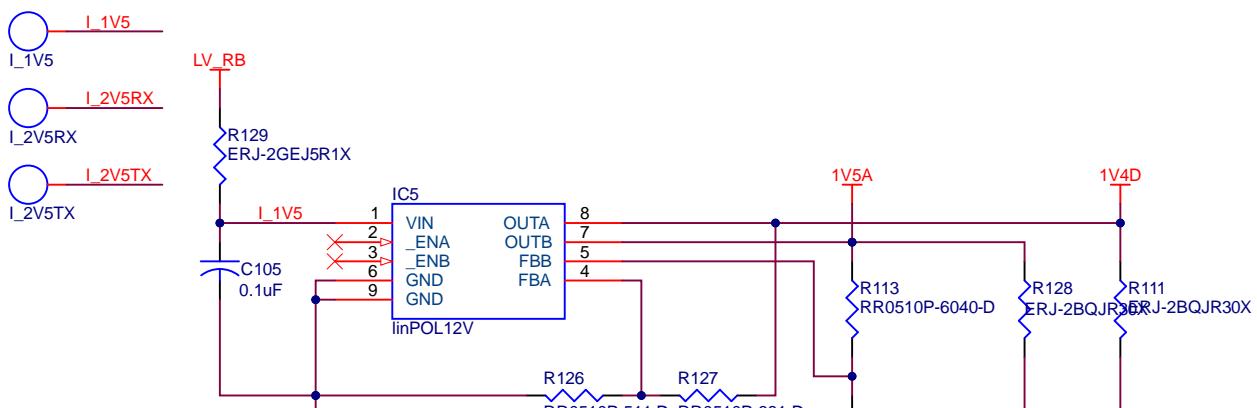

C

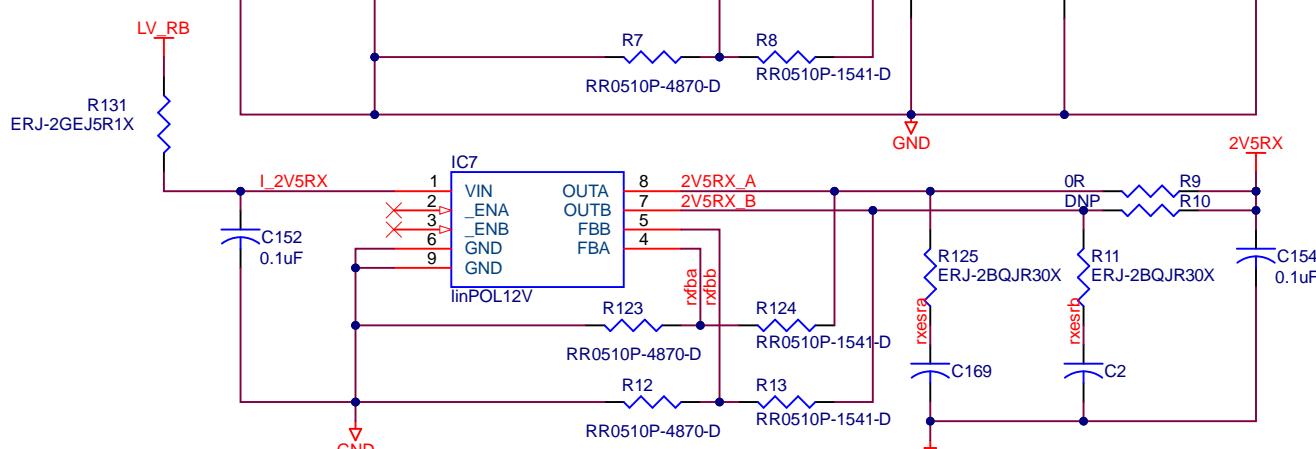

D

A resistance towards ground must be placed to avoid a TID-induced peak at 1-2Mrad. The value of the resistance must be set to have at least 1.1mA always flowing in the regulator.

Between this pin and ground a series of a resistor of 300mOhm and a capacitor of 10uF has to be placed for stability purpose.



LINPOL12

3 / 4  
Boston University  
Rev v2.1  
2022/11/14  
ap sw pg

A

B

C

D

A

B

C

D

