
Machine Translated by Google

Product model : Cell type : **IMP06160231P32B**

Product electrical performance index

Standard capacity Rated capacity (Ah)	1/3C	33.3
	1C	32
Standard energy Rated power capacity (Wh)	1/3C	124.21
	1C	117.44
Nominal voltage Nominal voltage (V)	1/3C	3.73
	1C	3.67
Gravimetric energy density ÿWh/kgÿ	1/3C	249
	1C	235
Volumetric energy density Volumetric energy density (Wh/L)	1/3C	560
	1C	529
Operating voltage range (V)		4.3-2.75
DCIR (internal resistance in DC current) (mÿ, 25ÿ, 2C0.5S)		2.4ÿTypical (typical value)
ACIR (internal resistance in mÿ, 25ÿ, 1kHz)		1.1ÿTypical (typical value)
Cycle life (25ÿ, SC/1C, SOH ÿ) 80%ÿ		1500

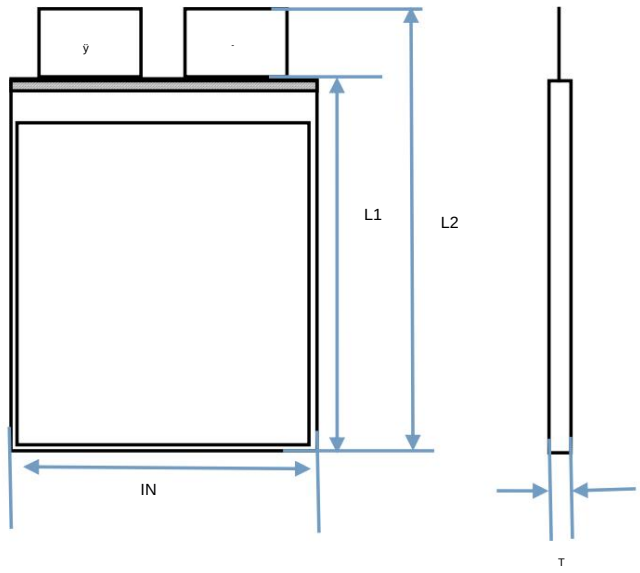

Charge and discharge characteristics

Charging operating temperature Charging operating temperature range (°C)	-20~55
Discharging operating temperature Discharge operating temperature (°C)	-30~55
Fast charge time Fast charging time (min, 0-80%@25ÿ)	<55
Maximum charging current (A) 25ÿ10Sÿ50%SOCÿ	96(3C)
Maximum discharging current ÿAÿ25ÿ10Sÿ50%SOCÿ	160 (5C)

The dimensions and specifications

Width ÿÿWÿmm)	161 ±1
Height ÿÿL1ÿmmÿ	231 ±1
Height ÿÿL2ÿmmÿ	248 ±2
Thickness (T, mm)	6.05 ±0.15
Weight (g)	498 ±15