


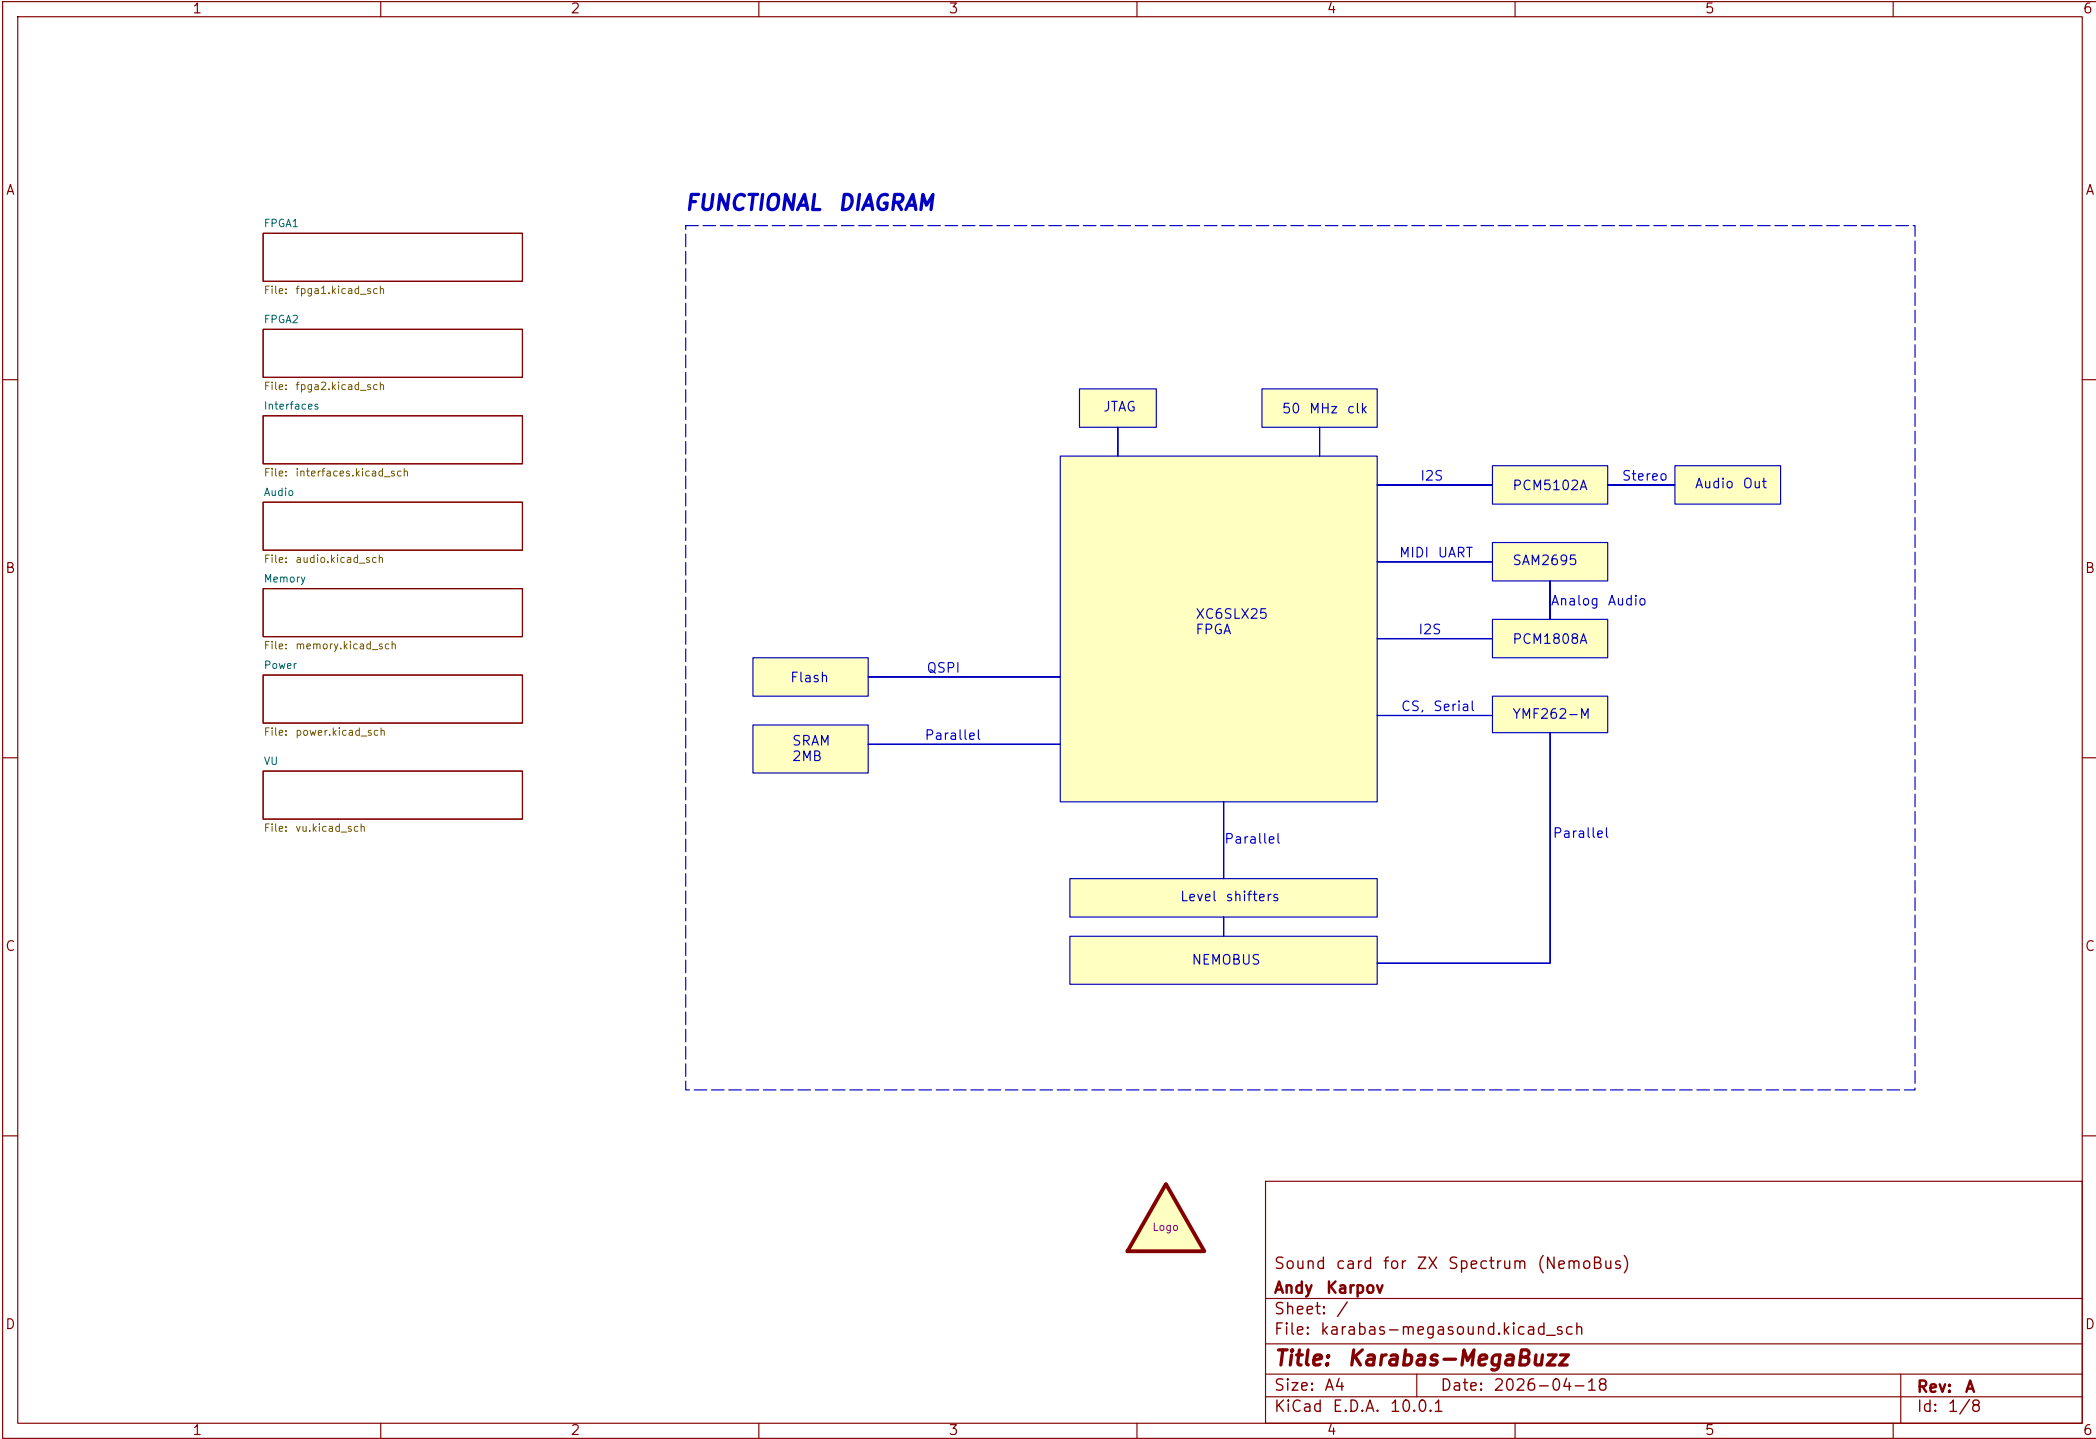

[illegible]

Diagram illustrating the connection for the BT module reset pin (BT_N_RST). The pin is connected to a 10k pull-up resistor to +3V3 and a 446 ohm resistor to GND. The text "BTN1 Reset" is also present.


The diagrams illustrate the following connections:

- U4 (SN74CB3T3245PW):** VCC (pin 20) to +3V3, GND (pin 10) to ground. Data inputs: A15-A0 (pins 18-11). Data outputs: xA15-xA0 (pins 2-9). Control inputs: B0-B7 (pins 17-10). Control outputs: xA15-xA0 (pins 2-9). CE (pin 19) to ground.
- U6 (SN74CB3T3245PW):** VCC (pin 20) to +3V3, GND (pin 10) to ground. Data inputs: WAIT, IODOS, WR, RD, IORQ, MREQ, D4, D3 (pins 18-11). Data outputs: xWAIT, xIODOS, xWR, xRD, xIORQ, xMREQ, xD4, xD3 (pins 2-9). Control inputs: A0-A7 (pins 17-10). Control outputs: xA15-xA0 (pins 2-9). CE (pin 19) to ground.
- U5 (SN74CB3T3245PW):** VCC (pin 20) to +3V3, GND (pin 10) to ground. Data inputs: A7-A0 (pins 18-11). Data outputs: xA7-xA0 (pins 2-9). Control inputs: B0-B7 (pins 17-10). Control outputs: xA15-xA0 (pins 2-9). CE (pin 19) to ground.
- U7 (SN74CB3T3245PW):** VCC (pin 20) to +3V3, GND (pin 10) to ground. Data inputs: A10-A0 (pins 18-11). Data outputs: xA10-xA0 (pins 2-9). Control inputs: B0-B7 (pins 17-10). Control outputs: xA15-xA0 (pins 2-9). CE (pin 19) to ground.
- U22 (SN74LV1T34DBV):** VCC (pin 5) to +3V3, GND (pin 3) to ground. Input A (pin 2) to RST. Output Y (pin 4) to xRST.


Rev: A

SIZE: A1	
KiCad E.D.A. 10.0.1	


OPL3

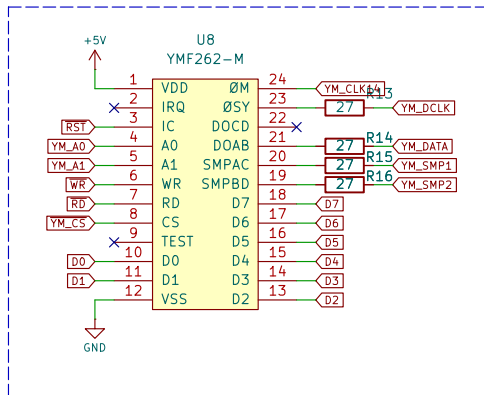


SOUND OUT

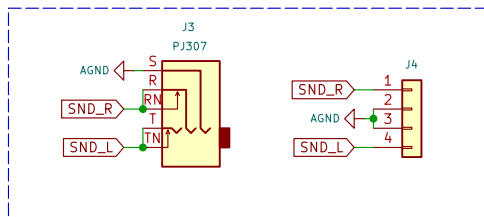


MIDI

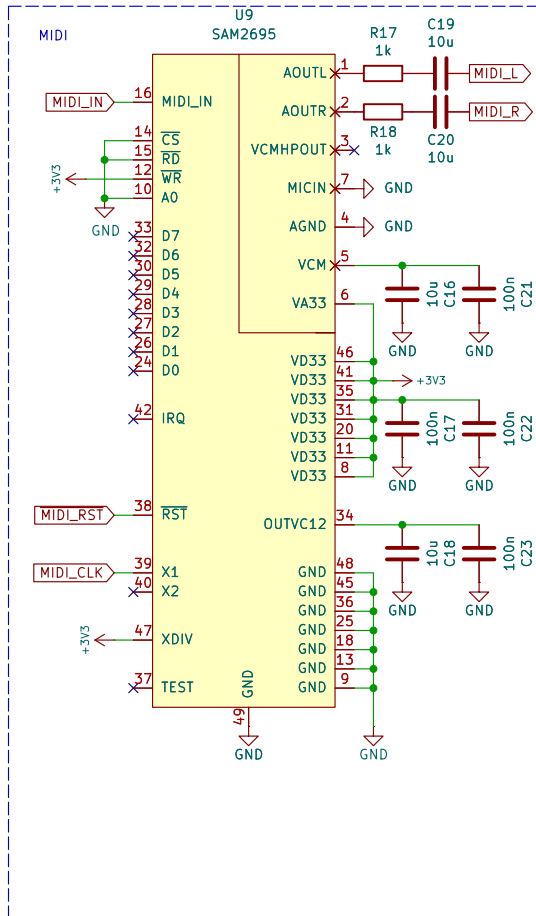

ADC

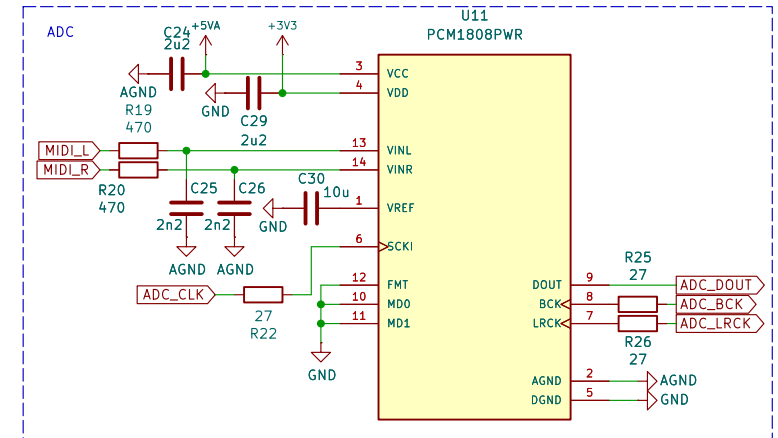

DAC

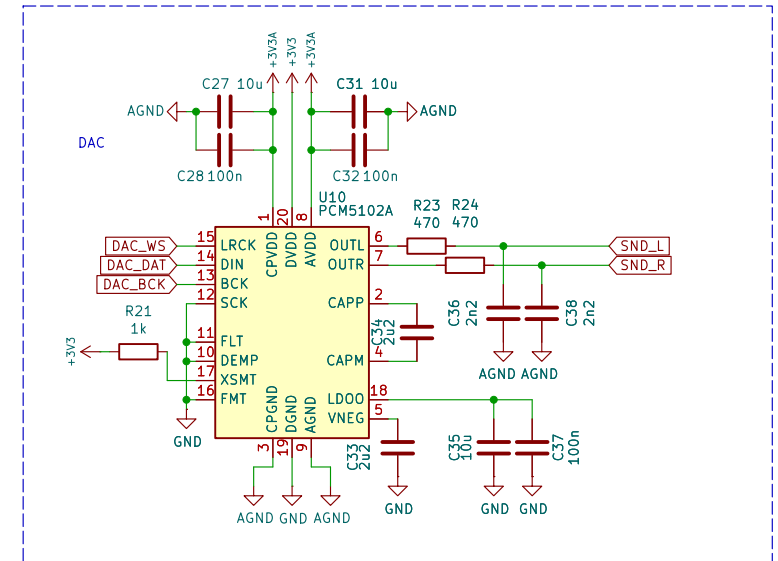

Andy Karpov

Sheet: /Audio/

File: audio.kicad_sch

Title: Karabas-MegaBuzz

Size: A4


Date: 2026-04-18

KiCad E.D.A. 10.0.1

Rev: A

Id: 5/8

GS RAM

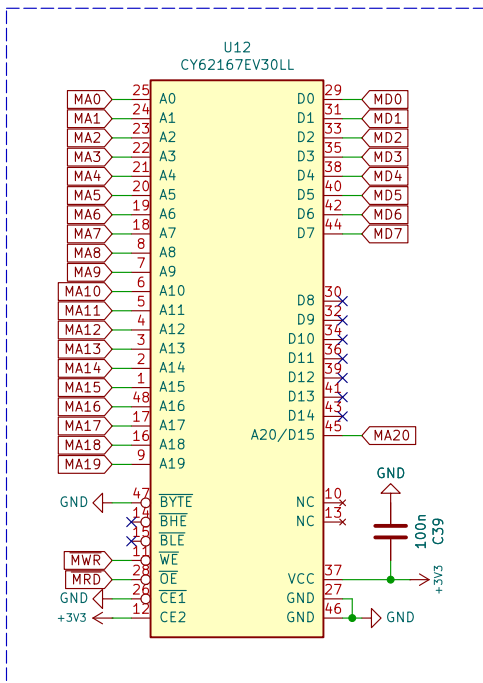

Andy Karpov

Sheet: /Memory/

File: memory.kicad_sch

Title: Karabas-MegaBuzz

Size: A4

Date: 2026-04-18

Rev: A

KiCad E.D.A. 10.0.1

Id: 6/8


POWER

The schematic diagram illustrates the power supply section of a PCB. It features three DC-DC converters (U13, U14, U15) and a 5V regulator (U1). U13 converts +5V to +3V3, U14 converts +5V to +3V3A, and U15 converts +5V to +1V2. A 5V regulator (U1) is connected to +5V and +5VA. The schematic includes various capacitors (C40-C49), inductors (L1), and resistors (R27-R29). It also shows a 5V_PRG pin (J5) connected to +5V and GND. The diagram is labeled 'POWER' in the top left corner.

Sheet: /Power/
File: power.kicad_sch

Size: A4	Date: 2026-04-18
----------	------------------

Rev: A
Id: 7/8

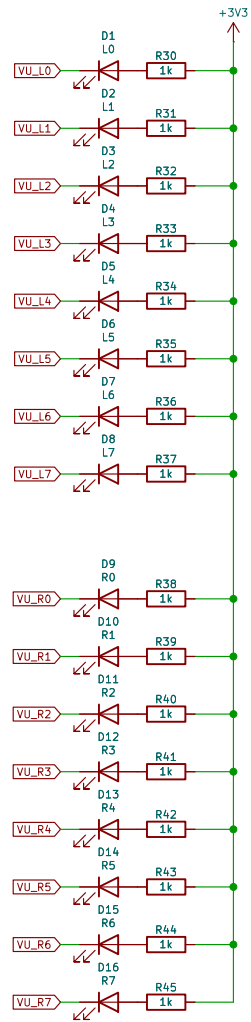

Andy Karpov

Sheet: /VU/

File: vu.kicad_sch

Title: Karabas-MegaBuzz

Size: A4

Date: 2026-04-18

Rev: A

KiCad E.D.A. 10.0.1

Id: 8/8