



Ethernet Interface

■ We are using a low-profile ethernet jack to fit within the 11mm height limit of the shields. However, low-cost and low-profile ethernet jacks do not have integrated magnetics.

PoE Interface

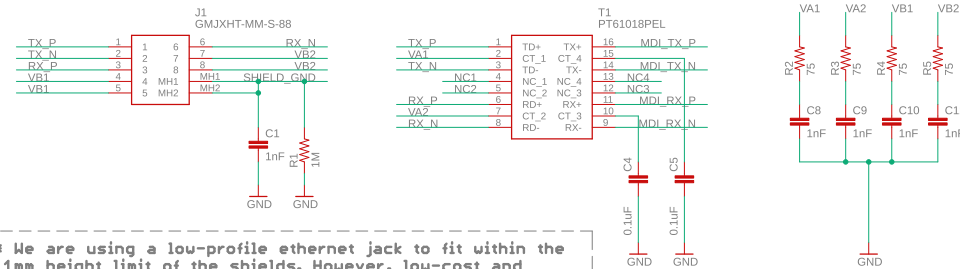

* We are using a low-profile ethernet jack to fit within the 11mm height limit of the shields. However, low-cost and low-profile ethernet jacks do not have integrated magnetics.

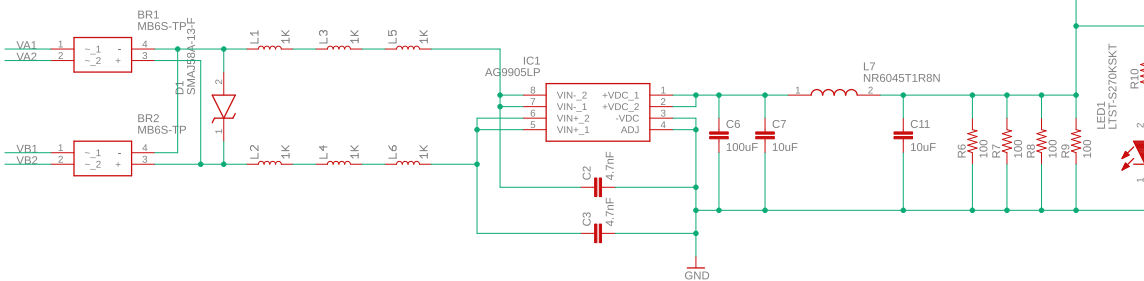

* There is a minimum current requirement on the PoE Module which requires us to draw 200mA at 5V (1W) at all times. To meet this we use four 100ohm resistors in parallel for 25ohms of effective resistance which draws $5/25=200\text{mA}$. However, this does drop 1W of power constantly into the PCB which will cause the PoE shield to get warm.

Ethernet Interface

We are using a low-profile ethernet jack to fit within the 1mm height limit of the shields. However, low-cost and low-profile ethernet jacks do not have integrated magnetics.

PoE Interface

There is a minimum current requirement on the PoE Module which requires us to draw 200mA at 5V (1W) at all times. To meet this we use four 100ohm resistors in parallel for 25ohms of effective resistance which draws 5/25=200mA. However, this does drop 1W of power constantly into the PCB which will cause the PoE shield to get warm.

Shield Interface


The diode prevents reverse-current and reverse-voltage from going backwards into the PoE Shield. Since the minimum current requirement of the PoE Shield already burns 200mA constantly, there is no point in using an ideal diode to improve the design efficiency.

Mechanical

Copyright (c) 2013-2023 OpenMV <openmv@openmv.io>
This work is licensed under the Creative Commons Attribution-ShareAlike 3.0 License.
To view a copy of this license, visit http://creativecommons.org/licenses/by-sa/3.0/

TITLE: poe
Document Number:
Date: 4/12/2023 11:51 AM

REV:
Sheet: 1/1

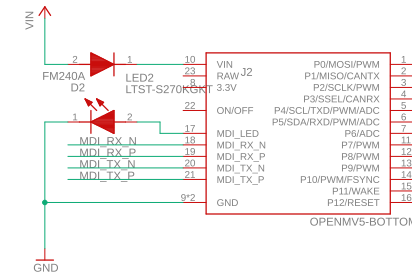

- * The diode prevents reverse-current and reverse-voltage from going backwards into the PoE Shield. Since the minimum current requirement of the PoE Shield already burns 200mA constantly, there is no point in using an ideal diode to improve the design efficiency.

Ethernet Interface

We are using a low-profile ethernet jack to fit within the 1mm height limit of the shields. However, low-cost and low-profile ethernet jacks do not have integrated magnetics.

PoE Interface

There is a minimum current requirement on the PoE Module which requires us to draw 200mA at 5V (1W) at all times. To meet this we use four 100ohm resistors in parallel for 25ohms of effective resistance which draws 5/25=200mA. However, this does drop 1W of power constantly into the PCB which will cause the PoE shield to get warm.

Shield Interface

The diode prevents reverse-current and reverse-voltage from going backwards into the PoE Shield. Since the minimum current requirement of the PoE Shield already burns 200mA constantly, there is no point in using an ideal diode to improve the design efficiency.

Mechanical

Copyright (c) 2013-2023 OpenMV <openmv@openmv.io>

This work is licensed under the Creative Commons Attribution-ShareAlike 3.0 License.

To view a copy of this license, visit <http://creativecommons.org/licenses/by-sa/3.0/>

TITLE: poe

Document Number:

Date: 4/12/2023 11:51 AM

REV:

Sheet: 1/1



Copyright (c) 2013-2023 OpenMV <openmv@openmv.io>

This work is licensed under the Creative Commons Attribution-ShareAlike 3.0 License.

To view a copy of this license, visit <http://creativecommons.org/licenses/by-sa/3.0/>

TITLE: poe

Document Number:

REV:

Date: 4/12/2023 11:51 AM

Sheet: 1/1