


# NodeMCU-32S

## PINOUT



CC BY 4.0

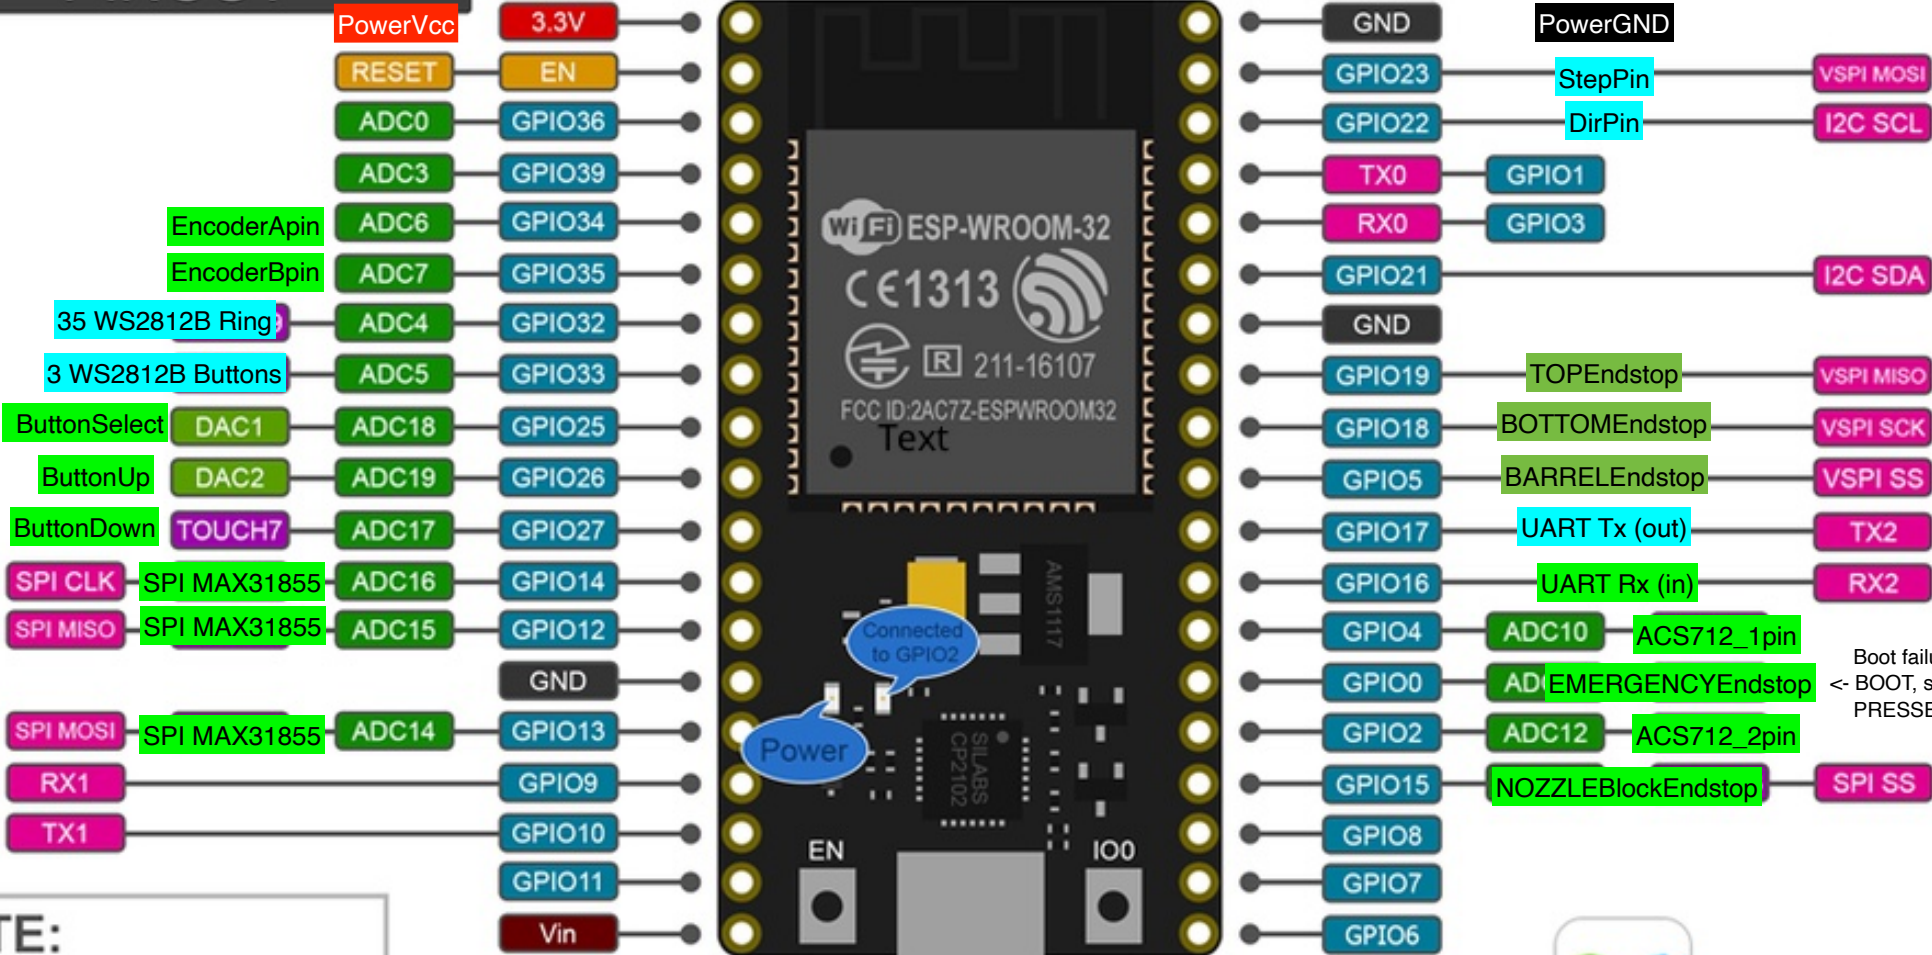

### NOTE:

All pin supported PWM and I2C  
Pin current 6mA (Max. 12mA)

Boot failure if LOW on  
<- BOOT, so assure IS/NOT  
PRESSED on BOOT..?



www.ioxhop.com