


NodeMCU-32S

PINOUT

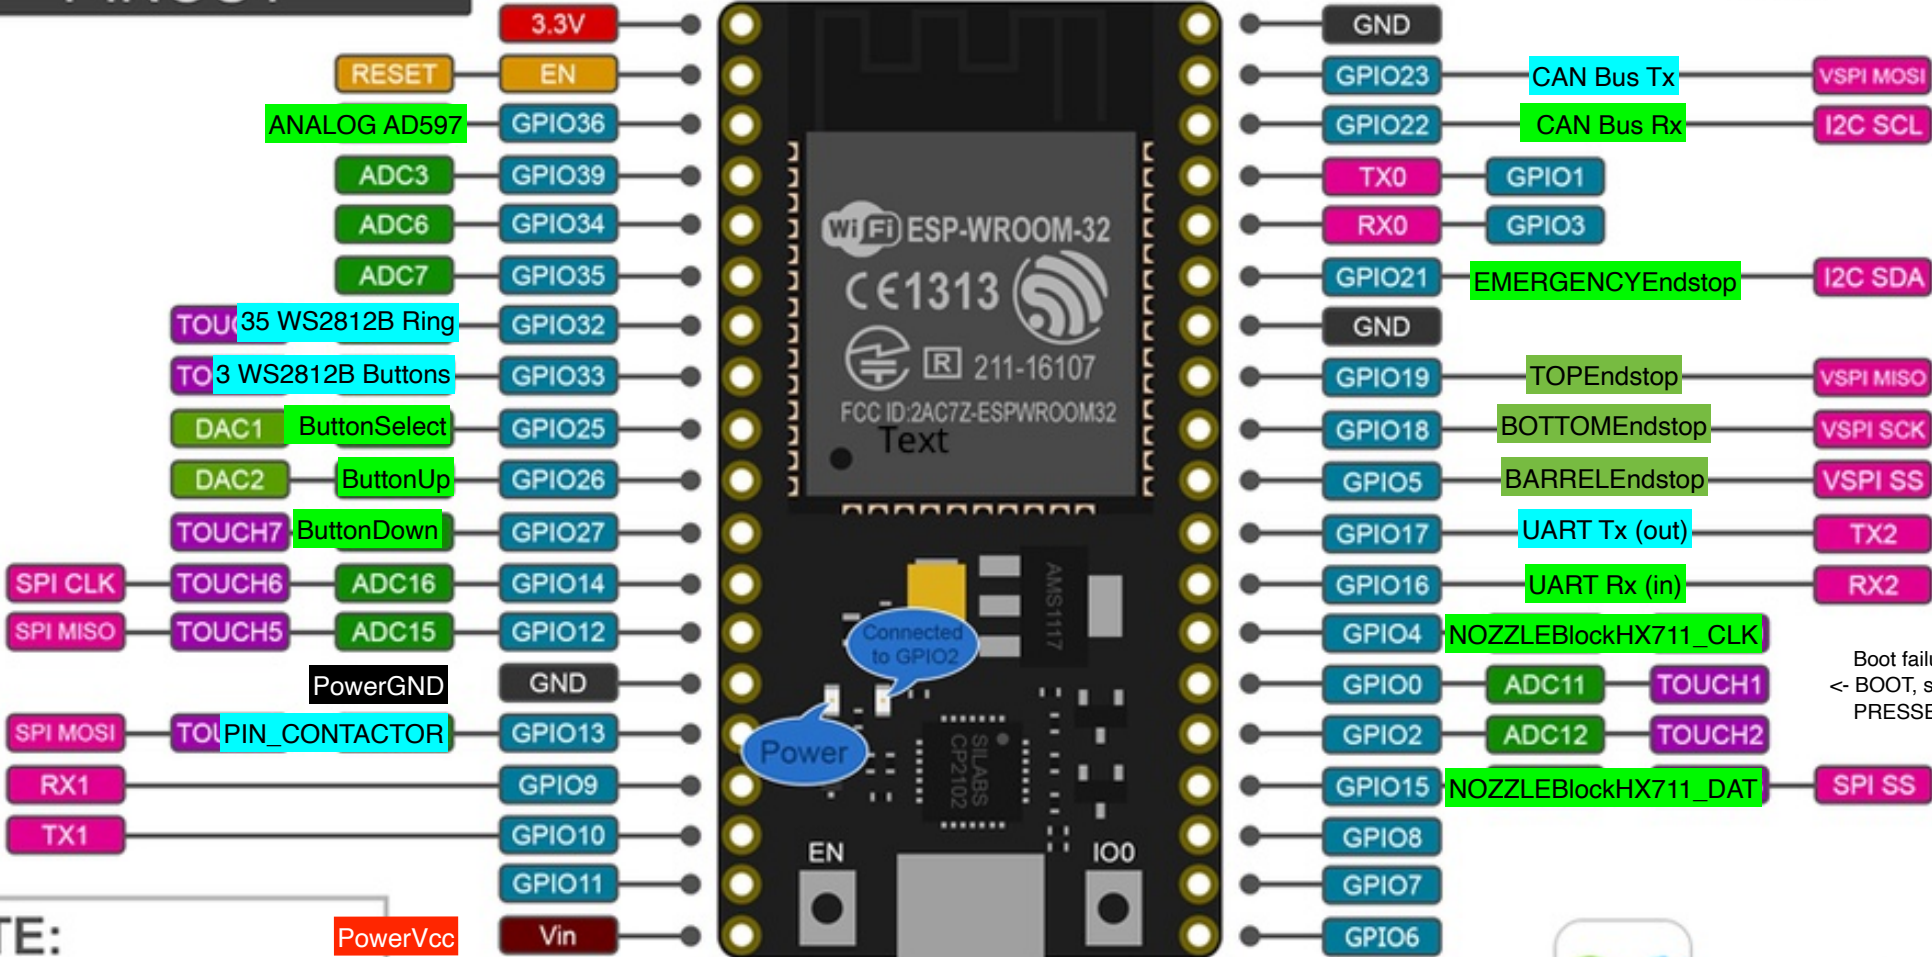

NOTE:
All pin supported PWM and I2C
Pin current 6mA (Max. 12mA)

Boot failure if LOW on
<- BOOT, so assure IS/NOT
PRESSED on BOOT..?