


(a) Simulated geometry and source direction

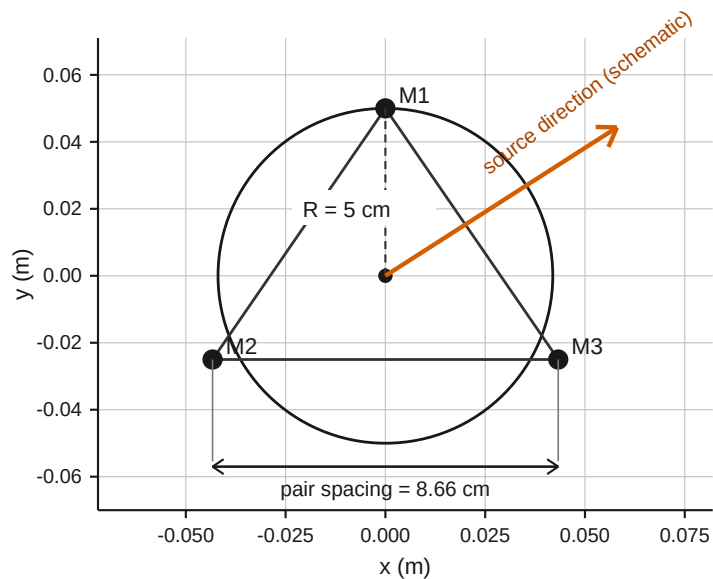

(b) Matched simulation controls

Category	Condition 1	Condition 2
Arrival construction	Fractional (F)	Rounded (Q)
Source history	Steady (S)	Onset (O)
Propagation	Direct (D)	Reflected (R)

Eight combinations share each source and noise record

Figure 1. Microphone geometry and matched simulation controls. (a) Layout of the equilateral three-microphone array with circumradius $R = 5\text{ cm}$ and inter-microphone spacing of 8.66 cm . The microphone coordinates are drawn to scale; the arrow shows one tested source azimuth and is not drawn to the 1.5 m source distance. (b) The three matched binary controls form eight combinations. Within each scene and recording, every combination uses identical source and microphone-noise samples. Onset denotes one source startup at the beginning of the complete recording.