rusEFI STI 2004: plug-and-play ECU for the 2004 USDM Subaru Impreza WRX STI (EJ257, drive-by-wire).

Built from Hellen-One modules. Signals between sheets are global net labels; power symbols are global.
Crossed-out (DNP) parts are optional footprints, not assembled: what each one is for is in documents/README.md.
Car pinout and cross-check: documents/STI2004-pinout-check.xlsx (tools/pinout_check.py).
Sheet order follows the signal: car connector -> power -> MCU -> inputs -> outputs -> comms -> aux.

Vehicle connector

File: Connector.kicad_sch

Units: D = B137, C = B136, B = B135, A = B134. Every pin carries a global net label used on the other sheets.

Power

File: Power.kicad_sch

M14 (main power module): +12V_RAW from the main relay (B5/B6), +12V_IGN (D15), back-up +12V (B19).

MCU and USB

File: Mcu.kicad_sch

M1: Hellen mega-mcu144 (STM32F7), with a 120R CAN terminator built in.

Sensors

File: Sensors.kicad_sch

Crank: 2-wire VR sensor (B10 +, B22 -) into M5. Knock (C25) into M13. M7 is a spare knock channel (not used).

Switch inputs

File: Inputs.kicad_sch

M11/M12 (dinput4): car lines that close to ground (defogger D11, lights D12, blower D13, test mode D14,

Outputs

File: Outputs.kicad_sch

Protected low-side drivers sized per load (Outputs): 8 DPAK, 4 SOT-223, 8 SOT-23F.

Comms

File: Comms.kicad_sch

M3: rusEFI wideband (WBO) for a Bosch LSU 4.9 front O2, on CAN to M1. It reaches the sensor through the stock

Aux and expansion

File: Aux.kicad_sch

J3: Molex Mini-Fit Jr 2x7 (pinout in documents/README.md): fused 12 V and 5 V, sensor ground, three digital

CONFIDENTIALITY NOTICE


THIS DRAWING AND INFORMATION CONTAINED HEREIN ARE THE EXCLUSIVE PROPERTY OF EMBEDDEDERA LLC. AND SHALL BE RETURNED UPON DEMAND AND SHALL NOT BE REPRODUCED IN WHOLE OR IN PART TO ANYONE ELSE OR USED, WITHOUT THE WRITTEN CONSENT OF EMBEDDEDERA LLC

EMBEDDEDERA

TITLE: rusEFI STI 2004 ECU			COSTUMER: EmbeddedEra
DESCRIPTION: rusefiSTI2004	PART NUMBER: TBD		REV: B
SIZE: A3	DATE ISSUE: 2026-10-13	DESIGNER: AGD	SHEET: 1 OF 14

Vehicle connector J1 (TE 1-1376430-0): the stock 2004 STI ECM plugs.

Units: D = B137, C = B136, B = B135, A = B134. Every pin carries a global net label used on the other sheets.
Pin functions: documents/oem-ecm-pinout-2004-sti.csv (FSM EN(STi)-18..22, wiring WI-106..118); check: tools/pinout_check.py.
Coil outputs B15-B18 run through F1-F4 (50 mA PTC, block below J1C, joined by IGNn_COIL labels). R1/R2 divide battery voltage for IN_VMAIN.

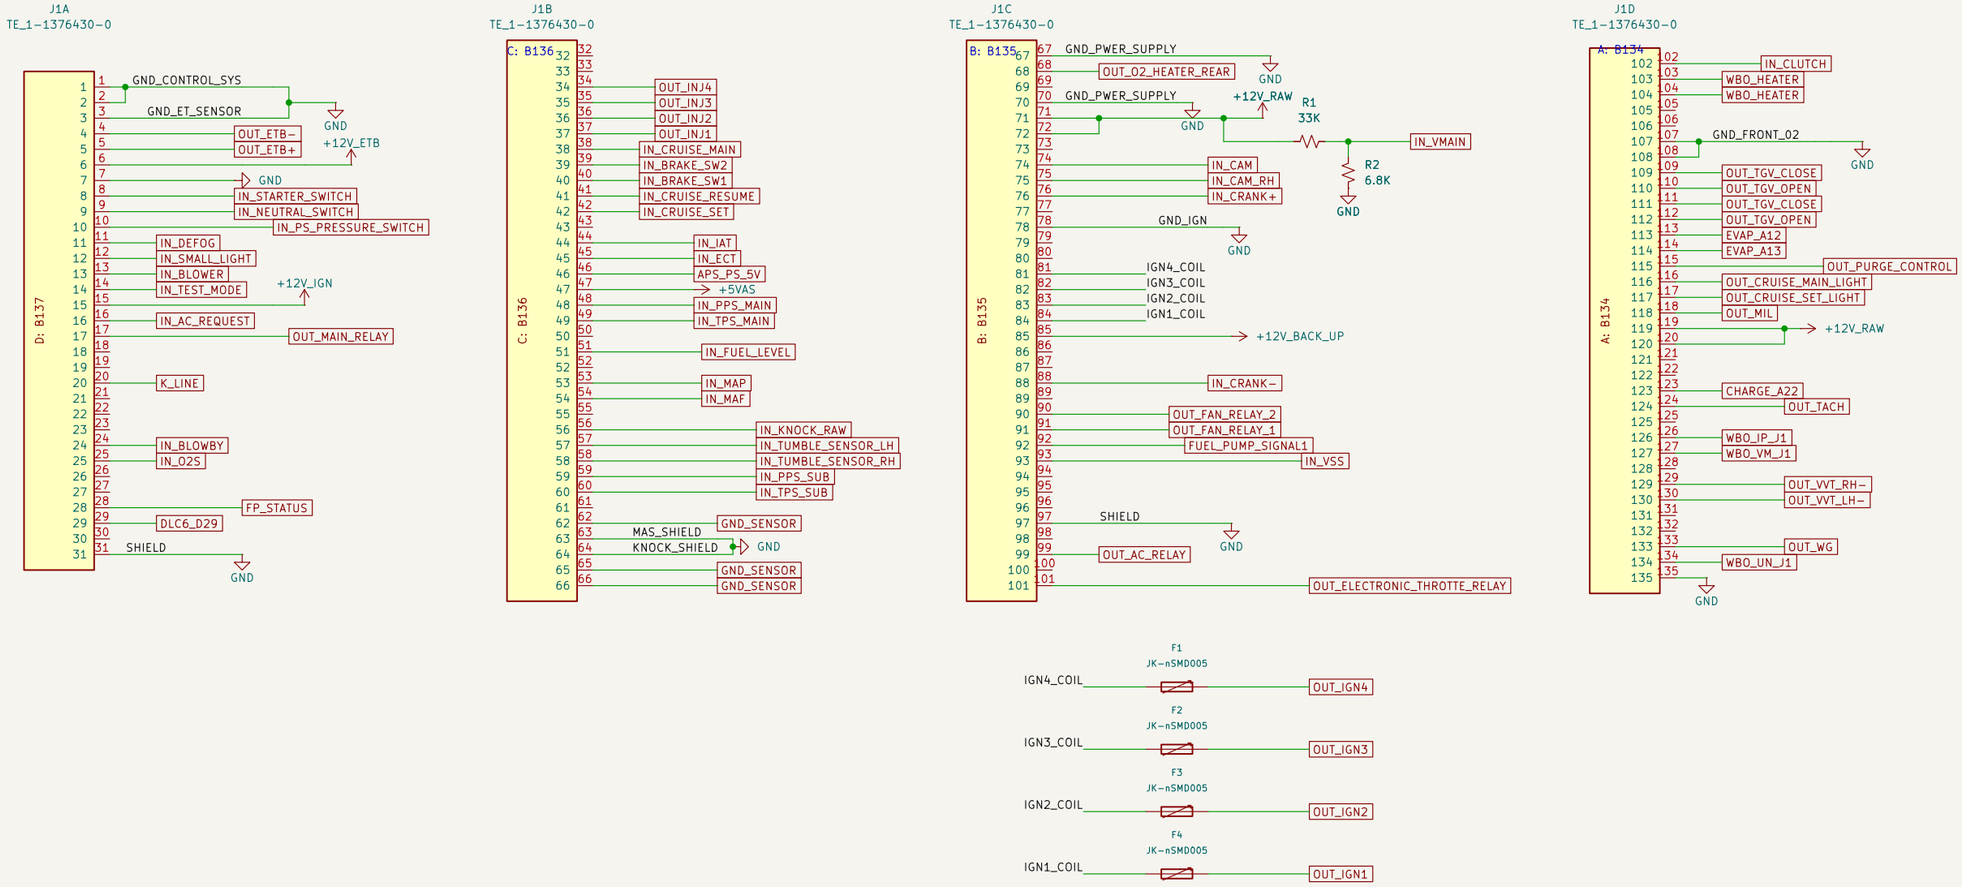

CONFIDENTIALITY NOTICE


THIS DRAWING AND INFORMATION CONTAINED HEREIN ARE THE EXCLUSIVE PROPERTY OF EMBEDDEDERA LLC. AND SHALL BE RETURNED UPON DEMAND AND SHALL NOT BE REPRODUCED IN WHOLE OR IN PART TO ANYONE ELSE OR USED. WITHOUT THE WRITTEN CONSENT OF EMBEDDEDERA LLC


EMBEDDEDERA


TITLE: rusEFI STI 2004 ECU			COSTUMER: EmbeddedEra
DESCRIPTION: Vehicle connector	PART NUMBER: TBD		REV: B
SIZE: A3	DATE ISSUE: 2026-10-13	DESIGNER: AGD	SHEET: 2 OF 14

Power.

M14 (main power module): +12V_RAW from the main relay (B5/B6), +12V_IGN (D15), back-up +12V (B19).
It makes +12V, +5V and +5VAS, the protected sensor 5 V for throttle TPS, MAP and TGV sensors (C16).
M8 (second power module) feeds only the pedal 5 V (APS_PS_5V, C15), so pedal and throttle sensors are on independent rails and their plausibility check works. The open link puts the pedal on +5VAS if M8 is not fitted.

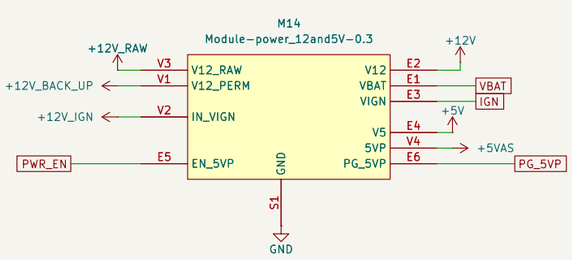

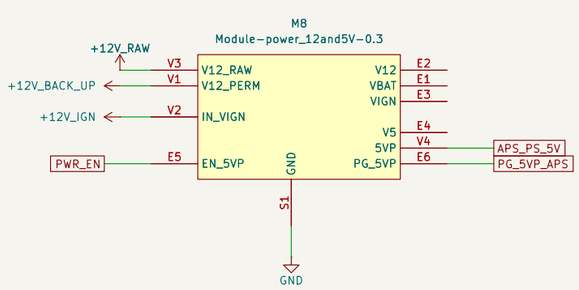





CONFIDENTIALITY NOTICE


THIS DRAWING AND INFORMATION CONTAINED HEREIN ARE THE EXCLUSIVE PROPERTY OF EMBEDDEDERA LLC. AND SHALL BE RETURNED UPON DEMAND AND SHALL NOT BE REPRODUCED IN WHOLE OR IN PART TO ANYONE ELSE OR USED, WITHOUT THE WRITTEN CONSENT OF EMBEDDEDERA LLC

EMBEDDEDERA

TITLE: rusEFI STI 2004 ECU			COSTUMER: EmbeddedEra
DESCRIPTION: Power		PART NUMBER: TBD	REV: B
SIZE: A3	DATE ISSUE: 2026-10-13	DESIGNER: AGD	SHEET: 3 OF 14

MCU and USB.

M1: Hellen mega-mcu144 (STM32F7), with a 120R CAN terminator built in.
J2 USB-C for TunerStudio: 5.1k CC pull-downs (device), USBLC6-2SC6 ESD (U1), shell to GND through a 0R link.
BOOT0 pad with an open link to 3.3 V forces the USB DFU bootloader; SWD pads (SWDIO, SWCLK, NRST) for a debugger.

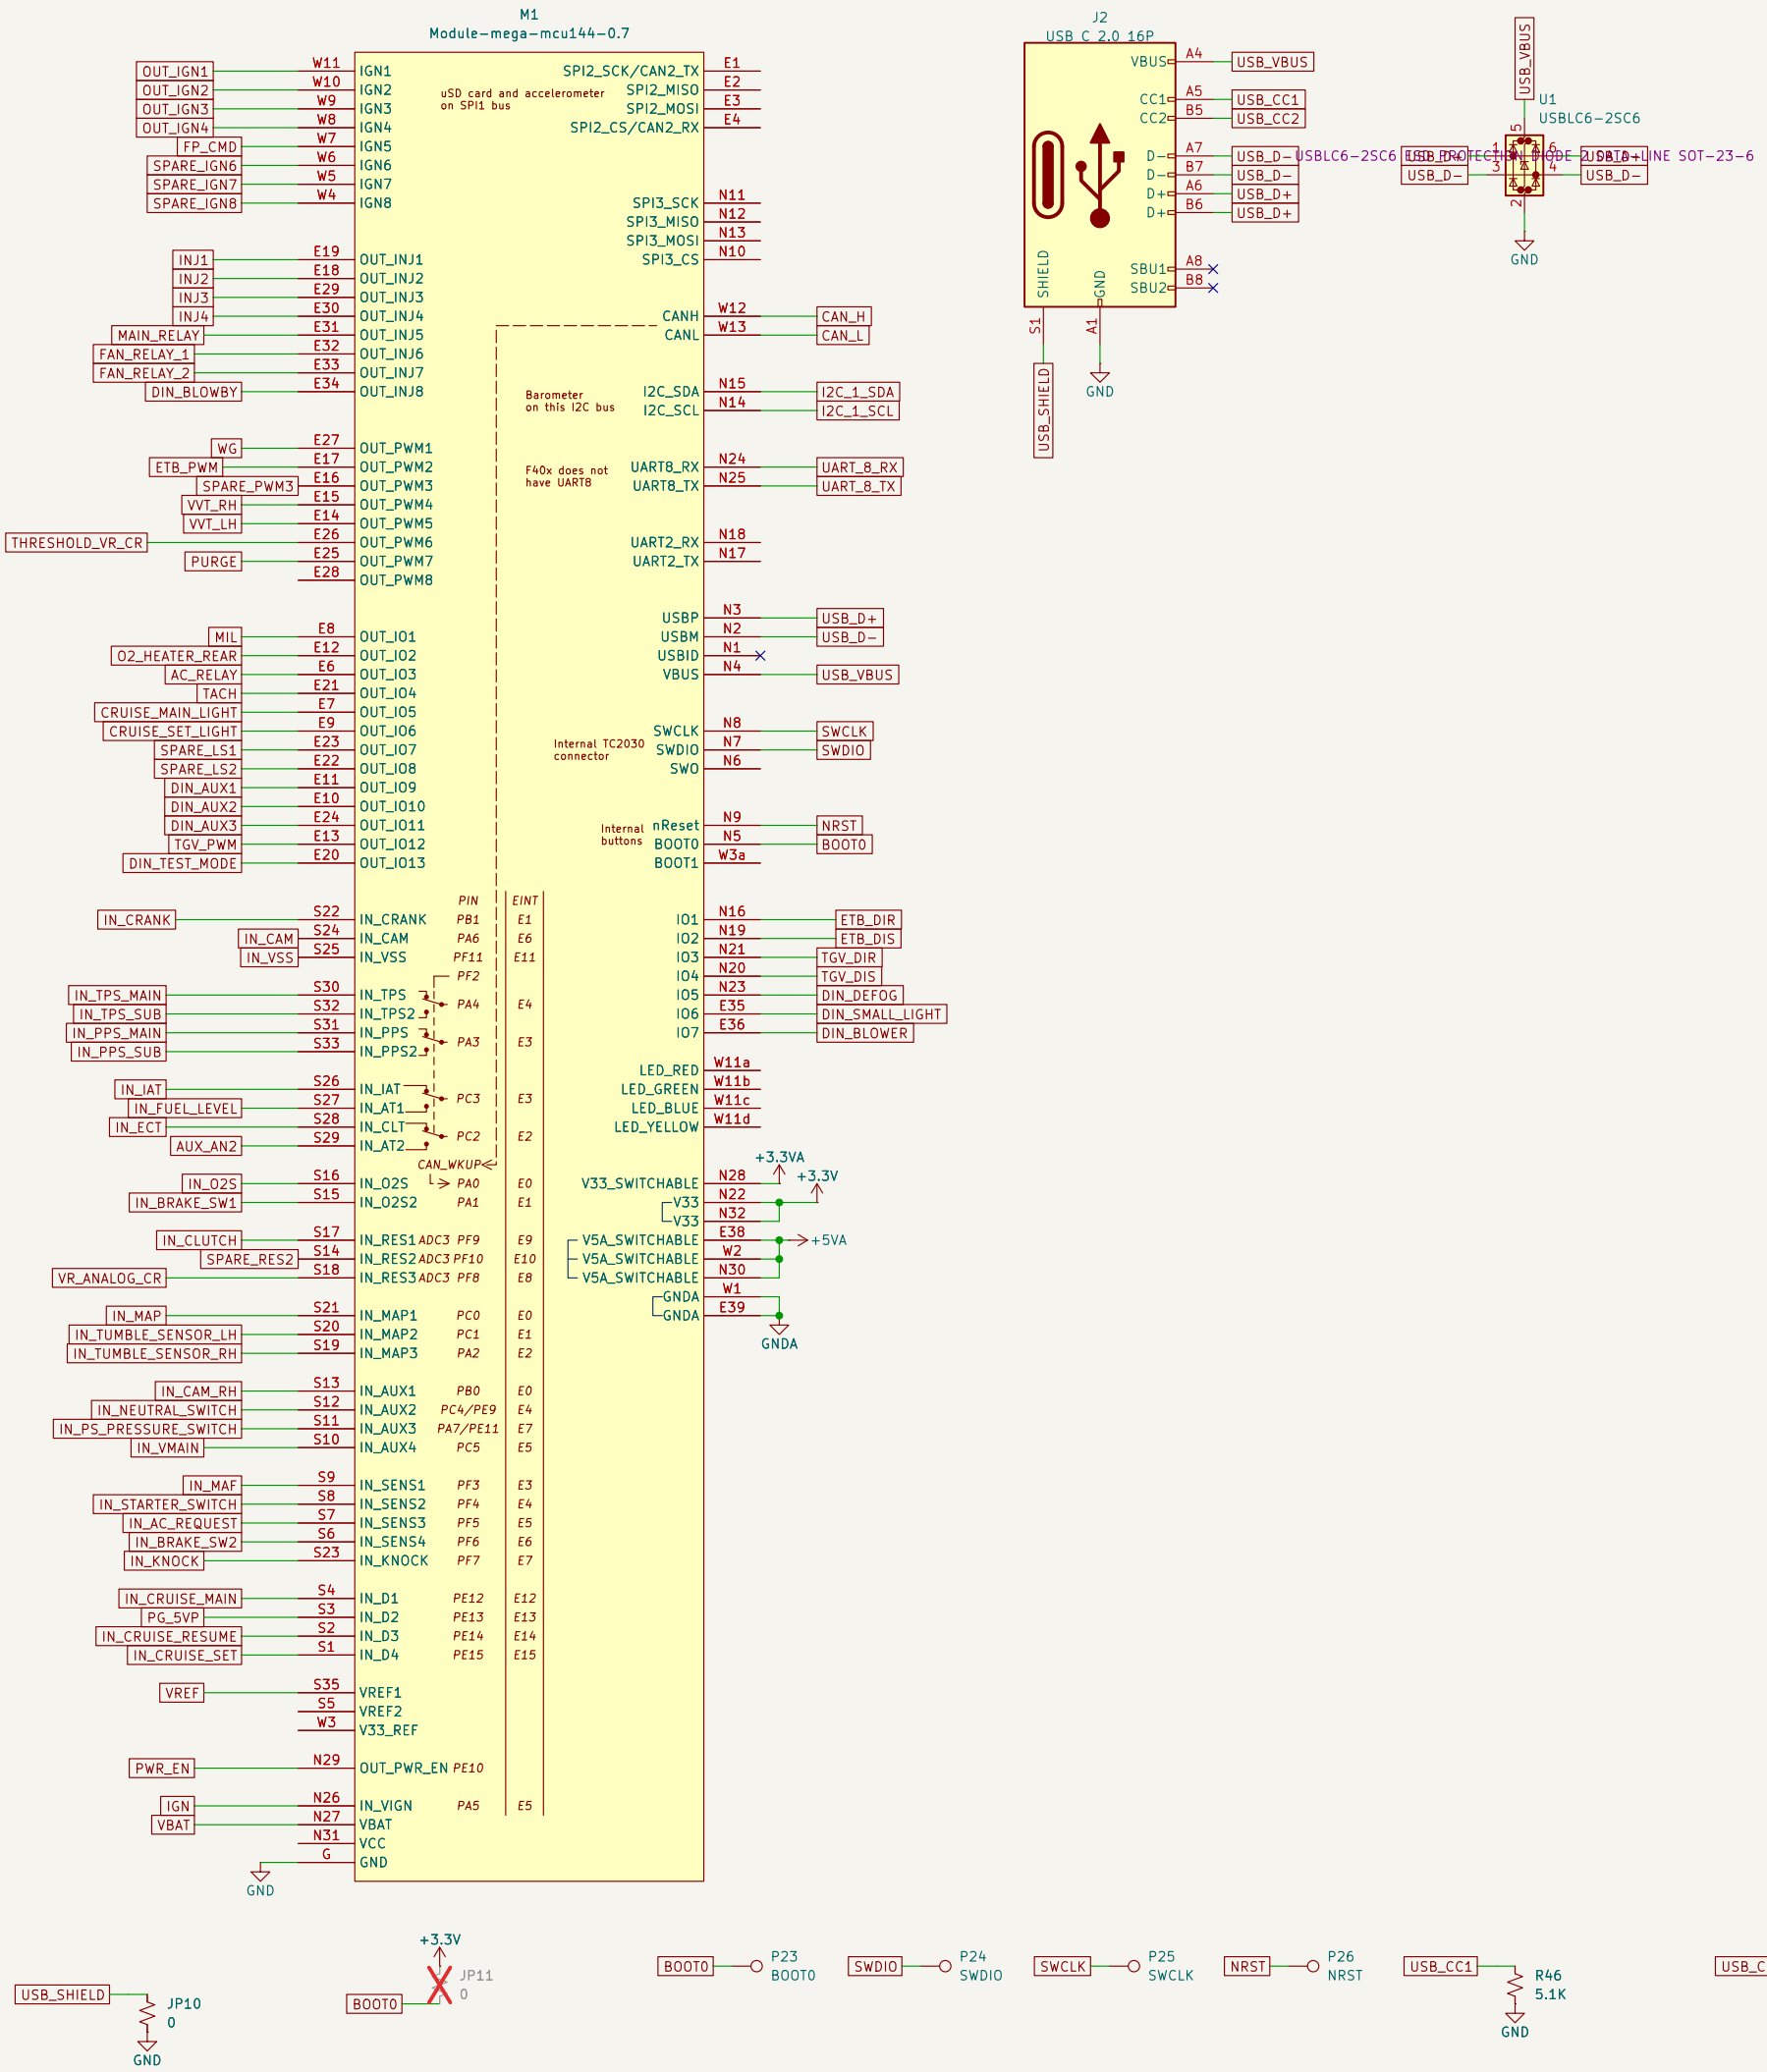

CONFIDENTIALITY NOTICE


THIS DRAWING AND INFORMATION CONTAINED HEREIN ARE THE EXCLUSIVE PROPERTY OF EMBEDDEDERA LLC. AND SHALL BE RETURNED UPON DEMAND AND SHALL NOT BE REPRODUCED IN WHOLE OR IN PART TO ANYONE ELSE OR USED, WITHOUT THE WRITTEN CONSENT OF EMBEDDEDERA LLC


EMBEDDEDERA


TITLE: rusEFI STI 2004 ECU			COSTUMER: EmbeddedEra
DESCRIPTION: MCU and USB	PART NUMBER: TBD		REV: B
SIZE: A3	DATE ISSUE: 2026-10-13	DESIGNER: AGD	SHEET: 4 OF 14


Engine sensors.

Crank: 2-wire VR sensor (B10 +, B22 -) into M5. Knock (C25) into M13 (the STI has one knock sensor).
Cams: 3-wire Hall sensors (WI-114), wired straight to M1 inputs that have pull-ups; crossed parts = stronger pull-ups.
Analog sensors (MAF, MAP, IAT, ECT, TPS, pedal, TGV, fuel level) go straight to M1 inputs by net label.
Sensor returns C31/C34/C35 (GND_SENSOR): to GND through the fitted 0R, or to GNDA through the open link.

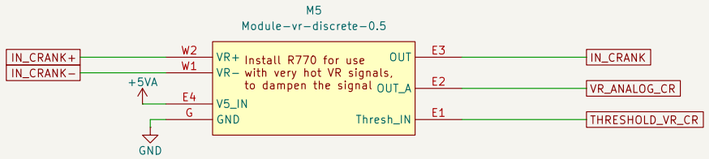

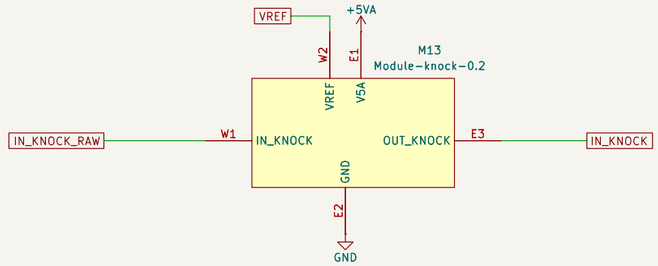









CONFIDENTIALITY NOTICE

THIS DRAWING AND INFORMATION CONTAINED HEREIN ARE THE EXCLUSIVE PROPERTY OF EMBEDDEDERA LLC. AND SHALL BE RETURNED UPON DEMAND AND SHALL NOT BE REPRODUCED IN WHOLE OR IN PART TO ANYONE ELSE OR USED, WITHOUT THE WRITTEN CONSENT OF EMBEDDEDERA LLC

EMBEDDEDERA


TITLE: rusEFI STI 2004 ECU | COSTUMER: EmbeddedEra


DESCRIPTION: Sensors | PART NUMBER: TBD | REV: B

SIZE: A3 | DATE ISSUE: 2026-10-13 | DESIGNER: AGD | SHEET: 5 OF 14

Switch inputs.

M11/M12 (dinput4): car lines that close to ground (defogger D11, lights D12, blower D13, test mode D14, blow-by D24) with 680k pull-ups, and three aux inputs (launch / 2-step, map switch, spare) that expect 12 V. 12 V-active switches (starter, A/C request, brake 1 and 2, clutch) and the cruise buttons are read on M1 analog inputs with the fitted pull-downs here. Crossed-out parts are options: see documents/README.md.

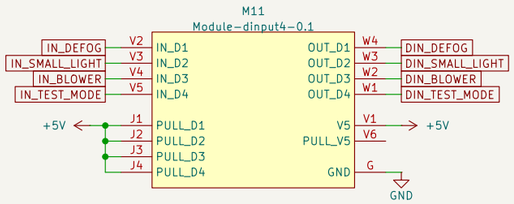


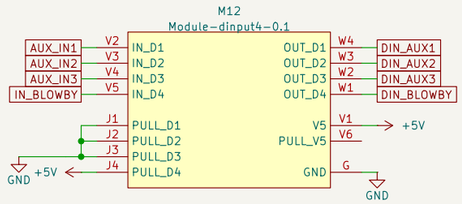

























CONFIDENTIALITY NOTICE

THIS DRAWING AND INFORMATION CONTAINED HEREIN ARE THE EXCLUSIVE PROPERTY OF EMBEDDEDERA LLC. AND SHALL BE RETURNED UPON DEMAND AND SHALL NOT BE REPRODUCED IN WHOLE OR IN PART TO ANYONE ELSE OR USED, WITHOUT THE WRITTEN CONSENT OF EMBEDDEDERA LLC

EMBEDDEDERA


TITLE: rusEFI STI 2004 ECU | COSTUMER: EmbeddedEra

DESCRIPTION: Switch inputs | PART NUMBER: TBD | REV: B

SIZE: A3 | DATE ISSUE: 2026-10-13 | DESIGNER: AGD | SHEET: 6 OF 14

Outputs.

Protected low-side drivers, sized per load: INJ injectors 1-4 and LS2 wastegate, AVCS RH/LH, rear O2 heater on NCV8401B (DPAK); LS3 purge, A/C relay and the two spares (aux connector, or EVAP A12/A13 through the open links) on ZXMS6006DGQ (SOT-223, 2.8 A); LS1 main relay, fans, ETB relay and LS4 cruise lamps, MIL, tach on ZXMS6004FF (SOT-23F).
M2 drives the electronic throttle motor; M9 drives both TGV motors in parallel.
Fuel pump control unit command B26: 5 V PWM from IGN5 through 100R, with pull-up/down options.

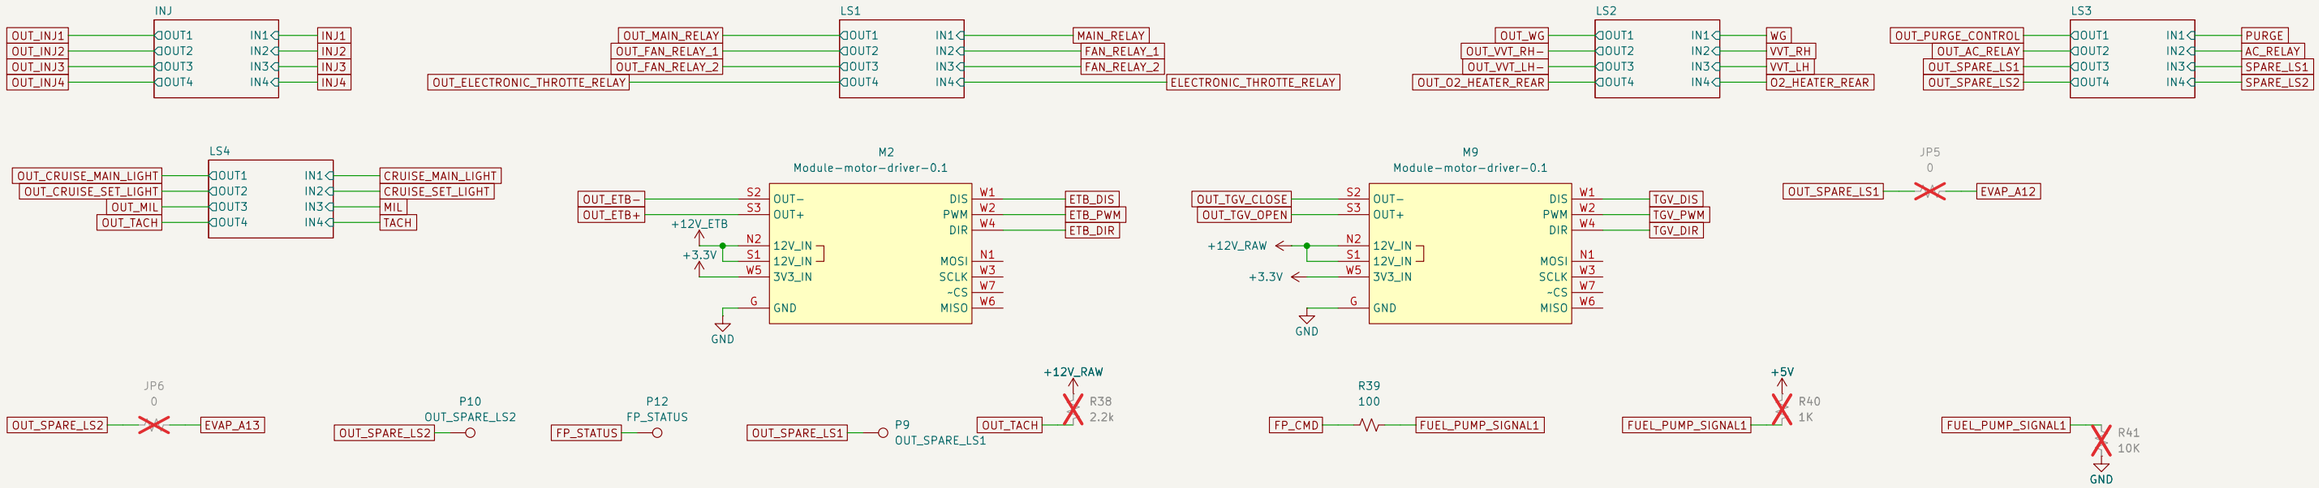


CONFIDENTIALITY NOTICE

THIS DRAWING AND INFORMATION CONTAINED HEREIN ARE THE EXCLUSIVE PROPERTY OF EMBEDDEDERA LLC. AND SHALL BE RETURNED UPON DEMAND AND SHALL NOT BE REPRODUCED IN WHOLE OR IN PART TO ANYONE ELSE OR USED, WITHOUT THE WRITTEN CONSENT OF EMBEDDEDERA LLC

EMBEDDEDERA

TITLE: rusEFI STI 2004 ECU			COSTUMER: EmbeddedEra
DESCRIPTION: Outputs		PART NUMBER: TBD	REV: B
SIZE: A3	DATE ISSUE: 2026-10-13	DESIGNER: AGD	SHEET: 7 OF 14

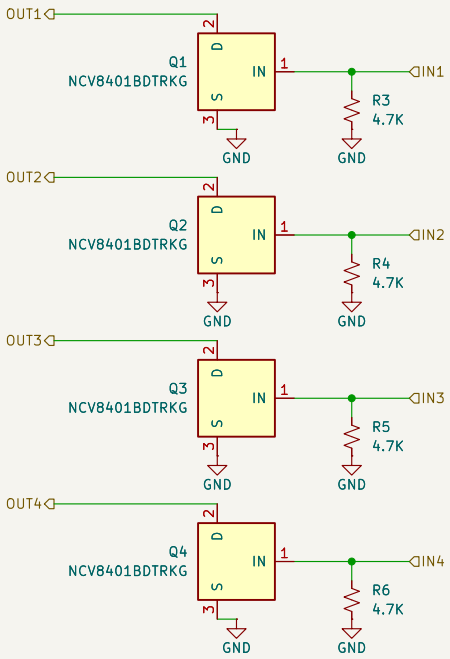


CONFIDENTIALITY NOTICE

THIS DRAWING AND INFORMATION CONTAINED HEREIN ARE THE EXCLUSIVE PROPERTY OF EMBEDDEDERA LLC. AND SHALL BE RETURNED UPON DEMAND AND SHALL NOT BE REPRODUCED IN WHOLE OR IN PART TO ANYONE ELSE OR USED, WITHOUT THE WRITTEN CONSENT OF EMBEDDEDERA LLC

EMBEDDEDERA

TITLE: rusEFI STI 2004 ECU		COSTUMER: EmbeddedEra	
DESCRIPTION: INJ	PART NUMBER: TBD		**REV: B**
SIZE: A4	DATE ISSUE: 2026-10-13	DESIGNER: AGD	SHEET: 10 OF 14

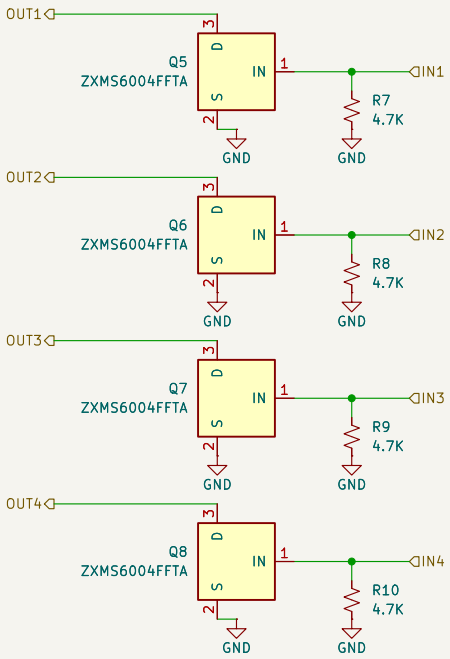


CONFIDENTIALITY NOTICE

THIS DRAWING AND INFORMATION CONTAINED HEREIN ARE THE EXCLUSIVE PROPERTY OF EMBEDDEDERA LLC. AND SHALL BE RETURNED UPON DEMAND AND SHALL NOT BE REPRODUCED IN WHOLE OR IN PART TO ANYONE ELSE OR USED, WITHOUT THE WRITTEN CONSENT OF EMBEDDEDERA LLC

EMBEDDEDERA

TITLE: rusEFI STI 2004 ECU		COSTUMER: EmbeddedEra	
DESCRIPTION: LS1	PART NUMBER: TBD		**REV: B**
SIZE: A4	DATE ISSUE: 2026-10-13	DESIGNER: AGD	SHEET: 11 OF 14

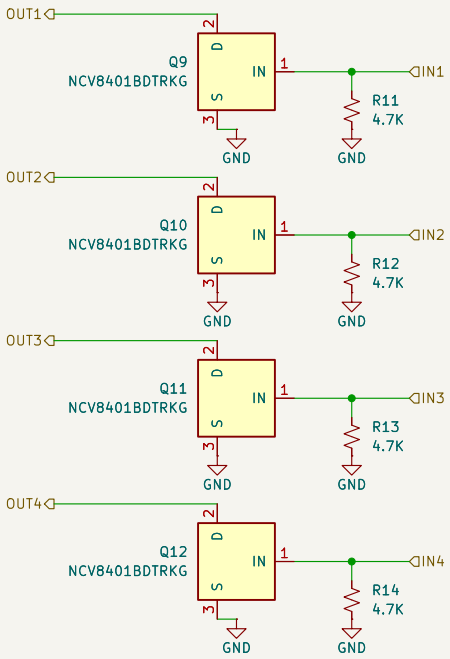


CONFIDENTIALITY NOTICE

THIS DRAWING AND INFORMATION CONTAINED HEREIN ARE THE EXCLUSIVE PROPERTY OF EMBEDDEDERA LLC. AND SHALL BE RETURNED UPON DEMAND AND SHALL NOT BE REPRODUCED IN WHOLE OR IN PART TO ANYONE ELSE OR USED, WITHOUT THE WRITTEN CONSENT OF EMBEDDEDERA LLC

EMBEDDEDERA

TITLE: rusEFI STI 2004 ECU		COSTUMER: EmbeddedEra	
DESCRIPTION: LS2	PART NUMBER: TBD		**REV: B**
SIZE: A4	DATE ISSUE: 2026-10-13	DESIGNER: AGD	SHEET: 12 OF 14

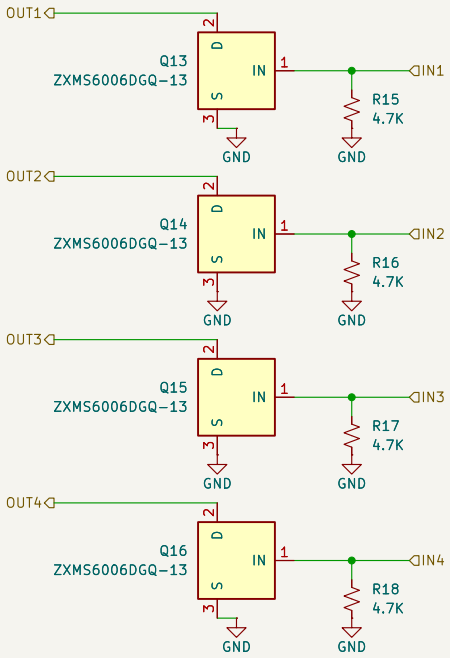


CONFIDENTIALITY NOTICE

THIS DRAWING AND INFORMATION CONTAINED HEREIN ARE THE EXCLUSIVE PROPERTY OF EMBEDDEDERA LLC. AND SHALL BE RETURNED UPON DEMAND AND SHALL NOT BE REPRODUCED IN WHOLE OR IN PART TO ANYONE ELSE OR USED, WITHOUT THE WRITTEN CONSENT OF EMBEDDEDERA LLC

EMBEDDEDERA

TITLE: rusEFI STI 2004 ECU			COSTUMER: EmbeddedEra
DESCRIPTION: LS3	PART NUMBER: TBD		**REV: B**
SIZE: A4	DATE ISSUE: 2026-10-13	DESIGNER: AGD	SHEET: 13 OF 14

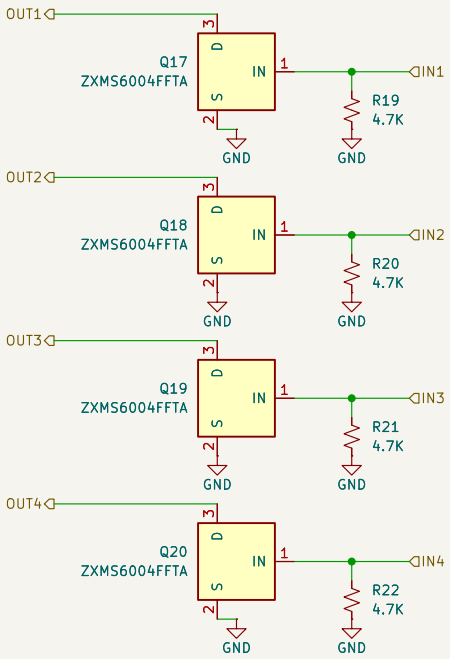

CONFIDENTIALITY NOTICE


THIS DRAWING AND INFORMATION CONTAINED HEREIN ARE THE EXCLUSIVE PROPERTY OF EMBEDDEDERA LLC. AND SHALL BE RETURNED UPON DEMAND AND SHALL NOT BE REPRODUCED IN WHOLE OR IN PART TO ANYONE ELSE OR USED, WITHOUT THE WRITTEN CONSENT OF EMBEDDEDERA LLC

EMBEDDEDERA

TITLE: rusEFI STI 2004 ECU			COSTUMER: EmbeddedEra
DESCRIPTION: LS4	PART NUMBER: TBD		**REV: B**
SIZE: A4	DATE ISSUE: 2026-10-13	DESIGNER: AGD	SHEET: 14 OF 14

Communications.

M3: rusEFI wideband (WBO) for a Bosch LSU 4.9 front O2, on CAN to M1. It reaches the sensor through the stock harness (A33/A26/A25, heater A2+A3) via the 0R links, or through a pigtail on the pads (adapter table in README).
M10: LIN transceiver used as the K-line (SSM, D20). D29 reaches the K-line only through an open link.
CAN H/L on pads, with an optional 120R terminator for an external bus end.

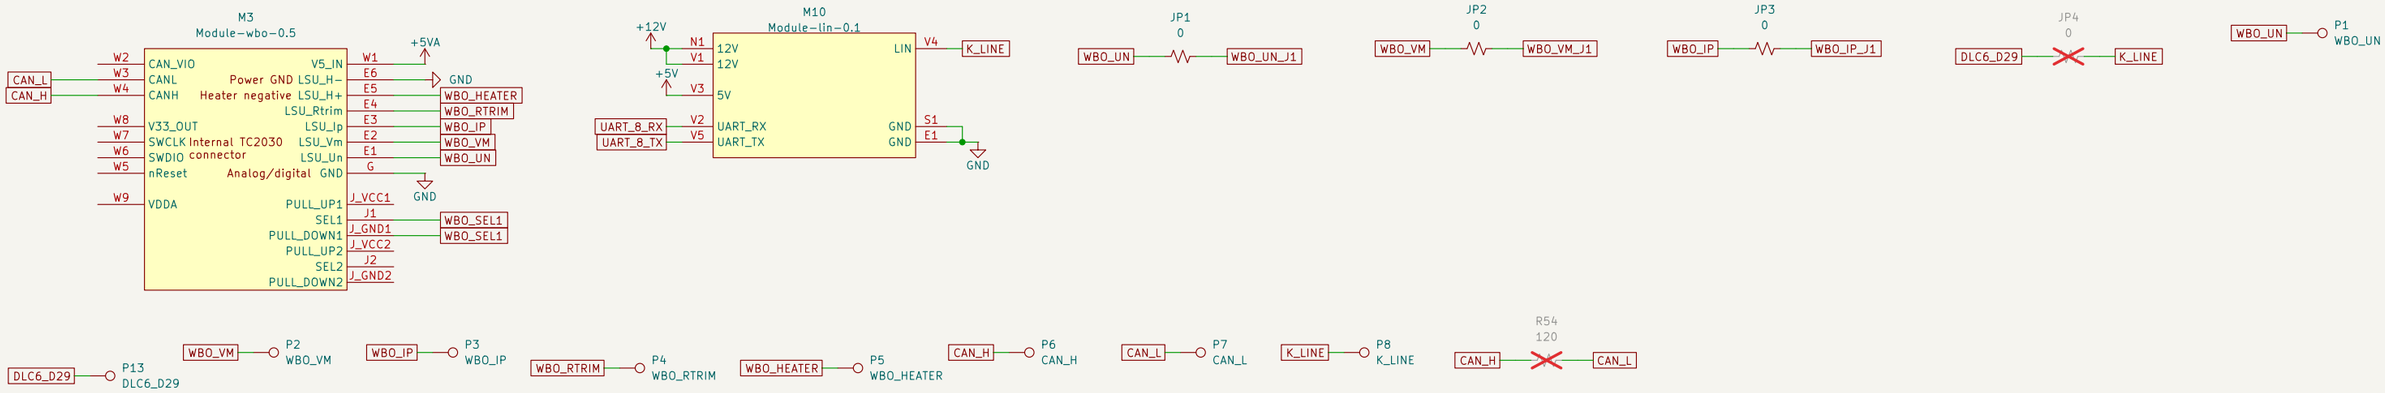

CONFIDENTIALITY NOTICE


THIS DRAWING AND INFORMATION CONTAINED HEREIN ARE THE EXCLUSIVE PROPERTY OF EMBEDDEDERA LLC. AND SHALL BE RETURNED UPON DEMAND AND SHALL NOT BE REPRODUCED IN WHOLE OR IN PART TO ANYONE ELSE OR USED, WITHOUT THE WRITTEN CONSENT OF EMBEDDEDERA LLC

EMBEDDEDERA

TITLE: rusEFI STI 2004 ECU			COSTUMER: EmbeddedEra
DESCRIPTION: Comms		PART NUMBER: TBD	REV: B
SIZE: A3	DATE ISSUE: 2026-10-13	DESIGNER: AGD	SHEET: 8 OF 14

Aux connector and expansion.

J3: Molex Mini-Fit Jr 2x7 (pinout in documents/README.md): fused 12 V and 5 V, sensor ground, three digital inputs, two analog inputs, two low-side outputs, CAN.
Spare MCU pins (IGN6-8, I2C, OUT_PWM3, IN_RES2) and every rail are on pads next to the prototype area G1.

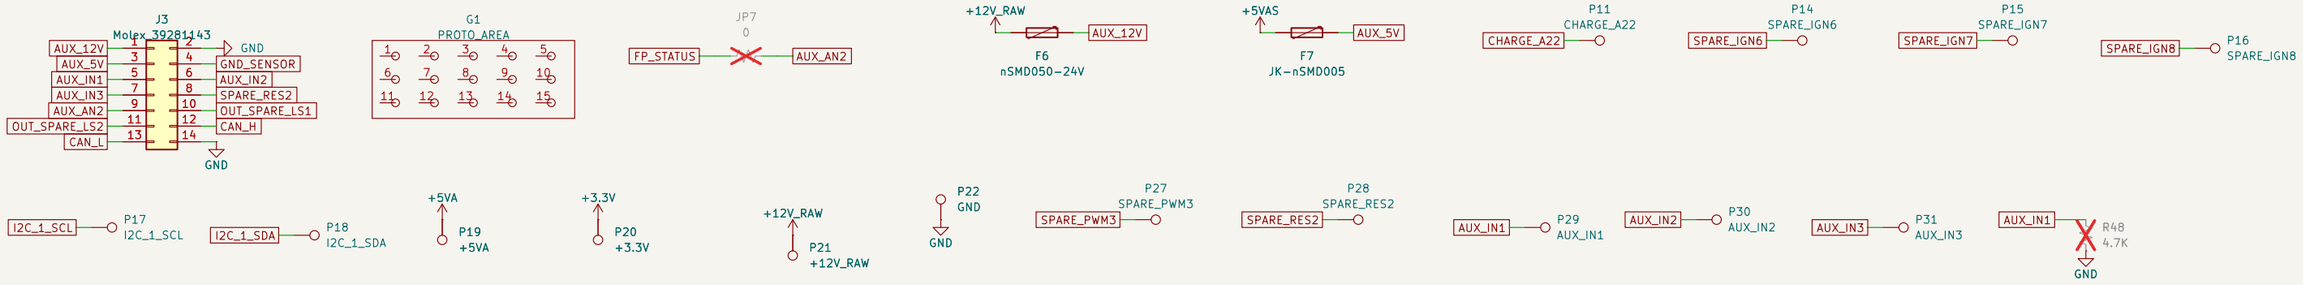

Mounting: H1-H4 M3 plated holes, no net (the board is not grounded to the case through them).
J1's three screws hold the connector to the board only.

CONFIDENTIALITY NOTICE

THIS DRAWING AND INFORMATION CONTAINED HEREIN ARE THE EXCLUSIVE PROPERTY OF EMBEDDEDERA LLC. AND SHALL BE RETURNED UPON DEMAND AND SHALL NOT BE REPRODUCED IN WHOLE OR IN PART TO ANYONE ELSE OR USED, WITHOUT THE WRITTEN CONSENT OF EMBEDDEDERA LLC

EMBEDDEDERA

TITLE: rusEFI STI 2004 ECU			COSTUMER: EmbeddedEra
DESCRIPTION: Aux and expansion		PART NUMBER: TBD	REV: B
SIZE: A3	DATE ISSUE: 2026-10-13	DESIGNER: AGD	SHEET: 9 OF 14