



The Quality Pump for Your Application



KDIN

DIN 24255

End Suction Centrifugal Pump

KDIN pump is a centrifugal pump according to DIN 24255. This is one of the most versatile pump type. The pump has a wide range of shaft sealing options, varying from gland packing to balance mechanical seal and double mechanical seal. The standard materials are cast Iron, SS 304 and SS 316. The other materials like duplex stainless is an option.

Technical Information

Flow Rate: 2 - 1,100 m³/hr.

Head: 2 - 150 m.

Speed: 50Hz – 1450 or 2900 rpm

Temperature: -10 – 105 Degree C

Working Pressure: 10 Bars Standard, 16 Bars for some pump sizes

Test Pressure: 16 Bars Standard, 24 Bars for some pump sizes

Application



Industry

KDIN's ample choice of shaft sealing options and its availability in several materials makes it is a suitable pump for general proposes. Complying to DIN 24255 (EN733), provided with industrial standard gland packing or mechanical seal according to DIN 24960. **KDIN** is always the right pump for your application.



Utility

Applications of **KDIN** within utility buildings are as general duty pumps, circulation pump in heating systems and pump in water purification plants.



KDINC in Closed Couple Design

Technical Specification

KDIN CENTIFUGAL PUMPS

The KDIN Pumps fully confirms to the European pump standard DIN24255/BS EN733 and covers all sizes nominated. This covers both performance and dimensions.

The **KDIN** pumps offer users many advantages over equivalent pumps, because the range incorporates a number of features that improve reliability & performance, while simplifying maintenance and spare parts inventory.

The pumps have a back pull out design, and when a suitable spacer coupling is fitted to a direct coupled unit, the casing and motor can remain in position while all other pump parts can be removed for simple and quick maintenance

Pump casing

- Flanges according to ISO 2084 PN16
- Max working pressure at 16 bar
- Large drain opening



KDIN in Standard Design

Shaft


- Steel alloy shaft
- Most seal options with shaft sleeve (extended impeller key ensures co-rotation of the shaft)
- Rigid, reliable shaft
- No contact between shaft and pumped liquid when shaft sleeve applied

OPTIONAL MATERIALS

- Available in cast iron, SS 304, SS 306 and Duplex Stainless
- Suitable for a wide range of applications

Motor Power Recommendation

Absorbed Pump Shaft kW	Driver Power Reserve
Up to 7.5	Approx. 20%
7.5 - 40	Approx. 15%
Above 40	Approx. 10%

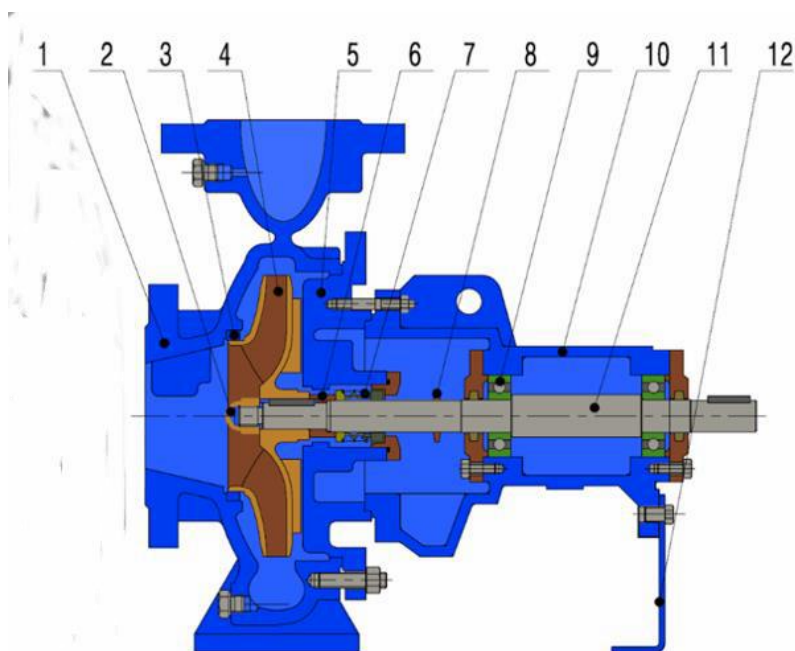

Operating Data 50 Hz

Pump sizes	32mm to 200mm	
Flow	up to	1100 m ³ /Hr
Head	up to	150 m.
Temperature	up to	105°C
Speed	up to	2950 or 3000rpm
Pressure	up to	16 bar



Part Number	1	2	3	4	5	6
Part Name	Volute Casing	Impeller Nut	Wear Ring	Impeller	Casing Cover	Shaft Sleeve

Part Number	7	8	9	10	11	12
Part Name	Shaft Seal	Slinger	Bearing	Bearing Housing	Shaft	Support Foot


Material Construction

Component	Code		
	C4	34	36
Casing	Cast Iron	Stainless steel 304	Stainless steel 316
Back Plate	Cast Iron	Stainless steel 304	Stainless steel 316
Impeller	Stainless steel 304	Stainless steel 304	Stainless steel 316
Shaft	Stainless steel 420	Stainless steel 304	Stainless steel 316


Note: The material combinations are available as on request.

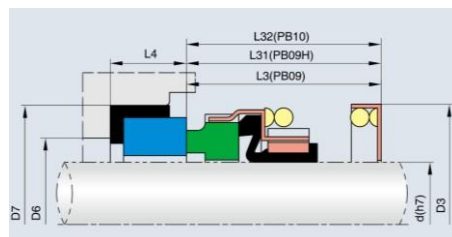

SGL unbalance bellow mechanical seal

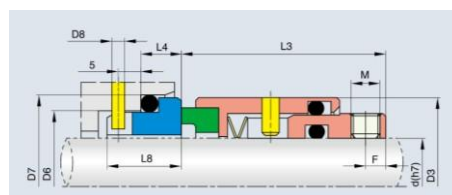

SGL balance enclosed spring mechanical seal

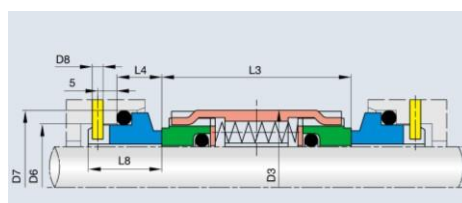

Double component mechanical seal


Mechanical Seal Options

Description	Code			
	A1V	A2V	G1V	76V
Type	SGL Unbalance Rubber Bellow	SGL Unbalance Rubber Bellow	SGL Balance Enclosed Spring	Double Back to Back
Seal Faces	Carbon/SiC	SiC/SiC	Carbon/SiC	Carbon/SiC - SiC/SiC
Elastomers	Viton	Viton	Viton	Viton
Metal Parts	316	316	316	316

Note: The mechanical seal type and material combinations are available as on request.

Shaft sealing

- 4 possible mechanical DIN-seal options and more as on request
- Sealing rings and elastomers in several possible combinations
- Can sealing cover with quench and flush connections
- Suitable for many possible liquids and applications
- Suitable for high temperature


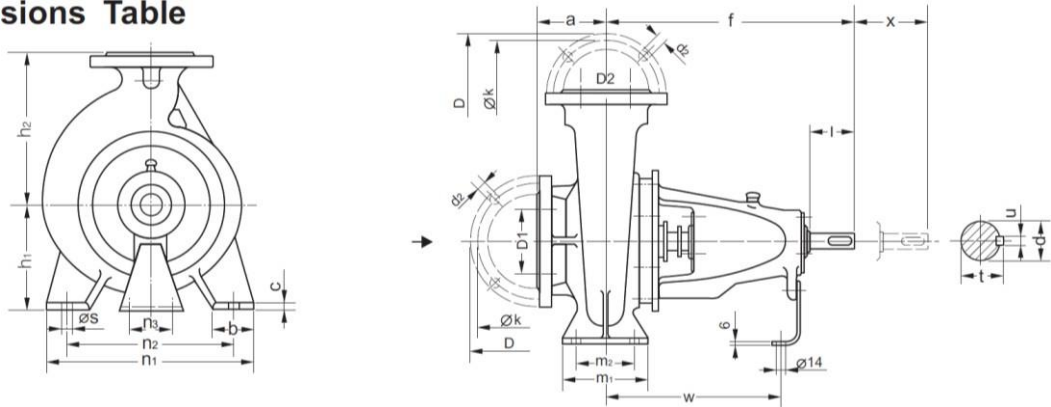
Dimensions Table


Pump Model	Bearing housing	D2	D1	a	f	h1	h2	b	c	m1	m2	n1	n2	n3	s	w	d	l	t	u	x
32-13	25	32	50	80	360	112	140	50	14	100	70	190	140	100	14	267	24	50	27	8	4
32-16	25A	32	50	80	360	132	160	50	14	100	70	240	190	100	14	267	24	50	27	8	4
32-20	25	32	50	80	360	160	180	50	14	100	70	240	190	110	14	267	24	50	27	8	4
32-26	25A	32	50	100	360	180	225	65	14	125	95	320	250	110	14	267	24	50	27	8	4
40-13	25	40	65	80	360	112	140	50	14	100	70	210	160	100	14	267	24	50	27	8	4
40-16	25A	40	65	80	360	132	160	50	14	100	70	240	190	100	14	267	24	50	27	8	4
40-20	25	40	65	100	360	160	180	50	14	100	70	265	212	110	14	267	24	50	27	8	4
40-26	25A	40	65	100	360	180	225	65	14	125	95	320	250	110	14	267	24	50	27	8	4
40-32	35	40	65	125	470	200	250	65	14	125	95	345	280	110	14	342	32	80	35	10	4
40-32H	45	40	65	125	526	200	250	65	14	125	95	345	280	110	14	367	42	110	45	12	4
50-13	25	50	65	100	360	132	160	50	14	100	70	240	190	100	14	267	24	50	27	8	4
50-16	25A	50	65	100	360	160	180	50	14	100	70	265	212	110	14	267	24	50	27	8	4
50-20	25	50	65	100	360	160	200	50	14	100	70	265	212	110	14	267	24	50	27	8	4
50-26	25A	50	65	100	360	180	225	65	14	125	95	320	250	110	14	267	24	50	27	8	4
50-26H	35	50	65	100	470	180	225	65	14	125	95	320	250	110	14	344	32	80	35	10	4
50-32	35	50	65	125	470	225	280	65	18	125	95	345	280	110	14	342	32	80	35	10	4
50-32H	45	50	65	125	526	225	280	65	18	125	95	345	280	110	14	367	42	110	45	12	4
65-13	25	65	80	100	360	160	180	65	14	125	95	280	212	110	14	267	24	50	27	8	4
65-16	25A	65	80	100	360	160	200	65	14	125	95	280	212	110	14	267	24	50	27	8	4
65-20	25	65	80	105	360	180	225	65	14	125	95	320	250	110	14	267	24	50	27	8	4
65-20H	35	65	80	105	465	180	225	65	14	125	95	320	250	110	14	339	32	80	35	10	4
65-26	35	65	80	100	470	200	250	80	15	160	120	360	280	110	18	342	32	80	35	10	4
65-32	35	65	80	125	470	225	280	80	18	160	120	400	315	110	18	342	32	80	35	10	4
65-32H	45	65	80	125	526	225	280	80	18	160	120	400	315	110	18	367	42	110	45	12	4
80-16	25A	80	100	125	360	180	225	65	14	125	95	320	250	110	14	267	24	50	27	8	4
80-20	35	80	100	125	470	180	250	65	15	125	95	345	280	110	14	342	32	80	35	10	4
80-26	35	80	100	125	470	200	280	80	15	160	120	400	315	110	18	342	32	80	35	10	4
80-32	35	80	100	125	470	250	315	80	16	160	120	400	315	110	18	342	32	80	35	10	4
80-32H	45	80	100	125	526	250	315	80	16	160	120	400	315	110	18	367	42	110	45	12	4
80-40	45	80	100	125	530	280	355	83	18	160	120	440	340	110	18	370	42	110	45	12	4
100-16	35	100	125	125	470	200	250	80	15	160	120	360	280	110	18	342	32	80	35	10	4
100-20	35	100	125	125	470	200	280	80	16	160	120	360	280	110	18	342	32	80	35	10	4
100-26	35	100	125	140	470	225	280	80	16	160	120	400	315	110	18	342	32	80	35	10	4
100-32	35	100	125	140	470	250	315	80	16	160	120	400	315	110	18	342	32	80	35	10	4
100-32H	45	100	125	140	526	250	315	80	16	160	120	400	315	110	18	367	42	110	45	12	4
100-40	45	100	125	140	530	280	355	100	20	200	150	500	400	110	23	370	42	110	45	12	4
125-20	35	125	150	145	470	250	315	80	16	160	120	400	315	110	18	342	32	80	35	10	4
125-26	35	125	150	140	470	250	355	80	16	160	120	400	315	110	18	342	32	80	35	10	4
125-32	45	125	150	140	530	280	355	100	18	200	150	500	400	110	23	370	42	110	45	12	4
125-40	45	125	150	160	530	315	400	100	18	200	150	500	400	110	23	370	42	110	45	12	4
150-20	35	150	200	160	497	280	400	100	18	200	150	400	315	110	23	367	32	80	35	10	4
150-26	45	150	200	160	530	250	355	100	18	200	150	450	350	110	23	370	42	110	45	12	4
150-32	45	150	200	160	530	280	400	100	18	200	150	550	450	110	23	370	42	110	45	12	4
150-40	45	150	200	160	530	315	450	100	18	200	150	550	450	110	23	370	42	110	45	12	4
200-26	45	200	250	180	555	315	450	100	20	200	150	550	450	110	28	392	42	110	45	12	4
200-32	55	200	250	180	670	315	480	120	20	220	170	600	480	110	28	505	48	110	51	14	4
200-40	55	200	250	180	670	335	480	120	20	220	170	600	480	110	28	505	48	110	51	14	4
250-32	55	250	300	220	691	355	520	150	26	250	200	660	510	110	28	525	48	110	51	14	4
250-40	55	250	300	220	682	400	560	150	26	250	200	660	510	110	28	516	48	110	51	14	4

*Pumps dimension may vary, please refer to manufacturer.

Flange Dimensions and drilling according to ISO2084 16BAR (BS4504-1969 TABLE 16/11). Holes-Equaly spaced straddling pump centreline											
PN 16											
D1 / D2	32	40	50	65	80	100	125	150	200	250	300
Ø D	140	150	165	185	200	220	250	285	340	405	460
Ø K	100	110	125	145	160	180	210	240	295	350	410
d ₂ x number	Ø18 4	Ø18 4	Ø18 4	Ø18 4	Ø18 8	Ø18 8	Ø18 8	Ø22 8	Ø22 12	Ø26 12	Ø26 12


Performance Chart 50 Hz

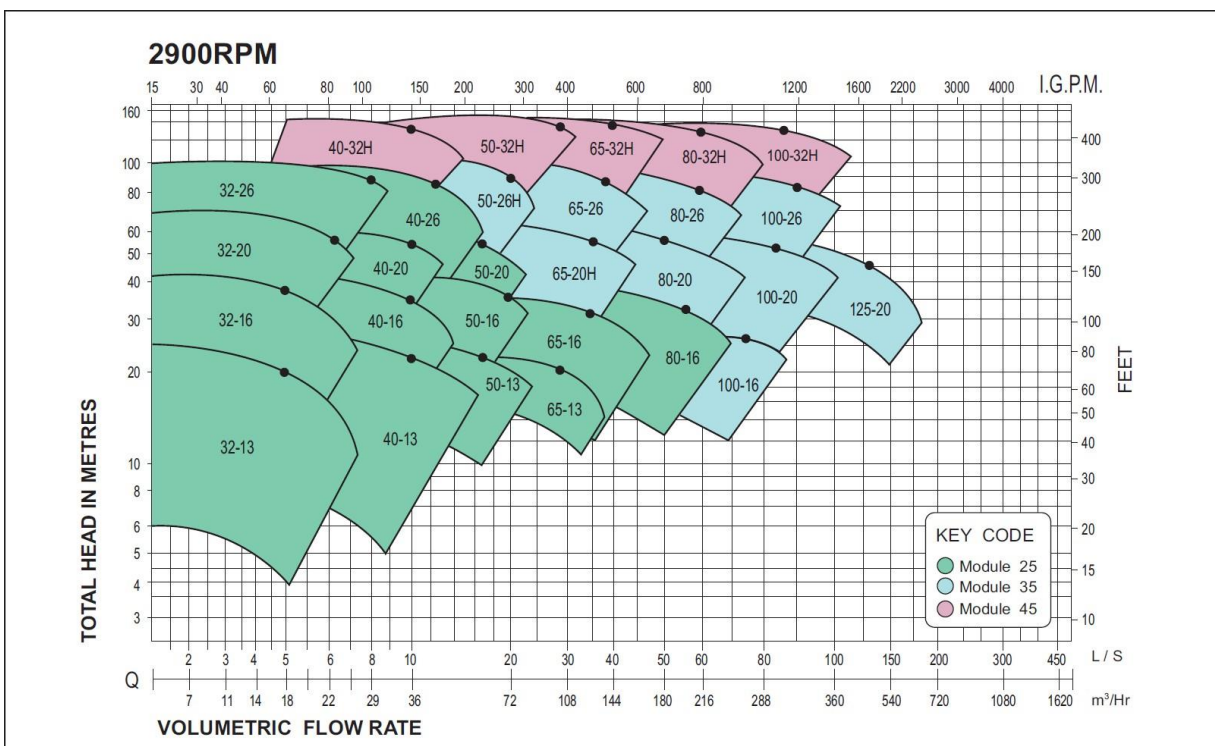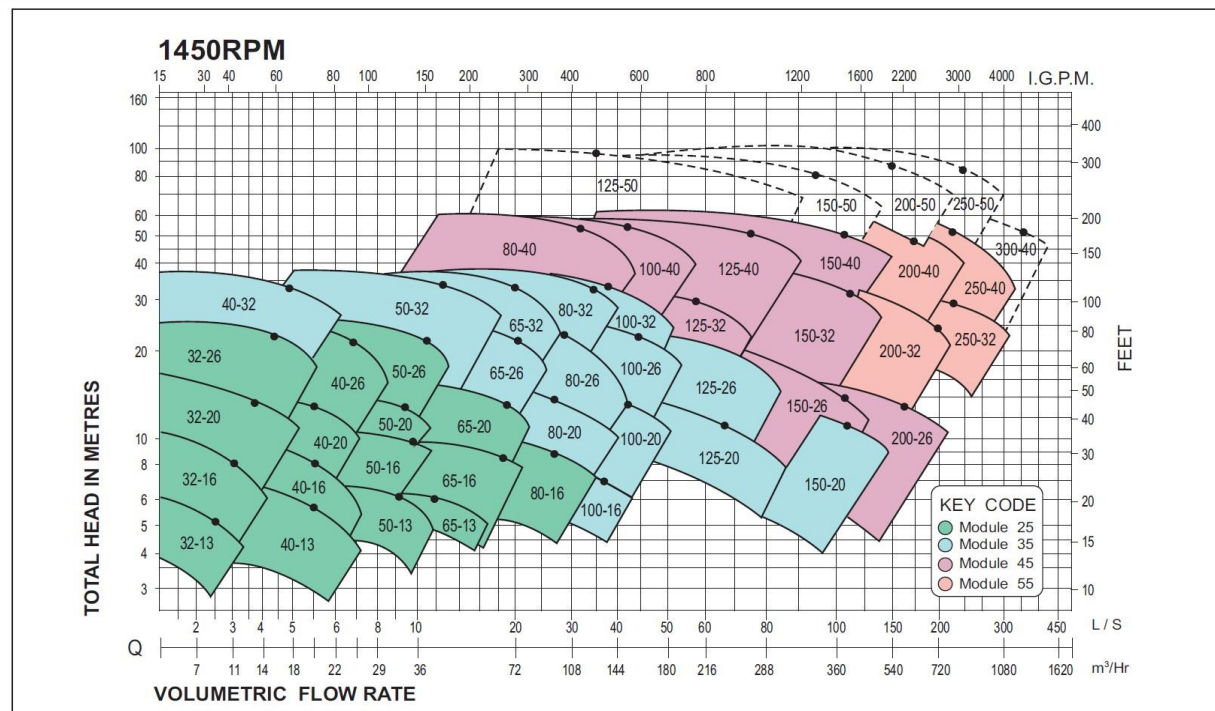

Pump Selection

For pump selection the hydraulic performance curves should be used. These curves are based on water at 15°C and SG equal to 1.0.

NPSH values are indicated on the performance curves. At least 0.5m should be added as a safety margin.

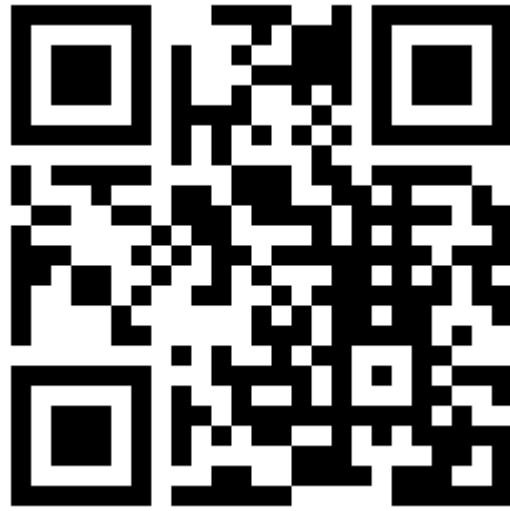

KOP (Thailand) Co., Ltd.

www.koppump.com

sales@koppump.com

1312/3 Anamai Ngamcharoen 25,
Tha Kham, Bangkhuntien, Bangkok 10150

(+66)094-351-6699

(+66)02-490-4906-7



The Efficient Flow Solution