


Sheet: /
File: attinav.kicad_sch

Title:


Size: A4	Date:	**Rev:**
KiCad E.D.A. 10.0.4		Id: 1/5

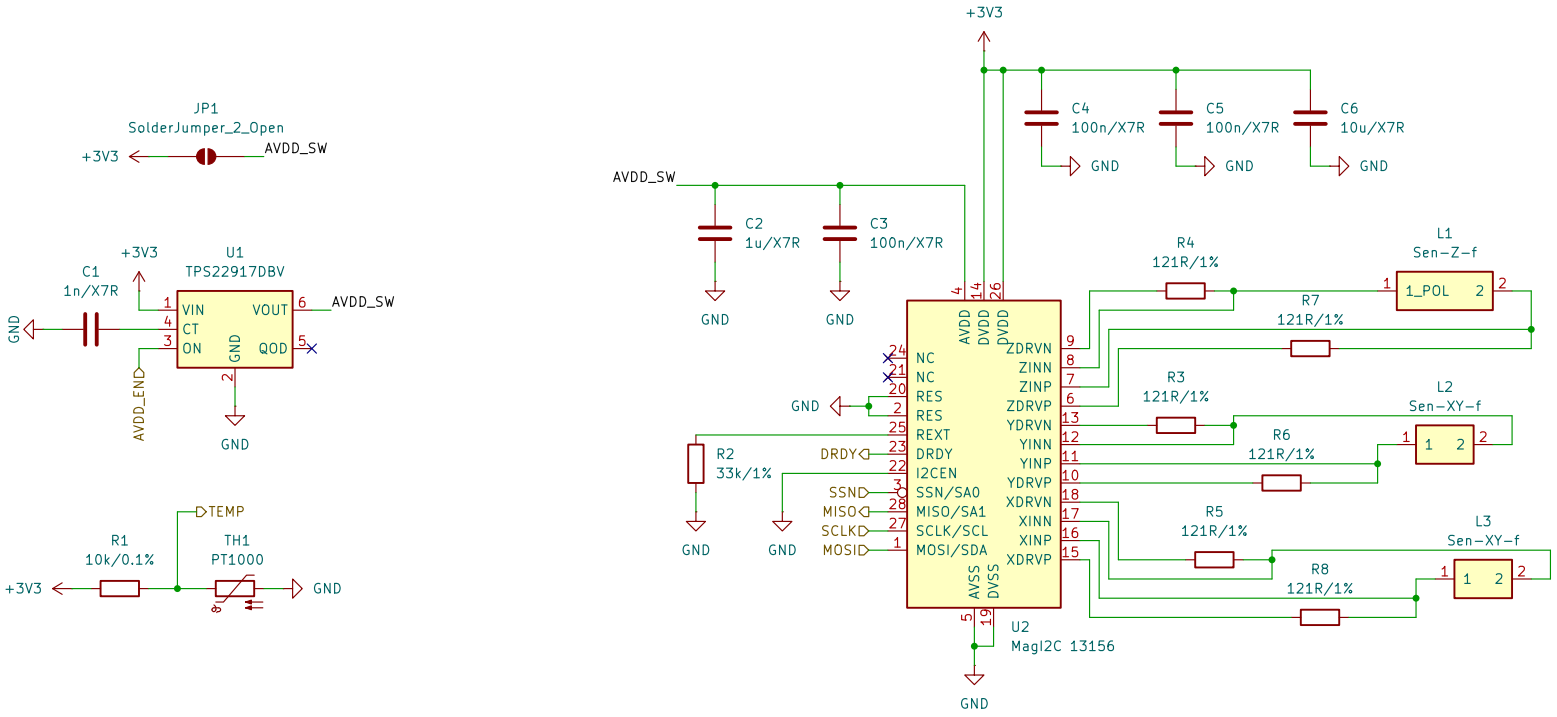

RM3100 triad. Keep caps/resistors away from coils; decouple at MagI2C.
121R in series with each DRV pin (PNI manual R07).

AVDD switchable for quiet-window power gating; close JP1 to bypass U1.


Sheet: /MAG1/		
File: mag.kicad_sch		
Title:		
Size: A4	Date:	**Rev:**
KiCad E.D.A. 10.0.4		Id: 2/5

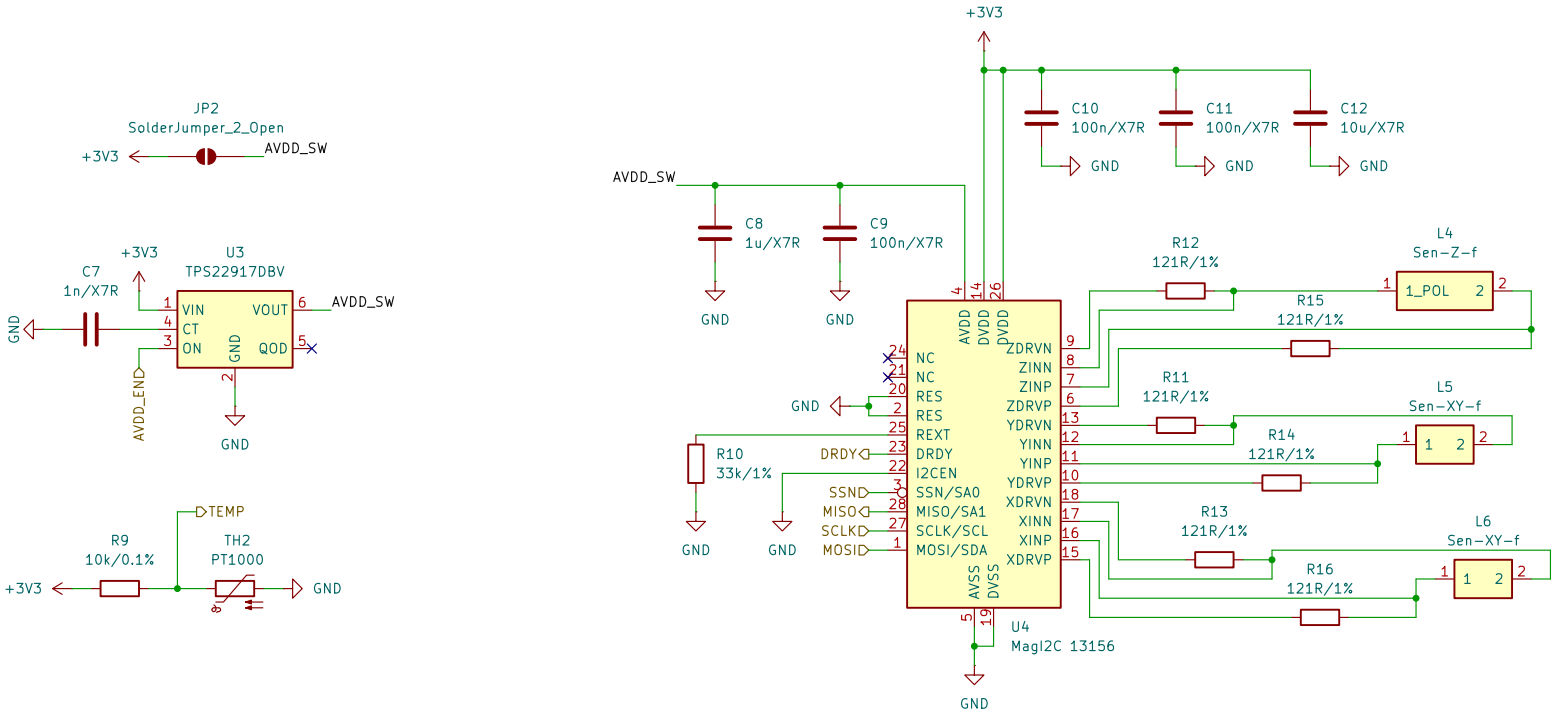

RM3100 triad. Keep caps/resistors away from coils; decouple at MagI2C.
121R in series with each DRV pin (PNI manual R07).

AVDD switchable for quiet-window power gating; close JP1 to bypass U1.


Sheet: /MAG2/		
File: mag.kicad_sch		
Title:		
Size: A4	Date:	**Rev:**
KiCad E.D.A. 10.0.4		Id: 3/5

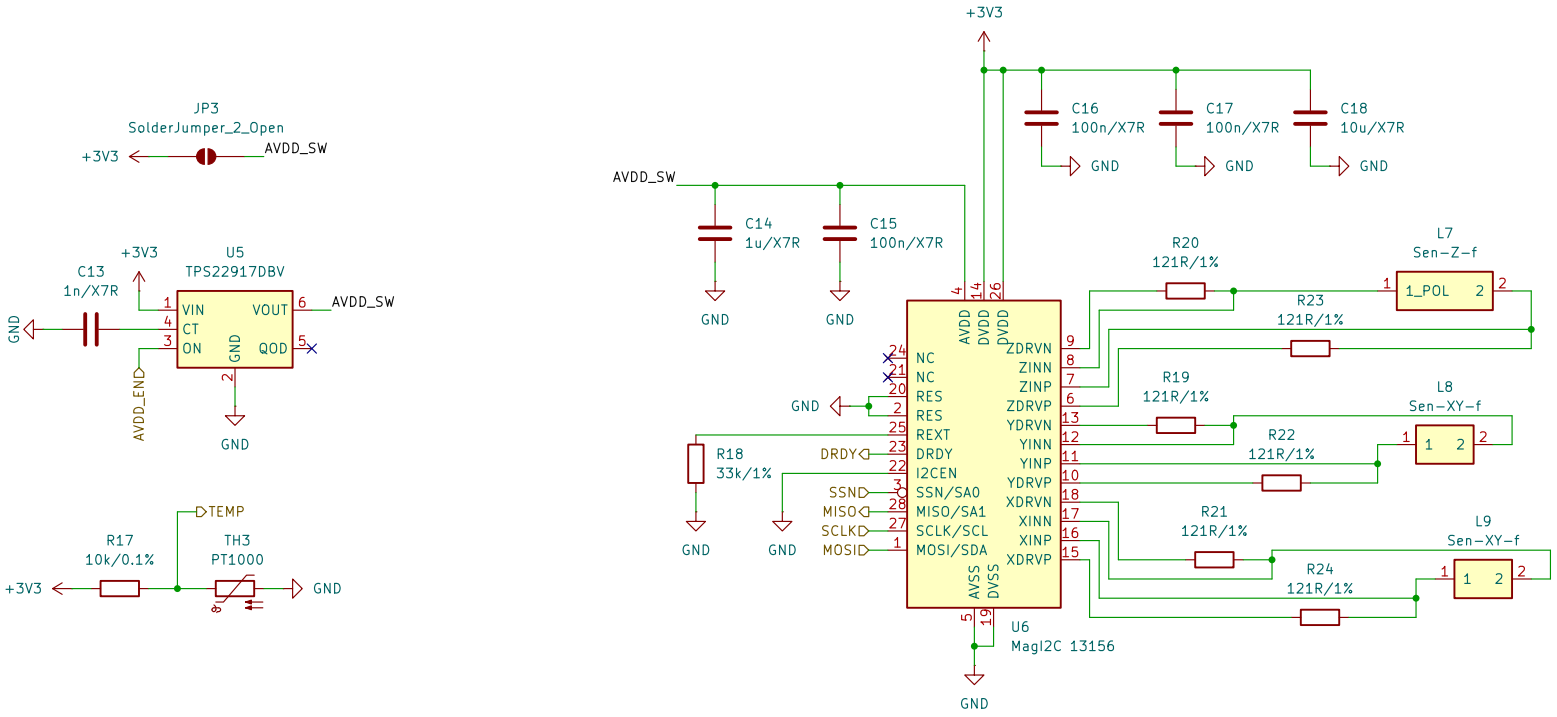


RM3100 triad. Keep caps/resistors away from coils; decouple at MagI2C.
121R in series with each DRV pin (PNI manual R07).

AVDD switchable for quiet-window power gating; close JP1 to bypass U1.

Sheet: /MAG3/		
File: mag.kicad_sch		
Title:		
Size: A4	Date:	**Rev:**
KiCad E.D.A. 10.0.4		Id: 4/5

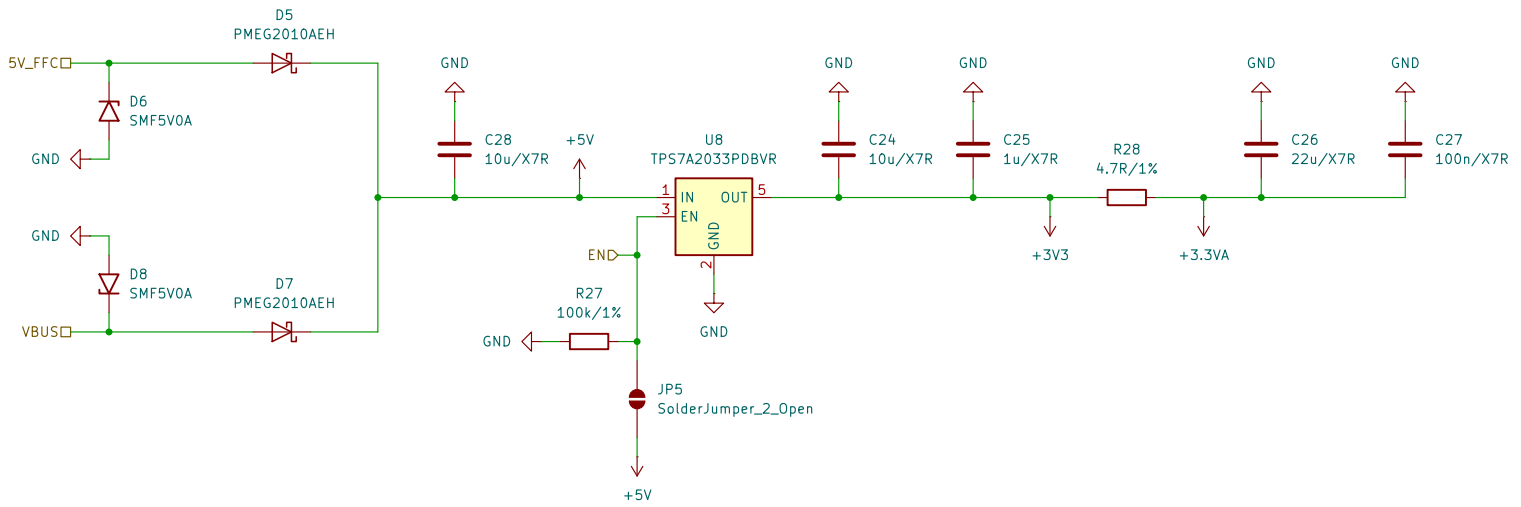





Power: 5 V from FFC or USB VBUS, Schottky OR-ed, TVS on each input.
TPS7A2033 LDO 300 mA, 7 uVrms, high PSRR.

EN: 100k pulldown (default off); JP5V->EN for bench enable. +3.3VA: RC, no ferrite (non-magnetic).

Sheet: /POWER/		
File: power.kicad_sch		
Title:		
Size: A4	Date:	**Rev:**
KiCad E.D.A. 10.0.4		Id: 5/5