

PRODUCT TECHNICAL DATASHEET

H30/644

Optical encoder 

Magnetic limit switch 

230V AC 




CODE	DESCRIPTION	PCS/PALLET
H30/644	Electromechanical motor 230V AC, irreversible, ideal for sliding gates up to 600 kg with built-in control unit H70 and optical encoder. Complete with fixing plate with tie rods and magnetic limit switch.	44

PRODUCT TECHNICAL SPECIFICATIONS	
Max gate weight	600 kg
Power line supply	230V AC - 50Hz
Stand-by consumption	0,5W
Motor power supply	230V AC
Power	350W
Frequency of use	50%
Thrust	850N
Operating temperature	-20+55°C
Protection level	IP44
Reductor Type	Irreversible
Manoeuvre speed	9.5 m/min (0.16 m/s)
Motor thermal protection	150°C
Incorporated condenser	12,5 µF
Limit switch	Magnetic
Onboard control unit	H70/104AC
Encoder	Optical
Type exit gear	Z15/mod 4
Maximum dimension product in mm (L x W x H)	315 x 165,8 x 329


Product weight packed (Kg)	11,8
Number items per pallet/box	44

PRODUCT DIMENSIONS AND PREPARING FOR INSTALLATION

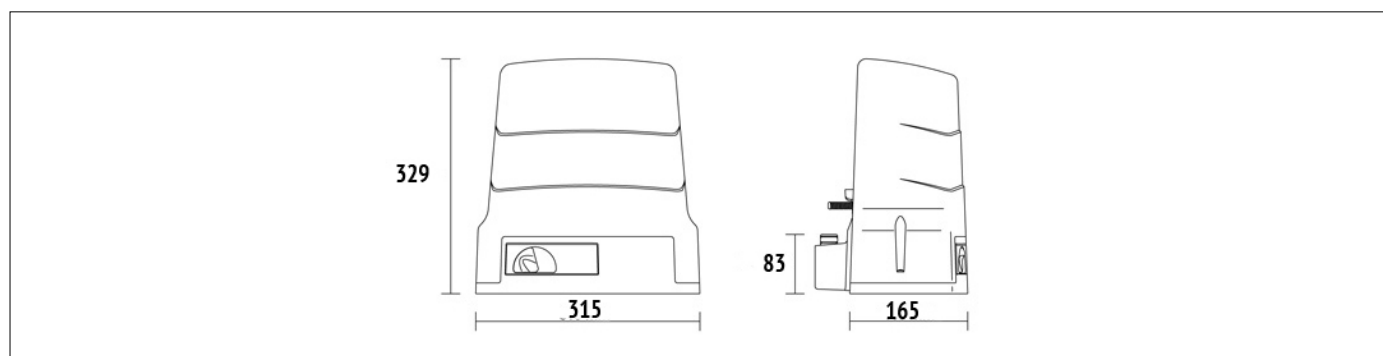


DIMENSIONS

PRODUCT PREPARING FOR INSTALLATION

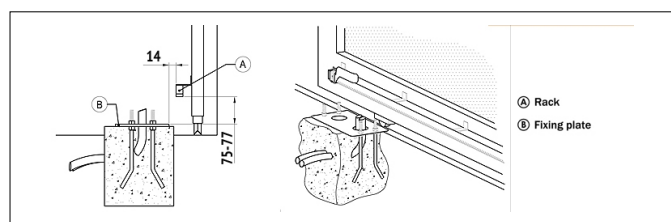


PREDISPOSITION FOR STANDARD INSTALLATION

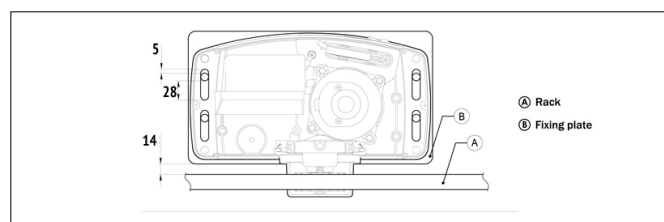


PRODUCT ACCESSORIES




KT214/SA
Adapter plate complete with tie rods and screws for series H30.



KT214/SC
Adapter plate complete with tie rods and screws for series H30.



KT214/SF
Adapter plate complete with tie rods and screws for series H30.



KT214/SN
Adapter plate complete with tie rods and screws for series H30.



KT221
Raised fixing plate for H30 series (+3,5 cm).



GA550
Galvanised steel rack 22x22x1000, module 4.




GA551
Galvanised steel rack 30x12x1000, module 4, complete with spacers and screws.



GA554
Pocket of 6 spacers (2,5 cm) with screws.



GA557
Roger Technology nylon rack, module 4 to 6 connectors, L.1000.



LT330
Kit for chain drive for BH30 - H30 series.



LT334
1/2" X 5/16" 5 meter chain piece for LT330 complete with joint.