
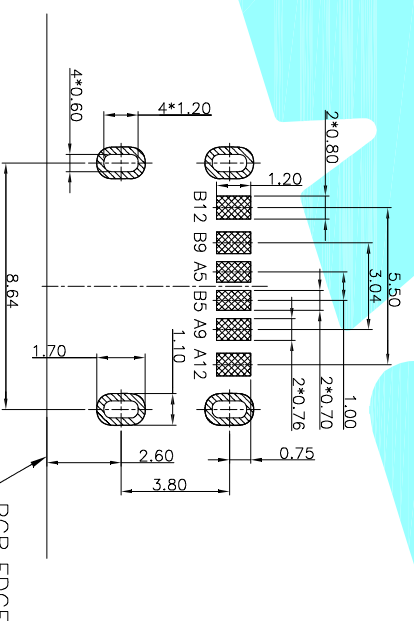
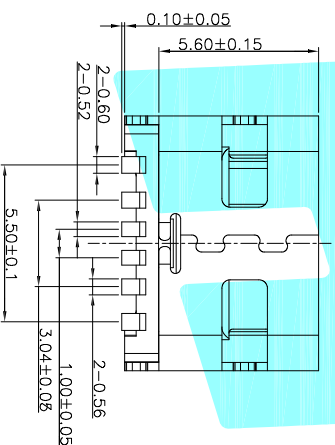
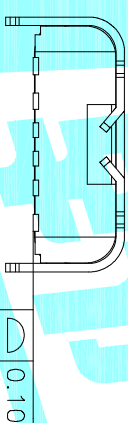
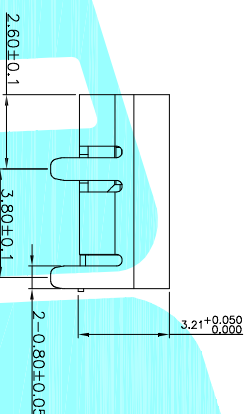


NOTES:
SPECIFICATION:

1. CURRENT RATING: 3.0A MAX
2. VOLTAGE: 100 VAC
3. TEMPERATURE RANGE: -30 °C ~ 85 °C
4. CONTACT RESISTANCE: 40 MILLIONHM MAX
5. INSULATION RESISTANCE: 100 MEGOHMS MIN.
6. LNSERTION FORCE : 5N~20N
7. UNMATING FORCE: 8N~20N
8. DURABILITY: 10000 CYCLES

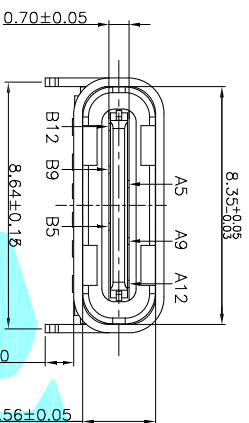

A5	CC1	B12	GND
A9	VBUS	B9	VBUS
A12	GND	B5	CC2
PIN	SIGNAL NAME	PIN	SIGNAL NAME

③	Shell	—	1	STAINLESS STEEL	Ni Plated	—
②	Contact	—	6	COPPER ALLOY	Au Plated	—
①	Housing	—	1	LCP	Black	—
ITEM	PART NAME	TER.NO.	QTY.	MATERIAL	FINISHING	REMARK

[illegible]