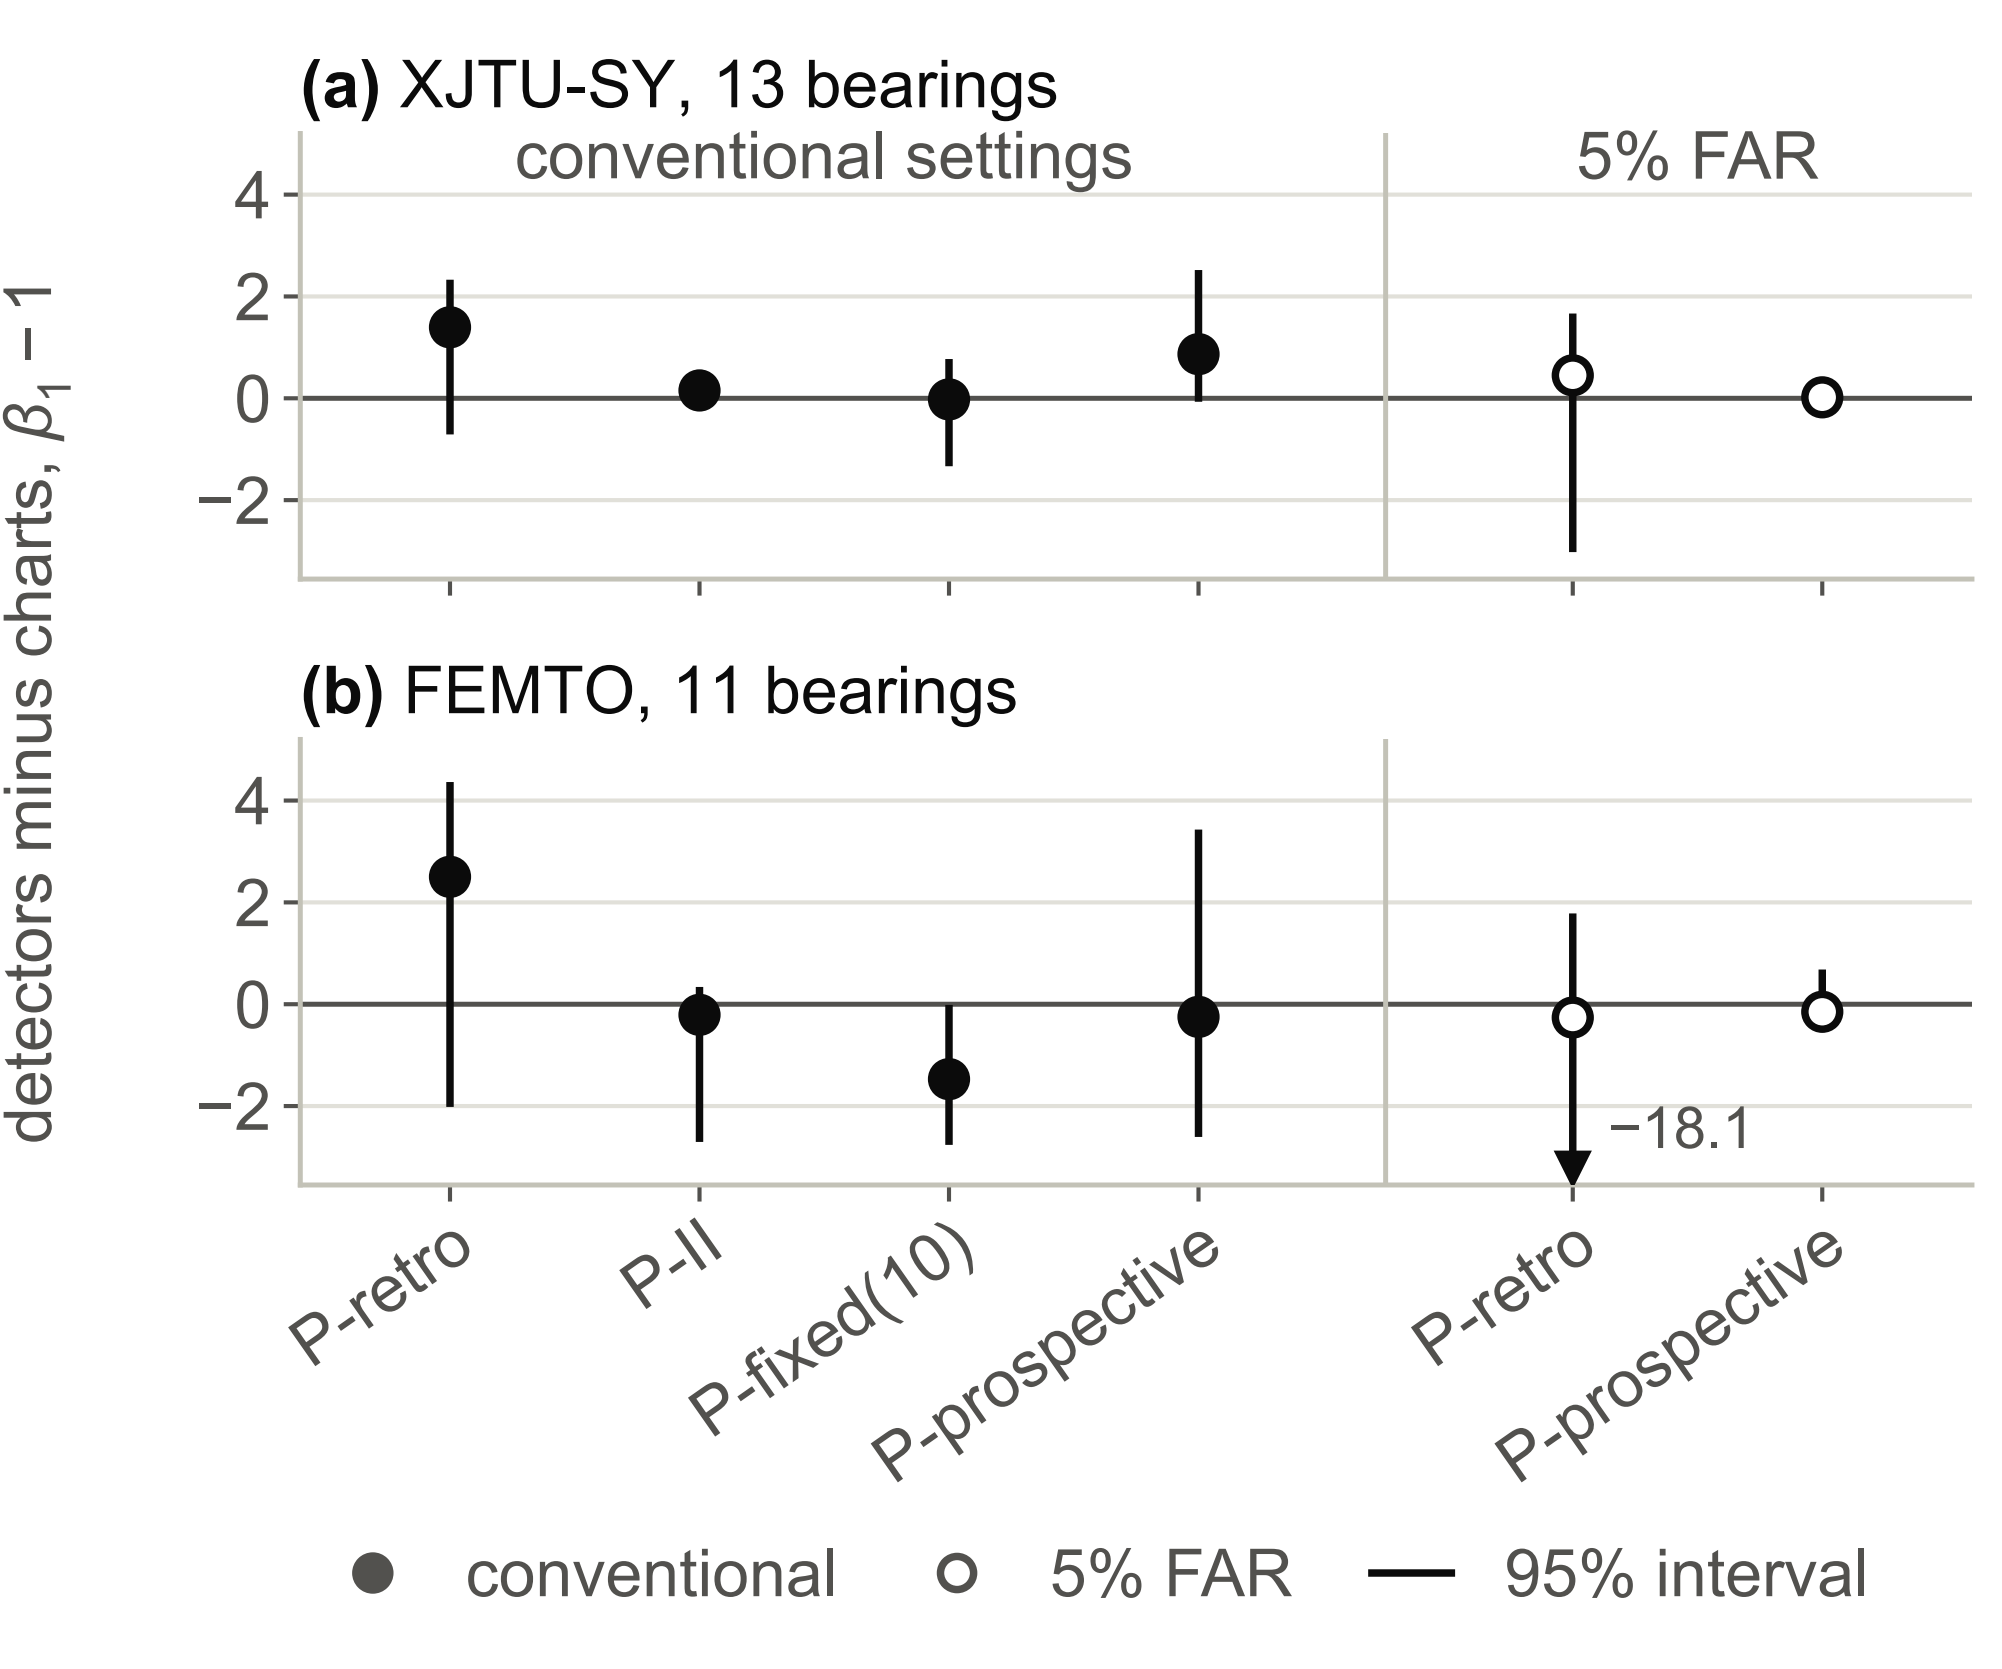
(a) XJTU-SY, 13 bearings
conventional settings
5% FAR
(b) FEMTO, 11 bearings
detectors minus charts, $\beta_1 - 1$
4
2
0
−2
−18.1
P-retro
P-II
P-fixed(10)
P-prospective
P-retro
P-prospective
conventional
5% FAR
95% interval