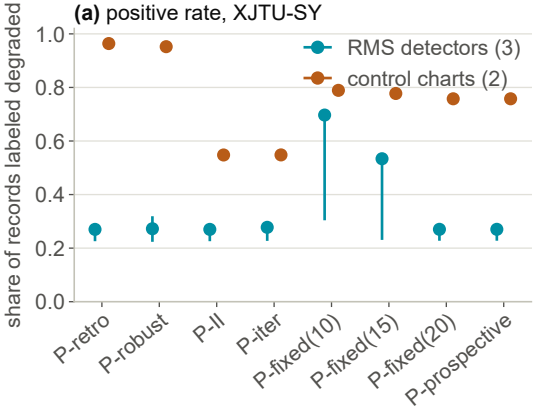
(a) positive rate, XJTU-SY
share of records labeled degraded
1.0
0.8
0.6
0.4
0.2
0.0
RMS detectors (3)
control charts (2)
P-retro
P-robust
P-II
P-iter
P-fixed(10)
P-fixed(15)
P-fixed(20)
P-prospective

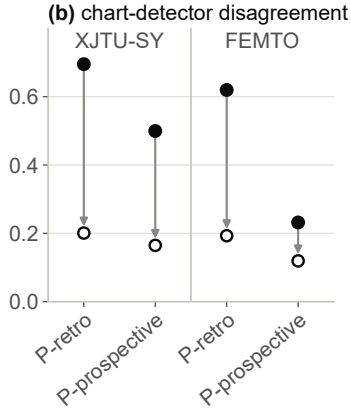
(b) chart-detector disagreement
XJTU-SY
FEMTO
0.6
0.4
0.2
0.0
P-retro
P-prospective
P-retro
P-prospective

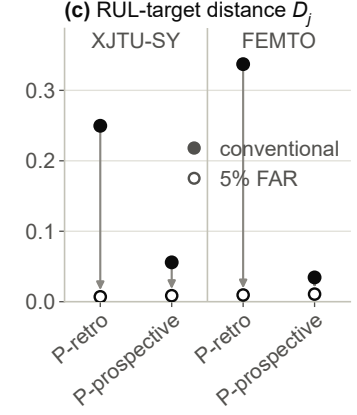
(c) RUL-target distance D_j
XJTU-SY
FEMTO
0.3
0.2
0.1
0.0
conventional
5% FAR
P-retro
P-prospective
P-retro
P-prospective