

SEM-6611VR-EY2

4 MP Fixed Network Minidome Camera



RELEVANT FEATURES AND FUNCTIONS

- 1/3" Progressive Scan CMOS Sensor
- 4 Megapixel resolution
- 2.8 mm lens
- Digital WDR
- Outdoor (IP67)
- Vandalproof (IK10)
- Up to 30 m



SEM-6611VR-EY2

CAMERA

Sensor	1/3" Progressive Scan CMOS
Min. illumination	0.03 lux @F1.6, AGC ON; 0 lux with IR.
Focal length	2.8 mm lens @F1.6
Focus	Fixed
Angle of view	Horizontal FOV 98° Vertical FOV 53° Horizontal FOV 116°
Lens mount	M12
Shutter time	1/3 s to 1/100,000 s
Day/Night	IR Cut Filter (Auto switch)
Angle Adjustment	Pan : 0° to 355°, Tilt : 0° to 70°, Rotation : 0° to 355°
Wide Dynamic Range	Digital WDR
Image usability	BLC, HLC, 3D DNR
IR Distance	20 - 30 m
DORI distances	Detect: 56.52 m Observe: 22.61 m Recognize: 11.30 m Identify: 5.65 m

VIDEO

Max. resolution	2560 x 1440
Frame rate	Main Stream: 50Hz: 1-25fps (2560 x 1440, 2304 x 1296, 1920 x 1080, 1280 x 720) 60Hz: 1-30fps (2560 x 1440, 2304 x 1296, 1920 x 1080, 1280 x 720) Sub Stream: 50Hz: 1-25fps (1280 x 720, D1, CIF) 60Hz: 1-30fps (1280 x 720, D1, CIF) Third Stream: 50Hz: 1-25fps (D1, 480 x 240, CIF) 60Hz: 1-30fps (D1, 480 x 240, CIF)
Video compression	H.265/H.264/MJPEG
Video bit rate	64 Kbps to 8 Mbps
ROI	Each ROI to be configured separately
Image settings	ROI, Saturation, Brightness, Hue, Contrast, Wide Dynamic, Sharpness, Image Mirror, Image Flip, NR, etc. adjustable through client software or web browser

NETWORK

Network storage	Network remote storage
Communication interface	1 RJ45
Protocols	UDP, IPv4, IPv6, DHCP, NTP, RTSP, RTP, RTCP, PPPoE, DDNS, SMTP, FTP, 802.1x, SNMP, UPnP, HTTP, HTTPS, QoS
Simultaneous Live View	Up to 3 users
Security	Watermark, video mask, heartbeat, corridor pattern. Video encryption, firmware encryption, HTTPS encryption, configuration encryption, illegal login lock, IP address filtering, 802.1x authentication, basic and digest authentication for HTTP/HTTPS
Compliance	ONVIF

ORDERING INFORMATION


- SEM-6611VR-EY2

SEM-6611VR-EY2

GENERAL

Power supply	12 VDC PoE, IEEE802.3af
Power consumption	< 4 W
Operating conditions	-30 °C to 60 °C (-22 °F to 140 °F) Humidity 95% or less (non-condensing)
Protection level	IP67
Impact protection	IK10
NDAA	Compliant
Dimensions	Φ 110 × 83.3 mm
Weight	500 g

DIMENSIONS

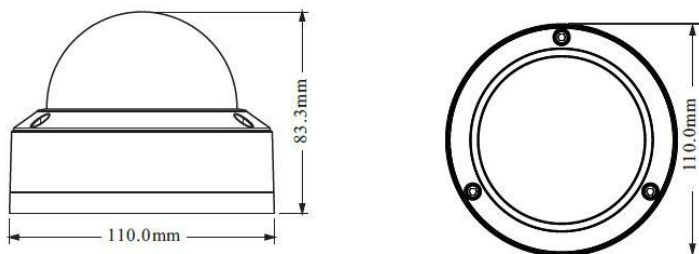

ACCESSORIES



SES-6302
Junction box



SES-6501
Vertical pole mount



SES-6601
Corner mount



SES-6407
Wall mount