


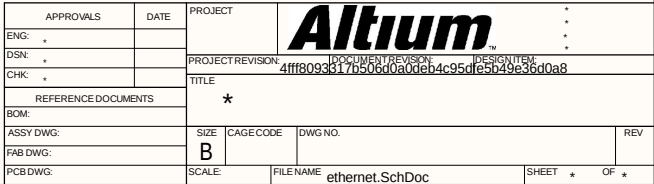
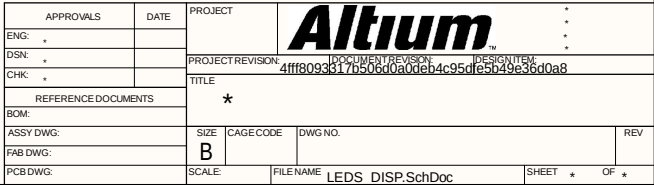






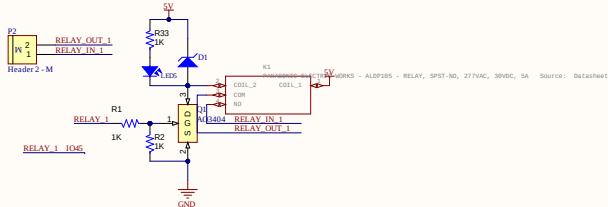







DWG. NO.	REV.	SHT.	2	1
			REVISION	DESCRIPTION
				DATE
				APPROVED

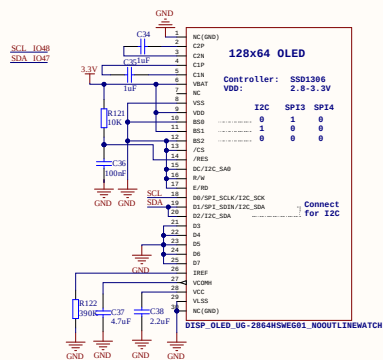


DWG. NO.	REV.	SHT.	2	1
			REVISION	DESCRIPTION
				DATE
				APPROVED







REVISION	DESCRIPTION	DATE	APPROVED

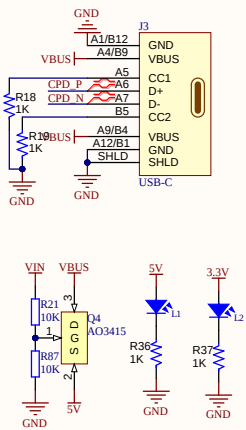

APPROVALS	DATE	PROJECT	Altium		*
ENG:					*
DSN:	*				*
CHK:	*				*
REFERENCE DOCUMENTS		PROJECT REVISION:	DOCUMENT REVISION:	DESIGN ITEM:	
BOM:		4ffff8093317b506d0a0d6b4c95dfc5b49e36d0a8			
		TITLE			
		★			
ASSY DWG:		SIZE	CAGE CODE	DWG NO.	REV
FAB DWG:		B			
PCB DWG:		SCALE:	FILE NAME	POWER SCH.SchDoc	SHEET * OF *

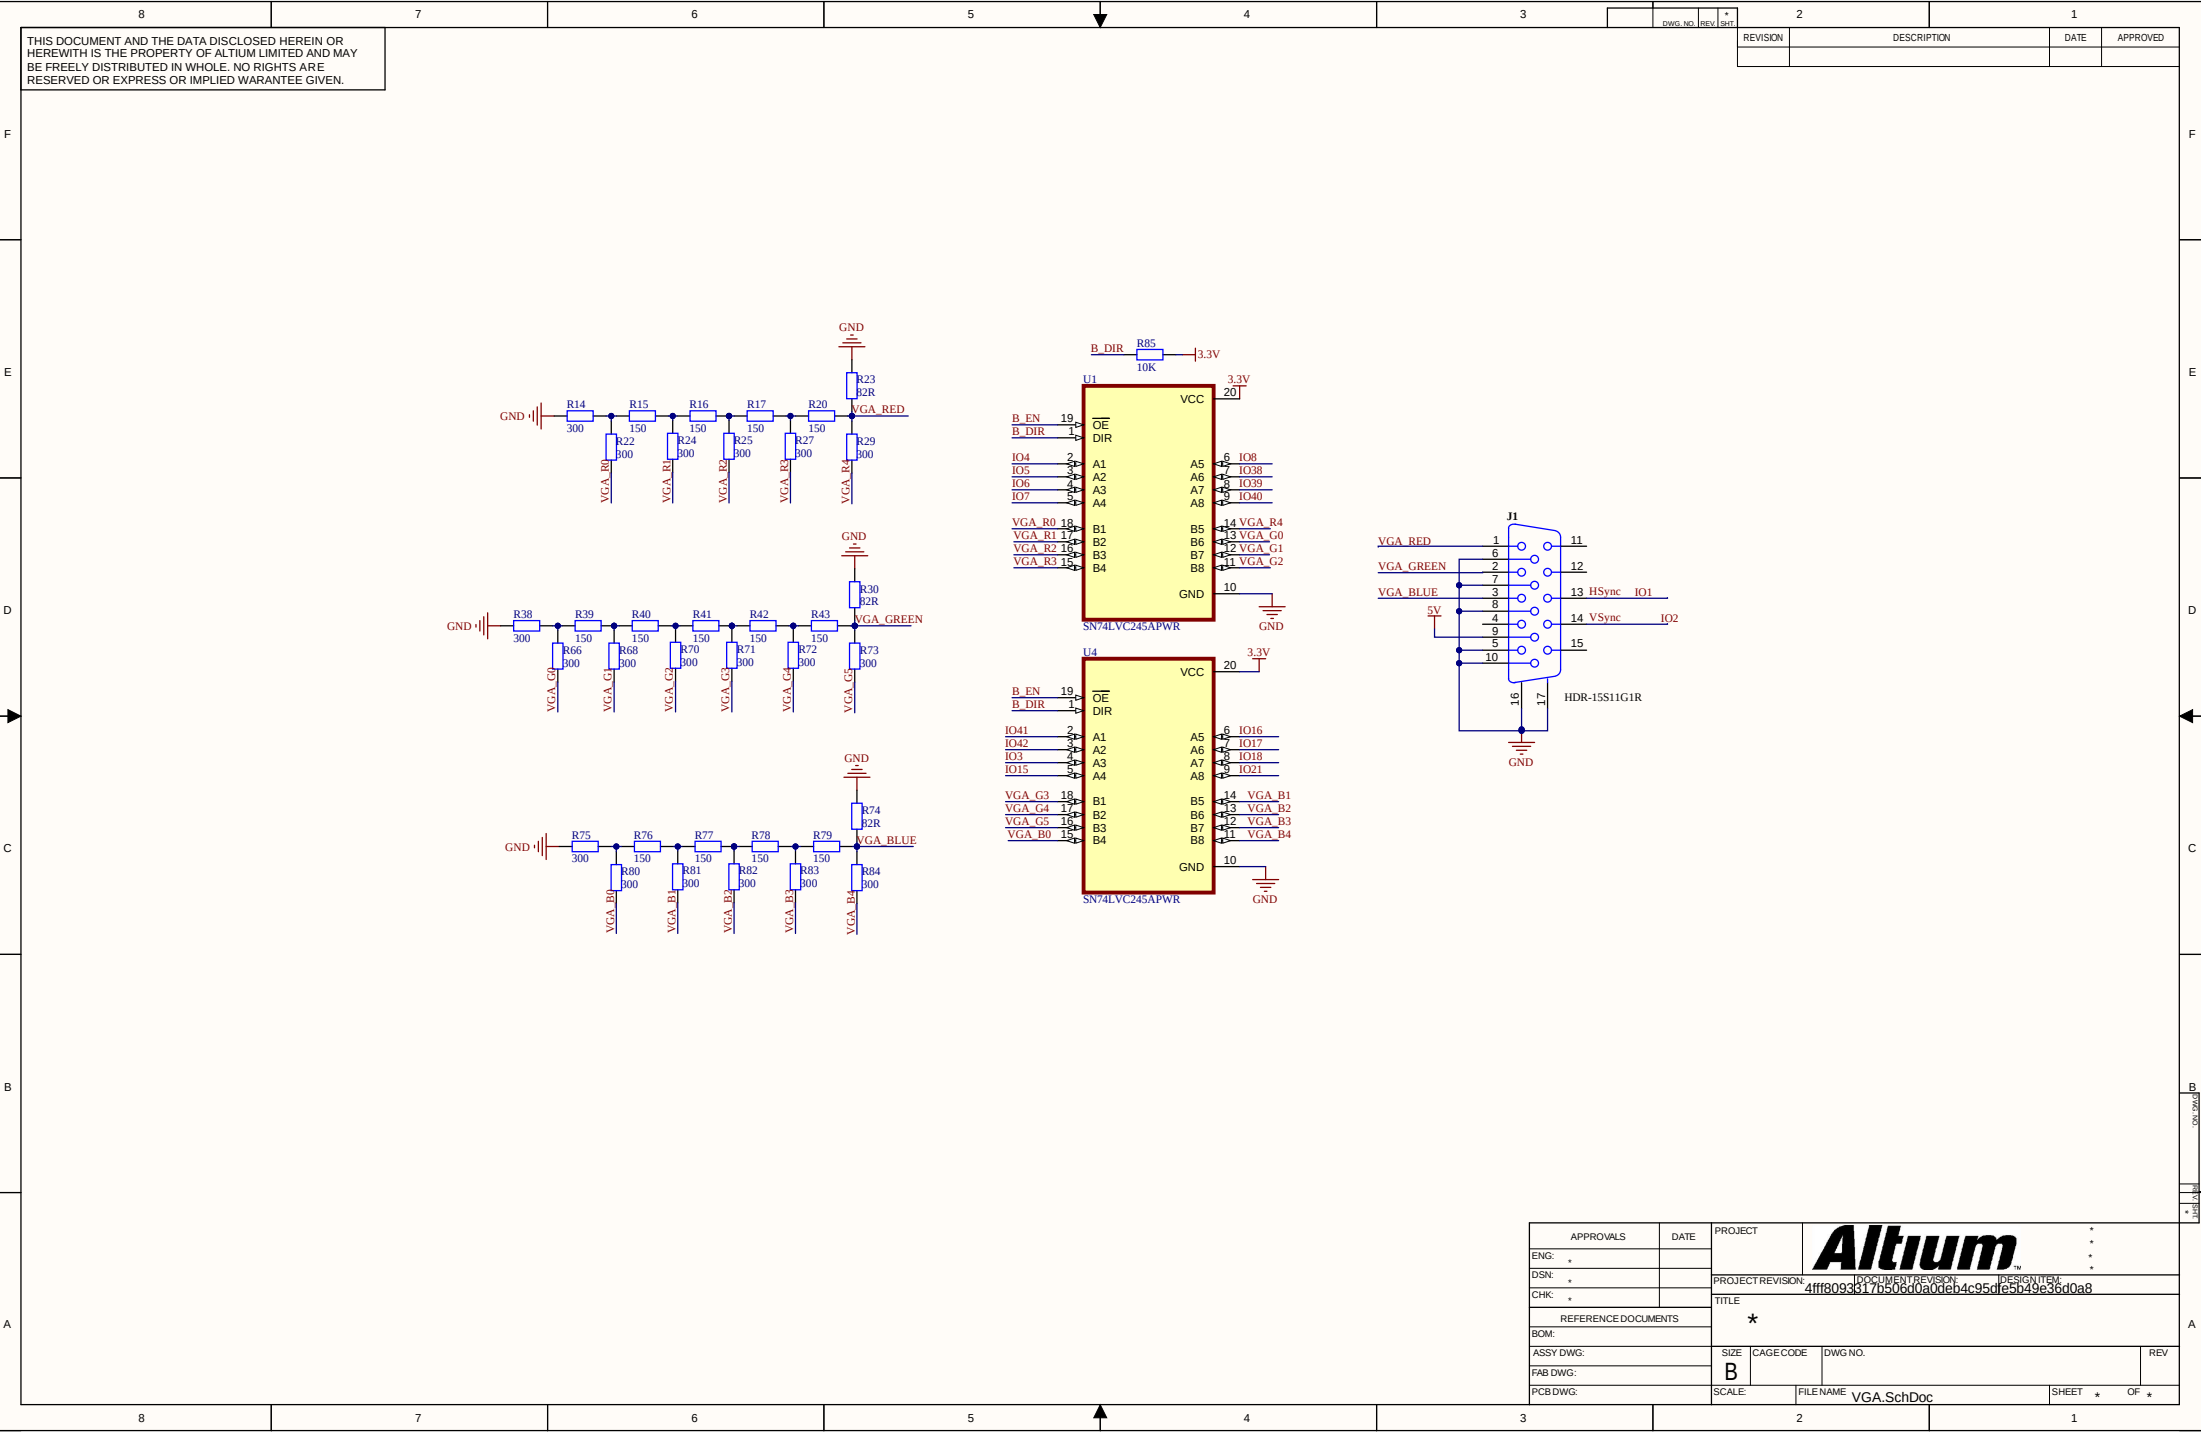

APPROVALS		DATE	PROJECT		Altium * * * *							
ENG:		*										
DSN:		*	PROJECT REVISION: 4fff8093817b506d0a0deb4c95dfe5b49e36d0a8									
CHK:		*	DOCUMENT REVISION: 4fff8093817b506d0a0deb4c95dfe5b49e36d0a8									
REFERENCE DOCUMENTS			TITLE			* * * *						
BOM:			★									
ASSY DWG:			SIZE		CAGE CODE		DWG NO.	REV				
FAB DWG:			B									
PCB DWG:			SCALE						FILE NAME	VGA.SchDoc	SHEET	* OF *

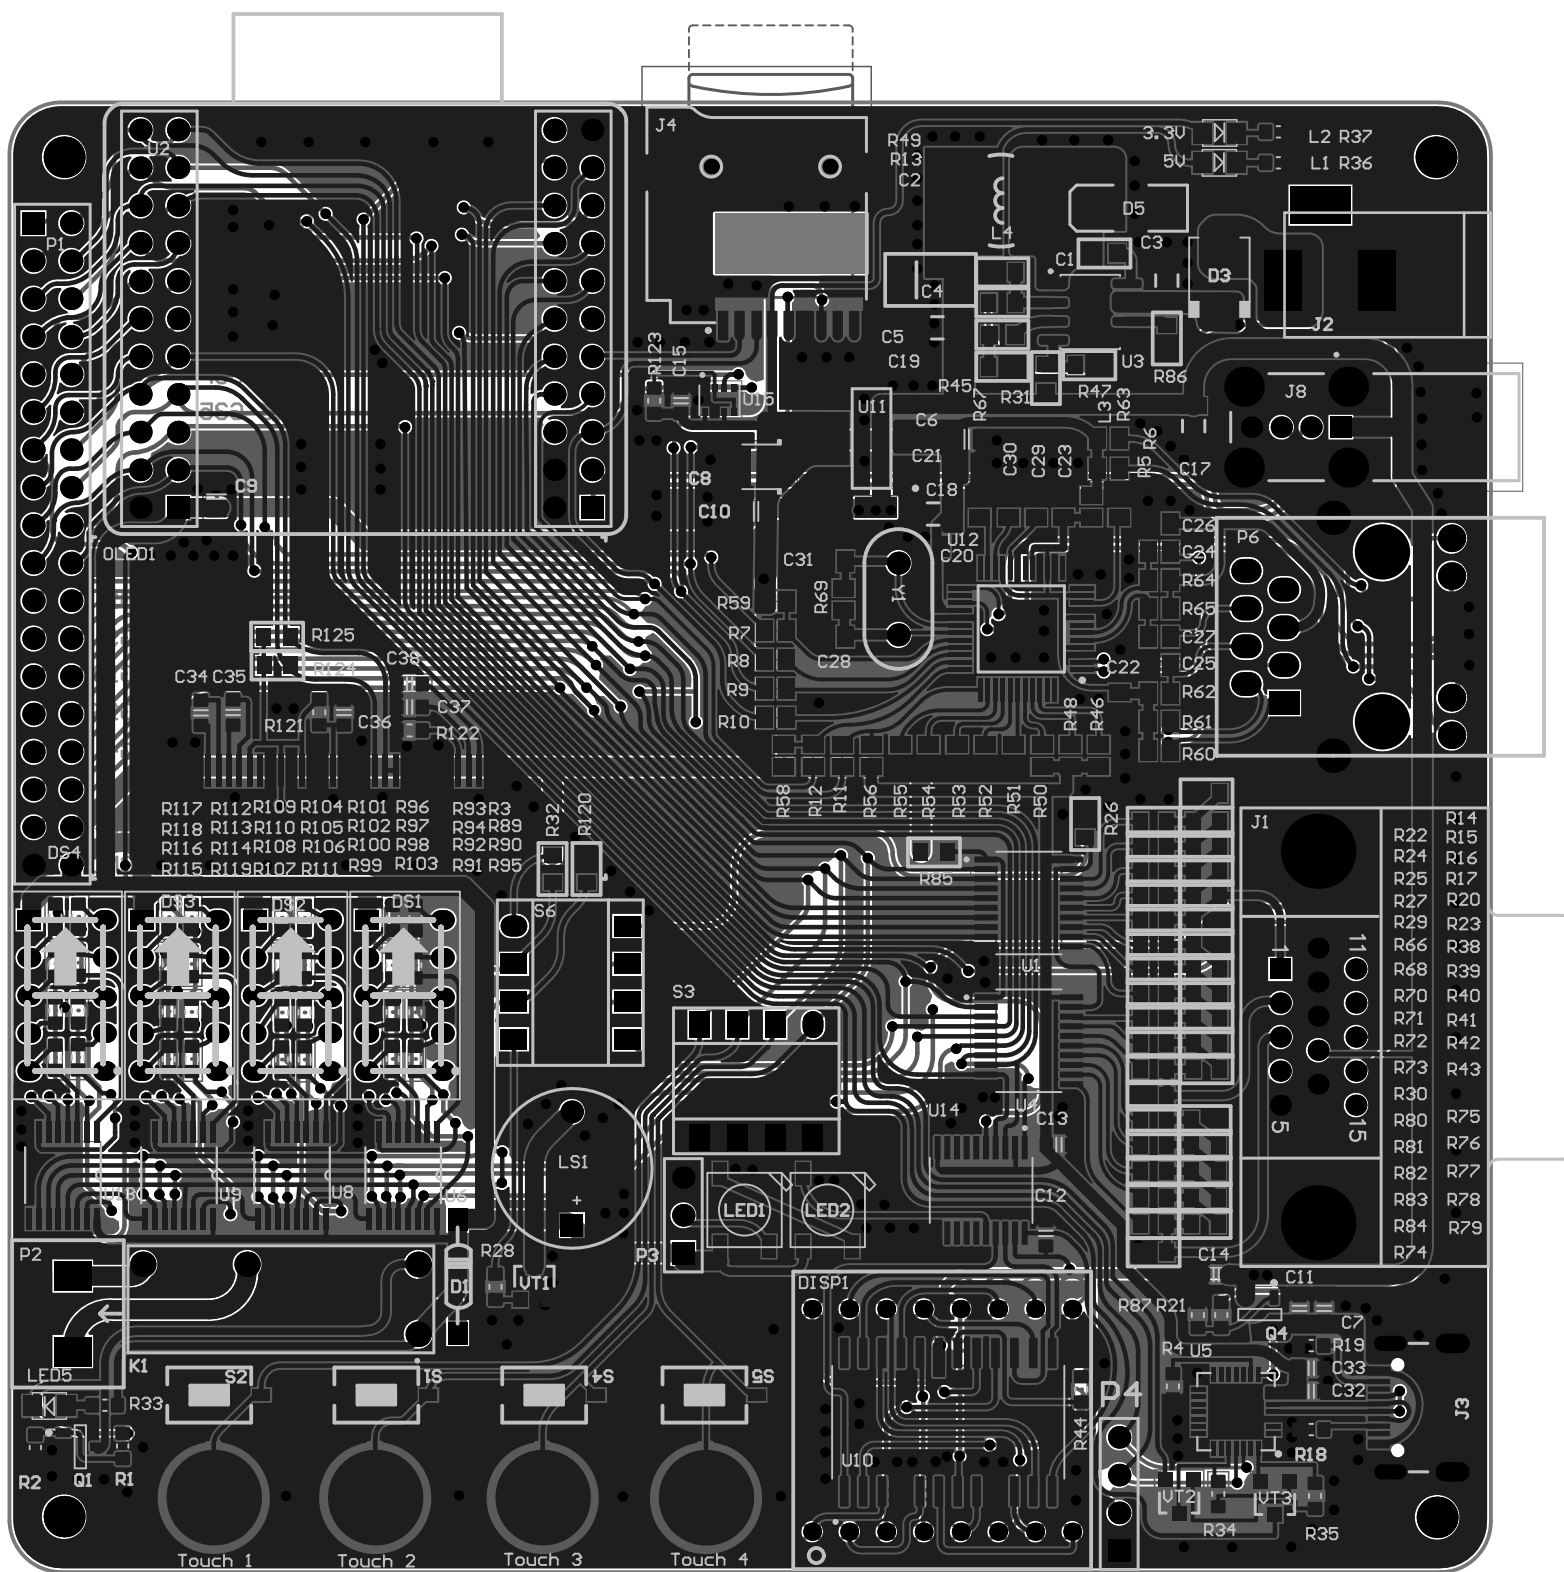

Comment	Description	Designator	Footprint	Label	Quantity
0.1uF	Capacitor	C1	CAP-0603	Cap	1
150uF	Capacitor	C2	CAP-0603	Cap	1
0.1uF	Capacitor	C3, C5	C1206	Cap SMD 1206	2
47uF	Polarized Capacitor (Avail)	C4	Tantal_8	Cap Pol	1
approved sub OK	Capacitor SMD Cer 1.8uF 10% 50V X7R X805	C6, C9, C10	CAPC2012X139N	CAP_C_0805	3
Cap Semi	CAP SM 0603 XSR 10uF 10%, CAP SM 0603 X7R 100uF 10%	C7, C11, C12, C13, C14, C15, C32, C33, C34, C35, C36, C37, C38	CAPC1608X90N	CAP-SM-0603-XSR-10uF, CAP-SM-0603-X7R-100uF	13
CAP	Polarized Capacitor (Avail)	C9	CAPMP528V210N	CAP Tantalum	1
tanCap	Polarized Capacitor (Avail)	C17, C18	C1206	Cap Pol2	2
Cap	Capacitor	C19, C20, C21, C22, C23, C24, C25, C26, C27, C28, C29, C30, C31	C0805	Cap	13
Diode Zener	Zener Diode	D1	DIODE/NOM/0.5A	Diode Zener	1
MBR5130L	Diode Schottky SMD 30V 2A DO-214AAA	D3	DO-214AAA	DIODE_SCHOTTKY_MBR5130L	1
D324	Diode Schottky	D5	SMB	Diode Schottky	1
DISP_MATRIX_B08	DISP_MATRIX_B08	DISP1	DISP_B08_MATRIX_2x200	DISP_MATRIX_B08	1
LED7SEG-1-0.36T	7.6mm Micro Bright Green 7-Segment Display CA_RH DP	D50, D52, D53, D54	LED7SEG-1-0.36T	LED7SEG-1-0.36T	4
HDR-15S11G1R	Socket: High Density DB15 (HD15) R/A Female Through Hole	H	DB15-VGA-Female	CON 15 Female	1
jac.DC	jac.DC input	J2	DC-IN	DCin	1
USB-C	USB-C	J3	USB-C_8p	USB-C	1
MicroSD	Micro SD Memory Card Connector	J4	SDCard_Micro	MicroSD	1
USBR-A-S-F-O-VU	USB-A (USB TYPE-A) USB 2.0 Receptacle Connector 4 Position Through Hole	J8	SAMTEC_USBR-A-S-F-O-VU	USBR-A-S-F-O-VU	1
PANASONIC ELECTRIC WORKS - ALDP105 RELAY (SPST-NO) 277VAC, 30VDC, 5A Source: Datasheet		K1	ALDP	ALDP105	1
LED SMD		L1, L2, LEDs	SM-LED-0805-Orange	LED SMD 0805	3
Inductor	Inductor	L3	C0805	Inductor	1
LSuH		L4	Inductor SMD 6.8*6.8*4.5	Inductor	1
WS2812B	Raspberry Pi HAT_40 pin_Wheeled Robotics Kit	LED1, LED2	WS2812B	WS2812B	2
Speaker	Loudspeaker	S1	SPEAKER	Speaker	1
DISP_OLED_UG-2864HWE01_1NOO UTLINEWATCH		OLED1	UG-2864HWE01_1_3	DISP_OLED_UG-2864HWE01_1NOO UTLINEWATCH	1
Header 18x2	Header, 18-Pin, Dual Row	P1	HDR2X18	Header 18x2	1
Header 2 - M	Header, 2-Pin, Medium	P2	Medium - Header 2	Header 2 - M	1
Header 3	Header, 3-Pin	P3	HDR3L3	Header 3	1
Header 4	Header, 4-Pin	P4	HDR4L4	Header 4	1
HR911105A	845標準	R8	HR911105A	HR911105A	1
AC03404		R2	SOT23-3	AC03404	1
AC03415		R4	SOT23-3	AC03415	1
1K	Resistor SMD chip 0.0 30m Ohm 0.1W 0603	R1, R2, R18, R19, R28, R29, R26, R27	RES1608N_ZERO	RES_0603	8
Resistor	RES SM 0603 300R, RES SM 0603 10K	R3, R4, R21, R34, R35, R44, R87, R89, R90, R91, R92, R93, R94, R95, R96, R97, R98, R99, R100, R101, R102, R103, R104, R105, R106, R107, R108, R109, R110, R111, R112, R113, R114, R115, R116, R117, R118, R119, R121, R122, R123	RES1608N_ZERO	RES-SM-0603-10K	41
Res2	Resistor	R5, R6, R7, R8, R9, R10, R11, R12, R46, R48, R50, R51, R52, R53, R54, R55, R56, R58, R59, R60, R61, R62, R63, R64, R65, R67, R69	C0805	Res2	27
10K		R13, R45, R49	RES-0603	Res	3
Res2	Resistor	R14, R15, R16, R17, R20, R22, R23, R24, R25, R26, R27, R29, R30, R32, R36, R39, R40, R42, R43, R46, R48, R70, R71, R72, R73, R74, R75, R76, R77, R78, R79, R80, R81, R82, R83, R84, R85, R120, R124, R125	RES-0603	Res2	41
43K		R17	RES-0603	Res	1
8.2K		R47	RES-0603	Res	1
100K		R86	RES-0603	Res	1
1W DIP-4	Switch	S1, S2, S4, S9	SW-SMD	1W DIP-4	4
1W DIP-4	DIP Switch, 4 Position, SPST	S3, S6	DISP SWITCH4	1W DIP-4	2
Touch Pad		T02, T03, T05, T04	Touch Pad	Touch Pad	4
SN74LVC245APWR	Octal Bus Transceiver With 3-State Outputs 20-TSSOP -40 to 125	U1, U4	SN74LVC245APWR	SN74LVC245APWR	2
ESP32S3_CONTROLLER		U2	ESP32S3_controller	ESP32S3_CONTROLLER	1
MP1584EN	Buck Switching Regulator IC Positive Adjustable 0.8V 1 Output 3A 4-KCIC 0.154, 3.90mm Width - Exposed Pad	U3	SOIC127P800X170-9N	MP1584EN	1
CP2102-GM	Single-Chip USB to UART Bridge, 1024 Bytes EEPROM, -40 to +85 deg.C, 28-pin QFN, Tube	U5	CP2102	CP2102-GM	1
74HC595PW.118	Shift Shift Register 1 Element 8 Bit 16-TSSOP	U6, U8, U9, U13	SN74HC595PW.118	74HC595PW.118	4
MAX7219CWG-T	LED Driver 64 Segment 330000uA Supply Current 24-Pin SDC W T/R	U10	SOIC127P1032X285-24N	MAX7219CWG-T	1
AMS1117-3.3	VARIABLE	U11	SOT223 14	AMS1117	1
W5500	8-Bit Industrial Ethernet voltage-level shifter for open-drain and push-pull applications	U12	LOQP-48	W5500	1
TVS0108PWR		U14	SN74V0108PWR	TVS0108PWR	1
BMP280	Barometric Pressure Sensor for Battery Powered Devices 2 x 2.5mm	U15	XDCR_BMP280	BMP280	1
38050	Surface mount NPN transistor, package SOT-23	V11, V12, V13	SMT_TRIODE_NPN	SMT_TRIODE_NPN	3
DSB4H	Crystal Oscillator	X1	XTAL_HC49	XTAL	1