


www.astropackgulf.com

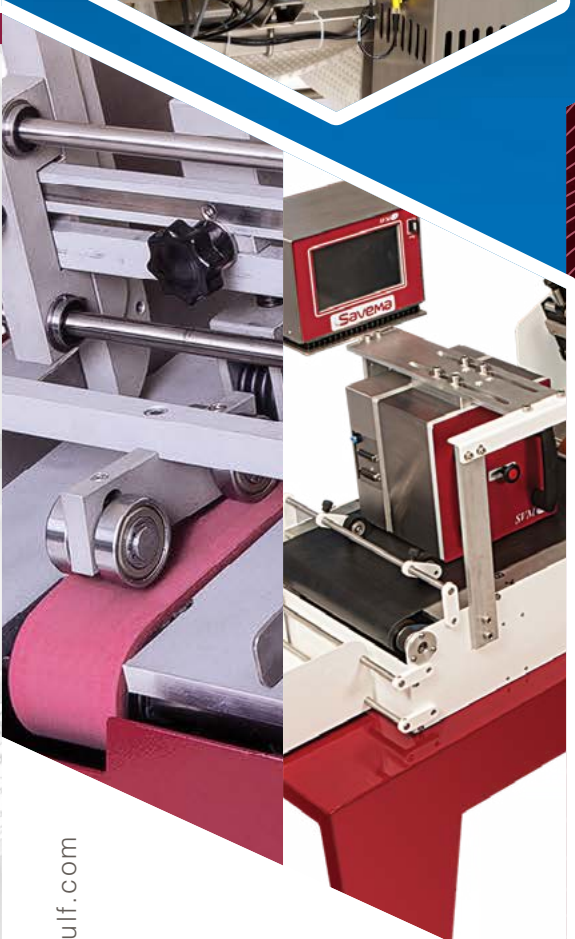

# Index

|    |                                                              |                                                                                       |
|----|--------------------------------------------------------------|---------------------------------------------------------------------------------------|
| 03 | PROFILE                                                      |                                                                                       |
| 04 | EBS-6900 Series                                              |                                                                                       |
| 05 | EBS-6500 Series                                              |                                                                                       |
| 06 | EBS-6200 P                                                   |    |
| 07 | HANDJET EBS-250                                              |                                                                                       |
| 08 | HANDJET EBS-260                                              |                                                                                       |
| 09 | EBS-230                                                      |                                                                                       |
| 10 | EBS-2500                                                     |                                                                                       |
| 11 | Savema 53-70 I                                               |                                                                                       |
| 12 | Savema 107-75 I                                              |  |
| 13 | Feeder Machines SVM 100-B                                    |                                                                                       |
| 14 | Traverse Printers                                            |                                                                                       |
| 15 | Thermo Scientific APEX 500                                   |                                                                                       |
| 16 | Thermo Scientific Checkweigher                               |  |
| 17 | Thermo Scientific NextGuard                                  |                                                                                       |
| 18 | Thermo Scientific Xpert                                      |                                                                                       |
| 19 | e-SolarMark                                                  |  |
| 20 | Packaging Machines                                           |                                                                                       |
| 21 | Powder Packaging Machine                                     |  |
| 22 | FAR - E                                                      |  |
| 23 | Vacuum Packaging Technology                                  |  |
| 24 | Filma Stretch Wrapping M/Sealing Machine & Strapping Machine |  |
| 25 | High speed SACHET Packaging complete line                    |  |
| 26 | Sachet & STICK-PACK Machine                                  |                                                                                       |
| 27 | Astro Supplies                                               |  |

**Astropack Gulf LLC** has been established in the Middle East Region with a mission to provide unmatched support to processing and packaging industries. All engineers are qualified & trained having extensive experience in installation and support of Packing, Coding and Inspection equipment the Middle East.

Sharing the responsibility of our principals, we are honored to be your partner and to fulfil your requirement from inception of ideas to implementation of projects. Our expertise are not limited to:

- Packaging Machines
  - iPac Vertical Form Fill Seal Machines
  - IPS Flow Wrapping Systems
- Coding systems
  - EBS Inkjet Printers
  - Savema Thermal Transfer Printers
  - Solaris Laser Coding Machines
  - HP industrial Carton coding printers
- Inspections Systems
  - Thermo Scientific Metal Detection Systems
  - Thermo Scientific X-Ray Inspection
  - Thermo Scientific Check-weighing machines
- Endline packing solutions:
  - Filma Stretch Wrapping Machines
  - Carton Sealers/strappers

Feel free to contact us for any packaging query and for budgetary or formal quotes.




# EBS-6900 Series

Continuous Ink-Jet Printer

**GOODBYE  
TO NOZZLE BLOCKAGE**




## Summary of Printhead Features

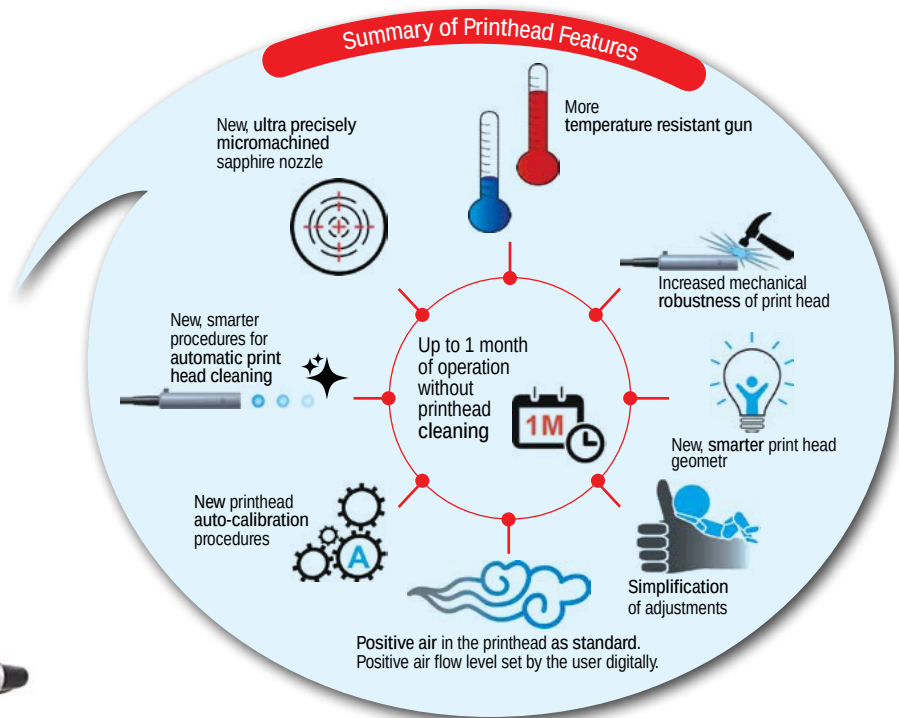


## UPS Power Supply

- Innovative integrated UPS power supply.
- Fully compatible (dimensions and connectors) to the standard power supply.
- A bank of four Super Caps [SC] provides power for a full shutdown procedure.
- Other than normal battery packs, the SC can be discharged unlimited times and are recharged in 2 minutes.
- Up to 30 sec blackouts are ignored and the printer stays in printing mode, before the shutdown starts.
- If the power returns before solvent was supplied to the print head, the printer automatically will go in Stand-by mode and production can be continued immediately.

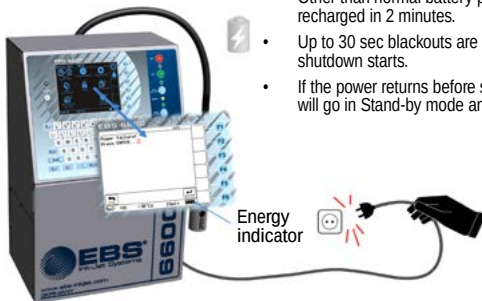


## Ink System

Additional solvent reservoir ensures clean printer shutdown, even if the solvent bottle is completely empty.

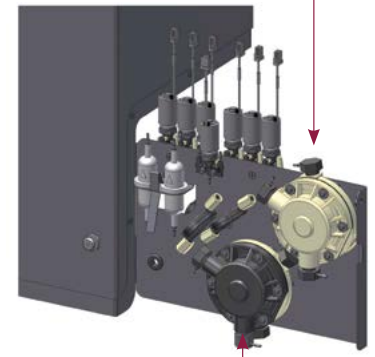

New solvent pump construction with a second connector in the control chamber for better cleaning and rinsing.

## Features Boltmark® II

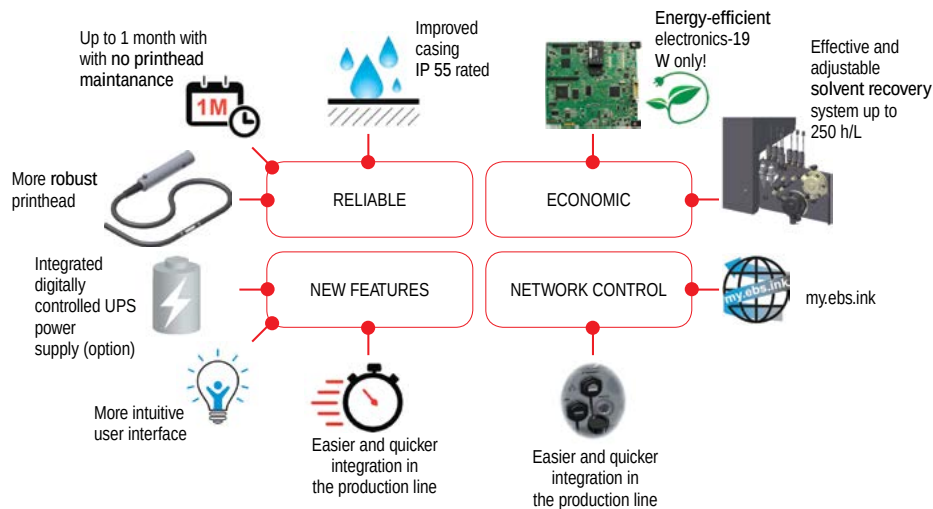



## Technical Parameters

|                                                                                                 |              |                                                  |                                                                                         |
|-------------------------------------------------------------------------------------------------|--------------|--------------------------------------------------|-----------------------------------------------------------------------------------------|
| 16 dots - 2 lines<br>Version „MINI“                                                             | •            | Umbilical cord                                   | •                                                                                       |
| 25 dots - 3 lines<br>Version „MIDI“                                                             | •            | Printhead position                               | jede / any                                                                              |
| High Contrast LCD<br>with touchscreen                                                           | •            | Print speed<br>(up to)                           | 441 Meter / Minute @ Matrix 5x5,<br>2083 char. / sec.                                   |
| Graphics / barcodes                                                                             | •            | Font matrix<br>(depending on<br>printer version) | 5x5, 7x4, 7x5, 9x5, 9x7, 11x7, 12x6,<br>12x7, 14x9, 16x9, 16x10, 16x14,<br>21x15, 25x15 |
| Available<br>barcodes                                                                           | 1D (2D opt.) | Keyboard layout<br>Arabic or Cyrillic            | •                                                                                       |
| International fonts (choose from):<br>Cyrillic, Arabic, Japanese, Chinese,<br>Korean and others |              | Message memory                                   | 100                                                                                     |
| RS232 & USB<br>interface                                                                        | •            | Electricity<br>consumption                       | dynamisch <<br>30W                                                                      |
| Positive air in<br>print-head<br>(anti-polluting)                                               | •            | Installation: hanging or standing                |                                                                                         |
| Special channel for<br>external data                                                            | •            | Weight (w/o fluids)                              | 12,5 kg                                                                                 |
| Dye-based ink<br>different types                                                                | •            |                                                  |                                                                                         |
| pigmented ink                                                                                   | -            |                                                  |                                                                                         |
| „clean hands“<br>bottle design                                                                  | •            |                                                  |                                                                                         |
| iModule® change<br>without tools                                                                | •            |                                                  |                                                                                         |
| USB library manager                                                                             | •            |                                                  |                                                                                         |



IP54 protection class -  
V2A stainless steel



High contrast LCD  
with touchscreen



## Technical Parameters

|                                                                                            |                                                                                                            |                                               |                                                                      |
|--------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------|-----------------------------------------------|----------------------------------------------------------------------|
| 16 dots - 2 lines<br>Version „MINI“                                                        | •                                                                                                          | soft-pigmented inks                           | ○                                                                    |
| 25 dots - 3 lines<br>Version „MIDI“                                                        | •                                                                                                          | Pigmented inks                                | •                                                                    |
| 32 dots - 4+ lines<br>Version „MAXI“                                                       | •                                                                                                          | Umbilical cord                                | 4m (13.1ft) [opt. 6m (19.7ft)]                                       |
| Special model „Micro“                                                                      | ○                                                                                                          | Printhead position                            | any                                                                  |
| Graphics / barcodes                                                                        | •                                                                                                          | Print speed                                   | up to 1488 char/sec, matrix 7x5<br><=> 595 meter/minute (1950ft/min) |
| Available barcodes                                                                         | EAN-8, EAN-13, Code 128, EAN-128,<br>Code 128B, ITF8, ITF 14, Datalogic,<br>2/5 Bars, Interleaved, Code 39 | Font matrix (depending<br>on printer version) | 5x5, 7x5, 9x5, 11x8, 12x6, 12x7, 14x9,<br>16x10, 16x14, 21x15, 32x18 |
| 2D Code ECC200                                                                             |                                                                                                            | Keyboard layout<br>Arabic oder Kyrillic       | •                                                                    |
| International fonts                                                                        | Kyrillic, Arabic, Japanese, Chinese,<br>Korean and others                                                  | Message memory                                | 1000 messages (2000 optional)<br>expandable memory                   |
| RS232 interface                                                                            | •                                                                                                          | Electricity consumption                       | dynamic < 30W                                                        |
| Positive air in printhead<br>(anti-polluting)                                              | •                                                                                                          | Installation hanging or standing              |                                                                      |
| Special channel for<br>external data                                                       | •                                                                                                          | Weight (w/o fluids)                           | 12,9 kg (29.4 lbs)                                                   |
| Windows® Software<br>EdGra® for message<br>management, parameters<br>and status of printer | optional                                                                                                   | Dimensions (HxWxD)                            | 435 x 300 x 202 mm<br>(17.1" x 11.8" x 8")                           |
| Dye-based ink black                                                                        | •                                                                                                          |                                               |                                                                      |
| Dye-based inks<br>(varying colours),<br>special inks,                                      | ○                                                                                                          |                                               |                                                                      |





## Technical Parameters

|                                                         |                                                                                                                                                                                                                                               |
|---------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Number of nozzles                                       | 16                                                                                                                                                                                                                                            |
| Nozzle diameter                                         | 150 µm                                                                                                                                                                                                                                        |
| Print height                                            | 11 mm, 20 mm and 27 mm                                                                                                                                                                                                                        |
| Height of objects to be printed                         | from 35 mm                                                                                                                                                                                                                                    |
| Working position in 3D space                            | any                                                                                                                                                                                                                                           |
| Line printing                                           | enables printing of up to 10 texts in successive lines                                                                                                                                                                                        |
| max. number of characters per text                      | 1500 (including control characters for the printer's built-in fonts)                                                                                                                                                                          |
| Number of texts and the accompanying print param.       | from 1 to 10 (Texts are loaded into printer via PC)                                                                                                                                                                                           |
| Printing of graphics (logo, special graphic characters) | editing and printing of graphical texts and symbols with the use of Windows®-Fonts (True Type) as standard                                                                                                                                    |
| Special characters                                      | national (diacritical) characters, graphic characters for information, warnings, etc.                                                                                                                                                         |
| Variable fields                                         | date and time in any format, expiry date, up- and down counters, universal counter (pieces, pallets, metres, etc.)                                                                                                                            |
| Programming                                             | <ul style="list-style-type: none"> <li>- wireless (radio) with range of up to 50 m</li> <li>- Text- and parameter processing Software, Windows® 98SE/ME/NT/2000/XP</li> <li>- Network of up to 20 printers, radiocontrolled via PC</li> </ul> |

|                                                           |                                                                                                                      |
|-----------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------|
| Timing                                                    | either synchronised with rotational speed of the lower stabiliser or at intervals by an internal generator           |
| Power supply                                              | Battery powered by 3 Li-Ion cells                                                                                    |
| Approximate operating time with the battery fully charged | 50 hours<br>- of non-stop printing at a temperature of 20°C, automatic low-battery indication.                       |
| Recharging                                                | automatically via an external 24V/1A DC power pack.<br>Charging time, less than 150 minutes                          |
| Ink                                                       | available in easily removable cartridges ethanol-, acetone- or water based, in various colours                       |
| Cartridge capacity                                        | 110 ml<br>for printing about 100.000 characters with 7x5 dot matrix or about 17.000 characters with 16x10 dot matrix |
| Working pressure                                          | 0,3 bar to 0,4 bar                                                                                                   |
| Operating temp. range                                     | +0,5°C to +40°C                                                                                                      |
| Storage temperature range                                 | - +1°C to +45°C<br>with water based ink -<br>-10°C to +45°C<br>with acetone or ethanol based ink                     |
| Humidity                                                  | Up to 95% without steam condensation (the printer can be operated when it rains, on a dry surface)                   |

EBS GmbH reserves the right to change these specifications without prior notice.



## Technical Parameters

|                                               |                                                                                                                                       |                                 |                                                                                                                                                              |
|-----------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------|---------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Touchscreen                                   | Coloured display with hardened glass, 9cm diagonal                                                                                    | Optional special functions      | Master-Slave Bluetooth connection with input devices such as; scanner, database functions, php-script administration                                         |
| Number of nozzles                             | 32                                                                                                                                    | Power supply                    | External power supply 24V, 1,25A                                                                                                                             |
| Nozzle diameter                               | 150 µm, optional 200 µm und 120 µm                                                                                                    | Operating                       | time Up to 16 hours                                                                                                                                          |
| Print image height                            | 7 - 56 mm                                                                                                                             | Ink base                        | Quick-drying inks; ethanol, acetone or MEK-based, also pigmented (to be specified when ordering)                                                             |
| Minimum size of object to be printed on       | from 40 mm                                                                                                                            | Ink types                       | Different colours; (black, blue, red, green, yellow) UV legible, (security inks), food-grade inks, inks for wood, concrete, pigmented inks for dark surfaces |
| Working position of the printer               | any                                                                                                                                   | Cartridge volume                | 200 ml                                                                                                                                                       |
| Printer memory                                | 2 Gigabyte                                                                                                                            | Capacity per cartridge          | > 200.000 characters in Matrix 7x5                                                                                                                           |
| Memory blocks for projects                    | >50.000 Projekte with 10.000 characters or more                                                                                       | Operating pressure              | Nominal 0,35 bar, internal mini-compressor                                                                                                                   |
| Graphics, logos, graphical special characters | Black & white PNG data can be imported up to a height of 32 dots.                                                                     | Operating temp. range           | 5°C - 40°C                                                                                                                                                   |
| Capable of Unicode                            | Yes                                                                                                                                   | Storage / transport temperature | 0°C - 45°C                                                                                                                                                   |
| TrueType Fonts installable                    | Yes                                                                                                                                   | Humidity                        | Max. 90% without condensation                                                                                                                                |
| Special characters                            | National, diacritical characters, graphical info-, warning and transport characters                                                   | Weight incl. cartridge          | 1,65 kg                                                                                                                                                      |
| Special register                              | Date, time, expiry date, incremental and decremental counter, universal counter (piece, palette, etc. ...)                            |                                 |                                                                                                                                                              |
| Date format editable                          | yes                                                                                                                                   |                                 |                                                                                                                                                              |
| Programming the printer                       | Via the built-in touchscreen, directly on the website of the specific printer in the Firefox browser or via Offline Editor (included) |                                 |                                                                                                                                                              |
| Special functions                             | Laser positioner, automatic measuring of objects                                                                                      |                                 |                                                                                                                                                              |





- Easy handling
- Robust design
- High-capacity memory
- Capable of graphics
- Unbeatable efficiency

Single-line coding on packaging has never been so easy!

## Technical Parameters

|                                 |                                                                                                                                                                                               |
|---------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Print height                    | 6 - 11 mm with 7-nozzle printhead<br>6 - 27 mm with 16-nozzle printhead                                                                                                                       |
| Printhead position              | any                                                                                                                                                                                           |
| Memory                          | 30 texts with up to 1300 characters each                                                                                                                                                      |
| Print speed                     | 600 vertical rows / sec. up to 60 m/min.                                                                                                                                                      |
| Special characters              | National (diacritical) characters, graphic characters for information, warnings, transport purposes etc.                                                                                      |
| Special registers               | Date and time in any format, expiry date, incremental counter, decremental counter                                                                                                            |
| Programming                     | - Software for editing text and parameter, compatible with Windows® XP/Vista/7 or programming via Terminal "T200"<br>- data transfer via provided connection cable                            |
| Ink consumption                 | ca. 2.000.000 characters per 1 litre (7x5 matrix)                                                                                                                                             |
| Weight                          | < 1.600 g excluding the ink bottle                                                                                                                                                            |
| Elements of the printing system | Printhead, junction box including power supply and photocell, USB cable from PC->EBS 230, 1 ltr. ink system, printhead holder, basic holder system, PC software and user's manual on a CD-ROM |
| Nozzle diameter                 | 150 µ                                                                                                                                                                                         |
| Simulation of Windows® fonts    | Possible, limited to the vertical print resolution                                                                                                                                            |
| Compressed air supply           | Not required!                                                                                                                                                                                 |
| Ink bases                       | Water; Ethanol; Acetone; MEK                                                                                                                                                                  |

|              |                                                                           |
|--------------|---------------------------------------------------------------------------|
| Timing       | Internal generator or optional shaft encoder (for varying conveyor speed) |
| Power supply | 100 - 240 V~ protection rating IP54                                       |





- Easy to handle
- Replaces expensive labels
- Complete coding solution with maximum flexibility

### Editing & printing capabilities

- State of the art, all-in-one system for high quality printouts on all porous surfaces. Replaces expensive labels. Best quality at all times.
- Lightweight, compact and easy to mount.
- Web (www) editor allows editing via Ethernet interface
- LCD 5.7" color display with touch screen for printer control, file management & maintenance with preview function of message (Editing via PC)
- Works virtually under any operation system (Windows®, Linux®, Mac®) - no need to install printer-specific software – only general purpose Firefox® web browser is required,
- Fixed text + very flexible types of variable text (counters, date (including offset and shifts), expiry date, text files, RS 232 data)
- TrueType® fonts with possibility of installing unlimited number of additional user fonts
- Graphics / logos with free resizing, PNG file import function
- Text / graphics / barcode rotation
- Horizontal rotation (reverse print) / vertical rotation (upside down print)
- Useful online help including a number of illustrations and animations
- Automatic support for making test printouts while editing
- Unique intensity regulation for different porous surfaces
- Automatic conveyor parameters detection
- Multi-level user management with password protection
- Waste ink collector (maintenance system)

## Technical Parameters

### Printer Performance

#### High Resolution Print Head - Ink-Jet technology

- Number of nozzles: 510
- Nozzle pitch: 141.1 µm (approx. 1/180 inch)
- Vertical resolution: 180 dpi
- Active printing height: 71.8 mm (2.827 inch)
- Firing frequency: 7 kHz
- Printing speed at horizontal resolution:  
360 dpi: 30 m/min (98.42 ft/min)  
180 dpi: 60 m/min (196.85 ft/min)  
90 dpi: 120 m/min (393.70 ft/min)
- Ink: oil ink and others
- Drop volume: 35 pl
- Intensity control (of whole printout)
- Print distance from nozzle to substrate (for best quality of printouts): maximum 4 mm
- Ink bottle capacity: 0.5 l (allows for up to 0.5 million printouts)
- project resolution: 500 x 500, 10% ink coverage)

#### Memory for user data / projects storage

- USB pendrive: factory installed 1 GByte
- File systems: FAT, FAT32 (possibility of back up data with standard PC computer)

### Barcodes

- Numeric: EAN codes, Code 11, Code 25, Codabar, Leticode and others
- Alphanumeric: Code 39, GS1-128 (UCC/EAN-128), Code 128, 2D:Data Matrix, 2D:MicroPDF417 and others

### Communication, connections

#### 1x Ethernet:

- TCP/IP
- Web server
- Network neighborhood (for pendrive network share)

#### 2x USB 2.0 connectors:

- Storage memory (factory installed pendrive)
- Other optional EBS equipment (RS-232 converter, signal lamp, etc.)

### Triggering / synchronization

- Built-in product detector (photocell)
- External product-detector connector (optional)
- External shaft encoder connector (optional)

### Dimensions and weight

#### Size:

- Length: 420 mm (16.54")

- Weight: 160 mm (6.30")

- Height: 210 mm (8.27")

Weight: 4.8 kg (2.18 lbs) - with 0.5 l ink bottle

### Cabinet

Stainless steel

Protection class (BS EN 60529): IP 54 / NEMA13

### Environment

Operating temperature range: 5 - 40°C (40 - 104°F)

Relative humidity: up to 80% non-condensing

Power supply (included in cabinet):

- AC 100-240 V, 50-60 Hz
- 0.95 - 0.45 A / max. 24 W - low power consumption



### Technical Parameters

|                       |                                                                              |                            |
|-----------------------|------------------------------------------------------------------------------|----------------------------|
|                       | 53-70 I                                                                      | 53 C                       |
| Print Area            | Width 53mm<br>Length 70mm                                                    | Width 53mm<br>Length 125mm |
| Resolution            | 12 dots/mm (300dpi)<br>horizontally and vertically                           |                            |
| Print Speed           | Up to 600mm / second 700mm / second                                          |                            |
| Production            | 350 prints/min (in one line) 500 prints/min                                  |                            |
| Thermal Ribbon        | 600 meter (656 yds.) loaded ribbon                                           |                            |
| Memory                | 5000 text memory<br>USB standart                                             |                            |
| Power Supply          | 110/220/240 V 50/60 Hz                                                       |                            |
| Air Supply            | min. 1 bar - max. 4 bar                                                      |                            |
| Wight (printer)       | 9,4 kg                                                                       |                            |
| Dimensions            | 180mm H x 250mm W x 210mm D                                                  |                            |
| Outputs               | Machine on error (failsafe) - image ready,<br>power on, print per minute etc |                            |
| Ribbon Widths         | 22 mm and 35 mm. - 55 mm. (0,9" - 1,4"-2,2")                                 |                            |
| Operating Temperature | 5°- 50°C (41° -104°F)                                                        |                            |
| Control Panel         | 7" Touch Screen Panel                                                        |                            |

|                |                                                                                                                                                                                                   |
|----------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Fields         | Real DATE/Time, Text, Barcode, 2D<br>Barcodes, Logo, Counter (Serial No),<br>Shift Code, Shape, Currency                                                                                          |
| Barcodes       | 1 D Barcodes, 2 D Barcodes, Datamatrix<br>EAN- 8,EAN-13,EAN-128, CODE 128,<br>CODE 39, 1-2 of 5, CODE 93, CODE BAR<br>DUN 14, ISBN, UPC-A, UPC-E<br>2D Datamatrix, QR Code, AZTEC Code,<br>PDF417 |
| Communications | RS-232 (PC), LAN, USB<br>Multi-language (14) support standard                                                                                                                                     |
| Pc Programmes  | SAYASIS Label Program                                                                                                                                                                             |





### Technical Parameters

|                       |                                                                           |                             |                                                                                                                                                                                      |
|-----------------------|---------------------------------------------------------------------------|-----------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
|                       | 107-75 I                                                                  | 107 C                       |                                                                                                                                                                                      |
| Print Area            | Width 107mm<br>Length 75mm                                                | Width 107mm<br>Length 125mm | Fields                                                                                                                                                                               |
|                       | Width 107mm<br>Length 125mm } Optional                                    |                             | Real DATE/Time, Text Barcode, 2D Barcodes, Logo, Counter (Serial No), Shift Code, Shape, Currency                                                                                    |
| Resolution            | 12 dots/mm (300dpi) horizontally and vertically                           |                             | Barcodes                                                                                                                                                                             |
| Print Speed           | Up to 350mm / second 350mm / second                                       |                             | 1 D Barcodes, 2 D Barcodes, Datamatrix EAN- 8, EAN-13, EAN-128, CODE 128, CODE 39, 1-2 of 5, CODE 93, CODE BAR DUN 14, ISBN, UPC-A, UPC-E 2D Datamatrix, QR Code, AZTEC Code, PDF417 |
| Production            | 200 prints/min (in one line) 250 prints/min                               |                             | Communications                                                                                                                                                                       |
| Thermal Ribbon        | 600 meter (656 yds.) loaded ribbon                                        |                             | RS-232 (PC), LAN, USB Multi-language (14) support standard                                                                                                                           |
| Memory                | 5000 text memory USB standart                                             |                             | Pc Programmes                                                                                                                                                                        |
| Power Supply          | 110/220/240 V 50/60 Hz                                                    |                             | SAYASIS Label Program                                                                                                                                                                |
| Air Supply            | min. 1 bar - max. 4 bar                                                   |                             |                                                                                                                                                                                      |
| Wight (printer)       | 11,6 kg                                                                   |                             |                                                                                                                                                                                      |
| Dimensions            | 210mm H x 210mm W x 255mm D                                               |                             |                                                                                                                                                                                      |
| Outputs               | Machine on error (failsafe) - image ready, power on, print per minute etc |                             |                                                                                                                                                                                      |
| Ribbon Widths         | 55 mm. 110 mm. (2,2" - 4,28")                                             |                             |                                                                                                                                                                                      |
| Operating Temperature | 5°- 50°C (41° -104°F)                                                     |                             |                                                                                                                                                                                      |
| Control Panel         | 7" Touch Screen Panel                                                     |                             |                                                                                                                                                                                      |



## Technical Parameters

|                       |                                                   |
|-----------------------|---------------------------------------------------|
| Min. width of product | : 50mm x 80mm                                     |
| Max. width of product | : 300mm x 300mm                                   |
| Maximum Belt Speed    | : 200mm/sn.                                       |
| Power                 | : 220V-50Hz-7A                                    |
| Weight                | : 16 kg.                                          |
| Dimensions of Belt    | : Width : 400mm - Length : 550mm<br>Height :160mm |

Our feeders are designed to work with conveyor belt that placed in front of for serving in different industries. While products are moving continuously or intermittently, we are able to mark with Inkjet, Thermal Transfer Printers and Labelling. We are adjusting marking place with very sensitive sensors. It is very easy to use our systems. It can be mounted barcode readers, image control systems, address labelling&printing tools to our systems. At the rear back, there is a gathering box that is for marked products.

### Applications

- Postal service and cargo
- Invoice and magazine feeding
- Ink jet printings
- Thermal Transfer Printer printings
- Labelling
- Pre-made package feeding
- Folding Machine feeding (OPP, CPP, PE, Paper, etc.)



## 

### 

- 53mm x 400mm print area.
- 600 meter ribbon capacity.
- Resolution 300 dpi (12 dots / inch)
- Print Speed up to 400 mm/sec.
- 7" touch panel color control screen.
- 90 °, 180 °, 270 ° rotate features of the templates.
- Memory: 5000 Templates can be stored in the control screen memory.
- Power Supply: 110/220V 50/60 Hz.
- Programming: Real Date/Time, Text, 1D Barcode, 2D Barcode, Logo, Counter (Serial No), Shift Code, Shape, Currency.
- Barcode Types: 1D Barcodes (EAN-13, EAN-8, CODE128, CODE39, ITF 2of 5, ITF 14, CODABAR, UPC-A, UPC-E), 2D Barcodes (Datamatrix, QR Codes, PDF 417, Aztec code Semacode, Macro PDF 417).
- Communication: RS-232 (PC), LAN, USB
- PC Programme: Sayasis

Patented long life mechanical design needs no maintenance.

53mm – 400mm print area.

600 m. Ribbon Capacity.

300 dpi (12 dot/inch) Print Quality.

Up to 400mm per/second print speed.

Large memory for all label formats to be stored locally.

The USB can be used to transfer messages between printers and through computer too.

### 

- 107mm x 400mm print area.
- 600 meter ribbon capacity.
- Resolution 300 dpi (12 dots / inch)
- Print Speed up to 400 mm/sec.
- 7" touch panel color control screen.
- 90 °, 180 °, 270 ° rotate features of the templates.
- Memory: 5000 Templates can be stored in the control screen memory.
- Power Supply: 110/220V 50/60 Hz.
- Programming: Real Date/Time, Text, 1D Barcode, 2D Barcode, Logo, Counter (Serial No), Shift Code, Shape, Currency.
- Barcode Types: 1D Barcodes (EAN-13, EAN-8, CODE128, CODE39, ITF 2of 5, ITF 14, CODABAR, UPC-A, UPC-E), 2D Barcodes (Datamatrix, QR Codes, PDF 417, Aztec code Semacode, Macro PDF 417).
- Communication: RS-232 (PC), LAN, USB
- PC Programme: Sayasis

Patented long life mechanical design needs no maintenance.

107mm – 400mm print area.

600 m. Ribbon Capacity.


300 dpi (12 dot/inch) Print Quality.

Up to 400mm per/second print speed.

Large memory for all label formats to be stored locally.

The USB can be used to transfer messages between printers and through computer too.



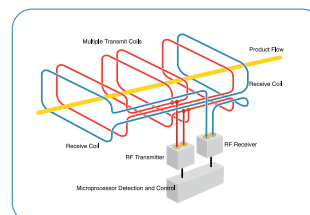

**APEX 500 Metal Detector  
Multi/Coil Architecture**

Advanced detection of metal  
contamination in package and  
process applications



## Technical Parameters

|                                           |                                                                                                                                                                                                     |
|-------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Construction                              | Stainless steel 304 straightlined case, ABS plastic control panel, epoxy lined aperture                                                                                                             |
| Protection Ratings                        | IP 69K, NEMA 4X, ATEX zone 22, hazardous location Class II Division 2 Groups F & G                                                                                                                  |
| Operating Temperature                     | -10°C to +40°C (+14°F to +104°F)                                                                                                                                                                    |
| Relative Humidity                         | 20% to 80% non-condensing                                                                                                                                                                           |
| Electrical Supply                         | 85 VAC to 260 VAC single phase plus earth ground; 47 Hz to 65 Hz, 100 watts maximum                                                                                                                 |
| Air Supply for AuditCheck option          | 5.5 bar (80 psi)                                                                                                                                                                                    |
| Product Speed                             | 0.5 m/min (1.7 ft/min) to 1000 m/min (3,300 ft/min)                                                                                                                                                 |
| Output Types                              | 6 Relays outputs; Relays: 250 VAC, 2-amp max.; 50 VDC, 1-amp max.                                                                                                                                   |
| Output Applications (software selectable) | Reject 1, Reject 2, AuditCheck, Fault, Alarm, Warning, QA lamp                                                                                                                                      |
| Input Types                               | 6 Inputs – Active 12 VDC + 12 V auxiliary supply for input sensors                                                                                                                                  |
| Input Applications (software selectable)  | Speed Sensor, Keylock, Product Select 1, Product Select 2, Product Trigger, Reject 1 Confirm, Reject 1 Complete, Reject 2 Confirm, Bin Full, External Suppression, Clear All Warnings/Faults/Alarms |
| Communications Options                    | Modbus Ethernet TCP/IP or RTU serial                                                                                                                                                                |
| Safety and Export Approvals               | cCSAus, CE, ATEX zone 22                                                                                                                                                                            |
| Manufacturing Quality                     | ISO9001 certified                                                                                                                                                                                   |
| Help-Text, Users Manual Languages         | English, Spanish, French, German, Italian, Dutch, Chinese, Czech, Russian, Polish                                                                                                                   |



- Broad range of applications
- High accuracy and stability
- Very easy to use and maintain

### Technical Parameters

| Specifications by Model  |                 |                 |             |                |                 | Box 25‡         |
|--------------------------|-----------------|-----------------|-------------|----------------|-----------------|-----------------|
| VersaWeigh Model         | 10-015          | Pharma*†        | 20-015/030  | 30-015/030/060 | 40-30-060-100   | 35/45-120/250*† |
| Weigh Range              | 1.5 kg          | 1.2 kg          | 1.5/3.0 kg  | 1.5/3.0/6.0 kg | 3.0/6.0/10.0 kg | 12/24 kg        |
| Belt Width (BW)          | 100 mm          | 80-140 mm       | 200 mm      | 300 mm         | 400 mm          | 350-450 mm      |
| Infeed Length (IL)       | 350, 500 mm     | 350-500 mm      | 250-1000 mm | 350-1000 mm    | 500-1000 mm     | 600-800 mm†     |
| Combo Infeed Length (CL) | 600-700, 800 mm | Consult factory | 600-1000 mm | 600-1000 mm    | 700-1000 mm     | Consult factory |
| Weigh Table Length (WL)  | 200, 250 mm     | 200-250 mm 2    | 50-500 mm   | 350-600 mm     | 500-800 mm      | 600-800 mm      |
| Outfeed Length (OL)      | 350, 500 mm     | 350-500 mm      | 250-1000 mm | 350-1000 mm    | 500-1000 mm     | 600-800 mm†     |
| Roller Diameter          | 16 mm           | 16 mm           | 24 mm/27 mm | 34 mm          | 34 mm           | 49 mm           |
| Tubing Diameter          | 50 mm           | 50 mm           | 50 mm       | 75 mm          | 75 mm           | 64 mm           |
| Motor Type               | 100 W           | 100 W           | 200 W       | 400 W          | 400 W           | 400 W           |

#### Specifications Common to All Models

|                            |                                                                                                                                                                                                             |
|----------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Material                   | Integrated, stainless-steel conveyors and frame; Optional stainless-steel, free-standing infeed/outfeed; Pulleys: aluminum                                                                                  |
| Interface Languages        | Multi-language interface standard                                                                                                                                                                           |
| Data Communication Options | USB; serial; parallel; FTP Ethernet; Modbus                                                                                                                                                                 |
| Options                    | Many options for reject and product handling; IP66 option pack; FDA belting; Servo filler/feedback option; Tracker option; Combination system with any Thermo Scientific APEX metal detector; and many more |
| Certifications             | OIML, MID (for OIML, MID and special certifications, some values may vary)                                                                                                                                  |


\*Pulleys stainless steel or aluminum. Pharma weigh table in aluminum; for availability consult factory. Box 25 partially aluminum and stainless steel, for availability in what countries, consult factory.

†Free-standing conveyor frames are stainless steel, pulleys are stainless steel or aluminum

‡Not available in the United States or Latin America



**Touchscreen**  
Protected, large touchscreen for washdown and durability, and adjust image function for on-the-fly detection adjustment while the system is inspecting



**Rejection Systems**  
Configurable rejection systems based on the VersaWeigh checkweigher. Variable speed controlled by the NextGuard.



**QA Check Function**  
Unique, configurable software feature allows definition of up to three audit types. Prompts the operator to run the audit and saves statistics/images from the process separately from production data.



- Detects a wide variety of foreign objects
- Simple to install and use
- Easy to own and service

Certified around the world  
Safety is assured with an LED light stack, multiple e-stops, x-ray key switch and safety interlocks on all doors and covers.

USB and Ethernet ports  
Standard watertight connections are available for data input/output and remote connection for help and troubleshooting.

Radiation shielding curtains (with cover removed)  
Lead and no-lead shielding curtains available. Easy to replace and adjust.

Modular conveyor  
Transport system is completely removable in minutes for thorough cleaning, belt change and maintenance/repair. Conveyor direction can be changed in the field by service technicians in less than one hour.



## Technical Parameters

### Application and X-Ray Specifications

|                                                        |                                                                                                                                                                 |
|--------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------|
| X-Ray Power                                            | 160 Watts or 100 Watts, 40-80kV                                                                                                                                 |
| X-Ray Detector                                         | Unique design with no inspection blind spots, 0.8mm pixel size                                                                                                  |
| Scan Rate                                              | Up to 1667 lines per second                                                                                                                                     |
| Typical Sensitivity                                    | ≥ 1mm diameter for steel, ≥ 3 mm for other dense contaminants (depends on the relative density of the contaminant as compared to the package)                   |
| Detection Algorithms contaminant                       | Available Simple threshold, gradient, dot morphology small, dot morphology medium, dot morphology large, area measure                                           |
| Aperture/Product Width and Height                      | 340 mm X 185 mm (13.4 in X 7.3 in)                                                                                                                              |
| Belt Speed                                             | Variable speed - 10-80m/min (262 ft/min) for 160 Watts, 50m/min (164 ft/min) for 100 Watts                                                                      |
| Conveyor Heights                                       | (specify at order time) 800 mm (31.5 in), 900 mm (35.4 in), 1000 mm (39.4 in), 1100 mm (43.3 in)                                                                |
| Conveyor Length                                        | 1 m (3.28 ft), optional reject systems extend system length                                                                                                     |
| Belt Material                                          | USDA/FDA approved urethane                                                                                                                                      |
| Security/Safety Features                               | X-ray power key, four level password system, emergency X-ray/conveyor stop button, lead/lead-free curtains, failsafe LED x-ray imminent and on indication light |
| Human Machine Interface (HMI)                          | Windows® 7, touchscreen, 307 mm (12.1 in) diagonal                                                                                                              |
| Language Interfaces Available                          | English, Spanish, French, Italian, German, simplified Chinese. Contact the factory for additional languages.                                                    |
| Data File Export                                       | Excel, PDF, or xml format selectable                                                                                                                            |
| Remote Access                                          | Teamviewer standard                                                                                                                                             |
| External Rejecter Options                              | Integrated variable speed conveyors. Air blast or pusher. Lockable reject bin and reject/bin full photo sensors.                                                |
| Environment, Electrical and Operational Specifications |                                                                                                                                                                 |
| Operating Temperature                                  | 5°C to 30°C (41°F to 86°F) with cooling fan or 5°C to 40°C (41°F to 104°F) with air conditioner                                                                 |
| Relative Humidity                                      | 20% to 90% non-condensing                                                                                                                                       |
| Electrical Supply                                      | 195 VAC to 250 VAC, 50/60 Hz, auto sensing, single phase, 10 amps.                                                                                              |
| Digital Outputs/Allocation                             | Four outputs, 24 VDC 0.5 A, assignable function                                                                                                                 |
| Digital Inputs/Allocation                              | Four inputs, 24VDC 25 mA, NPN/PNP (jumper selectable), assignable function                                                                                      |
| USB Port                                               | Watertight USB 2.0 standard                                                                                                                                     |
| Ethernet Port                                          | Watertight Ethernet port standard                                                                                                                               |
| Machine Weight                                         | 320 kg (700 lbs)                                                                                                                                                |
| Conformance Tests and Certifications                   |                                                                                                                                                                 |
| Radiation Safety Conformance                           | FDA CFR 21 part 1020.40, RED act. Others available, contact the factory.                                                                                        |
| Export/Safety Certificate                              | CE. UL or CSA on request                                                                                                                                        |
| IP Washdown Conformance                                | IP65 with air conditioner, IP54 with cooling fans. Full stainless steel type 304 construction.                                                                  |
| Manufacturing Quality                                  | ISO9001 certified facility                                                                                                                                      |





Safety is assured via an LED light pole, multiple e-stops, X-ray key switch, inspection area door lock and safety interlocks on all doors.



Conveyor belt changes in minutes. Modular design with many infeed/outfeed lengths, rejecters, bins, and shields.



No lead X-ray shielding curtains on fully adjustable and removable frame for safety, flexibility and easy maintenance.



Protected, large touchscreen for washdown and durability. Watertight USB port for data import and export. Ethernet connection also built in.



High-quality, stainless-steel air conditioning cooling. Wide operating temperature range and IP65 rating.



Air blast and pusher rejection options. Lockable reject bins with reject verification and bin full photoeyes, too.

## Technical Parameters

### Application and X-Ray Specifications

|                                 |                                                                                                                                 |
|---------------------------------|---------------------------------------------------------------------------------------------------------------------------------|
| X-Ray Power                     | 70 kV, 1.2 mA (84 W)                                                                                                            |
| Detector Scan Rate              | Up to 2800 lines/second                                                                                                         |
| Detector Resolution             | 0.8 mm standard, 0.4 mm optional                                                                                                |
| Detection Algorithms Available  | Binary, Contrast, Gradient, Groups, Morphology                                                                                  |
| Inspection Algorithms Available | Weight, Count, Grid and customizations                                                                                          |
| Aperture Width and Height       | See beam coverage drawing                                                                                                       |
| Belt Speed Range                | 5 m/min to 80 m/min (16 ft/min to 263 ft/min)                                                                                   |
| Multilane Operation             | Up to 8 lanes                                                                                                                   |
| Conveyor Heights Available      | 800 mm to 1400 mm (31.5 in to 55 in)                                                                                            |
| Conveyor Lengths Available      | 1.5 m (4.9 ft) standard, others available on request                                                                            |
| Belt Material                   | FDA approved urethane                                                                                                           |
| X-Ray Curtain Material          | Proprietary no-lead material                                                                                                    |
| Safety/Security Features        | X-ray power key, emergency stops, radiation curtains, LED X-ray imminent/on lights, all doors equipped with magnetic interlocks |
| Human Machine Interface (HMI)   | 15-inch diagonal touchscreen with protective cover                                                                              |
| Interface Languages Available   | English, Spanish, Italian, French, German, Chinese; Others available on request                                                 |

### Environmental, Electrical and Operational Specifications

|                                        |                                                  |
|----------------------------------------|--------------------------------------------------|
| Operating Temperature                  | +5°C to +40°C (+41°F to +104°F)                  |
| Machine Cooling                        | Built-in 2083 BTU (610 W) cabinet airconditioner |
| Relative Humidity                      | 20% to 90% non-condensing                        |
| Electrical Input                       | 190 to 240 VAC, 50/60 Hz, 20-amp service         |
| Digital Outputs                        | 4 available                                      |
| Digital Inputs                         | 6 available                                      |
| USB Port                               | 2.0, watertight port on outside of machine       |
| Network Port                           | Ethernet                                         |
| Compressed Air (for rejection devices) | 80 psi to 100 psi (5.5 bar to 6.9 bar)           |
| Machine Weight (standard model)        | 415 kg (915 lbs)                                 |

### Conformance Tests and Certifications

|                              |                                                                                                   |
|------------------------------|---------------------------------------------------------------------------------------------------|
| Radiation Safety Conformance | FDA CFR 21 part 1020.40, UK IRR 1999, RED act (contact factory for other regional certifications) |
| Export/Safety                | CE, UL or CSA 508A on request (verified by ETL)                                                   |
| Intrusion Protection Rating  | IP65                                                                                              |



### OPTIONALS


- Touch Screen GUI Control Unit interface for local job creation and modification
- Alphanumeric Keyboard Control Unit interface for local job modification
- IP 66 / NEMA 4 enclosure
- Scanning Head Mounting Extension Modules
- Product Detector and Shaft Encoder
- Fumes / Dust Extractor (with Active Carbon filter)
- Chiller for Water-Cooled Systems

## Technical Parameters

|                         |                                                                                                |                            |
|-------------------------|------------------------------------------------------------------------------------------------|----------------------------|
| Laser Output Power      | 10W                                                                                            | 30W                        |
|                         | Sealed CO2 laser tube, laser gas lifetime – 30,000 hours average/for fiber laser 100,000 hours |                            |
| Electrical Requirements | 230V 50Hz / 115V 60Hz, 1PH                                                                     | 230V 50Hz / 115V 60Hz, 1PH |
| Power Consumption       | 450W                                                                                           | 700W                       |
| Marking Head            |                                                                                                |                            |
| Dimensions              | 812 x 140 x 140 mm                                                                             | 726 x 140 x 140 mm         |
| LxHxW                   | (32.2 x 5.5 x 5.5 in.)                                                                         | (28.8 x 5.5 x 5.5 in.)     |
| Weight                  | 13 kg (29 lb.)                                                                                 | 13 kg (29 lb.)             |
| Control Unit            |                                                                                                |                            |
| Dimensions              | 160 x 360 x 335 mm                                                                             | 160 x 360 x 335 mm         |
| HxWxD                   | (6.3 x 14.2 x 13.2 in.)                                                                        | (6.3 x 14.2 x 13.2 in.)    |
| Weight                  | 8 kg (18 lb.)                                                                                  | 8 kg (18 lb.)              |

### Marking Specifications

|                    |                           |         |                                                   |           |           |
|--------------------|---------------------------|---------|---------------------------------------------------|-----------|-----------|
| Marking speed      | 1000 characters/sec       |         | Character height 2mm, Lens and Material Dependent |           |           |
|                    | Flat field (F-Theta) lens |         |                                                   |           |           |
| Lens type          | LF2                       | LF3     | LF4                                               | LF5       | LF8       |
| Marking field (mm) | 50 x 50                   | 80 x 80 | 100 x 100                                         | 120 x 120 | 200 x 200 |

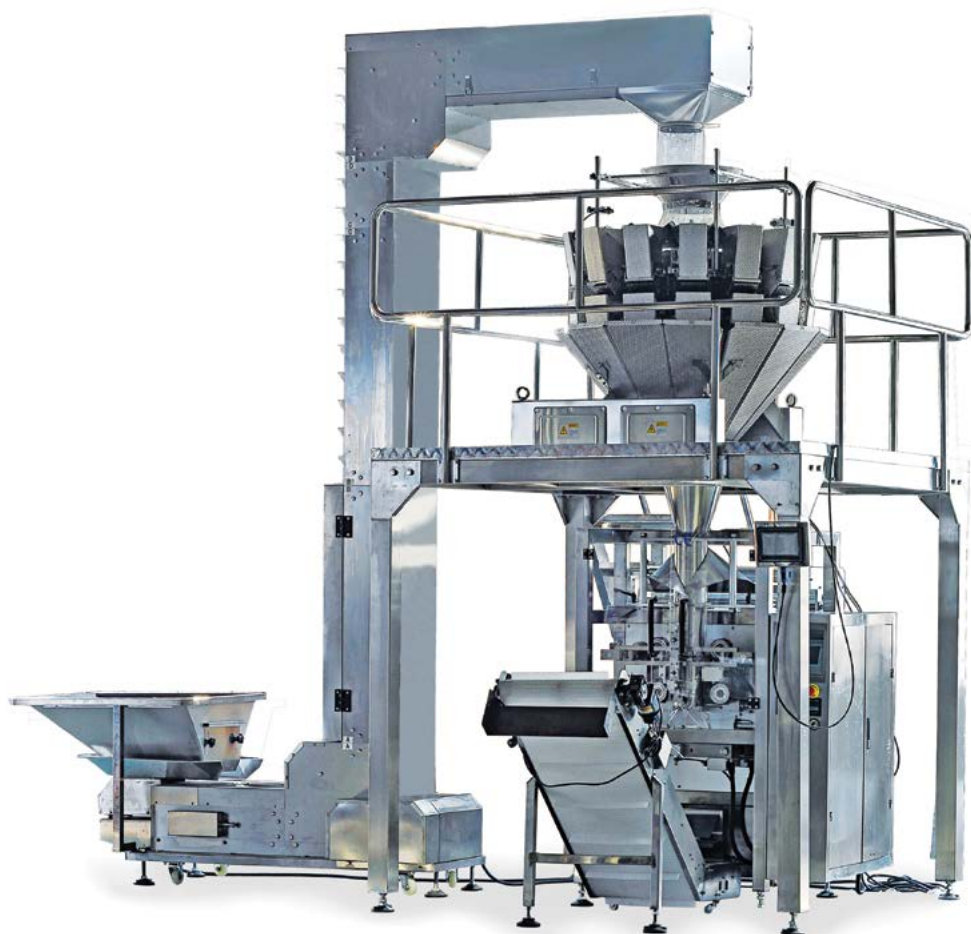

## Technical Parameters

### Application:

Multi head weighing and packaging system is suited for variety of applications and available in 5 models, the 8, 10, 14, 16, 20 and 24 head. Suitable for products like nuts, biscuits, dried fruits, frozen food, sugar etc.

- Fully automatic weigh-form fill seal machine
- Vertical Packing Machine
- Multihead weigher
- Automatic Z-type bucket elevator
- supporting platform
- Finished products conveyor
- Finished Products Conveyor

### Optional:

- Bag Support and ejector
- Gusset device for flat bottom
- Product feeding conveyor instead of elevator
- Thermal Transfer Printer
- Label Applicator Euro-hole
- Photocell for print alignment
- Checkweigher or Metal detector

| Packing Volume         | Upto 500g   | Upto 1000g  | Upto 3000g  | Upto 5000g     |
|------------------------|-------------|-------------|-------------|----------------|
| Max width of roll film | 320 mm      | 420 mm      | 520 mm      | 720 mm         |
| Power voltage          | 220VAC 50HZ | 220VAC/50Hz | 220VAC/50HZ | 220VAC/50/60HZ |
| Power                  | 2KW         | 2.2KW       | 4KW         | KW             |



## Technical Parameters

### Application:

Auger filling system to pack different types of powders like flour, coffee, milk powder, starch, herbs, spices etc.

- Fully automatic Form Fill Seal Machine
- Large Vertical Packing Machine
- Auger Filler
- Auger Elevator
- Finished Products Conveyor

### Optional:

- Bag Support and ejector
- Gusset device for flat bottom
- Thermal Transfer Printer
- Label Applicator
- Euro-hole
- Photocell for print alignment
- Check weigher or Metal detector

| Packing Volume         | Upto 500g   | Upto 1000g  | Upto 3000g  | Upto 5000g     |
|------------------------|-------------|-------------|-------------|----------------|
| Max width of roll film | 320 mm      | 420 mm      | 520 mm      | 720 mm         |
| Power voltage          | 220VAC 50HZ | 220VAC/50Hz | 220VAC/50HZ | 220VAC/50/60HZ |
| Power                  | 2KW         | 2.2KW       | 4KW         | 3KW            |





## Technical Parameters

### FAR-E – ROTARY JAWS FLOW PACK MACHINE WITH FILM ROLL FROM THE TOP

Main machine structure in steel with covers in stainless steel  
 Product contact parts in stainless steel  
 Easy access to electric and pneumatic parts  
 1600 mm long infeed conveyor with nylon pushers (standard)  
 Two sets of wheels for longitudinal sealing  
 1-up transverse rotary sealing jaw 240mm  
 Reel holder with expanding shaft 500mm  
 800 mm long discharge conveyor belt complete of AC motor  
 Three brushless servomotors  
 High-resolution 4,3" touch screen integrated control panel  
 Power 3/6 Kw. Voltage 400V-3-50 Hz.  
 CE conformity

### OPTIONALS

Photocell for print registered film  
 Printers  
 Two or more up-jaws  
 Special loading systems  
 Zig-zag knives  
 Euroslot die cutting system  
 Full Inox version

## Table Top Range



**T2**

Cover: Flat  
Seal: Single  
Pump Capacity: 4 m<sup>3</sup>



**T3**

Cover: High  
Seal: Double  
Pump Capacity: 8 m<sup>3</sup>



**T4**

Cover: High  
Seal: Double  
Pump Capacity: 16 m<sup>3</sup>



**T5**








Cover: Flat  
Seal: Double  
Pump Capacity: 21 m<sup>3</sup>



**T6**

Cover: High  
Seal: Double  
Pump Capacity: 16 m<sup>3</sup>

### Seal Configurations



**Options**  
Filler plates / Liquid filler plates  
Digital time control  
Sensor control  
Soft Air  
Seal  
Gas  
Pump upgrade  
Voltage according to Pump upgrade



## Double Chambers



**D1**

Cover: Double  
Seal: Trenn (pre-cut) / 1-2 / Bi-Active  
Pump Capacity: 63 m<sup>3</sup>



**D3**

Cover: Double  
Seal: Trenn (pre-cut) / 1-2 / Bi-Active  
Pump Capacity: 160 m<sup>3</sup>



**D4**








Cover: Double  
Seal: Trenn (pre-cut) / 1-2 / Bi-Active  
Capacity: 160 m<sup>3</sup>



**D6**

Cover: Double  
Seal: Trenn (pre-cut) / 1-2 / Bi-Active  
Capacity: 40 m<sup>3</sup>

### Seal Configurations



**Options**  
Filler plates / Liquid filler plates  
Digital time control  
Sensor control  
Soft Air  
Seal  
Gas  
Pump upgrade  
Voltage according to Pump upgrade



### Professionals in FOOD & NON-FOOD Packaging

Professionals in 80 countries worldwide choose Henkovac as their number 1 source for vacuum packaging machines. Henkovac offers a complete product line that fulfills the vacuum packing needs of small to medium size food processing and food preparation companies in many industries.

## Technical Parameters

|                                                                          | FP/ECO      | FP/10            |
|--------------------------------------------------------------------------|-------------|------------------|
| Turntable Diameter (M.M.)                                                | 1500        | 1500             |
| Turntable Rotating Speed (R.P.M.)                                        | 10          | 10               |
| Max. Load Capacity (KG.)                                                 | 1500        | 1500             |
| Max. Load Width (MM.)                                                    | 1200        | 1200             |
| Max Load Length (MM.)                                                    | 1200        | 1200             |
| Max Load Height (MM.)                                                    | 2000        | 2000             |
| Max Film Roll External Diam. (MM.)                                       | 300         | 300              |
| Max Film Roll Height (MM.)                                               | 500         | 500              |
| Film Carriage With Chain Transmission                                    | Standard    | Standard         |
| Mechanical Clutch For The Film Tension Regulation                        | Standard    | Standard         |
| Buttons For The Manual Control Of The Film Carriage Ascent/Descent       | Standard    | ○                |
| Electronic Control Box (Programmed Microprocessor) With Digital Keyboard | ○           | Standard         |
| Cross Wrapping Cycle                                                     | ○           | Standard         |
| Wrapping Cycle With Reinforcing Wraps (Manual Control/Positioning)       | ○           | Standard         |
| Separate Timer For The Bottom And Top Wraps Setting                      | ○           | Standard         |
| Reset Button For The Repositioning Of The Film Carriage                  | ○           | Standard         |
| Photocell For The Pallet Height Detection                                | ○           | Standard         |
| Must With Hinge Facility For A Very Easy And Quick Installation          | Standard    | Standard         |
| Installed Capacity (KW)                                                  | 0,4         | 0,4              |
| Standard Electric Setting                                                | 380V 3F + T | 380V S-PH+ Earth |
| Machine Total Weight (KG)                                                | 350         | 360              |

Wide Range Of Accessories Available

○ : Not Available



Carton Sealing Machine

Options:

- Outside tension adjustment
- Air filter
- Stainless steel structure SUS #304
- Caster with brake



Semi-automatic Strapping Machine

Options:

- Extension roller table
- 60 sec. auto-stop
- Stainless steel structure SUS #304
- 3 phase, 220/380/415/440V

## Technical Parameters

|              |                                                                                                |
|--------------|------------------------------------------------------------------------------------------------|
| Power        | 1 Phase, 110/220V, 50/60Hz                                                                     |
| OPP          | 2 7/3" (Please advise when ordering)                                                           |
| Sealing Size | L above 150 x W200~500 x H120~500mm (2" tape)<br>L above 150 x W225~500 x H120~500mm (3" tape) |
| Capacity     | 30 boxes/min. For box length 300mm (Belt speed 20M/min)                                        |
| Net Weight   | 160Kgs                                                                                         |
| Machine Size | L1044 x W779 x H1569~1764 mm                                                                   |

|                   |                                        |
|-------------------|----------------------------------------|
| Power             | 1 Phase, 110/220V, 50/60Hz             |
| OPP               | 9, 12, 15 mm (adjustable) (6mm option) |
| Strapping Tension | 15 ~ 50 kgs                            |
| Strapping Speed   | 2.0 sec./strap                         |
| Strapping Size    | Min. : 60 mm, Max. : Any size          |
| Table Height      | 750 mm                                 |
| Machine Size      | L910 x W580 x H750 mm                  |



## Technical Parameters

### OMAG High Speed Sachet Line

Composed by of N.2 Omag sachet machine Mod C3/9, 9 each and N.1 Intermittent Cartoning Machine to achieve a total real production rate up to 1350 sachets/min.

### SACHETS Display Box

Final presentation of N. 14 triplex sachets into a display box. The Sachets number can be changed according to Customer's needs.



## Sachet & STICK-PACK Machine

For packing Ketchup, Mayonnaise, Sugar, Powders etc...



# We cater all your IT Needs



## Our Services

Printer & Supplies, Pc's & Graphical Displays

Storage & Networking Accessories, Cyber Security, Services & Back Up Solutions

🌐 [astrosupplies.com](http://astrosupplies.com) ✉ [info@astrosupplies.com](mailto:info@astrosupplies.com) ☎ +971 4 2737090

📞 +971 56 422 1430





Industrial Inkjet Printers, Thermal Transfer Printers, HP industrial Carton coding printers, Laser Coding Machines, Inspections Systems, Metal Detection, X-Ray Inspection, Check-weighing machines, Flow-wrappers, Packaging Machines, Consumables, Spares, technical support for EBS & Image Printers... etc.



**ASTROPACK**  
www.astropackgulf.com  
**GULF LLC**



P.O. BOX 8787 | Al Jurf | Ajman | UAE

+971 6 749 4981 +971 6 749 4982 info@astropackgulf.com