

CORPORATE OFFICE

101-103, First Floor, Titanium One, Near Pakwan Cross Roads, S. G. Highway, Ahmedabad - 380 054. Gujarat, INDIA
T. +91-79-29704833, +91-79-61554444 | **E.** info@sunhearrt.com

MUMBAI OFFICE

301/A- 3rd Floor, Sri Krishna, Opp. Laxmi Ind. Estate,
New Link Road, Andheri(W), Mumbai - 400 053.
T. +91-63588 77310 | **E.** mh3@sunhearrt.com

DELHI / NOIDA OFFICE

A-17, 2nd Floor, Sector 9, Noida - 201303 (NCR).
T. +91-120-4278530, +91-120-4278560
E. dl2@sunhearrt.com

BENGALURU OFFICE

Sai Arcade, Bearing Municipal No. 150, PID No. 50-70-150R.V.
Road, Vishveshwarpuram, Bangalore - 560 004.
T. +91-95120 00141 | **E.** ka2@sunhearrt.com

INTERNATIONAL ENQUIRY

T. +91-95120 00351 | **E.** export.vp@sunhearrt.com

TOLL FREE: 1800 233 1012

E. info@sunhearrt.com | www.sunhearrt.com



ABOUT COMPANY

Path-breaking innovations with a Promise of quality!

Inspired in collection, and unmatched in design; Sunhearrt, a brand by Sunshine Tiles Company Pvt. Ltd., through its novel technology and product introductions, is leading the Ceramic industry to achieve a peerless national and global reputation in becoming a single-stop

solution for any space amplification. Penetrating the industry with an ever-expanding portfolio, Sunhearrt has now diversified its core strength of Ceramics, and Vitrified tiles into GVT/PVT, Porcelain, Sanitaryware, as well as a range of complete Tiling Solutions.

Acing interiors by Enhancing spaces!

Fulfilling an array of myriad construction requirements, Sunhearrt crafts high-end products with a keen focus on delivering the best. Prioritising customer satisfaction, we create products that are unique, sustainable, durable, in addition to

being easy to install, maintain, bacteria protected, as well as resistant to fire, heat, and chemicals; making them a preferred choice for designing any space that speaks opulence.

Company strength and achievements that defines our place in the industry.



AMONG TOP 10 CERAMIC BRANDS IN INDIA



LARGEST VITRIFIED TILES PLANT NEAR KANDLA PORT



14+ SIZES IN 5000+ DESIGNS



ONE OF THE LARGEST TILE EXPORTERS, CONSECUTIVELY FOR THE LAST 6 YEARS



1,00,000+ SQM. MANUFACTURING CAPACITY / DAY



PRESENCE IN 83+ COUNTRIES



19 PRODUCTION LINES



THE FIRST COMPANY IN THE CERAMIC INDUSTRY WITH 3-STAR EXPORT HOUSE



900+ CHANNEL PARTNERS



INVESTMENTS IN RENEWABLE ENERGY



Tiles

Flooring the extensions of your dream space, tiles from Sunhearrt are a great addition to every ambience. With their simplistic elegance and finesse, our tiles introduce modernity and grandeur by manufacturing the best alternatives and replacements to natural surfaces. This collection, thence, is the perfect choice for 'architecting' the spectacular!



woodlot
GVT WOODEN TILES

SUNHEARRT
CERAMIK

Engulf in the
*nuances of
nature*

20x120cm

20x
120cmTILE FEATURE
GVT WOODLOTFINISH
RUSTIC

HARMONY SABBIA

Faces - 9

woodlot 20x
120cmTILE FEATURE
GVT WOODLOTFINISH
RUSTIC

ROVERWOOD PINE

Faces - 6




HARMONY AMBAR

Faces - 9



HARMONY COFFEE

Faces - 9

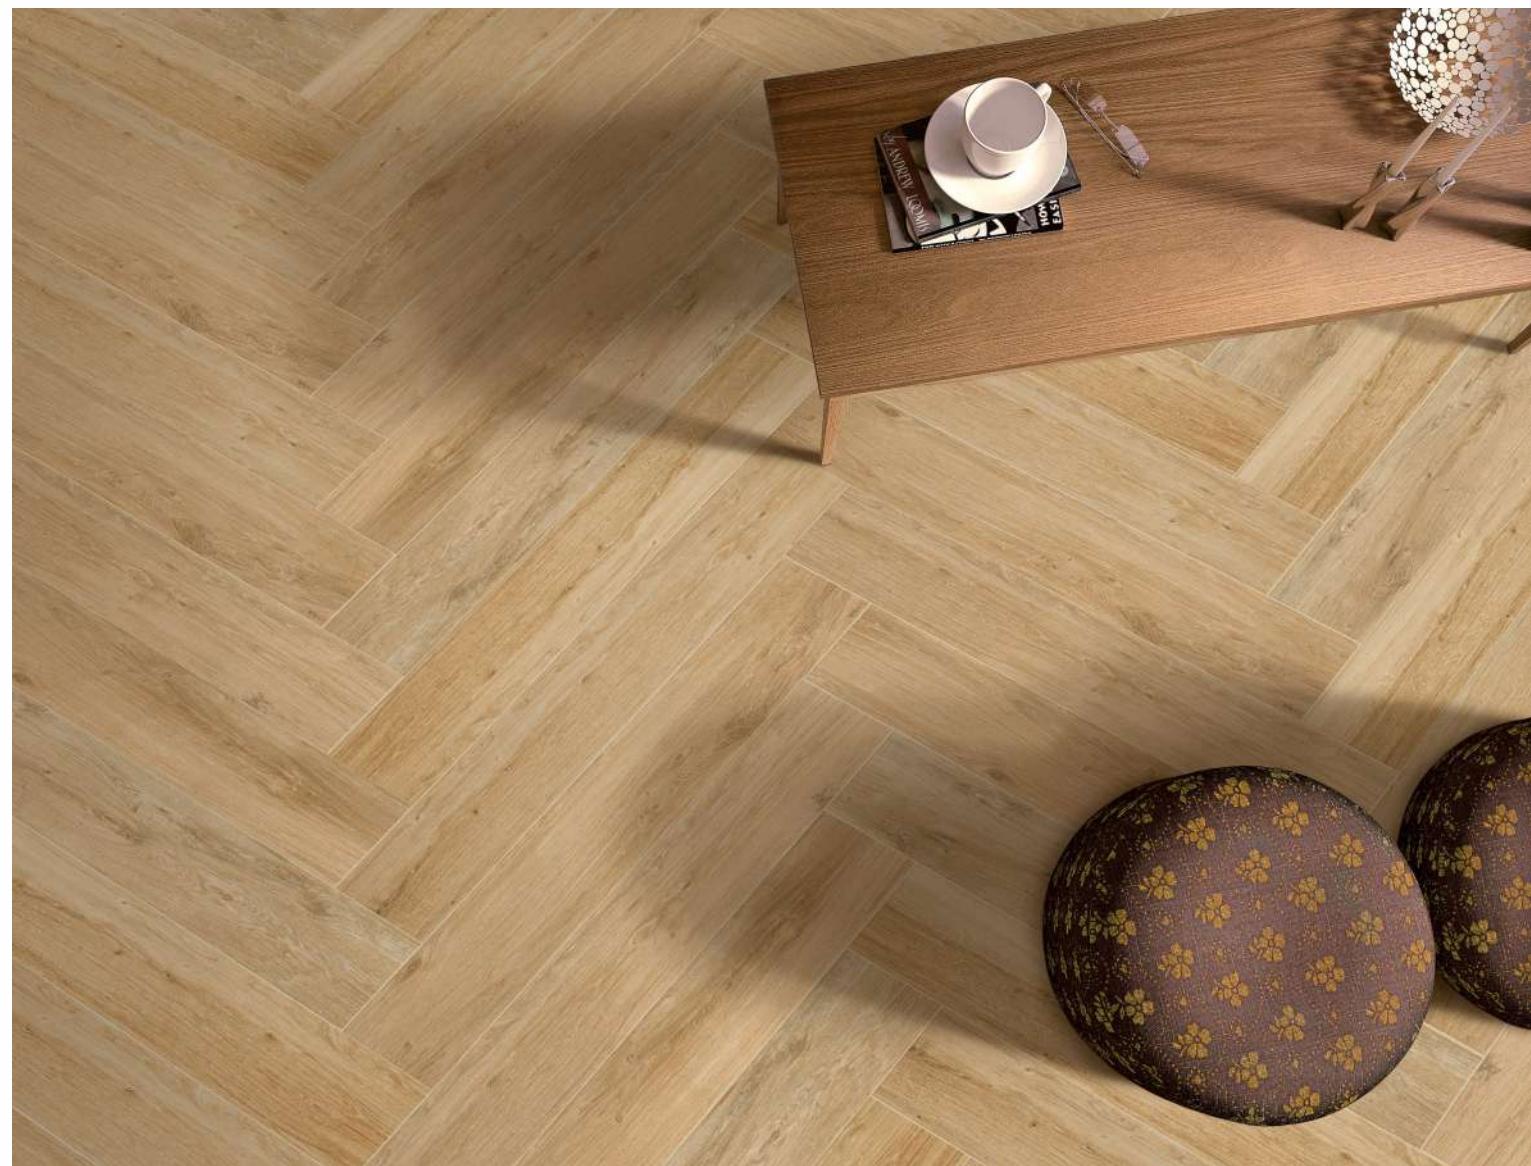Low Water
AbsorptionFrost
ResistantChemical
ResistantStain
ResistanceZero
MaintenanceEasy to
CleanRandom
Design


ROVERWOOD PINE



20x
120cm


TILE FEATURE
GVT WOODLOT

FINISH
RUSTIC

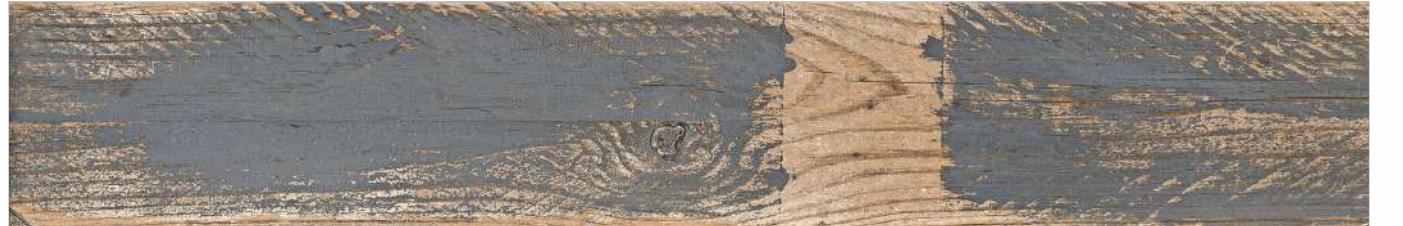

ARTPAINT BLUE

Faces - 13

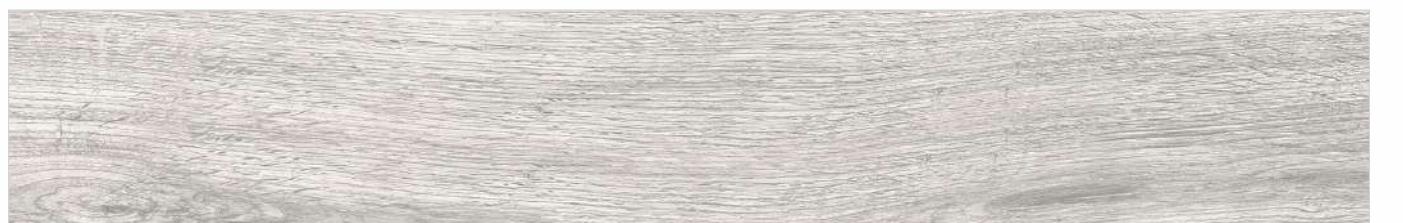

ANGELES APEX

Faces - 8



ANGELES ZENITH

Faces - 8



Low Water
Absorption



Frost
Resistant



Chemical
Resistant



Stain
Resistance



Zero
Maintenance



Easy to
Clean



Random
Design



ARTPAINT BLUE



CHARM BROWN

 20x
120cm

TILE FEATURE
GVT WOODLOT

FINISH
RUSTIC



CHARM CREAM

Faces - 10



CHARM AMBAR

Faces - 10



CHARM BROWN

Faces - 10

-  Low Water Absorption
-  Frost Resistant
-  Chemical Resistant
-  Stain Resistance
-  Zero Maintenance
-  Easy to Clean
-  Random Design



20x
120cm

TILE FEATURE
GVT WOODLOT

FINISH
RUSTIC



GRAIN CHOCOLATE

Faces - 8



OAK WALNUT

Faces - 4



LANCE WOOD

Faces - 9

- Low Water Absorption
- Frost Resistant
- Chemical Resistant
- Stain Resistance
- Zero Maintenance
- Easy to Clean
- Random Design



LANCE WOOD



KINGWOOD ZENITH

 **woodlot** | 20x120cm

TILE FEATURE
GVT WOODLOT

FINISH
RUSTIC



KINGWOOD BEIGE

Faces - 9



KINGWOOD BROWN

Faces - 9



KINGWOOD ZENITH

Faces - 9



Low Water
Absorption



Frost
Resistant



Chemical
Resistant



Stain
Resistance



Zero
Maintenance



Easy to
Clean



Random
Design

20x
120cmTILE FEATURE
GVT WOODLOTFINISH
RUSTIC

LEVIS BROWN

Faces - 10



LEVIS TOBECO

Faces - 10



ROVERWOOD NATURAL

Faces - 6

Low Water
AbsorptionFrost
ResistantChemical
ResistantStain
ResistanceZero
MaintenanceEasy to
CleanRandom
Design

ROVERWOOD NATURAL



BOSTAN SANDAL

 20x
120cm

TILE FEATURE
GVT WOODLOT

FINISH
MATT



BOSTAN BEIGE

Faces - 8



BOSTAN BROWN

Faces - 8



BOSTAN SANDAL

Faces - 8



Low Water
Absorption



Frost
Resistant



Chemical
Resistant



Stain
Resistance



Zero
Maintenance



Easy to
Clean



Random
Design



20x
120cm


TILE FEATURE
GVT WOODLOT

FINISH
MATT



TOUCH WOOD BROWN

Faces - 6

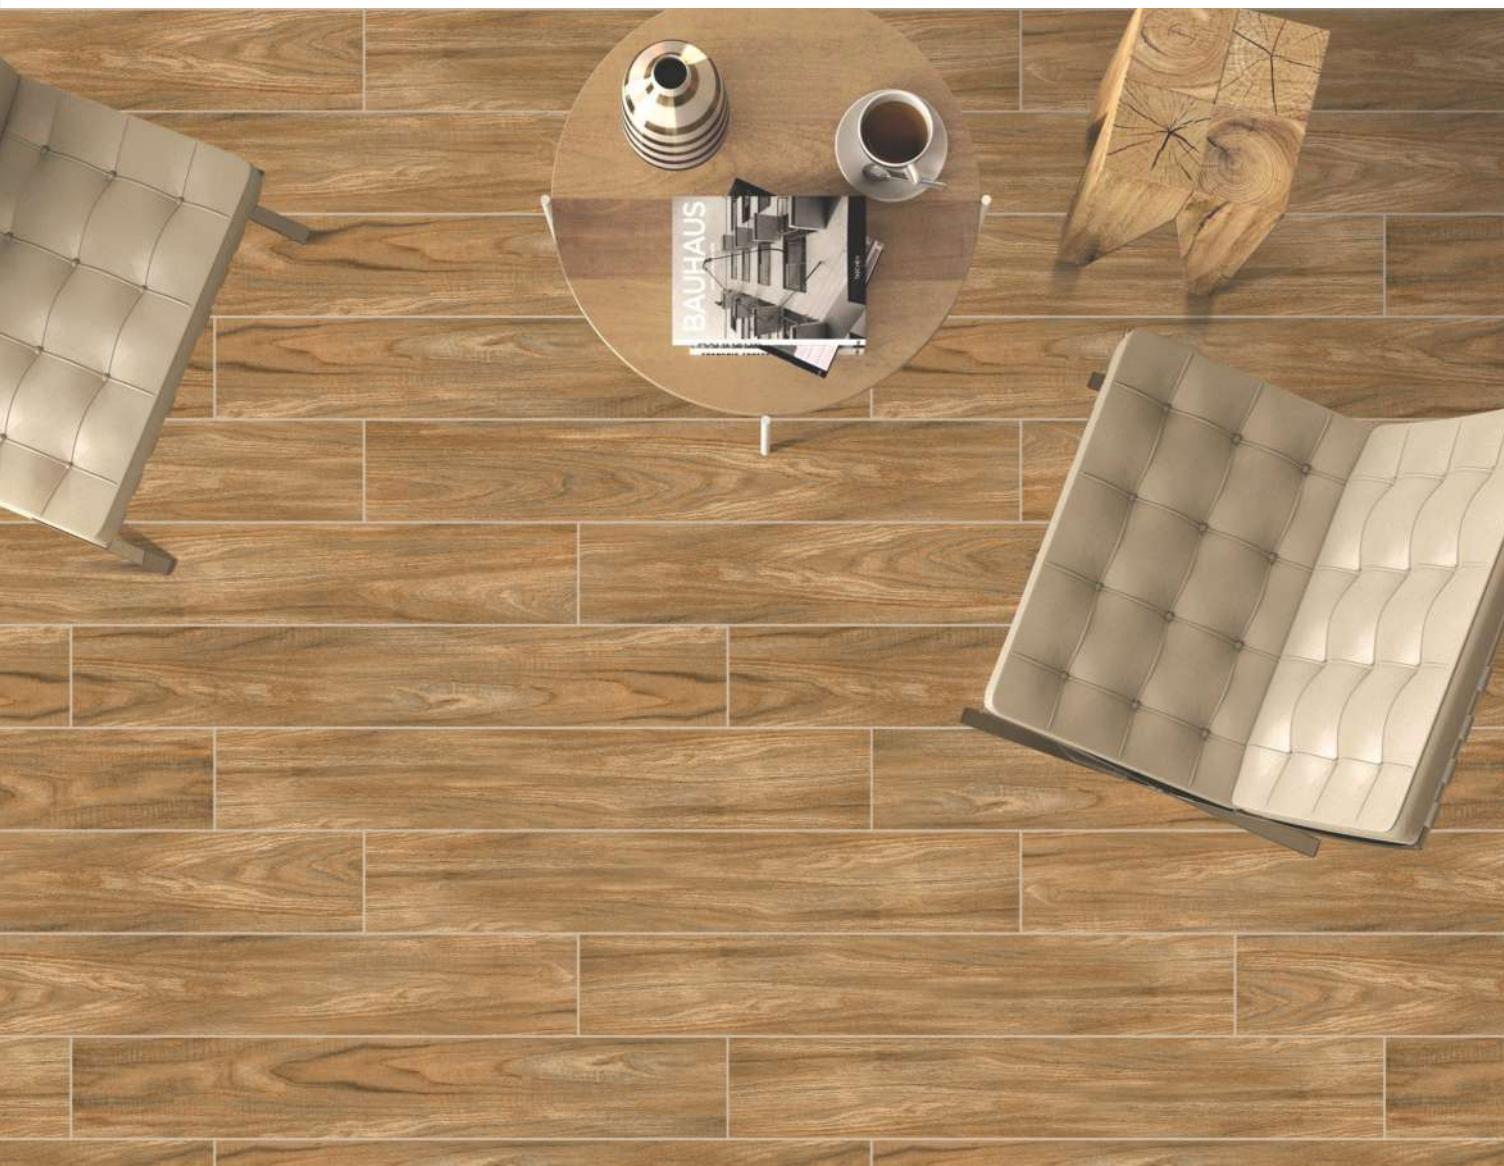

TOUCHWOOD BROWN



DESERT SATUVARIO

Faces - 9



DESERT SATUVARIO

NOTES

TECHNICAL SPECIFICATION

S. No	Characteristics	IS 15622:2017 Group Bla	EN 14411:2016 Group Bla	TEST METHOD	SUNHEARRT VALUE
A DIMENSION & SURFACE QUALITY					
I	Length & Width	±0.1%	± 0.6%	ISO 10545-2	± 0.1%
II	Thickness	± 5.0%	± 5.0%		± 4%
III	Straightness of Side	±0.1%	± 0.5%		± 0.1%
IV	Rectangularity	±0.1%	± 0.5%		± 0.1%
V	Surface Flatness				
a	Center curvature (%)	± 0.5 %	± 0.5%		± 0.2 %
b	Edge curvature (%)	± 0.5 %	± 0.5%		± 0.2 %
c	Corner warpage (%)		± 0.5%		± 0.2 %
VI	Surface Quality	Min. 95 % of tiles will be free from visible defects	Min. 95 % of tiles will be free from visible defects		Min. 98 % of tiles will be free from visible defects
B PHYSICAL PROPERTIES					
I	Water Absorption	<0.08%	<0.5% Ind Max 0.6%	ISO 10545-3	<0.2%
II	Modulus of Rupture [N/mm ²]	Av 35, Individual 32 min	Av 35, Individual 32 min	ISO 10545-4	>45
III	Breaking Strength in N	700 for < 7.5mm thickness 1100 for ≥ 7.5mm thickness	700 for < 7.5mm thickness 1300 for ≥ 7.5mm thickness	ISO 10545-4	>2000
IV	Moisture Expansion in mm/m	0.02	0.06% /0.6mm/m	ISO 10545-10	Nil
V	Resistance to Abrasion of glazed tiles(Class I to V)	Depending on surface (As reported)	Depending on surface (As reported)	ISO 10545-7	Class 4 for GVT Class 3 for PGVT
VI	Coefficient of linear thermal expansion from embiant temperature to 100 ° C	6 X 10 ⁻⁶ K ⁻¹	9 X 10 ⁻⁶ K ⁻¹ max	ISO 10545-8	6 X 10 ⁻⁶ K ⁻¹ max
VII	Thermal Shock Resistance	10 Cycle Passed	10 cycle min	ISO 10545-9	10 cycle min
VIII	Crazing Resistance	4 cycle	2 Cycle (@ 5 bar))	ISO 10545-11	4 cycle passed
IX	Frost resistance	100 Cycle	Required	ISO 10545-12	Passed
X	Impact Resistance	0.55		ISO 10545-5	0.75
XI	Bulk Density	2.2	Not A requirement		2.2 gm/cc.min
C CHEMICAL PROPERTIES					
I	Stain Resistance	Min Class I	Min Class 3	ISO 10545-14	Class 3
II	Resistance to household chemicals	Class AA	Min Class B	ISO 10545-13	Class A
III	Resistance to Acid and alkalies			ISO 10545-13	Class A

PACKING DETAILS

S.No.	SIZE	PIECES / BOX	COVERAGE AREA / BOX		WEIGHT / BOX
1	20X120cm	5pcs	12.92 sq. ft.	1.20 sq. meter	28 kg

Note: Color shown in catalog may vary with the original tile. Slight shade & size variation is an inherent property of ceramic / Vitrified tiles.