

101-103, First Floor, Titanium One, Near Pakwan Cross Roads, S. G. Highway, Ahmedabad - 380 054. Gujarat, INDIA **T.** +91-79-29704833, +91-79-61554444 | **E.** info@sunhearrt.com

MUMBAI OFFICE

301/A- 3rd Floor, Sri Krishna, Opp. Laxmi Ind. Estate, New Link Road, Andheri(W), Mumbai - 400 053. T. +91-63588 77310 | E. mh3@sunhearrt.com

DELHI / NOIDA OFFICE

A-17. 2nd Floor, Sector 9.Noida - 201303 (NCR). T. +91-120-4278530, +91-120-4278560 E. dl2@sunhearrt.com

BENGALURU OFFICE

Sai Arcade, Bearing Municipal No. 150, PID No. 50-70-150R.V. Road, Vishveshwarapuram, Bangalore - 560 004. **T.** +91-95120 00141 | **E.** ka2@sunhearrt.com

CHENNAI OFFICE

2B, Plot No. 28, Jahnvi Heights, Babu Jagan Street, Opp. Hotel Vijay Park, 100 Ft. Road, Arumbakam, Chennai - 600 106. **T.** +91-44-23633360 | **E.** tn19@sunhearrt.com

COCHIN OFFICE

30/40 A3, Pushpamangalam Estate, Near Bhima Jewellery, NH Bye Pass, Edappally, Ernakulam, Cochin - 682 024. **T.** +91-48-44851119 | **E.** kl12@sunhearrt.com

INTERNATIONAL ENQUIRY

T. +91-95120 00351 | **E.** export.vp@sunhearrt.com

TOLL FREE: 1800 233 1012

E. info@sunhearrt.com | www.sunhearrt.com

















SUNHEARRT CERAMIK

ADMIXTURE



PROOFING

TILE ADHESIVE

TILE GROUT

ABOUT US

Continuously striving to achieve perfection and expanding with revolution, Sunhearrt Ceramik, a brand by Sunshine Tiles Company Pvt. Ltd., through its novel technology and product introductions, is leading the Ceramic industry to achieve a peerless national and global reputation, in becoming a single-stop solution for any space amplification.

Penetrating the industry with its evergrowing portfolio, Sunhearrt has now diversified its core strength of Ceramics to a complete range of Tiling Solutions. These construction chemicals, available from seamless grouting to building the resilience of your floors with adhesive and admixtures; create a niche in the market with their standardised product quality and efficacy.

Our extensive range, applicable in various commercial, residential, and public spaces, increases the efficiency of the area; fulfilling an array of myriad construction requirements with a keen focus on delivering the best and prioritising customer satisfaction.

Path-breaking innovation with a **Promise of Quality**



Our Collection Offers a Wide Range of Products for Achieve Tiling Perfection

TILE ADHESIVE

TILE **EQUALIZER** **EPOXY GROUT**

TILE **CLEANER** TILE **GROUT**

WATER **PROOFING** **ADMIX PLUS**

GROUT

TILE **SPACERS**

Application Areas














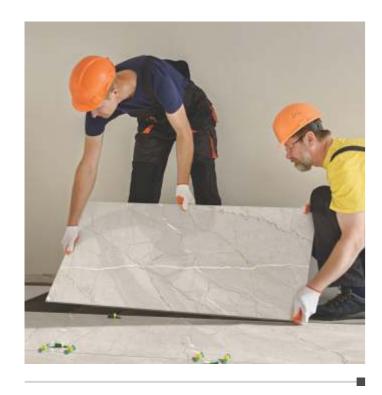

POLYMER MODIFIED
TILE ADHESIVE



NSA GP (grey) is a polymer-modified cementbased tile adhesive suitable for fixing floor tiles in interiors. For difficulty in application and demanding situation, consult Sunhearrt regarding the use of higher performance adhesive.

NSA GP

FEATURES

- Premium quality polymer modified adhesive
- Suitable for fixing interior floor tiles
- Good strength for interior decor
- User-friendly and easy blending application
- Nsa gp meets the adhesion requirements

APPLICATION AREAS

- Floors
- Interiors

IS 15477:2019


Type1

TECHNICAL INFORMATION

PROPERTIES	RESULTS
Appearance	Free flowing powder
Colours	Grey
Pot Life @ 25°C, minutes	>20mins
Adjustability time, minutes	15 Mins, 30°C
Open time	30 Mins, 30°C
Trafficable time	24 Hrs
Adhesion Strength	≥O.5N / mm²

COVERAGE ESTIMATES

PACK SIZE	COVERAGE
20 kgs.	Approximately 40-45 sq.ft /20kgs. @ 4mm thickness, when using a thin trowel

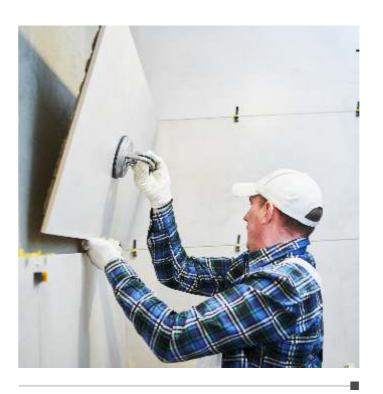

NSA GOLD (grey) is a high polymer-modified tile adhesive produced for the application of tiles in exterior areas, swimming pool and tile on tile. For the use of adhesive excluding these applications, consult Sunhearrt.

POLYMER MODIFIED TILE ADHESIVE



NSA GOLD

FEATURES

- Premium quality polymer modified adhesive
- Suitable for outdoor spaces, tile on tile & swimming pools
- Good strength for interior & exterior decor
- User-friendly and easy blending application
- Nsa gold meets the adhesion requirements

APPLICATION AREAS

- Wall & Floors
- Interior & Exteriors
- Swimming Pool

Conform to IS & EN sto


IS 15477:2019	EN 12004:2017
Type 2	C1T

TECHNICAL INFORMATION

PROPERTIES	RESULTS
Appearance	Free flowing powder
Colours	Grey
Pot Life @ 25°C, minutes	>20 Mins
Adjustability time, minutes	15 Mins, 30°C
Open time	30 Mins, 30°C
Trafficable time	24 Hrs
Adhesion Strength	≥1.ON / mm²

COVERAGE ESTIMATES

PACK SIZE	COVERAGE
20 kgs.	Approximately 40-45 sq.ft /20kgs. @ 4mm thickness, when using a thin trowel

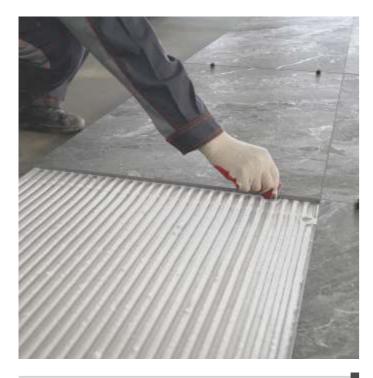

NSA DIAMOND (grey / white) is adhesive to install glass mosaic tiles . tile on tile . big format application for applications excluding the ones mentioned above, we

offer a higher performance adhesive.

POLYMER MODIFIED TILE ADHESIVE



NSA DIAMOND

FEATURES

- Premium quality polymer modified adhesive
- Suitable for glass mosaic & swimming pool
- Good strength for interior & exterior decor
- User-friendly and easy blending application
- Nsa diamond meets the adhesion requirements

APPLICATION AREAS

- Wall & Floors
- Interiors & Exteriors
- Dry & Wet Areas
- Bathroom

Swimming

Pool

Conform to IS & EN std

IS 15477:2019	EN 12004:2017
Type3	C2TES1

TECHNICAL INFORMATION

PROPERTIES	RESULTS
Appearance	Free flowing powder
Colours	Grey & White
Pot Life @ 25°C, minutes	>20mins
Adjustability time, minutes	15 Mins, 30°C
Open time	30 Mins, 30°C
Trafficable time, Hrs	24 Hrs
Adhesion Strength	≥1.ON / mm²

COVERAGE ESTIMATES

PACK SIZE	COVERAGE
20 kg.	Approximately 40-45 sq.ft /20kgs. @ 4mm thickness, when using a thin trowel



Our most premium high polymer-modified cementbased tile adhesive NSA PLATINIUM (grey & white) is suitable for fixing exterior tiles, tile on tile and big format tiles in swimming pool area.

POLYMER MODIFIED TILE ADHESIVE



NSA PLATINUM

FEATURES

- Premium quality polymer modified adhesive
- Suitable for exterior tile, tile on tile & swimming pool
- Good strength for interior & exterior decor
- User-friendly and easy blending application
- Nsa platinum meets the adhesion requirements

APPLICATION AREAS

- Wall & FloorsInteriors & Exteriors
- Dry & Wet Areas
- Swimming pool

IS 15477:2019	EN 12004:2017
Type 4	C2TES2

TECHNICAL INFORMATION

PROPERTIES	RESULTS
Appearance	Free flowing powder
Colours	Grey & White
Pot Life @ 25°C, minutes	>20 Mins
Adjustability time, minutes	15 Mins, 30°C
Open time	30 Mins, 30°C
Trafficable time, Hrs	24 Hrs
Adhesion Strength	≥1.ON / mm²

COVERAGE ESTIMATES

PACK SIZE	COVERAGE
20 kg.	Approximately 40-45 sq.ft /20kgs. @ 4mm thickness, when using a thin trowel

POLYMER MODIFIED TILE GROUT



PRODUCT DETAILS


Our polymer-modified TILE GROUT is a waterresistant and cement-based high-quality fine powder for interior and exterior. It is suitable for floor tile and wall tile joints.

APPLICATION INSTRUCTIONS

Mix 1kg of TILE GROUT with 250gms of water.

POLYMER MODIFIED TILE GROUT

Suitable for floor and wall tile joints

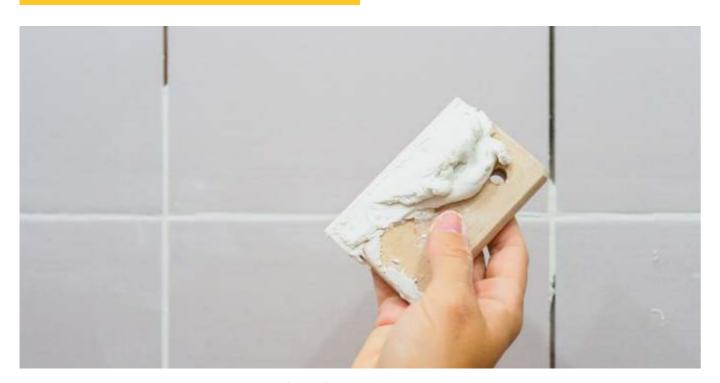

TECHNICAL INFORMATION

PROPERTIES	RESULTS
Pot Life @ 25°C	120 Mins.
Open Time	60 Mins.
Adjustability Time	15-20 Mins.
Initial Setting Time	2 Hrs.
Final Setting Time	12 Hrs.
Shrinkage	<0.1%

GROUT ADMIXPLUS




PRODUCT DETAILS

GROUT ADMIX PLUS is specially designed latex based grout hardner, to be used with sanded and unsanded grout. It improves the performance of cement grouts for all type of ceramic tiles, brick, marble, natural stone and agglomerate stone installations.

GROUT ADMIX PLUS

Suitable for making all the cement Based grout flexible

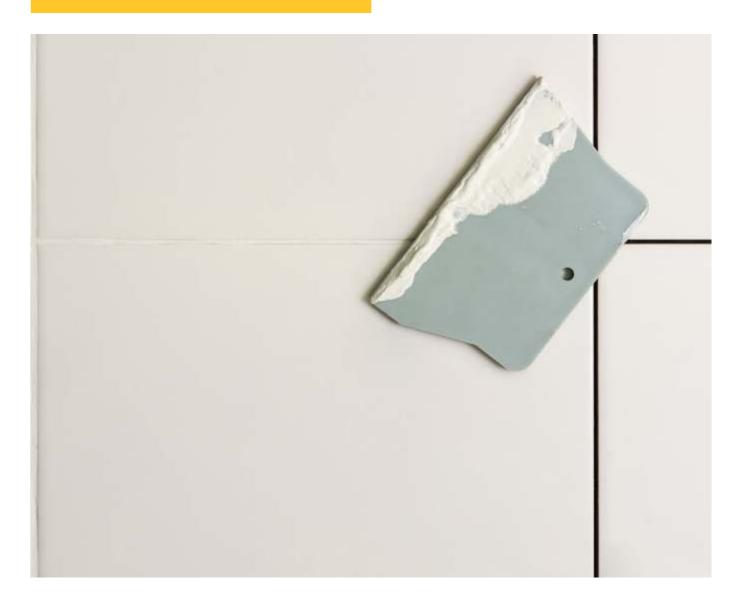

CLEANER



PRODUCT DETAILS


Our TILE CLEANER is a powerful heavy-duty acid-based cleaner for ceramic tiles, floors and walls. This cleaner can be easily applied to both horizontal and vertical surfaces, where it remains in contact with the area to be cleaned. It is designed for the removal of cement film residues, efflorescence and limescale.

NOTE

Do not use on surfaces that are not resistant to acids such as marble or terrazzo. keep away from children.

TILE CLEANER

Fast acting tile cleaner for tiles

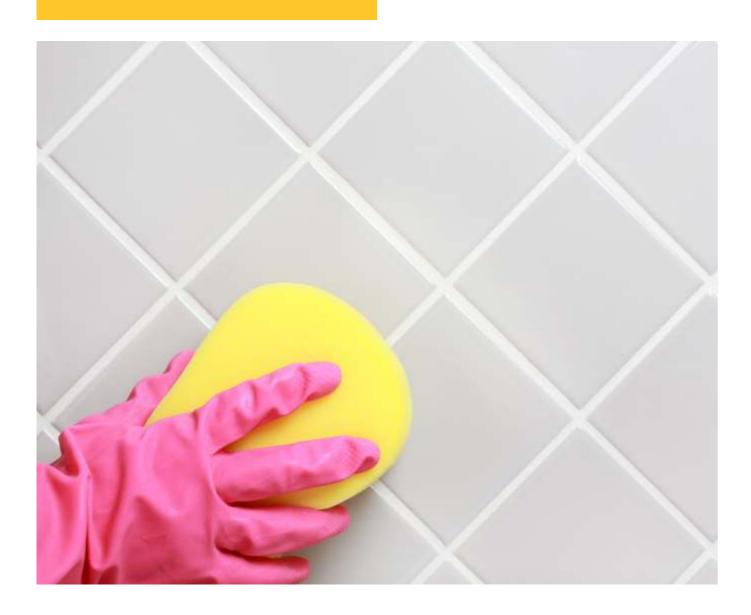

ADMIXTURE



PRODUCT DETAILS

SUNHEARRT LWP+ is a specially formulated integral liquid waterproofing compound composed of surface-active plasticizing agents, polymer and additives. It is used as an additive for concrete, plaster and mortar.

PACK SIZES

200 ML | 1 LTR | 5 LTR | 10 LTR | 20 LTR | 200 LTR

Dosage

200 ML / 50kg cement use

LWP+ ADMIXTURE

Integral liquid waterproofing compound
For concrete, plaster and mortar (admixture)



EPOXY GROUT (GRIPOXY)



transfer taints to food and other stuff. **APPLICATION INSTRUCTIONS**

PRODUCT DETAILS

This material is available in three-part, Part A (Resin), Part B (Hardener) and Part C (Filler). At first, mix Parts A and B thoroughly and as the mixing becomes uniform, add Part C and make it a consistent paste. Then apply this paste to substrates with its proper appliances.

SUNHEARRT GRIPOXY is stain-free, hygienic, hard-

wearing, impervious, epoxiy resin-based grout with

a high degree of resistance to chemical attack,

abrasion and impact. The cured grout does not

Resin based 3 part epoxy tile grout for Wall tiles and floor tiles





TECHNICAL INFORMATION

PROPERTIES	RESULTS
Joint Width	2 To 25 mm.
Gel Time	60 Mins.
Setting Time	48 Hrs.
Specific Gravity	1.75
Water Absorption	Nil

WATER PROOFING



PRODUCT DETAILS


SBR LATEX is latex for waterproofing and repairs. It also works as a admixture, bonding agent for mortar and screed.

PACK SIZES

200 ML | 500 ML | 1 LTR | 5 LTR | 20 LTR | 50 LTR | 200 LTR


SBR LATEX

Latex for waterproofing and repairs, Bonding agent for mortar and screed

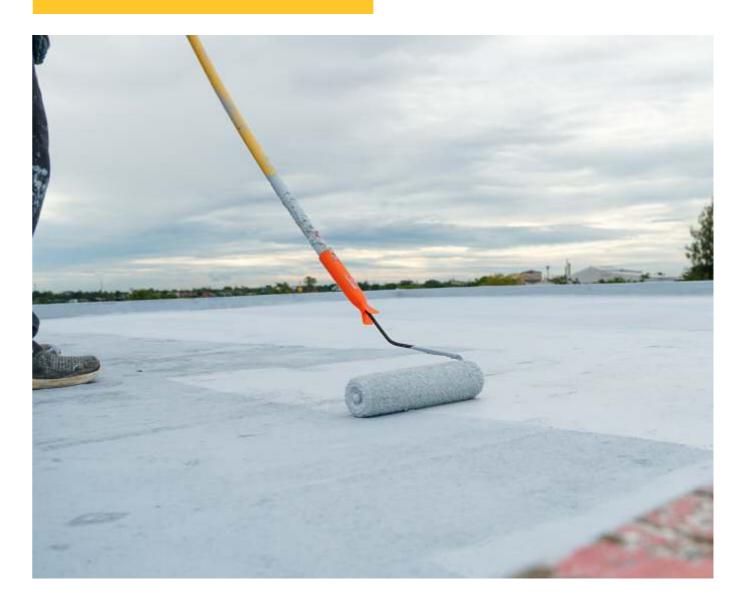



ACCESSORIES



AVAILABLE SIZES

2mm | 3mm | 4mm | 5mm | 6mm | 10mm

PACK SIZE

100 PCS / PKT

TILE SPACERS

To make space between wall tiles, Floor tiles, etc.



LEVELER KIT



AVAILABLE SIZES

CLIP 50 PCS/PKT | WEDGE 50 PCS/PKT

TILE EQUALIZER

For tiles leveling and equalizing surface




ACCESSORIES





TROWEL

For tile adhesiv leveling and equalizing surface

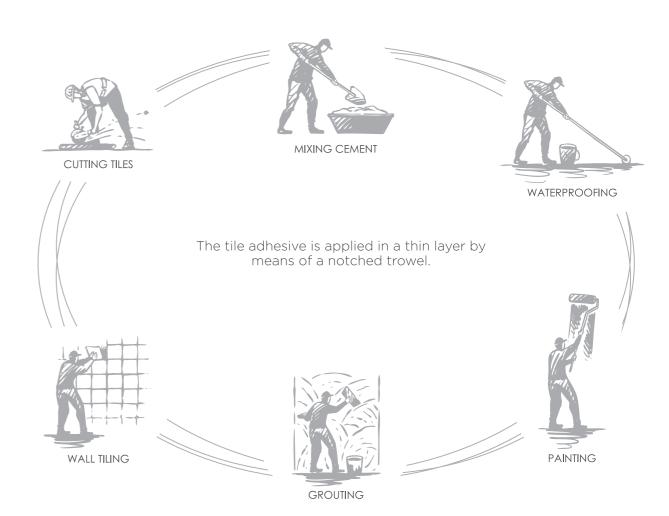

NOTE

Accept no liability for any loss or damage which arises as a result thereof.