


DEPARTMENT OF COMPUTER SCIENCE & ENGINEERING
THE UNIVERSITY OF TEXAS AT ARLINGTON

DETAILED DESIGN SPECIFICATION
CSE 4317: SENIOR DESIGN II
SPRING 2027

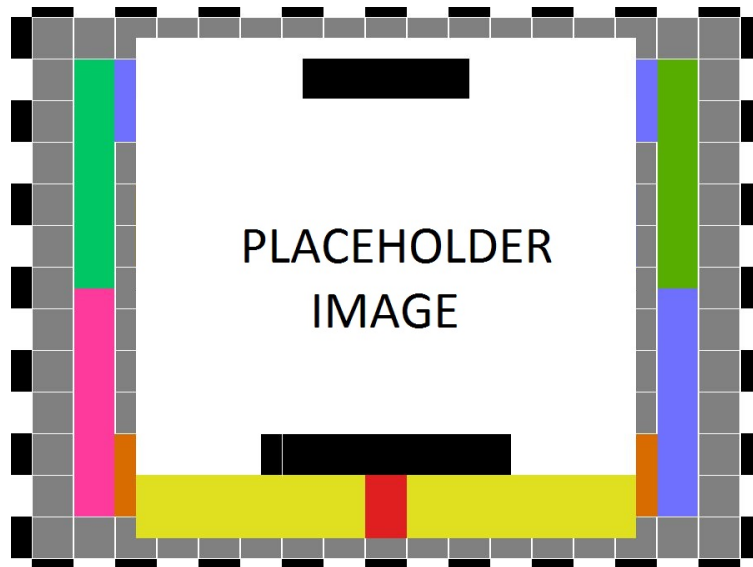

TEAM NIMBUS
AQUAGUARD SMART WATER-LEAK MONITOR

ALAN TURING
GRACE HOPPER
JOHN VON NEUMANN
ADA LOVELACE
CHARLES BABBAGE

REVISION HISTORY

Revision	Date	Author(s)	Description
0.1	01.20.2027	CB	document creation
1.0	02.05.2027	AT, GH, CB	official release

CONTENTS

1	Introduction	4
2	Design Stakeholders & Concerns	4
3	Design Viewpoints	4
4	System Overview	4
5	Sensor Device Layer	4
5.1	Layer Resources	4
5.2	Device.Sensing	4
5.3	Device.BLEPeripheral	4
6	Mobile Application Layer	5
6.1	Layer Resources	5
6.2	App.BLECentral	5
6.3	App.AlertEngine, App.UI, App.LocalStore	5
7	Cloud Services Layer	5
7.1	Layer Resources	5
7.2	Cloud.AccountAPI & Cloud.HistoryStore	5
7.3	Cloud.PushService	5
8	Requirements Traceability	5
9	Appendix A	5

1 INTRODUCTION

Implementation-level design of AquaGuard Smart Water-Leak Monitor as an IEEE 1016-2009 [1] Software Design Description, building on the SRS and ADS (layers Device, App, Cloud).

2 DESIGN STAKEHOLDERS & CONCERNS

Firmware/app/cloud implementers, integrators, testers, support; concerns of composition, data, interfaces, timing/state, algorithms, and resources.

3 DESIGN VIEWPOINTS

Context, Composition, Information, Interface, Interaction & State, Algorithm, Resource per IEEE 1016; omitted where not applicable.

4 SYSTEM OVERVIEW

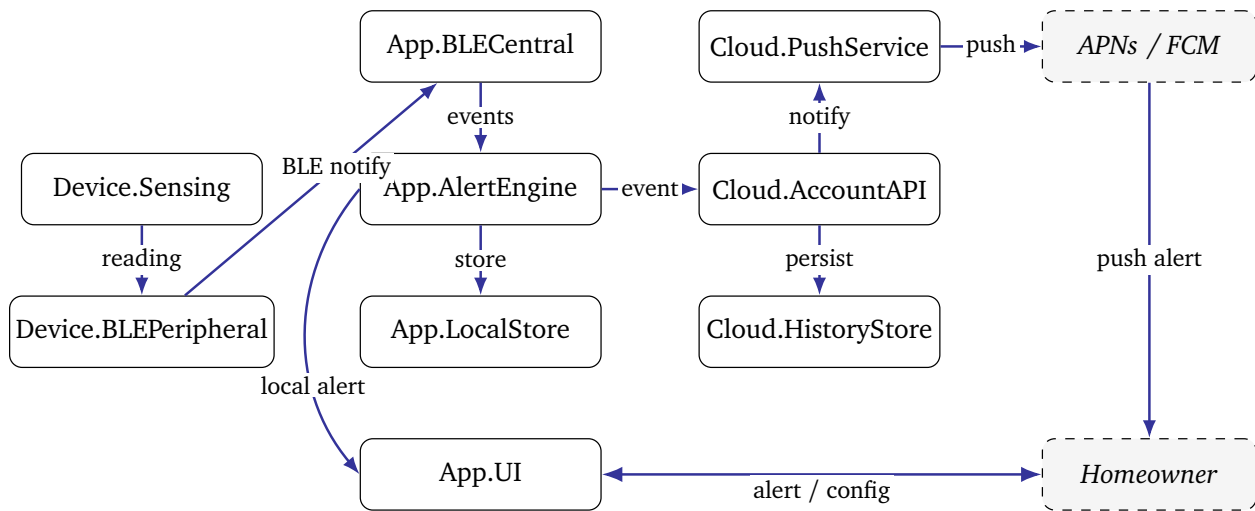


Figure 1: Device/app/cloud architecture carried forward from the ADS

Device: nRF52-class MCU with integrated BLE (C/Zephyr). App: Flutter (Dart) for iOS/Android parity. Cloud: a small serverless API + managed DB + APNs/FCM.

5 SENSOR DEVICE LAYER

5.1 LAYER RESOURCES

Hardware: nRF52 MCU + BLE, capacitive moisture pad, flow sensor, coin/AA battery. **OS:** Zephyr RTOS. **Language:** C.

5.2 DEVICE.SENSING

Information: `Reading{ts, moisture, flow, battery_mV}`. **Algorithm:** periodic ADC sample; a debounced threshold with hysteresis raises `leak=true` (FR-01); duty-cycled to meet PE-01. **State:** `IDLE→SAMPLING→LEAK` with cooldown.

5.3 DEVICE.BLEPERIPHERAL

Interface (#01, GATT): `svc AquaGuard: char reading (notify), leak (notify), threshold (read/write), battery (read)`. **Interaction:** bonded, encrypted connections only (SE-01); advertises when idle. **Rationale:** standard GATT keeps the app contract simple (AD-01).

6 MOBILE APPLICATION LAYER

6.1 LAYER RESOURCES

Deps: Flutter, a BLE plugin, a push plugin, local DB (SQLite); **Language:** Dart. **Platforms:** iOS + Android (QA-01).

6.2 APP.BLECENTRAL

Interface (#02): scan/connect/bond; subscribe reading/leak; write threshold. **State:** DISCONNECTED→SCANNING with auto-reconnect. **Rationale:** platform BLE-background differences isolated here so the rest of the app is platform-agnostic (QA-01).

6.3 APP.ALERTENGINE, APP.UI, APP.LOCALSTORE

App.AlertEngine: on leak while connected, fire local notification/haptic within 3 s (FR-03); if disconnected, POST the event to the backend for push (FR-04). **App.UI:** guided setup wizard, live status, and history list (US-01, FR-05). **App.LocalStore:** SQLite events{ts, type, value} and config.

7 CLOUD SERVICES LAYER

7.1 LAYER RESOURCES

Tech: serverless functions + managed DB; **Language:** TypeScript.

7.2 CLOUD.ACCOUNTAPI & CLOUD.HISTORYSTORE

Interface: POST /events, GET /events, device/user registration over TLS 1.3 (SE-01). **Information:** Event{device_id, ts, type, value} in the managed DB (FR-05).

7.3 CLOUD.PUSHSERVICE

On event ingest, look up the user's device token and send via APNs/FCM (EI-02, FR-04); delivery failures retried and logged (MS-01).

8 REQUIREMENTS TRACEABILITY

Req	Requirement (abbrev.)	Component	Iface
FR-01	Leak detection	Device.Sensing	#01
FR-02	Pair/config	App.BLECentral, Device.BLEPeripheral	#02/#01
FR-03	Local alert	App.AlertEngine	—
FR-04	Remote alert	Cloud.PushService	—
FR-05	History	App.LocalStore, Cloud.HistoryStore	—
SE-01	Secure pair/TLS	Device.BLEPeripheral, Cloud.AccountAPI	#01

9 APPENDIX A

BLE GATT profile table, firmware power budget, enclosure CAD (STEP), and wiring schematic are attached to the closeout package.

REFERENCES

- [1] IEEE, “IEEE Std 1016-2009 — IEEE Standard for Information Technology — Systems Design — Software Design Descriptions,” Institute of Electrical and Electronics Engineers, New York, NY, USA, Tech. Rep., 2009.