

EMonitor - Environment Monitoring Device

by Anju Chamantha

Website : <http://e-monitor.herokuapp.com>

GitHub : <https://github.com/anjuchamantha/EMonitor>

Table of Content

EMonitor - Environment Monitoring Device

Table of Content

1) Introduction

2) EMonitor Device : features & specifications

 2.1) Measuring Parameters

 2.2) Power

 2.3) Communication Protocol

 2.4) Sensor Readings & Data sending to server

 2.5) Connection Lost Self-Recovery

3) Website, Server & Database : Features & Specifications

4) Special Features

 4.1) OLED Display to view Readings and Connection States

 4.2) Automatic warning Email sending through EMonitor Device

5) Design Architecture Diagram

6) Schematic diagram of EMonitor Device

7) Fault Recovery Implementation

 7.1) Auto connect to Wi-Fi

 7.2) MSG Buffering

8) List of components and their costs

9) Algorithm used for the device and server (Pseudo code)

 9.1) EMonitor Device Algorithm

 9.2) Backend Server Logic

10) Full source code (an Annexure)

 10.1) EMonitor device source code

main.cpp

config.cpp

config.h

http.cpp

http.h

mail_client.cpp

mail_client.h

readings.cpp

readings.h

utils.cpp

utils.h

wifi_con.cpp

wifi_con.h

xml.cpp

xml.h

 10.2) Server source code

app.py

index.html


style.css

1) Introduction

EMonitor is a ESP32 Microcontroller based device which gets environmental data such as Temperature, Humidity, Pressure, Light Intensity, and sends those data to a Back-end database server using CAP(Common Alert Protocol). Also those data and other connection status information can be viewed from the OLED-display locally. The data that were sent to the server can be visualized using a simple [web-page](#). The device also features self fault recovery mechanisms to add more reliability to the system. EMonitor also sends a warning e-mail to pre-defined e-mail addresses in case of any sensor data exceeding a given threshold value.

2) EMonitor Device : features & specifications

Prototype Device

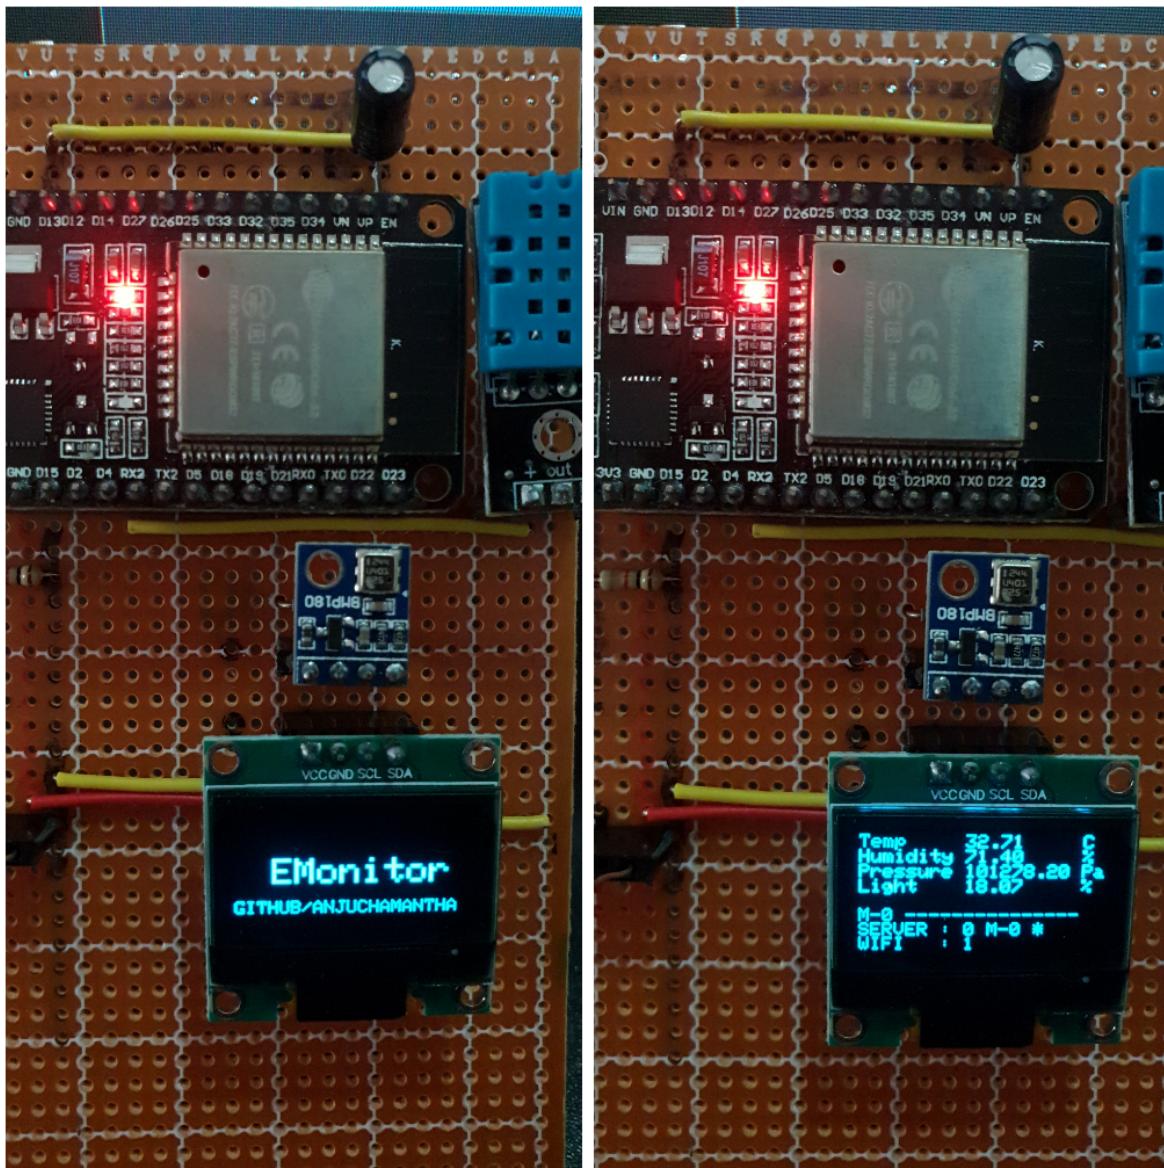

Scope of the Project

EMonitor is a [ESP32](#) microcontroller based device which has Wi-Fi inbuilt. With its Xtensa LX6 microprocessor operating at 240 MHz and memory of 520 KiB SRAM, EMonitor is more than capable of capturing the environment and sending data to the server after doing the necessary calculations seamlessly. It runs on [FreeRTOS](#), a leading operating system supported by Arduino which can be working with the relevant peripherals smoothly.

2.1) Measuring Parameters

- Temperature (°C) - DHT11 Sensor module
- Humidity (%) - DHT11 Sensor module
- Pressure (Pa) - BMP180 Sensor module
- Light Level (%) - LDR module

2.2) Power

The device can be powered using a Micro USB cable which is a very reliable mode of powering the ESP32 microcontroller. Since pretty much every standard mobile phone charging adapter outputs 5V, this device can be powered using the same way which means there's nothing to worry about power. Also EMonitor can be powered using any mobile phone charging power-bank which makes the device portable.

The ESP32 is a low power consuming microcontroller and has adaptive power controlling mechanisms which can handle some basic power related matters that makes the EMonitor very reliable when powering with Micro USB cable.

2.3) Communication Protocol

Data is transmitted from the EMonitor device to the cloud hosted [EMonitor server](#) using [CAP](#) (Common Alerting Protocol) over internet. CAP is an XML based data format for exchanging public warnings and emergencies between alerting technologies.

2.4) Sensor Readings & Data sending to server

The sensor data (temperature, humidity, pressure, light level) are read at **T** time intervals and after **N** number of sensor readings the Mean & Standard Deviation of those N number of data are sent to the server using CAP protocol. So the data is sent to the server at **TN** time intervals. (There can be an average 2-3s delay other than TN due to the other logics and calculations)

Example : Take N=15 & T=60s => The sensor readings are taken every 1 minute and after 15 rounds/readings (after 1min x 15 = 15 minutes) the mean and standard deviation of those 15 samples are send to the server.

Following are the basic data sent to the server as a message which is referred as `MSG` hereafter.

```
msg_id, timestamp, temperature, humidity, pressure, light, temperature_sd,  
humidity_sd, pressure_sd, light_sd
```

Other than these data, some constant data that are mandatory for CAP, like `sender`, `msg_type`, `category`, `urgency` etc are also sent to the server.

2.5) Connection Lost Self-Recovery

The EMonitor device is capable of withstand the following connection lost scenarios,


- Wi-Fi connection Lost
- Lost of connection to the EMonitor server

The device can self re-connect to Wi-Fi or self re-connect to server after any of the above cases. But the data is secure even during such connection issues.

In both above cases EMonitor detects the connection issue and cash the raw data which were not able to send to the server due to connection lost, to a buffer. After each TN time interval, the device checks the connection and if the connection is stable, it sends all the data which were buffered, to the server and clears the buffer. (During this process also if the connection is lost, it keeps the data safely in the buffer without removing)

3) Website, Server & Database : Features & Specifications

Deployed EMonitor website : <http://e-monitor.herokuapp.com/>

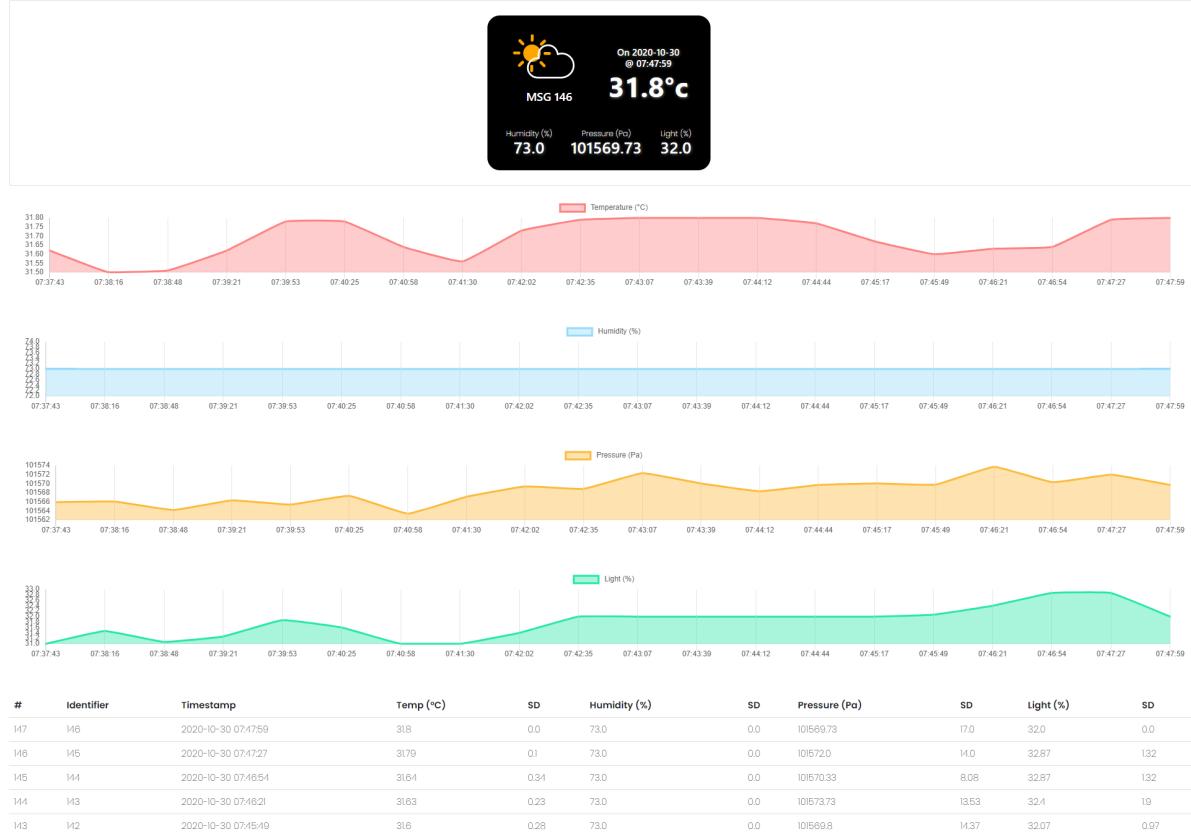

The backend server is developed using [Flask](#) which is a Python based web framework. It supports all the existing python libraries and tools and hence it is very much scalable and extensible.

The database used is [PostgreSQL](#) and all the data that comes to the server from the EMonitor device are saved in a database table of values, `msg_id`, `timestamp`, `temperature`, `humidity`, `pressure`, `light`, `temperature_sd`, `humidity_sd`, `pressure_sd`, `light_sd`

Backend supports the following end-points to communicate with it.


- [POST] : /data
- [GET] : /

The EMonitor device uses `/data` end-point to send data to the server using CAP protocol.

`/` endpoint is used to access the main dashboard of the EMonitor website, which shows the current(last received) readings as well as charts and the data of last 20 readings received.

4) Special Features

4.1) OLED Display to view Readings and Connection States

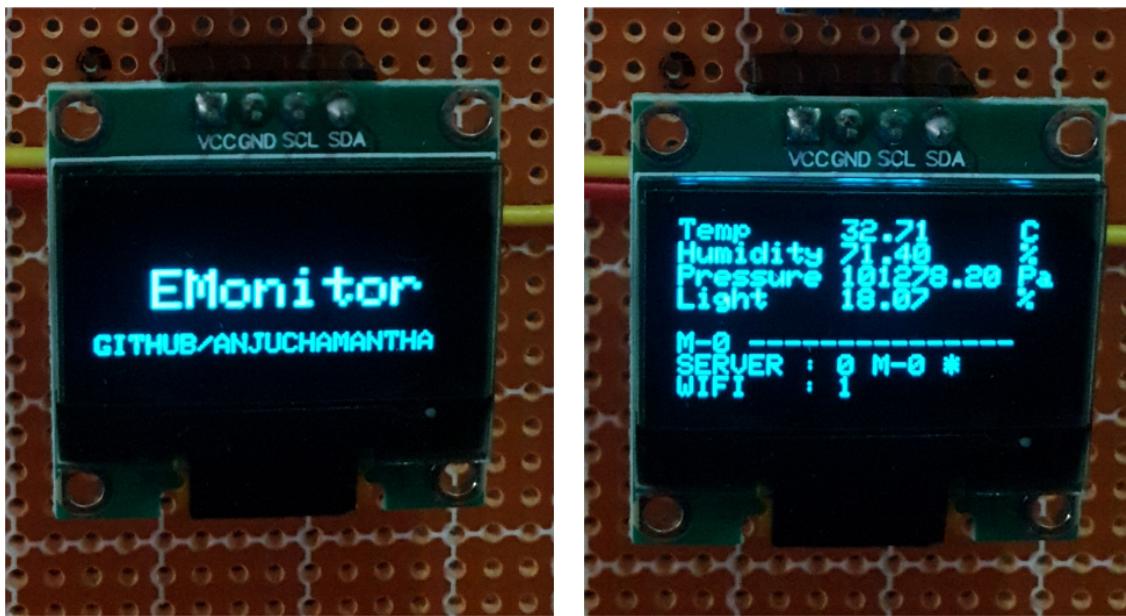

OLED Display shows the temperature, humidity, pressure and light level values which are sent to the server with the `msg_id` after each TN time interval. Also it shows the Wi-Fi and Server connection statuses.(0 - Not connected, 1 - Connected)

It also shows if a `MSG` is not sent to the server and buffered (using a `*` symbol) and sending buffered `MSG`s to the server (using `` symbol)

4.2) Automatic warning Email sending through EMonitor Device

EMonitor Device Alert!

EMonitor Device <shutterrainbow@gmail.com>
to chamantha97anju ▾

EMonitor Device Alert !

Temperature threshold exceeded !


Temperature = 40.93 °C

[Visit EMonitor website](#)

The EMonitor device sends a WARNING e-mail to a pre defined e-mail address if a value of a `MSG` exceeds a given threshold limit.


Currently if the temperature mean exceeds 40°C it sends a warning e-mail to my personal email.

5) Design Architecture Diagram

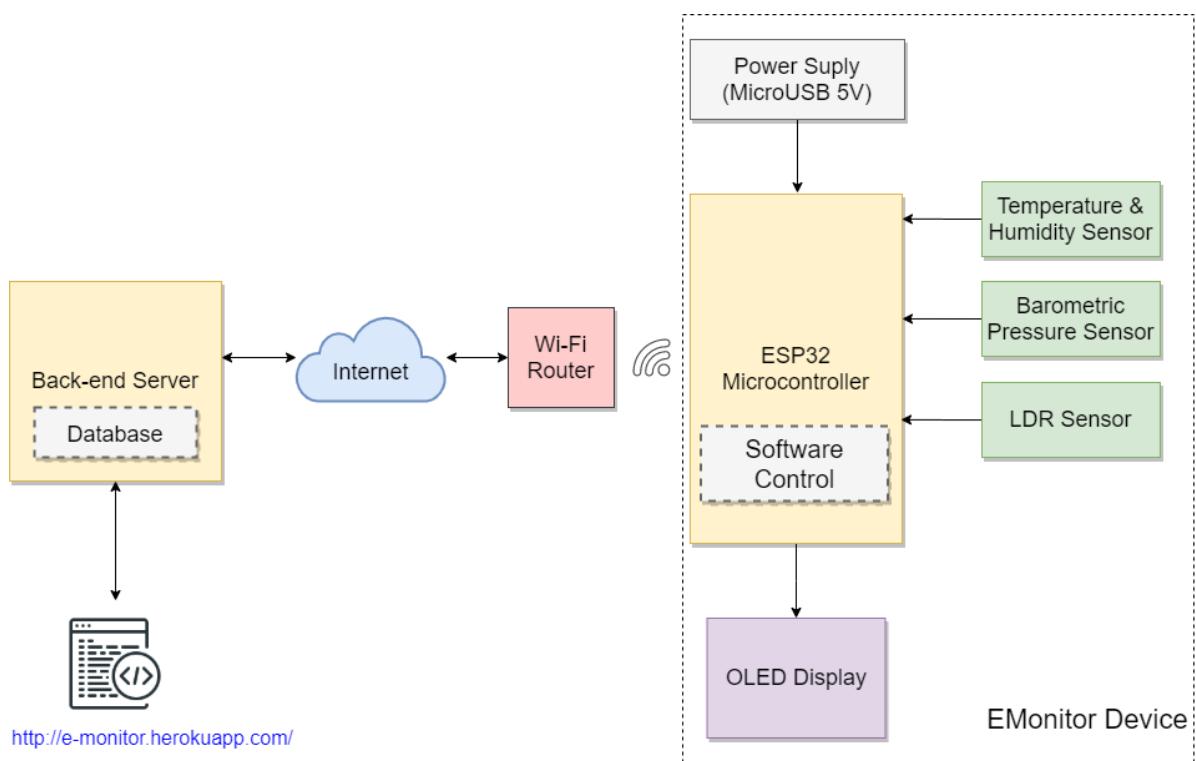


6) Schematic diagram of EMonitor Device

Breadboard Circuit Schematic

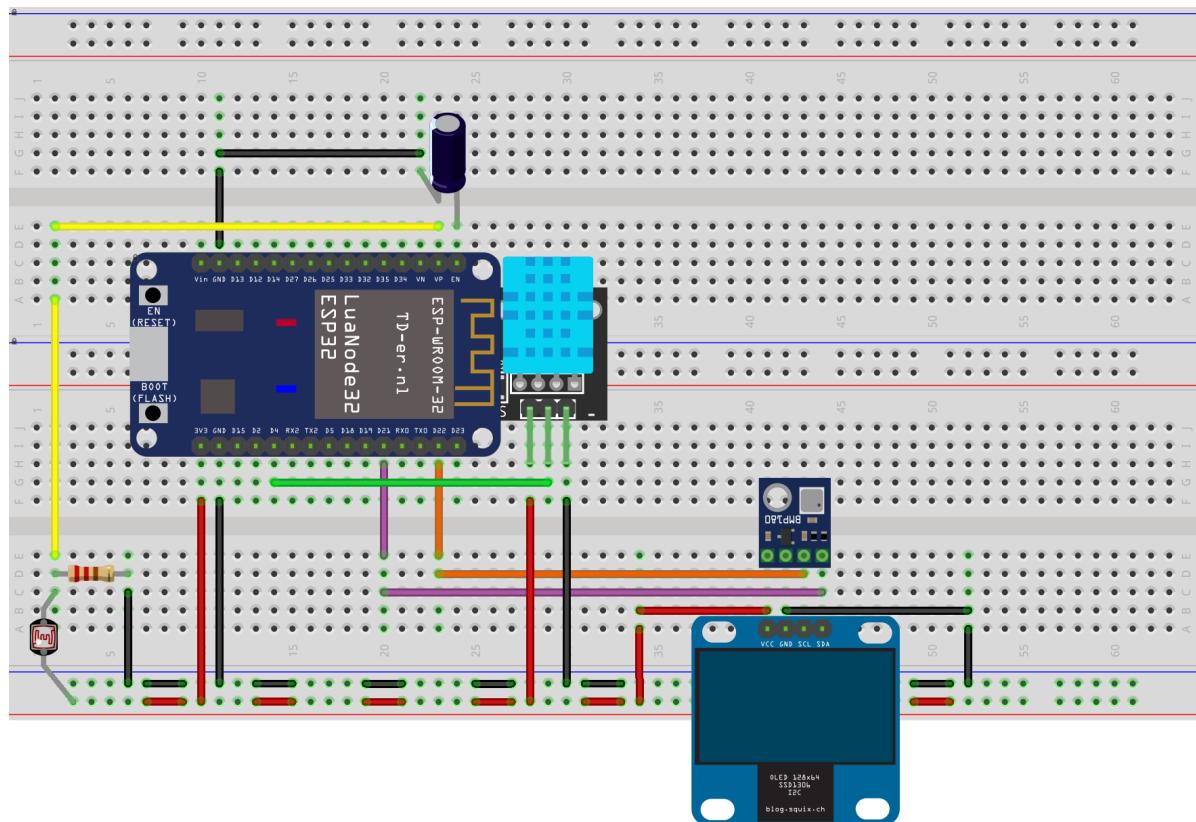

PCB Design

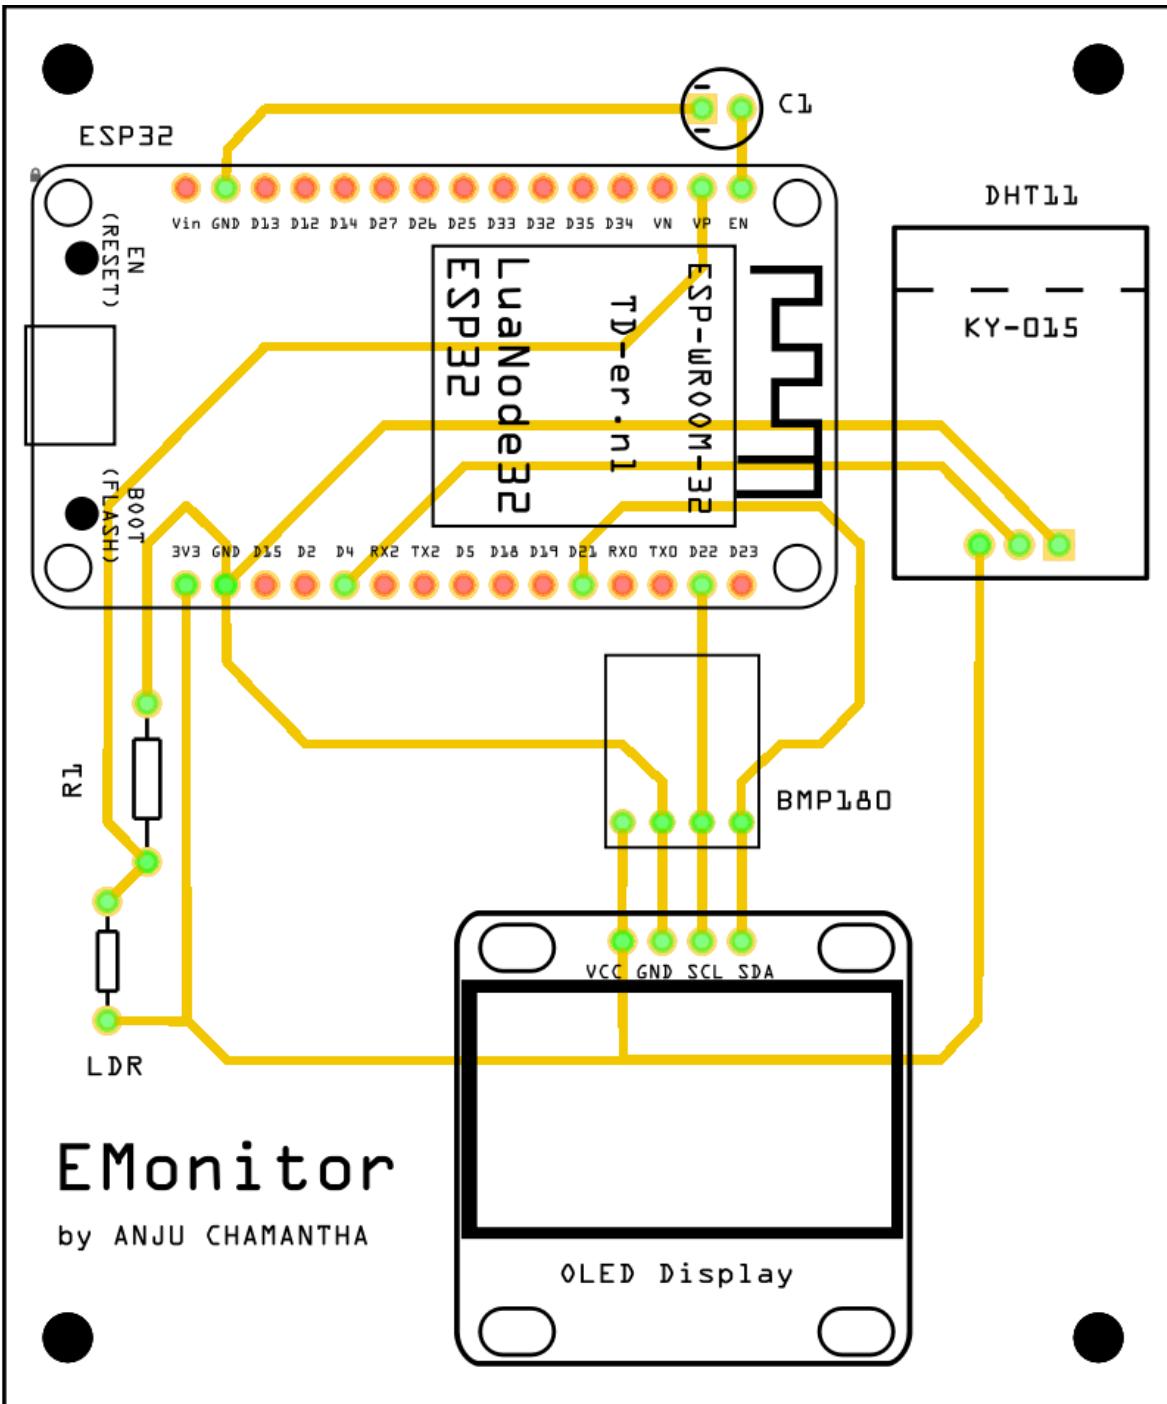

fritzing

7) Fault Recovery Implementation

As mentioned in 1.5) *Connection Lost Self-Recovery*, EMonitor is capable of self connecting to Wi-Fi & Server after a connection lost. During the connection lost period, the MSGs are buffered and when the connection is established back, it sends the buffered MSGs to the server.

7.1) Auto connect to Wi-Fi

```
void loop{
    //calculate readings and create CAP MSG
    if (WiFi.status() != WL_CONNECTED)
    {
```

```

        //if not connected, try to connect to WiFi in each loop iteration
        bool connected = connect_to_wifi();
        if (connected){
            //send MSG to server
        }
        else{
            //buffer MSG
        }
    }
    else{
        //send MSG to server
    }
}

bool connect_to_wifi(){
    WiFi.begin(SSID,PW) //begin the wifi connection
    if (WiFi.status() == WL_CONNECTED)
    {
        return true;
    }
    else{
        return false;
    }
}

```

7.2) MSG Buffering

There are total of 11 buffers as follows

```

queue<String> buffer_identifier;
queue<String> buffer_datetime;
queue<int> buffer_msg_ids;

//mean buffers
queue<double> buffer_t;
queue<double> buffer_h;
queue<double> buffer_p;
queue<double> buffer_l;

//sd buffers
queue<double> buffer_t_;
queue<double> buffer_h_;
queue<double> buffer_p_;
queue<double> buffer_l_;

```

```

void loop{
    //BUFFER LOGIC

    //loop buffer if buffer is not empty
    //    if connected
    //        POST buffer data and pop from buffer
    //    else break
}

```

```

while (!buffer_msg_ids.empty()){
    if (WiFi.status() == WL_CONNECTED){
        //create CAP MSG from raw data in buffers
        if (sendPostRequest(xmlchar_buf, msg_id_buf)){
            popBuffers();
        }
    }
}

//MAIN LOGIC

//calculate readings and create CAP MSG
if (WiFi.status() != WL_CONNECTED)
{
    bool connected = connect_to_wifi();
    if (connected){
        //send MSG to server
        if (!sendPostRequest(xmlchar, msg)){
            //buffer MSG
            pushToBuffers();
        }
    }
    else{
        //buffer MSG
        pushToBuffers();
    }
}
else{
    //send MSG to server
    if (!sendPostRequest(xmlchar, msg)){
        //buffer MSG
        pushToBuffers();
    }
}
}

void pushToBuffers(){
    //push all the raw data needed for MSG to queues
}

void popBuffers(){
    //pop the front element from the queues
}

```

8) List of components and their costs

- NodeMCU ESP-32S Microcontroller (LKR 1,050.00)
- BMP180 Digital Barometric Pressure Sensor (LKR 185.00)
- DHT11 Temperature & Relative Humidity Sensor (LKR 250.00)
- LDR (LKR 10)
- OLED Display 0.96" (LKR 600.00)
- Resistor 220Ohm (LKR 1.00)

- Capacitor 10 micro F (LKR 20) - Used to back out the code uploading issue of ESP32
- Vero Board & Circuit Wires (LKR 150)

9) Algorithm used for the device and server (Pseudo code)

9.1) EMonitor Device Algorithm

main.cpp

```

void beginOLED(){
    //initial setup and starting of OLED Display
}
void displayText(){
    //display the content in the OLED display
    //in various places, this function is called to print sensor and other
    information
}
void getTimeStamp(){
    //get the current time
}
void popBuffers(){
    //pop the front element from the queues
}
void pushToBuffers(){
    //push all the raw data needed for MSG to queues
}

void setup(){
    beginOLED();
    wait_and_connect_to_wifi();
    begin_sensors();
    configTime();
}

void loop(){

    //BUFFER LOGIC

    //loop buffer if buffer is not empty
    //    if connected
    //        POST buffer data and pop from buffer
    //    else break
    while (!buffer_msg_ids.empty()){
        if (WiFi.status() == WL_CONNECTED){
            //generate CAP XML message from the data in buffers
            generateXMLStr();
            if (sendPostRequest(xmlchar_buf, msg_id_buf)){
                popBuffers();
            }
        }
    }

    //MAIN LOGIC
}

```

```

//calculate readings and create CAP MSG
int x = 0;
int rounds = 15;
int round_time = 2000;
while (x < rounds){
    readTemperature();
    readHumidity();
    readPressure();
    readLightIntensity();

    delay(round_time);
    x++;
}

temperature = calculate_mean(t_, rounds);
humidity = calculate_mean(h_, rounds);
pressure = calculate_mean(p_, rounds);
light = calculate_mean(l_, rounds);

temperature_sd = calculate_sd(t_, rounds, temperature);
humidity_sd = calculate_sd(h_, rounds, humidity);
pressure_sd = calculate_sd(p_, rounds, pressure);
light_sd = calculate_sd(l_, rounds, light);

getTimestamp(datetime_);

//send WARNING e-mail
if ((temperature > 40) && (WiFi.status() == WL_CONNECTED)){
    //if a warning e-mail has not sent in last 5minutes
    // send mail
}

//generate CAP XML message from the calculated data
generateXMLStr();

if (WiFi.status() != WL_CONNECTED)
{
    bool connected = connect_to_wifi();
    if (connected){
        //send MSG to server
        if (!sendPostRequest(xmlchar, msg)){
            //buffer MSG
            pushToBuffers();
        }
    }
    else{
        //buffer MSG
        pushToBuffers();
    }
}
else{
    //send MSG to server
    if (!sendPostRequest(xmlchar, msg)){
        //buffer MSG
        pushToBuffers();
    }
}
}

```

9.2) Backend Server Logic

```
#database table model
class EMonitor(db.Model):
    __tablename__ = 'sensor_data'
    id = db.Column(db.Integer, primary_key=True)
    msg_id = db.Column(db.String(128))
    timestamp = db.Column(db.String(128))

    temperature = db.Column(db.Float)
    humidity = db.Column(db.Float)
    pressure = db.Column(db.Float)
    light = db.Column(db.Float)

    temperature_sd = db.Column(db.Float)
    humidity_sd = db.Column(db.Float)
    pressure_sd = db.Column(db.Float)
    light_sd = db.Column(db.Float)

def extract_data_from_xml(xml_str):
    """
    Given a XML string(CAP) this extracts the 'parameter' values
    :param xml_str: XML as a string
    :return: data as dictionary {name:value}
    """

def put_to_db(xml_data):
    """
    given a data dictionary this method put the data to the database
    :param xml_data: data as dictionary {name:value}
    :return: True if database write successful, otherwise False
    """

@app.route('/data', methods=['POST'])
def post():
    xml_str = request.data
    xml_data = extract_data_from_xml(xml_str)
    print("[POST] /data : ", xml_data)
    if put_to_db(xml_data):
        return "DATABASE updated"
    else:
        return "DATABASE modification failed !"


@app.route('/')
def index():
    #query the database table and get the list of data
    table = EMonitor.query.order_by(desc(EMonitor.timestamp)).limit(20).all()

    return render_template("index.html", table)
```

10) Full source code (an Annexure)

The full source code(Both EMonitor device & Server) can also be viewed in [<https://github.com/anjuchamantha/EMonitor>]

Below is the directory & file structure of the device & server source codes

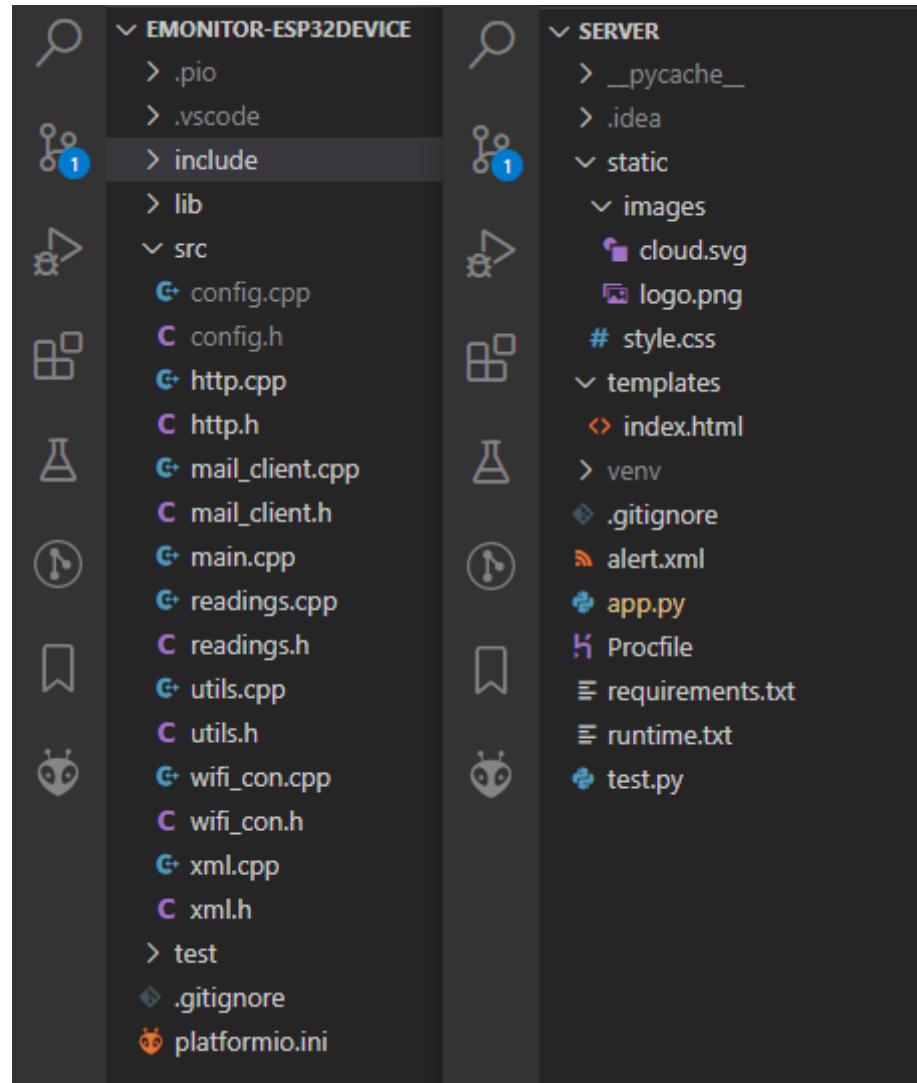

10.1) EMonitor device source code

main.cpp

```
#include <Arduino.h>
#include <WiFi.h>
#include <queue>
using namespace std;
#include "xml.h"
#include "http.h"
#include "time.h"

#include "readings.h"
#include "wifi_con.h"
#include "config.h"
#include "utils.h"

#include <Adafruit_GFX.h>
#include <Adafruit_SSD1306.h>
```

```

#include "mail_client.h"

#define SCREEN_WIDTH 128 // OLED display width, in pixels
#define SCREEN_HEIGHT 64 // OLED display height, in pixels

// Declaration for an SSD1306 display connected to I2C (SDA, SCL pins)
Adafruit_SSD1306 display(SCREEN_WIDTH, SCREEN_HEIGHT, &Wire, -1);

void beginOLED()
{
    if (!display.begin(SSD1306_SWITCHCAPVCC, 0x3C))
    { // Address 0x3D for 128x64
        Serial.println(F("SSD1306 allocation failed"));
        for (;;) {
            ;
        }
    }
    delay(2000);
    display.clearDisplay();
    display.setTextSize(2);
    display.setTextColor(WHITE);
    display.setCursor(20, 25);
    display.println("EMonitor");
    display.setTextSize(1);
    display.println("");
    display.println("GITHUB/ANJUCHAMANtha");
    display.display();
    delay(5000);
    display.setCursor(0, 0);
}

String t0 = "";
String t1 = "";
String t2 = "";
String t3 = "";
String t4 = "";
String t5 = "";
String t6 = "";
String t7 = "";

void displayText()
{
    display.setCursor(0, 0);
    display.clearDisplay();
    display.println(t0);
    display.println(t1);
    display.println(t2);
    display.println(t3);
    display.println(t4);
    display.println(t5);
    display.println(t6);
    display.println(t7);
    display.display();
}

const char *ntpServer = "pool.ntp.org";
const Long gmtOffset_sec = 19800;
const int daylightOffset_sec = 0;

```

```

queue<String> buffer_identifier;
queue<String> buffer_datetime;
queue<int> buffer_msg_ids;

//mean buffers
queue<double> buffer_t;
queue<double> buffer_h;
queue<double> buffer_p;
queue<double> buffer_l;

//sd buffers
queue<double> buffer_t_;
queue<double> buffer_h_;
queue<double> buffer_p_;
queue<double> buffer_l_;

int msg = 0;
double temperature = 0;
double humidity = 0;
double pressure = 0;
double light = 0;
double temperature_sd = 0;
double humidity_sd = 0;
double pressure_sd = 0;
double light_sd = 0;

char xmlchar[1700];
String identifier;
char datetime_[32] = {};
String datetime;

void getTimeStamp(char *datetime_)
{
    struct tm timeinfo;
    if (!getLocalTime(&timeinfo))
    {
        Serial.println("Failed to obtain time");
    }
    Serial.print("[TIME] ");
    // sprintf(times, &timeinfo, "%Y-%m-%dT%H:%M:%S%z");
    // Serial.println(&timeinfo, "%Y-%m-%dT%H:%M:%S%z");

    char timestamp[32];
    time_t timeT = time(NULL);
    strftime(timestamp, sizeof(timestamp), "%Y-%m-%dT%H:%M:%S%z",
    localtime(&timeT));
    printf("%s\n", timestamp);
    sprintf(datetime_, timestamp);
    // datetime_ = timestamp;
}

void popBuffers()
{
    buffer_msg_ids.pop();
    buffer_identifier.pop();
    buffer_datetime.pop();
}

```

```

buffer_t.pop();
buffer_h.pop();
buffer_p.pop();
buffer_l.pop();

buffer_t_.pop();
buffer_h_.pop();
buffer_p_.pop();
buffer_l_.pop();
}

void pushToBuffers()
{
    buffer_msg_ids.push(msg);
    buffer_identifier.push(identifier);
    buffer_datetime.push(datetime);

    buffer_t.push(temperature);
    buffer_h.push(humidity);
    buffer_p.push(pressure);
    buffer_l.push(light);

    buffer_t_.push(temperature_sd);
    buffer_h_.push(humidity_sd);
    buffer_p_.push(pressure_sd);
    buffer_l_.push(light_sd);
}

void setup()
{
    Serial.begin(115200);
    beginOLED();
    t7 = String("WIFI : 0");
    t6 = String("SERVER : 0");
    displayText();
    wait_and_connect_to_wifi();
    t7 = String("WIFI : 1");
    displayText();
    begin_sensors();
    configTime(gmtOffset_sec, daylightOffset_sec, ntpServer);
}

bool mailsent = false;
int mailTime = 10;

void loop()
{
    //BUFFER LOGIC

    //if buffer is not empty
    //    loop buffer
    //        if connected
    //            POST buffer data
    //        else break
    while (!buffer_msg_ids.empty())
    {
        Serial.println("[BUFFER] Processing Buffer... ");
        if (WiFi.status() == WL_CONNECTED)

```

```

{
    t7 = String("WIFI : 1");
    displayText();
    char xmlchar_buf[1700];

    int msg_id_buf = buffer_msg_ids.front();
    String identifier_buf = (String)buffer_identifier.front();
    String datetime_buf = (String)buffer_datetime.front();

    double t_buf = buffer_t.front();
    double h_buf = buffer_h.front();
    double p_buf = buffer_p.front();
    double l_buf = buffer_l.front();

    double t_sd_buf = buffer_t_.front();
    double h_sd_buf = buffer_h_.front();
    double p_sd_buf = buffer_p_.front();
    double l_sd_buf = buffer_l_.front();

    generateXMLStr(xmlchar_buf,
                    t_buf, h_buf, p_buf, l_buf,
                    t_sd_buf, h_sd_buf, p_sd_buf, l_sd_buf,
                    identifier_buf, datetime_buf);
    if (sendPostRequest(xmlchar_buf, msg_id_buf))
    {

        Serial.printf("[BUFFER] POST successful for : MSG %i\n\n", msg_id_buf);
        popBuffers();
        t6 = String("SERVER : 1 M-" + String(msg_id_buf) + " <B>");
        displayText();
    }
    else
    {
        t6 = String("SERVER : 0");
        displayText();
        Serial.printf("[BUFFER] POST Failed for : MSG %i\n\n", msg_id_buf);
        break;
    }
}
else
{
    Serial.println("[WiFi] Not Connected !");
    t7 = String("WIFI : 0");
    t6 = String("SERVER : 0");
    displayText();
    Serial.println("[BUFFER] Buffer Processing Skipped !\n\n");
    break;
}
}

// MAIN LOGIC

int x = 0;
//Get 10 sensor values in 0.5s intervals
//Calculate median & s.d for values in 10s intervals (10 readings x 1s)
int rounds = 15;
int round_time = 2000;

```

```

//get values and keep in the arrays
double t_[rounds];
double h_[rounds];
double p_[rounds];
double l_[rounds];

Serial.print("[SENSORS] Reading sensors > ");
String temp = String("M-" + String(msg) + " ");
while (x < rounds)
{
    t_[x] = round(readTemperature() * 100) / 100.00;
    h_[x] = round(readHumidity() * 100) / 100.00;
    p_[x] = round(readPressure() * 100) / 100.00;
    l_[x] = round(readLightIntensity() * 100) / 100.00;
    Serial.print(".");
    temp = temp + "-";
    t5 = temp;
    displayText();
    delay(round_time);
    x++;
}
Serial.print("\n");

temperature = calculate_mean(t_, rounds);
humidity = calculate_mean(h_, rounds);
pressure = calculate_mean(p_, rounds);
light = calculate_mean(l_, rounds);

temperature_sd = calculate_sd(t_, rounds, temperature);
humidity_sd = calculate_sd(h_, rounds, humidity);
pressure_sd = calculate_sd(p_, rounds, pressure);
light_sd = calculate_sd(l_, rounds, light);

Serial.printf("Temperature : %.2f +- %.2f %s \n", temperature, temperature_sd,
"°C");
Serial.printf("Humidity     : %.2f +- %.2f %s \n", humidity, humidity_sd, "%");
Serial.printf("Pressure      : %.2f +- %.2f %s \n", pressure, pressure_sd,
"Pa");
Serial.printf("Light        : %.2f +- %.2f %s \n", light, light_sd, "%");
Serial.print("\n");

t0 = String("Temp      " + String(temperature) + "      C");
t1 = String("Humidity   " + String(humidity) + "      %");
t2 = String("Pressure   " + String(pressure) + " Pa");
t3 = String("Light      " + String(light) + "      %");
displayText();

identifier = String(msg);
getTimestamp(datetime_);
datetime = String(datetime_);

if ((temperature > 40) && (WiFi.status() == WL_CONNECTED))
{
    if (!mailSent || (mailTime < 1))
    {
        sendMail(temperature);
        mailSent = true;
        mailTime = 10;
    }
}

```

```

        }
        mailTime--;
    }

// Get the xml as a string to xmlchar variable
generateXMLStr(xmlchar,
                temperature, humidity, pressure, light,
                temperature_sd, humidity_sd, pressure_sd, light_sd,
                identifier, datetime);

if (WiFi.status() != WL_CONNECTED)
{
    t7 = String("WIFI : 0");
    t6 = String("SERVER : 0");
    displayText();
    bool connected = connect_to_wifi();
    if (connected)
    {
        t7 = String("WIFI : 1");
        displayText();
        if (!sendPostRequest(xmlchar, msg))
        {
            pushToBuffers();
            Serial.printf("[BUFFER] MSG %i Queued !\n\n", msg);
            t6 = String("SERVER : 0 M-" + String(msg) + " *");
            displayText();
        }
        t6 = String("SERVER : 1 M-" + String(msg));
        displayText();
    }
    else
    {
        pushToBuffers();
        Serial.printf("[BUFFER] MSG %i Queued !\n\n", msg);
        t7 = String("WIFI : 0");
        t6 = String("SERVER : 0 M-" + String(msg) + " *");
        displayText();
    }
}
else
{
    t7 = String("WIFI : 1");
    displayText();
    if (!sendPostRequest(xmlchar, msg))
    {
        pushToBuffers();
        Serial.printf("[BUFFER] MSG %i Queued !\n\n", msg);
        t6 = String("SERVER : 0 M-" + String(msg) + " *");
        displayText();
    }
    else
    {
        t6 = String("SERVER : 1 M-" + String(msg));
        displayText();
    }
}
msg++;
}

```

config.cpp

```
const char *SSID = "WIFI SSID";
const char *PW = "WIFI PASSWORD";
const char *serverBase = "http://e-monitor.herokuapp.com/";
```

config.h

```
#ifndef SENSITIVE_CONFIG_H
#define SENSITIVE_CONFIG_H

extern const char *SSID;
extern const char *PW;
extern const char *serverBase;

#define emailSenderAccount "SENDER EMAIL ADDRESS"
#define emailSenderPassword "SENDER EMAIL ADDRESS PASSWORD"
#define emailRecipient "RECEIVER EMAIL ADDRESS"
#define smtpServer "smtp.gmail.com"
#define smtpServerPort 465
#define emailSubject "EMonitor Device Alert!"

#endif
```

http.cpp

```
#include <Arduino.h>
#include <WiFi.h>
#include <HTTPClient.h>
#include "config.h"

bool sendPostRequest(char *xmlstr, int msg)
{
    if (WiFi.status() != WL_CONNECTED)
    {
        Serial.println("[WIFI] Connection lost !");
        Serial.println();
        return false;
    }

    // Send POST request
    HTTPClient http;
    String url = (String)serverBase + "/data";
    http.begin((String)url);

    Serial.printf("[HTTP] POST Request : MSG %i\n", msg);
    int responseCode = http.POST(xmlstr);
    http.end();

    // Connection failed error codes
    if (responseCode < 0)
    {
        String errorMessage = http.errorToString(responseCode).c_str();
        Serial.printf("[HTTP] Request failed: %s\n", errorMessage.c_str());
        return false;
    }
}
```

```

// Server returned error code
if (responseCode != HTTP_CODE_OK)
{
    Serial.printf("[HTTP] %d \n", responseCode);
    return false;
}

// Success
Serial.printf("[HTTP] %d : %s\n\n", responseCode, "OK");
return true;
}

```

http.h

```

#ifndef HTTP_H
#define HTTP_H

bool sendPostRequest(char *xmlstr, int msg);

#endif

```

mail_client.cpp

```

#include "ESP32_MailClient.h"
#include "config.h"

SMTPData smtpData;

// Callback function to get the Email sending status
void sendCallback(SendStatus info);

void sendMail(double temperature)
{
    Serial.println("\n-----");
    Serial.println("[MAIL] Preparing to send email...");
    Serial.println();

    smtpData.setLogin(smtpServer, smtpServerPort, emailSenderAccount,
emailSenderPassword);
    smtpData.setSender("EMonitor Device", emailSenderAccount);
    smtpData.setPriority("High");
    smtpData.setSubject(emailSubject);
    smtpData.setMessage("<div><h1 style=\"color:#ff9966;\"> EMonitor Device
Alert !</h1><p>Temperature threshold exceeded !</p><h2 style=\"color:#cc3300;\">
Temperature = " + String(temperature) + " °C</h2><p><a href=\"" +
String(serverBase) + "\"><Visit EMonitor website</a></p></div>",
true);
    smtpData.addRecipient(emailRecipient);
    //smtpData.addRecipient("YOUR_OTHER_RECIPIENT_EMAIL_ADDRESS@EXAMPLE.com");
    smtpData.setSendCallback(sendCallback);

    if (!Mailclient.sendMail(smtpData))
        Serial.println("[MAIL] Error sending Email, " +
Mailclient.smtpErrorReason());
}

```

```

        smtpData.empty();
    }

// Callback function to get the Email sending status
void sendcallback(SendStatus msg)
{
    Serial.println("[MAIL] " + msg.info());
    if (msg.success())
    {
        Serial.println("-----");
    }
}

```

mail_client.h

```

#ifndef ALERT_MAIL_H
#define ALERT_MAIL_H

void sendMail(double temperature);

#endif

```

readings.cpp

```

#include <Arduino.h>
#include "DHT.h"
#include <Wire.h>
#include <Adafruit_BMP085.h>

#define DHTPIN 4
#define DHTTYPE DHT11
DHT dht(DHTPIN, DHTTYPE);

Adafruit_BMP085 bmp;

// Potentiometer is connected to GPIO 34 (Analog ADC1_CH6)
const int ldrPin = A0;

void begin_sensors()
{
    dht.begin();
    if (!bmp.begin())
    {
        Serial.println("Could not find a valid BMP085 sensor, check wiring!");
        while (1)
        {
        }
    }
}

float readTemperature()
{
    float t = dht.readTemperature();
    // Check if any reads failed and exit early (to try again).
    if (isnan(t))
    {

```

```

        serial.println(F("[DHT] Failed to read Temperature from DHT
sensor!\n"));
        return 0;
    }
    return t;
}

float readHumidity()
{
    float h = dht.readHumidity();
    if (isnan(h))
    {
        Serial.println(F("[DHT] Failed to read Humidity from DHT sensor!\\n"));
        return 0;
    }
    return h;
}

float readPressure()
{
    float p = bmp.readPressure();
    if (isnan(p))
    {
        Serial.println(F("[BMP] Failed to read Pressure from BMP sensor!\\n"));
        return 0;
    }
    return p;
}

float readLightIntensity()
{
    float ldrval = analogRead(ldrPin) * 100 / 3000;
    if (ldrval > 100)
    {
        return 100.00;
    }
    return ldrval;
}

```

readings.h

```

#ifndef READINGS_H
#define READINGS_H

void begin_sensors();
float readTemperature();
float readHumidity();
float readPressure();
float readLightIntensity();

#endif

```

utils.cpp

```
#include <Arduino.h>

double calculate_mean(double arr[], int len)
{
    double tot = 0;
    for (int i = 0; i < len; i++)
    {
        tot += arr[i];
    }
    return round((tot / len) * 100) / 100.00;
}

double calculate_sd(double arr[], int len, double mean)
{
    double variance = 0;
    for (int i = 0; i < len; i++)
    {
        variance += pow((arr[i] - mean), 2);
    }
    return round(sqrt(variance) * 100) / 100.00;
}
```

utils.h

```
#ifndef UTILS_H
#define UTILS_H

double calculate_mean(double arr[], int len);
double calculate_sd(double arr[], int len, double mean);

#endif
```

wifi_con.cpp

```
#include <Arduino.h>
#include <WiFi.h>
#include "config.h"

void wait_and_connect_to_wifi()
{
    WiFi.begin(SSID, PW);
    Serial.println("");
    while (WiFi.status() != WL_CONNECTED)
    {
        delay(1000);
        Serial.print("[WIFI] Trying to connect to : ");
        Serial.print(SSID);
        Serial.println("...");
    }

    Serial.print("[WIFI] Connected to : ");
    Serial.println(SSID);
    Serial.println("");
}
```

```

bool connect_to_wifi()
{
    WiFi.begin(SSID, PW);
    if (WiFi.status() == WL_CONNECTED)
    {
        Serial.print("[WIFI] Re-connected to : ");
        Serial.println(SSID);
        Serial.println();
        return true;
    }

    Serial.println("[WIFI] Not Connected to wifi");
    return false;
}

```

wifi_con.h

```

#ifndef WIFI_CON_H
#define WIFI_CON_H

void wait_and_connect_to_wifi();
bool connect_to_wifi();

#endif

```

xml.cpp

```

#include <Arduino.h>

void generateXMLStr(char *xmlchar,
                     double temperature, double humidity, double pressure, double
light,
                     double temperature_sd, double humidity_sd, double
pressure_sd, double light_sd,
                     String identifier, String timestamp)
{
    String temp = String(temperature);
    String hum = String(humidity);
    String pres = String(pressure);
    String lig = String(light);

    String temp_sd = String(temperature_sd);
    String hum_sd = String(humidity_sd);
    String pres_sd = String(pressure_sd);
    String lig_sd = String(light_sd);

    sprintf(
        xmlchar,
        "<?xml version = \"1.0\" encoding = \"utf8\"?>\n"
        "<alert>\n"
        "<identifier>%s</identifier>\n"
        "<sender> EMONITOR1</sender>\n"
        "<sent> %s</sent>\n"
        "<status> Actual</status>\n"
        "<msgType> Alert</msgType>\n"

```

```

"<scope> Public</scope>

"<info>
"<category> Env</category>
"<event> Readings</event>
"<urgency> Past</urgency>
"<severity> Minor</severity>
"<certainty> Observed</certainty>
"<senderName> EMONITOR1 Device</senderName>

"<parameter><valueName>%s</valueName><value>%s</value></parameter>
"<parameter><valueName>%s</valueName><value>%s</value></parameter>
"<parameter><valueName>%s</valueName><value>%s</value></parameter>
"<parameter><valueName>%s</valueName><value>%s</value></parameter>

"<parameter><valueName>%s</valueName><value>%s</value></parameter>
"<parameter><valueName>%s</valueName><value>%s</value></parameter>
"<parameter><valueName>%s</valueName><value>%s</value></parameter>
"<parameter><valueName>%s</valueName><value>%s</value></parameter>

"<area><areaDesc>Wadduwa, Sri Lanka</areaDesc></area>
"</info>
"</alert>",

identifier.c_str(), timestamp.c_str(),
"temperature", temp.c_str(),
"humidity", hum.c_str(),
"pressure", pres.c_str(),
"lightIntensity", lig.c_str(),

"temperature_sd", temp_sd.c_str(),
"humidity_sd", hum_sd.c_str(),
"pressure_sd", pres_sd.c_str(),
"lightIntensity_sd", lig_sd.c_str()

);
}

```

xml.h

```

#ifndef XML_H
#define XML_H

void generateXMLStr(char *xmlchar,
                     double temperature, double humidity, double pressure, double
light,
                     double temperature_sd, double humidity_sd, double
pressure_sd, double light_sd, String identifier, String timestamp);

#endif

```

10.2) Server source code

app.py

```
from flask import Flask, request, render_template
from flask_sqlalchemy import SQLAlchemy
from sqlalchemy import desc, asc
from flask_restful import Api, Resource
from xml.etree import ElementTree

import sys
import logging

app = Flask(__name__)

ENV = 'production'

if ENV == 'dev':
    app.debug = True
    app.config['SQLALCHEMY_DATABASE_URI'] =
    'postgresql://postgres:password@localhost/EMonitorDB'

else:
    debug = False
    app.config[
        'SQLALCHEMY_DATABASE_URI'] =
    'postgres://hzbudagklnpog:3d389e4927a6df93af4704c4cef861a000b85b6dac31c7f31832b
56eb7daf297@ec2-54-156-53-71.compute-1.amazonaws.com:5432/dfuqu09213kv5f'

    app.logger.addHandler(logging.StreamHandler(sys.stdout))
    app.logger.setLevel(logging.ERROR)

app.config['SQLALCHEMY_TRACK_MODIFICATIONS'] = False

db = SQLAlchemy(app)

class EMonitor(db.Model):
    __tablename__ = 'sensor_data'
    id = db.Column(db.Integer, primary_key=True)
    msg_id = db.Column(db.String(128))
    timestamp = db.Column(db.String(128))

    temperature = db.Column(db.Float)
    humidity = db.Column(db.Float)
    pressure = db.Column(db.Float)
    light = db.Column(db.Float)

    temperature_sd = db.Column(db.Float)
    humidity_sd = db.Column(db.Float)
    pressure_sd = db.Column(db.Float)
    light_sd = db.Column(db.Float)

    def __init__(self, msg_id, timestamp, temperature, humidity,
                 pressure, light, temperature_sd, humidity_sd, pressure_sd,
                 light_sd):
        self.msg_id = msg_id
```

```

    self.timestamp = timestamp

    self.temperature = temperature
    self.humidity = humidity
    self.pressure = pressure
    self.light = light

    self.temperature_sd = temperature_sd
    self.humidity_sd = humidity_sd
    self.pressure_sd = pressure_sd
    self.light_sd = light_sd

def extract_data_from_xml(xml_str):
    """
    Given a XML string(CAP) this extracts the 'parameter' values
    :param xml_str: XML as a string
    :return: data as dictionary {name:value}
    """

    root = ElementTree.fromstring(xml_str)
    param = root.findall('info/parameter')
    datetime = root.find('sent').text.strip()
    identifier = root.find('identifier').text.strip()
    readings = dict()
    readings['datetime'] = datetime
    readings['identifier'] = identifier
    data = {}
    for p in param:
        name = p.find('valueName').text.strip()
        value = p.find('value').text.strip()
        data[name] = float(value)
    readings["data"] = data
    return readings

def put_to_db(xml_data):
    """
    given a data dictionary this method put the data to the database
    :param xml_data: data as dictionary {name:value}
    :return: True if database write successful, otherwise False
    """

    msg_id = (xml_data['identifier'])
    timestamp = xml_data['datetime']

    temperature = xml_data['data']['temperature']
    humidity = xml_data['data']['humidity']
    pressure = xml_data['data']['pressure']
    light = xml_data['data']['lightIntensity']

    temperature_sd = xml_data['data']['temperature_sd']
    humidity_sd = xml_data['data']['humidity_sd']
    pressure_sd = xml_data['data']['pressure_sd']
    light_sd = xml_data['data']['lightIntensity_sd']

    try:
        DB_data = EMonitor(msg_id, timestamp, temperature, humidity, pressure,
                           light,
                           temperature_sd, humidity_sd, pressure_sd, light_sd)
    
```

```

        db.session.add(DB_data)
        db.session.commit()
        return True

    except:
        return False

@app.route('/data', methods=['POST'])
def post():
    xml_str = request.data
    xml_data = extract_data_from_xml(xml_str)
    print("[POST] /data : ", xml_data)
    if put_to_db(xml_data):
        return "DATABASE updated"
    else:
        return "DATABASE modification failed !"

@app.route('/')
def index():
    table = EMonitor.query.order_by(desc(EMonitor.timestamp)).limit(20).all()

    datetimes = []
    ids = []
    t = []
    h = []
    p = []
    l = []

    t_sd = []
    h_sd = []
    p_sd = []
    l_sd = []
    for row in reversed(table):
        datetimes.append(row.timestamp.split('T')[1].split('+')[0])
        ids.append(row.msg_id)

        t.append(row.temperature)
        h.append(row.humidity)
        p.append(row.pressure)
        l.append(row.light)

        t_sd.append(row.temperature_sd)
        h_sd.append(row.humidity_sd)
        p_sd.append(row.pressure_sd)
        l_sd.append(row.light_sd)

    return render_template("index.html", table=table, datetimes=datetimes,
                           ids=ids, t=t, h=h, p=p, l=l, t_sd=t_sd,
                           h_sd=h_sd, p_sd=p_sd, l_sd=l_sd)

if __name__ == "__main__":
    app.run(port=2017)

```

index.html

```
<!DOCTYPE html>
<html>
    <head>
        <meta charset="UTF-8">
        <meta name="viewport" content="width=device-width,initial-scale=1">
        <title>EMonitor</title>
        <script>
            src="https://cdn.jsdelivr.net/npm/chart.js@2.9.4/dist/Chart.min.js">
        </script>
        <link rel="stylesheet" href="https://www.w3schools.com/w3css/4/w3.css">
        <link rel="stylesheet" href="https://stackpath.bootstrapcdn.com/bootstrap/4.5.2/css/bootstrap.min.css"
        >
        <link rel="stylesheet" href="..static/style.css">
    </head>
    <body>
        <div class="card">
        </div>
        <div class="widget-container">
            <!-- Weather Widget -->
            <div class="widget">
                <div class="left">
                    
                    <h5 class="weather-status">MSG {{ table[0].msg_id }}</h5>
                </div>
                <div class="right">
                    <h5 class="city">On {{ table[0].timestamp.split('T')[0] }}</h5>
                    <h5 class="city">@ {{ table[0].timestamp.split('T')[1].split('+')[0] }}</h5>
                    <h5 class="degree">{{ table[0].temperature }}°C</h5>
                </div>
                <div class="bottom">
                    <div>
                        Humidity (%)<h3> {{ table[0].humidity }}</h3>
                    </div>
                    <div>
                        Pressure (Pa)<h3>{{ table[0].pressure }}</h3>
                    </div>
                    <div>
                        Light (%)<h3>{{ table[0].light }}</h3>
                    </div>
                </div>
            </div>
            <!-- ./End of weather widget -->
        </div>
        <div class="chart-container">
            <canvas id="temperatureChart"></canvas>
        </div>
        <div class="chart-container">
            <canvas id="humidityChart"></canvas>
        </div>
        <div class="chart-container">
            <canvas id="pressureChart"></canvas>
        </div>
    </body>

```

```

</div>
<div class="chart-container">
    <canvas id="lightChart"></canvas>
</div>
<div class="table-div">
    <table>
        <tr>
            <th>#</th>
            <th>Identifier</th>
            <th>Timestamp</th>

            <th>Temp (°C)</th>
            <th>SD</th>
            <th>Humidity (%)</th>
            <th>SD</th>
            <th>Pressure (Pa)</th>
            <th>SD</th>
            <th>Light (%)</th>
            <th>SD</th>
        </tr>
        {% for entry in table %}
        <tr>
            <td>{{ entry.id }}</td>
            <td>{{ entry.msg_id }}</td>
            <td>{{ entry.timestamp.split('T')[0] }} {{ entry.timestamp.split('T')[1].split('+')[0] }}</td>

            <td>{{ entry.temperature }}</td>
            <td>{{ entry.temperature_sd }}</td>
            <td>{{ entry.humidity }}</td>
            <td>{{ entry.humidity_sd }}</td>
            <td>{{ entry.pressure }}</td>
            <td>{{ entry.pressure_sd }}</td>
            <td>{{ entry.light }}</td>
            <td>{{ entry.light_sd }}</td>
        </tr>
        {% endfor %}

    </table>
</div>
<script>
    // Global parameters:
    // do not resize the chart canvas when its container does (keep at
600x400px)
    // Chart.defaults.global.responsive = false;

    // define the chart data
    var temperatureData = {
        labels : [% for item in datetimes %]
                    "{{item}}",
        {% endfor %}],
        datasets : [{
            label: ' Temperature (°C)',
            fill: true,
            lineTension: 0.1,
            backgroundColor: "rgba(253,128,128,0.4)",
            borderColor: "rgba(253,128,128,1)",

```

```

        borderCapStyle: 'butt',
        borderDash: [],
        borderDashOffset: 0.0,
        borderJoinStyle: 'miter',
        pointBorderColor: "rgba(253,128,128,1)",
        pointBackgroundColor: "#fff",
        pointBorderwidth: 1,
        pointHoverRadius: 5,
        pointHoverBackgroundColor: "rgba(253,128,128,1)",
        pointHoverBorderColor: "rgba(253,128,128,1)",
        pointHoverBorderwidth: 2,
        pointRadius: 1,
        pointHitRadius: 10,
        data : [% for item in t %]
            {{item}},
        {% endfor %}],
        spanGaps: false
    ]
}

var humidityData = {
    labels : [% for item in datetimes %]
        "{{item}}",
    {% endfor %}],
    datasets : [{

        label: ' Humidity (%)',
        fill: true,
        lineTension: 0.1,
        backgroundColor: "rgba(148,218,251,0.4)",
        borderColor: "rgba(148,218,251,1)",
        borderCapStyle: 'butt',
        borderDash: [],
        borderDashOffset: 0.0,
        borderJoinStyle: 'miter',
        pointBorderColor: "rgba(148,218,251,1)",
        pointBackgroundColor: "#fff",
        pointBorderwidth: 1,
        pointHoverRadius: 5,
        pointHoverBackgroundColor: "rgba(148,218,251,1)",
        pointHoverBorderColor: "rgba(148,218,251,1)",
        pointHoverBorderwidth: 2,
        pointRadius: 1,
        pointHitRadius: 10,
        data : [% for item in h %]
            {{item}},
        {% endfor %}],
        spanGaps: false
    ]
}

var pressureData = {
    labels : [% for item in datetimes %]
        "{{item}}",
    {% endfor %}],
    datasets : [{

        label: ' Pressure (Pa)',
        fill: true,
        lineTension: 0.1,

```

```

        backgroundColor: "rgba(252,186,57,0.4)",
        borderColor: "rgba(252,186,57,1)",
        borderCapStyle: 'butt',
        borderDash: [],
        borderDashOffset: 0.0,
        borderJoinStyle: 'miter',
        pointBorderColor: "rgba(252,186,57,1)",
        pointBackgroundColor: "#fff",
        pointBorderwidth: 1,
        pointHoverRadius: 5,
        pointHoverBackgroundColor: "rgba(252,186,57,1)",
        pointHoverBorderColor: "rgba(252,186,57,1)",
        pointHoverBorderwidth: 2,
        pointRadius: 1,
        pointHitRadius: 10,
        data : [{% for item in p %}
                  {{item}},
            {% endfor %}],
        spanGaps: false
    ]
}

var lightData = {
    labels : [{% for item in datetimes %}
              "{{item}}",
            {% endfor %}],
    datasets : [{

        label: ' Light (%)',
        fill: true,
        lineTension: 0.1,
        backgroundColor: "rgba(38,231,166,0.4)",
        borderColor: "rgba(38,231,166,1)",
        borderCapStyle: 'butt',
        borderDash: [],
        borderDashOffset: 0.0,
        borderJoinStyle: 'miter',
        pointBorderColor: "rgba(38,231,166,1)",
        pointBackgroundColor: "#fff",
        pointBorderwidth: 1,
        pointHoverRadius: 5,
        pointHoverBackgroundColor: "rgba(38,231,166,1)",
        pointHoverBorderColor: "rgba(38,231,166,1)",
        pointHoverBorderwidth: 2,
        pointRadius: 1,
        pointHitRadius: 10,
        data : [{% for item in l %}
                  {{item}},
            {% endfor %}],
        spanGaps: false
    ]
}

// get chart canvas
var ctx1 =
document.getElementById("temperatureChart").getContext("2d");

// create the chart using the chart canvas
var temperatureChart = new Chart(ctx1, {

```

```
        type: 'line',
        data: temperatureData,
        options: {
            maintainAspectRatio:false,
            scales: {
                xAxes: [{gridLines: {display: true}}],
                yAxes: [{gridLines: {display: false}}]
            }
        }
    });

var ctx2 =
document.getElementById("humidityChart").getContext("2d");

// create the chart using the chart canvas
var humidityChart = new Chart(ctx2, {
    type: 'line',
    data: humidityData,
    options: {
        maintainAspectRatio:false,
        scales: {
            xAxes: [{gridLines: {display: true}}],
            yAxes: [{gridLines: {display: false}}]
        }
    }
});

var ctx3 =
document.getElementById("pressureChart").getContext("2d");

// create the chart using the chart canvas
var pressureChart = new Chart(ctx3, {
    type: 'line',
    data: pressureData,
    options: {
        maintainAspectRatio:false,
        scales: {
            xAxes: [{gridLines: {display: true}}]
        }
    }
});
```

```

        }],
        yAxes: [{  

            gridLines: {  

                display: false  

            }
        }]
    }  

});  

var ctx4 = document.getElementById("lightChart").getContext("2d");  

// create the chart using the chart canvas
var lightChart = new Chart(ctx4, {  

    type: 'line',  

    data: lightData,  

    options: {  

        maintainAspectRatio:false,  

        scales: {  

            xAxes: [{  

                gridLines: {  

                    display: true
                }
            }],  

            yAxes: [{  

                gridLines: {  

                    display: false
                }
            }]
        }
    }
});  

</script>  

</body>  

</html>

```

style.css

```

@import url("https://fonts.googleapis.com/css2?  

family=Poppins:wght@100;200;600&display=swap");

body,  

html {  

height: 100%;  

margin: 0;  

font-family: "Poppins", sans-serif;
}

.widget-container {  

top: 150px;  

left: 50%;  

position: absolute;  

transform: translate(-50%, -50%);
}

.chart-container {  

margin: 20px;
}

```

```
margin-bottom: 50px;
}

.widget {
  width: 360px;
  height: 250px;
  border-radius: 20px;
  /* background: rgba(299, 299, 299, 0.4); */
  background-color: black;
}

.widget .left {
  position: absolute;
  left: 0;
  width: 200px;
}

.widget .right {
  position: absolute;
  right: 0;
  width: 200px;
  color: #fff;
  margin: 50px 0;
}

.icon {
  width: 75%;
  margin-bottom: -30px;
  display: block;
  margin-left: auto;
  margin-right: auto;
}

.weather-status {
  color: #fff;
  text-align: center;
  margin-top: 0;
}

.widget .right .city {
  font-size: 1em;
  text-align: center;
  margin: 0;
  text-shadow: 1px 1px 5px #707070;
}

.widget .right .degree {
  font-size: 3em;
  font-weight: bold;
  text-align: center;
  margin: 0;
  text-shadow: 1px 1px 5px #707070;
}

.widget .bottom {
  width: 100%;
  position: absolute;
  bottom: 10px;
```

```
display: flex;
justify-content: center;
color: #fff;
}

.widget .bottom div {
/* background-color: yellow; */
margin: 5px 15px 5px 15px;
text-align: center;
line-height: 100%;
font-size: 0.83em;
text-shadow: 1px 1px 5px #707070;
}

.bottom div h3 {
display: block;
/* font-weight: bold; */
}

.table-div {
margin-top: 20px;
overflow-x: auto;
}

table {
border-collapse: collapse;
width: 100%;
}

th,
td {
padding: 8px;
text-align: left;
border-bottom: 1px solid #ddd;
}

tr:hover {
background-color: #f5f5f5;
}

.card {
/* all: initial; */
padding: 20px;
margin: auto;
width: 100%;
height: 300px;
align-content: center;
/* background-color: #698996; */
}
```