



BILL OF MATERIAL			
ITEM	QTY	DESCRIPTION	PART NUMBER
1	6	NUT,REGULAR HEXAGON; #8-32	8-32_HN
2	1	HOSE,FLEXIBLE; 3/8" ID DRT CLNT SUPPLY	80-038
3	1	HOSE,FLEXIBLE; 3/8" ID DRT CLNT RETURN	80-038
4	1	HOSE,FLEXIBLE; 5/8" ID AT CLNT TEE - CCV	80-062
5	1	HOSE,FLEXIBLE; 5/8" ID AT CLNT CCV - DEF TANK	80-062
6	1	HOSE,FLEXIBLE; 5/8" ID AT CLNT DEF TANK - TEE	80-062
7	8	CLAMP,CSHN; EPDM RUBBER	16164-16
8	3	ISOLATOR,VIBRATION	62232
9	12	NUT,HEXAGON; 3/8-16	5280396
10	2	TEE,HOSE CONNECTOR; QD CLIP-IN	5246017749
11	1	CONNECTOR,QCK DISCONNECT; 3/8" 90°	5246033000
12	1	CONNECTOR,QCK DISCONNECT; 3/8" 180°	5246033100
13	4	CONNECTOR,QCK DISCONNECT; 5/8" 180°	5246049800
14	3	SCREW,HEXAGON HEAD CAP; 5/16-18 X 4 1/4"	91257A607
15	4	CLAMP, HOSE; LINED SAE#12 WORM GEAR	5076K14
16	8	CLAMP,HOSE	5076K160
17	5	SCREW,HEX FLANGE HEAD CAP; 1/4-20 X 1/2"	90602A210
18	4	SCREW,HEX FLANGE HEAD CAP; 1/4-20 X 3/4"	90602A212
19	2	SCREW,BUTTON HEAD CAP; M5 X 8mm	91239A222
20	6	SCREW,BUTTON HEAD CAP; #8-32 X 1/2"	91255A194
21	7	NUT,HEXAGON FLANGE; 1/4-20	94612A101
22	3	NUT,HEXAGON FLANGE; 5/16-18	94612A102
23	4	CAP,PROTECTIVE; SNAP-IN	9688K311
24	1	COOLANT CONTROL VALVE, 12V	A047U821
25	1	HOSE,FLEXIBLE; HEATED DEF SUCTION LINE 0.5m 90°X90°	A047U834
26	1	HOSE,FLEXIBLE; HEATED DEF RETURN LINE 0.5m 90°X90°	A047Y473
27	1	HOSE,FLEXIBLE; HEATED DEF PRESSURE LINE 1.0m 180°X180°	A050D464
28	1	DEF MODULE, 12V	A052B661
29	1	TANK, DEF RESERVOIR, PORTRAIT; 5 GALLON	A056J236
30	1	COVER, FRONT; DEF TANK FILL	A057W544
31	2	STRAP, AFTERTREATMENT DEV; DEF TANK MOUNT	A058N718
32	1	BRACKET, MOUNTING; SUPPLY MODULE	A058N721
33	1	BRACKET, DEF TANK; CRADLE MOUNT	A058N722
34	1	COVER, PROTECTIVE; DEF ENCLOSURE	A059J583
35	1	BRACKET,MOUNTING; AT PLUMBING	A060R214
36	1	BRACKET,MOUNTING; COOLANT TEES	A060R220
37	1	ADAPTER,O RING; M18 TO 5/8" HB	M4604-10-M18-SHORT
38	12	SPACER; STONE GUARD	MPP67
39	2	CONNECTOR,QCK DISCONNECT; J2044 9.49mm - 3/8" HOSE BARB	RCFIGE-095-06-11

SHT NO	1	REV NO	0
--------	---	--------	---

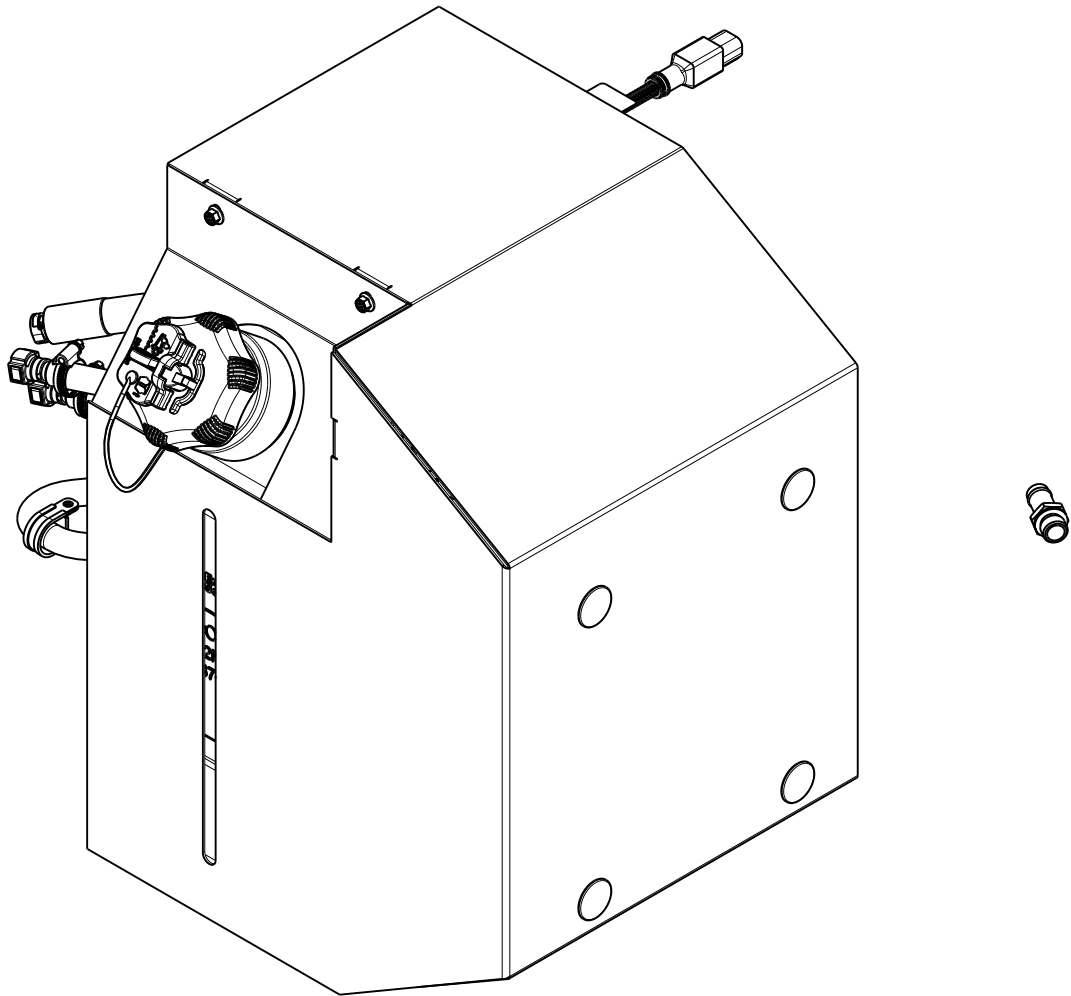

REFERENCE ISOMETRIC VIEW

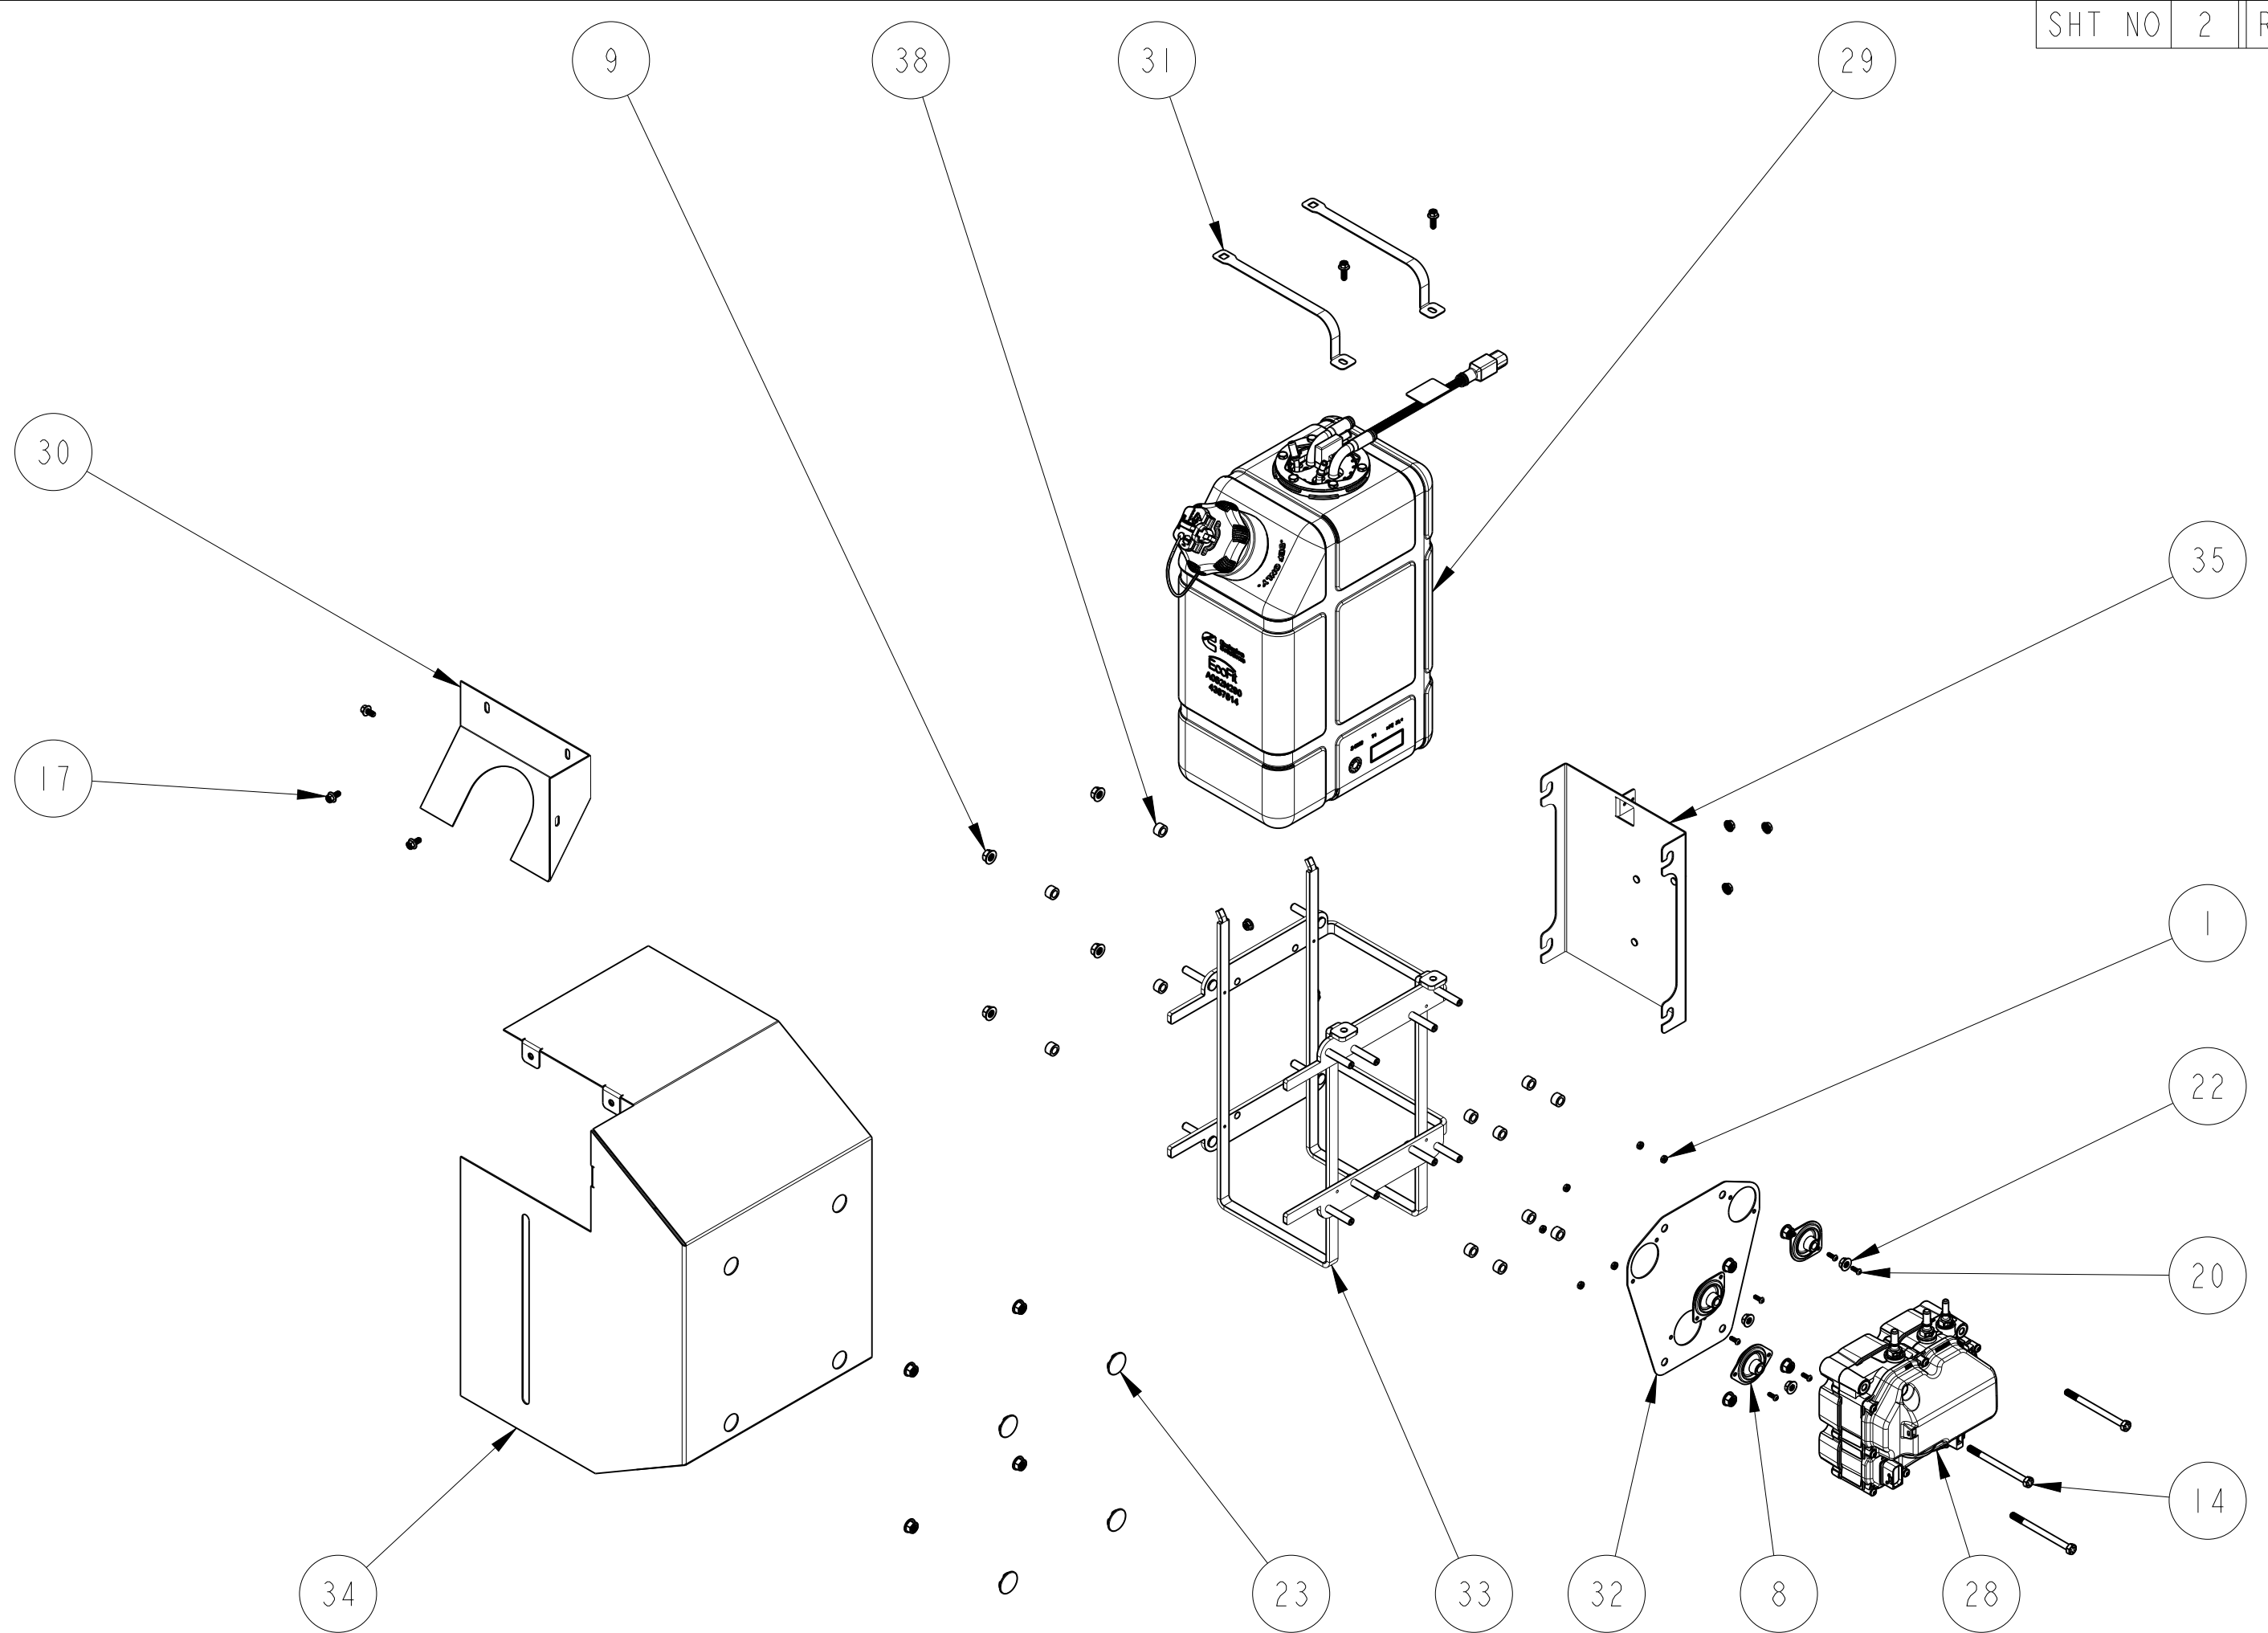

SCALE .125

