

8.5 x 6.7 x 10.971

Job name or no
18-12-24-02 frendz fan
24 inches new fans file



Frendz FOREVER

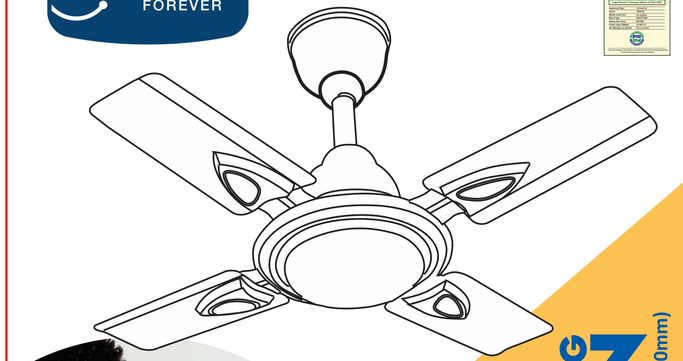

CEILING FAN
High Speed (600mm)
Born in India



ENERGY SAVING | RPM Max 850 | 730 DAYS WARRANTY ON MOTOR ONLY

100% CCA | With ISI Mark | 100% Quality Tested | Double Ball Bearing | Power Saver | Spring Air

Frendz FOREVER

Ceiling Fan

SPECIFICATIONS

PRODUCT	:	FR - 45		
MODEL	:	BRAVO ☐	CADDY ☐	
QUANTITY	:	1 UNIT		
M.R.P. (Inclusive of all taxes)	:	₹2895/-	₹2795/-	
RATED VOLTAGE	:	230 V 50Hz AC		
COLOUR	:	WHITE / BROWN / M BLACK / IVORY		
SWEEP	:	600 mm		

Contents : Motor, Canopy, Down Rod, Shackle,Warranty Card, WITHOUT REGULATOR. (Blade Set Packed Separately).

MONTH & YEAR OF MANUFACTURING

JAN	FEB	MAR	APR	MAY	JUN	JUL	AUG	SEP	OCT	NOV	DEC	YEAR
												2025

Above specifications are indicative.
Variations during manufacturing process is possible.


Marketed By -
M/s Frendz Forever Appliances (India)
268 , Block - J ,Sector - 1Bawana Industrial Area.
New Delhi 110039(India)
Email: frendzforeversup@gmail.com
Website : www.frendzappliances.in

CUSTOMER CARE NO.: 1800-309-5150

FRAGILE HANDLE WITH CARE

THIS SIDE UP

Frendz FOREVER

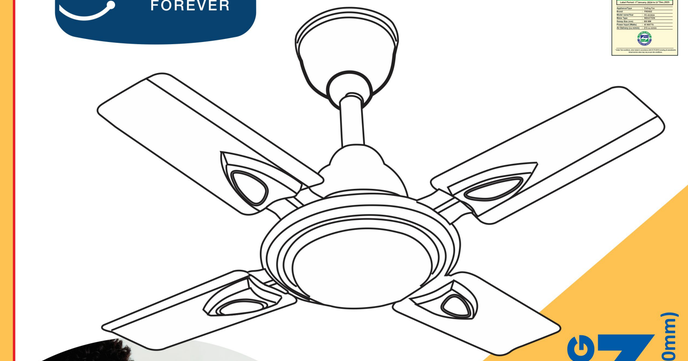

CEILING FAN
High Speed (600mm)
Born in India



ENERGY SAVING | RPM Max 850 | 730 DAYS WARRANTY ON MOTOR ONLY

100% CCA | With ISI Mark | 100% Quality Tested | Double Ball Bearing | Power Saver | Spring Air

Frendz FOREVER

Ceiling Fan





WORLD CLASS FEATURES

HIGH SPEED DECORATIVE FAN | Air Delivery Energy Efficient Performance Quick Start High Torque Motor CMC Winding | ANGULAR DESIGN | HIGH STRENGTH BODY

Installation Guidelines

1. Take out the Fan Motor (1) from the carton and place it on the Thermocole Pad.
2. Remove the Split Pin, Bolt, Nut, Spring Washers from the Down Rod.
3. Pass two nos. of supply Wires (3) through the Down Rod., connect them to the Terminal Block (3) and pull back, Fit the slitted end of the Down Rod on the Motor Shaft. Ensure that the Bolt and Nut with Washer and Spring Washer is fully tightened. Insert the Split Pin through the hole on the Bolt and spread its tow ends.
4. Insert Top and Bottom Canopies (4) through the free end of the Down Rod, Keeping the top Canopy inverted.
5. Take out the Shackle (5) and mount it at the top of the Down Rod after aligning the holes. Tighten the Grub Screw of the Bottom Canopy, Keeping sufficient gap from the Motor. Suspend the fan from the ceiling and connect the Supply Wires coming out from the upper end of the Down Rod to the Ceiling Rose. Connect Supply Earthing Wire to the Earthing Terminal provided on the Shackle. Then position the top Canopy correctly and tighten the Grub Screw.
6. Take out the Blades (6) gently from the carton and fix them on the Motor with the Screws, Spring Washers and anti-vibration pads provided in the respective positions.
7. Fan should be installed with blades 2.3m above floor.
8. To connect the Regulator, follow the Connection Diagram.