


Subject:

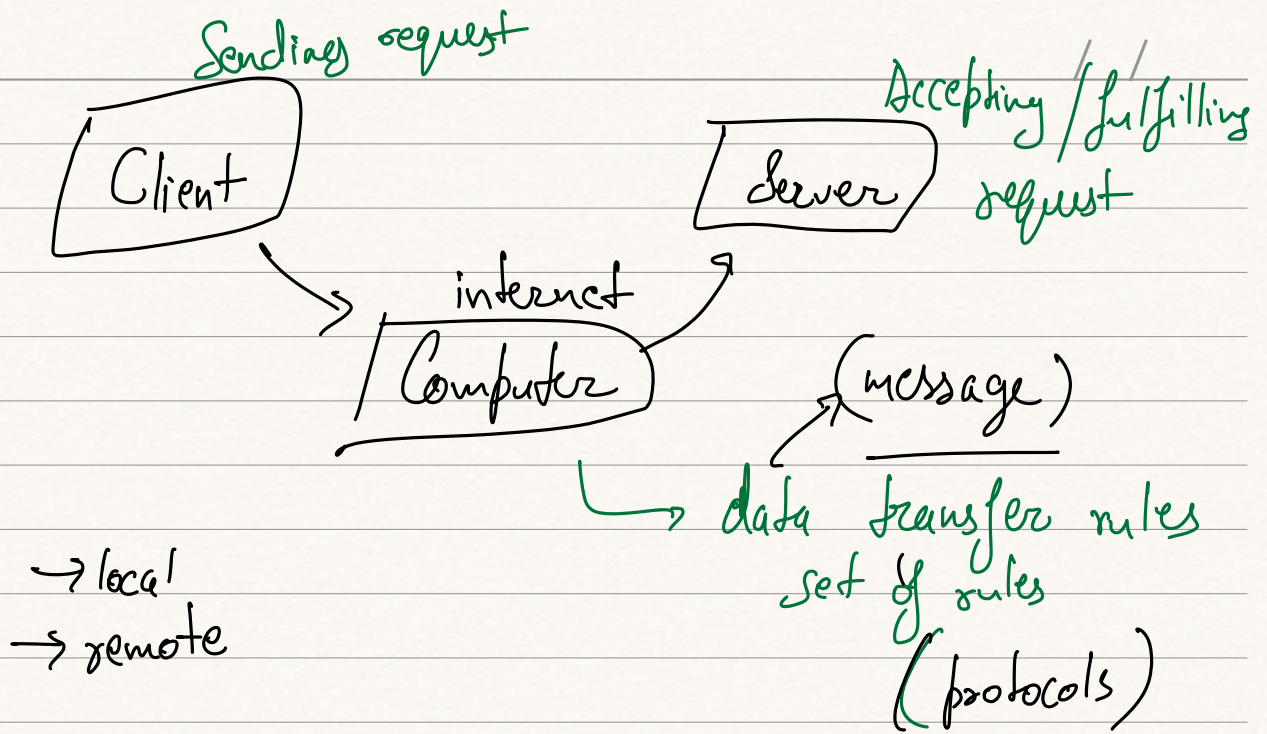

→ Same model client and server.

OSI model → TCP/I model
(not implemented) changes 5 layer.

7 layers


→ LAN (Local Area Network) / → WAN

→ Topology :-

- Bus
- Star
- Mesh

Subject: / /

→ Mesh a node connected to all nodes.

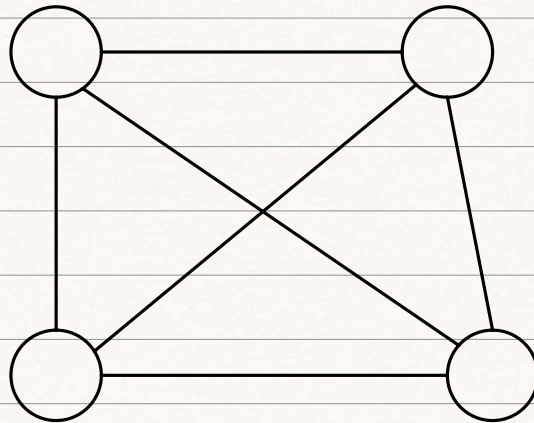

(node) $n = 4$

links (6)

$$n = 100$$

$$\rightarrow n_L = \frac{100 \times 99}{2}$$

links.

no. of links ↑ with no. of nodes.

→ cost increases


→ Time consuming

→ Ask topology, no. of links.

→ better for smaller network

Subject:


→ Star topology

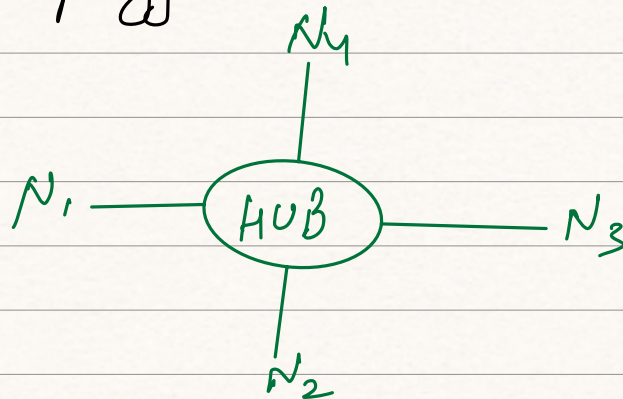

$$n = 4$$
$$n = 100$$


$$\text{links} = 4$$
$$\text{links} = 100$$

↳

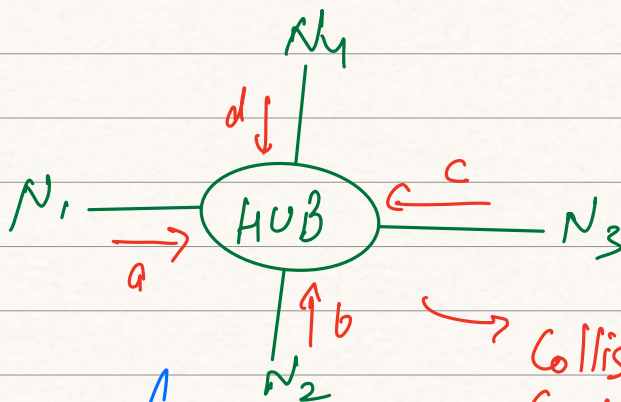

→ it is a passive device.

Collision
(if all requests at a time)

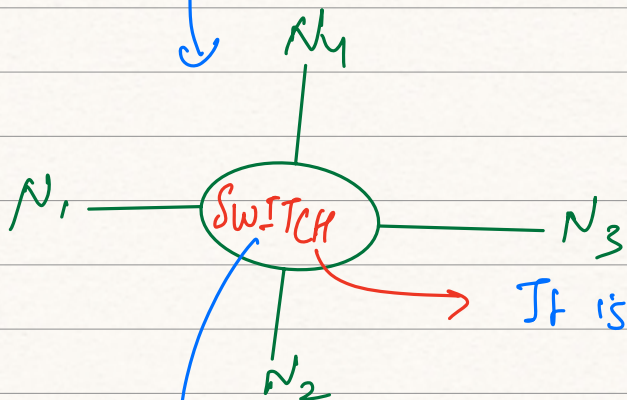

It is Collision detector.

Subject: / /

It has a look up table.

N_1	a
N_2	b
N_3	c
N_4	d

it looks the request that first saved in table.

→ SWITCH can be


→ Bridge

→ Router


→ Gateway



(with in networks)

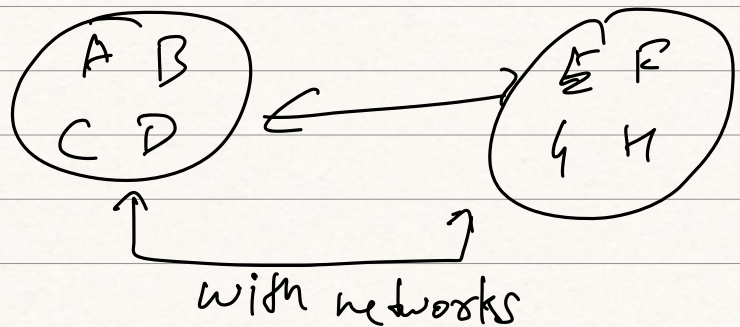

→ Bus Topology :-

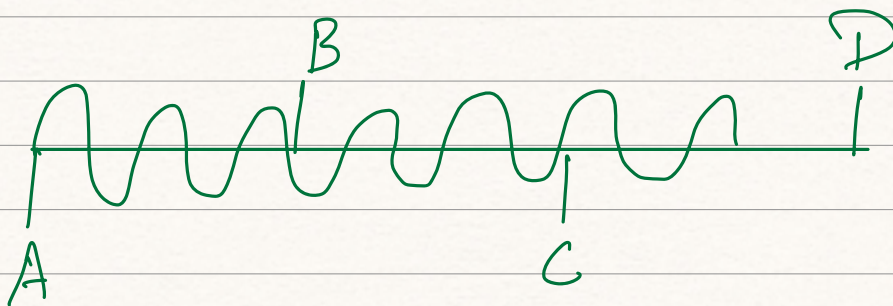

Subject:

→ 4 node

→ 4 links

→ 1 Base-band

///
Broad-band

