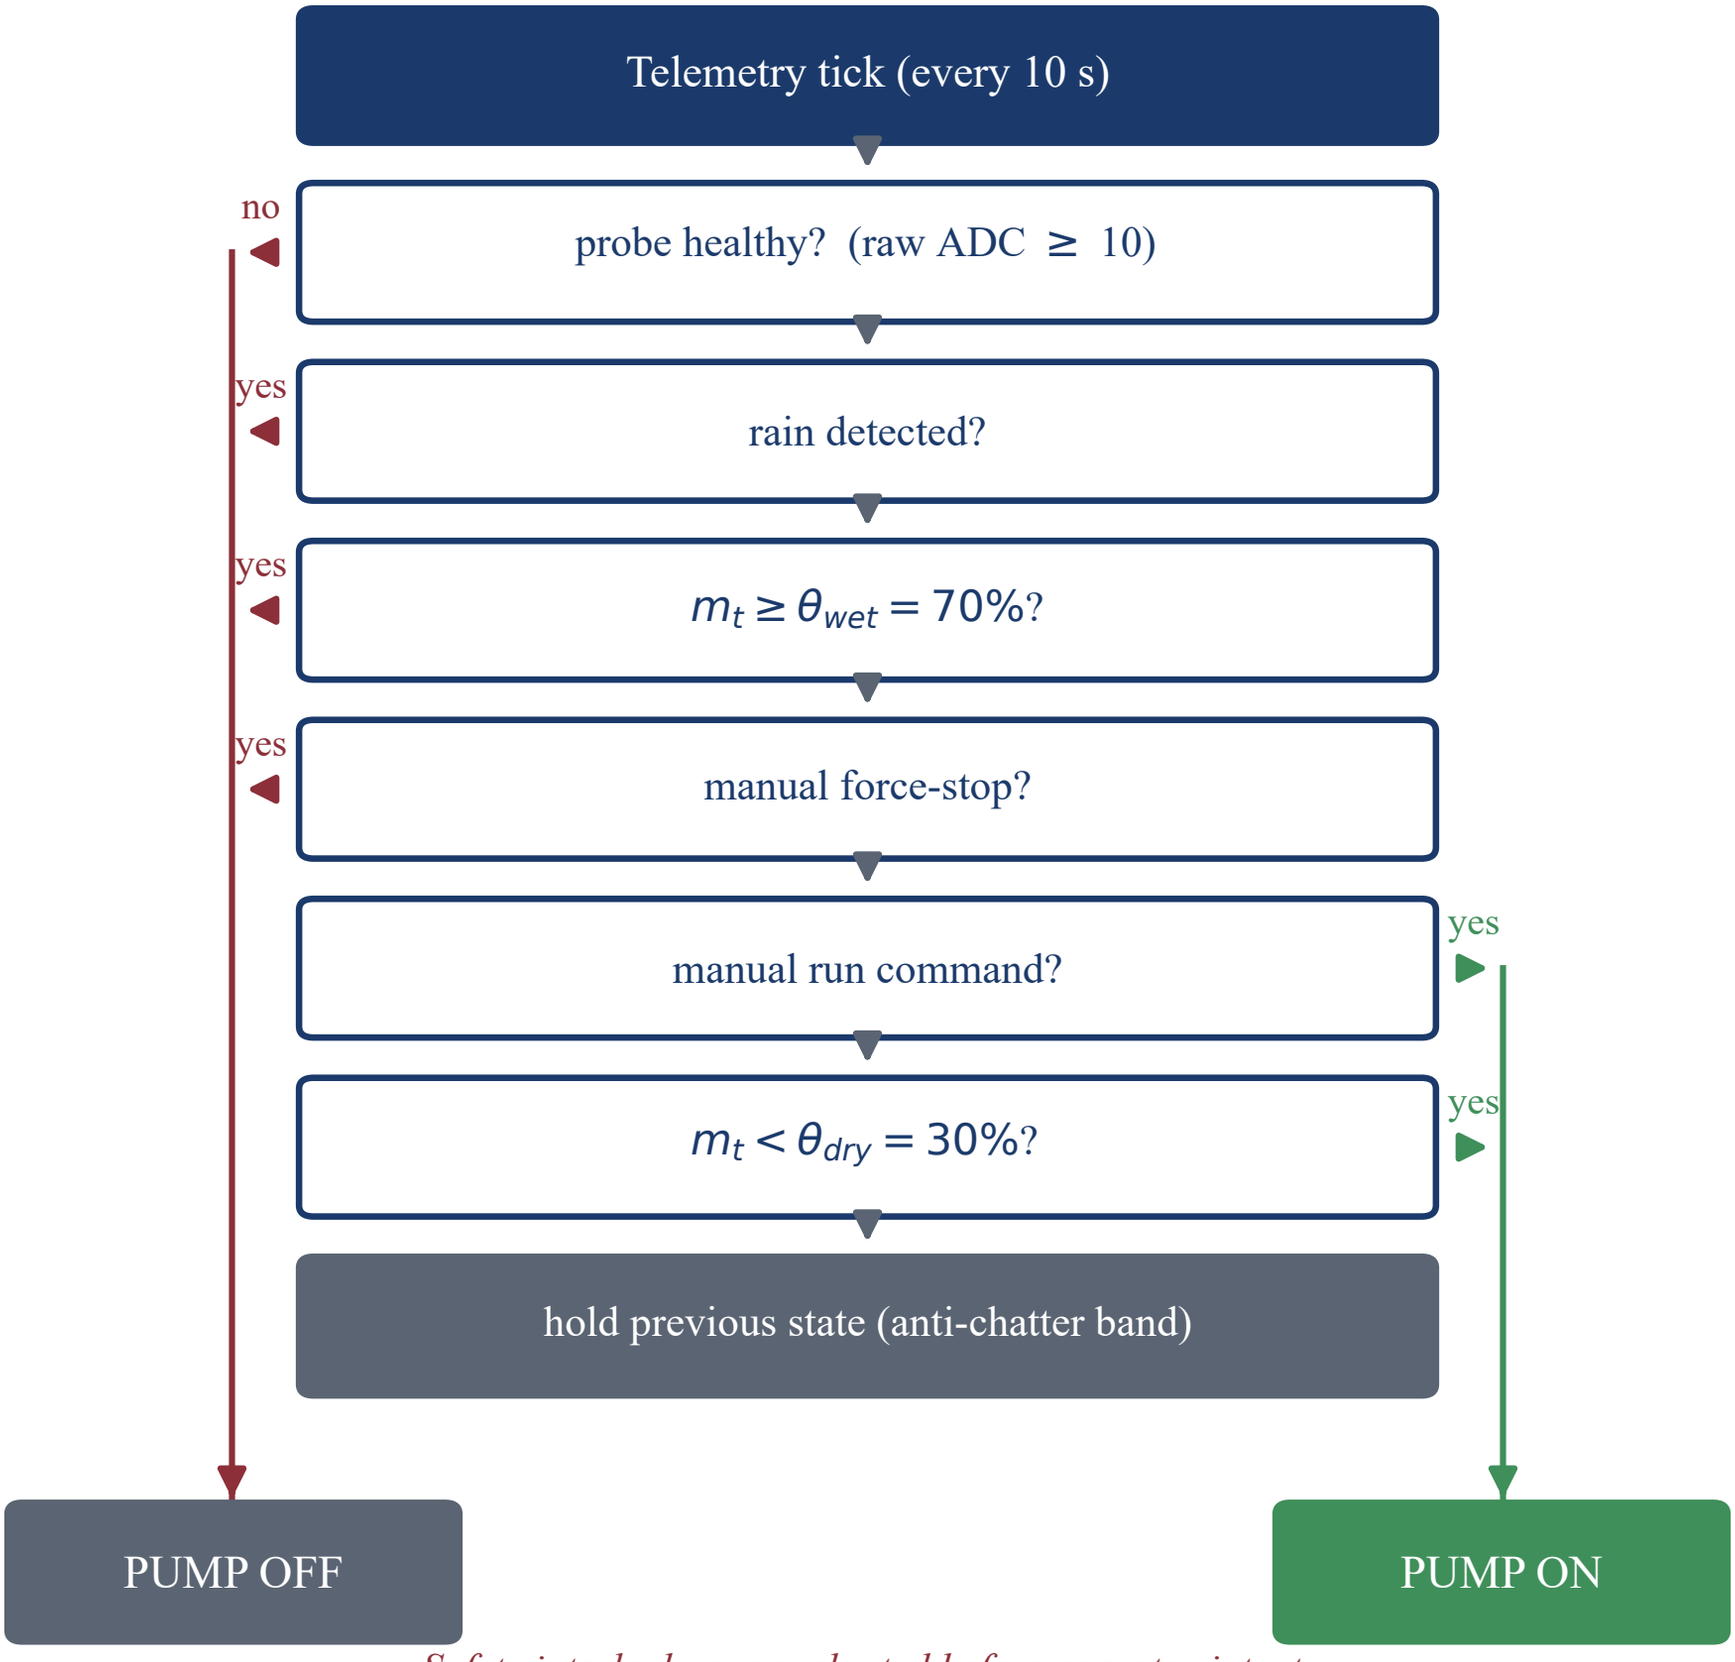


Safety interlocks are evaluated before operator intent:
a manual run cannot water through rain, wet soil,
or a failed probe. Runs cap at 15 min, then 30 min cooldown.