
ELECTRIC TOOL PARTS LIST

■ SCREW DRIVER Model W 6VA4

2006·12·1 (E1-1)

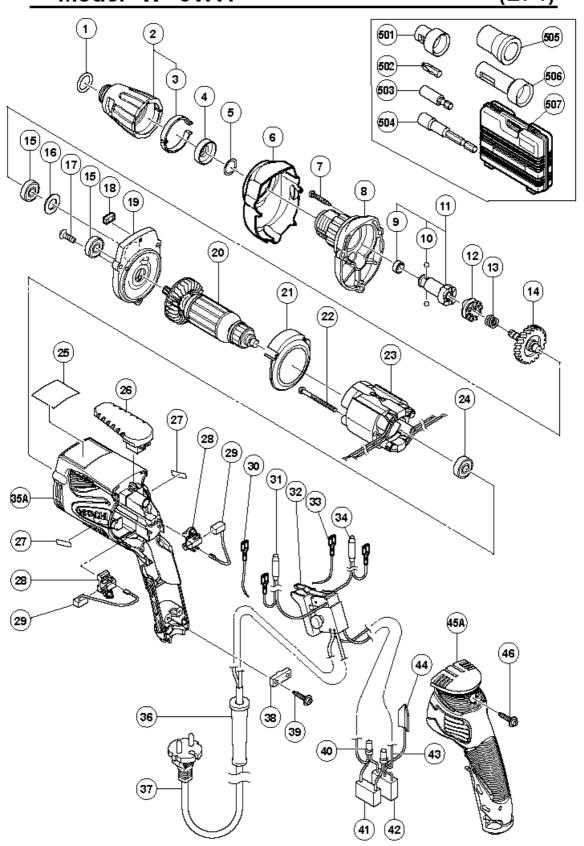

PARTS W6VA4

| | ITEM No. | CODE No. | DESCRIPTION | No. USED | REMARKS |
|---|-------------|----------|----------------------------------------|-------------|------------------------------------|
| | 1 | 876-031 | O-RING (S-16) | 1 | |
| | 2 | 323-487 | LOCATOR ASS'Y | 1 | INCLUD.3 |
| | 3 | 323-488 | CLICK SPRING | 1 | |
| | 4 | 971-468 | FRINGER (A) | 1 | |
| | 5 | 317-662 | O-RING (F) | 1 | |
| | 6 | 323-558 | PROTECT COVER (A) | 1 | |
| | 7 | 321-057 | TAPPING SCREW D4X25 (BLACK) | 3 | |
| | 8 | 323-486 | GEAR COVER (A) ASS'Y | 1 | INCLUD.5 |
| | 9 | 872-573 | SET RING | 1 | |
| | 10 | 959-148 | STEEL BALL D3.175 (10 PCS.) | 2 | |
| * | 11 | 323-491 | SOCKET (A) ASS'Y | 1 | INCLUD.9,10 |
| * | 11 | 323-482 | SOCKET (A) ASS'Y | 1 | INCLUD.9,10 FOR TPE,SIN,HKG |
| | 12 | 323-476 | CLUTCH DISC | 1 | |
| | 13 | 306-024 | SPRING | 1 | |
| | 14 | 323-474 | GEAR SET | 1 | |
| | 15 | 608-VVM | BALL BEARING 608VVC2PS2L | 2 | |
| | 16 | 933-545 | WASHER (A) | 1 | |
| | 17 | 323-556 | SLOTTED HD. SCREW (SEAL LOCK) M4X8 | 2 | |
| Ī | 18 | 323-557 | FELT (A) | 1 | |
| | 19 | 323-473 | INNER COVER ASS'Y (A) | 1 | INCLUD.15-18 |
| * | 20 | 360-670 | ARMATURE (B) 100V-110V | 1 | |
| * | 20 | 360-671U | ARMATURE ASS'Y (B) 120V | 1 | INCLUD.15,24 |
| * | 20 | 360-671E | ARMATURE (B) 220V-230V | 1 | |
| * | 20 | 360-671F | ARMATURE (B) 240V | 1 | |
| | 21 | 323-472 | FAN GUIDE | 1 | |
| | 22 | 961-672 | HEX. HD. TAPPING SCREW D4X50 | 2 | |
| * | 23 | 340-599C | STATOR 110V-120V | 1 | |
| * | 23 | 340-599E | STATOR 220V-240V | 1 | |
| | 24 | 608-VVM | BALL BEARING 608VVC2PS2L | 1 | |
| | 25 | | NAME PLATE | 1 | |
| | 26 | 323-471 | ноок | 1 | |
| | 27 | | HITACHI LABEL | 2 | |
| | 28 | 323-512 | BRUSH HOLDER (A) | 2 | |
| | 29 | 999-091 | CARBON BRUSH (AUTO STOP TYPE) (1 PAIR) | 2 | |
| * | 30 | 323-489 | INTERNAL WIRE (BROWN) | 1 | FOR SAU,SIN,HKG,USA,CAN,IND |
| * | 31 | 323-480 | CHOKE COIL (W/INTERNAL WIRE) BROWN | 1 | EXCEPT FOR SAU,SIN,HKG,USA,CAN,IND |
| | 32 | 323-479 | SWITCH (1P PILLAR TYPE) W/LOCK | 1 | |
| * | 33 | 323-490 | INTERNAL WIRE (BLUE) | 1 | FOR SAU,SIN,HKG,USA,CAN,IND |
| * | 34 | 323-481 | CHOKE COIL (W/INTERNAL WIRE) BLUE | 1 | EXCEPT FOR SAU,SIN,HKG,USA,CAN,IND |
| | 35A | 326-671 | HOUSING | 1 | |
| | 36 | 953-327 | CORD ARMOR D8.8 | 1 | |

PARTS W6VA4

| | ITEM No. | CODE No. | DESCRIPTION | No. USED | REMARKS |
|---|-------------|----------|----------------------------------------|-------------|------------------------------------|
| * | 37 | 323-559 | CORD (LENGTH 7.5M) | 1 | (CORD ARMOR D8.8) |
| * | 37 | 500-409Z | CORD | 1 | (CORD ARMOR D8.8) FOR SAU,IND |
| * | 37 | 500-423Z | CORD | 1 | (CORD ARMOR D8.8) FOR SIN |
| * | 37 | 323-561 | CORD (LENGTH 7.5M) | 1 | (CORD ARMOR D8.8) FOR NZL,AUS |
| * | 37 | 500-247Z | CORD | 1 | (CORD ARMOR D8.8) FOR SAF,YEN |
| * | 37 | 320-130 | CORD (LENGTH 7.5M) | 1 | (CORD ARMOR D8.8) FOR USA,CAN |
| * | 37 | 500-435Z | CORD | 1 | (CORD ARMOR D8.8) FOR HKG |
| * | 37 | 500-470Z | CORD | 1 | (CORD ARMOR D8.8) FOR TPE |
| * | 37 | 323-562 | CORD (LENGTH 7.5M) | 1 | (CORD ARMOR D8.8) FOR GBR (110V) |
| * | 37 | 323-560 | CORD (LENGTH 7.5M) | 1 | (CORD ARMOR D8.8) FOR GBR (230V) |
| * | 37 | 323-563 | CORD (LENGTH 7.5M) | 1 | (CORD ARMOR D8.8) FOR SUI |
| | 38 | 937-631 | CORD CLIP | 1 | |
| | 39 | 984-750 | TAPPING SCREW (W/FLANGE) D4X16 | 2 | |
| * | 40 | 959-140 | CONNECTOR 50091 (10 PCS.) | 2 | EXCEPT FOR SAU,SIN,HKG,USA,CAN,IND |
| * | 41 | 930-039 | NOISE SUPPRESSOR | 1 | EXCEPT FOR SAU,SIN,HKG,USA,CAN,IND |
| * | 42 | 994-273 | NOISE SUPPRESSOR | 1 | EXCEPT FOR SAU,SIN,HKG,USA,CAN,IND |
| * | 43 | 317-667 | INTERNAL WIRE | 2 | EXCEPT FOR SAU,SIN,HKG,USA,CAN,IND |
| * | 44 | 992-635 | EARTH TERMINAL | 1 | EXCEPT FOR SAU,SIN,HKG,USA,CAN,IND |
| | 45A | 326-672 | HANDLE COVER | 1 | |
| | 46 | 301-653 | TAPPING SCREW (W/FLANGE) D4X20 (BLACK) | 3 | |

STANDARD ACCESSORIES

| | ITEM No. | CODE No. | DESCRIPTION | No. USED | REMARKS |
|---|-------------|----------|------------------------------------------|-------------|----------------------------------------|
| * | 501 | 323-352 | SUB STOPPER (G) | 1 | EXCEPT FOR HKG,NZL,AUS,USA,CAN,TPE |
| * | 502 | 971-511Z | + DRIVER BIT (A) NO.2 25L | 1 | EXCEPT FOR TPE |
| * | 503 | 317-674 | MAGNETIC BIT HOLDER ASS'Y (41L) | 1 | INCLUD.502 EXCEPT FOR TPE,SIN,HKG,NZL, |
| Ī | 503 | 317-674 | MAGNETIC BIT HOLDER ASS'Y (41L) | 0 | AUS,USA,CAN |
| * | 503 | 982-554Z | MAGNETIC BIT HOLDER (75L) | 1 | FOR NZL,AUS,USA,CAN |
| * | 503 | 323-354 | MAGNETIC BIT HOLDER ASS'Y (47.1L) | 1 | INCLUD.502 FOR SIN |
| * | 503 | 323-353 | MAGNETIC BIT HOLDER ASS'Y (81.1L) | 1 | INCLUD.502 FOR HKG |
| * | 504 | 323-356 | MAGNETIC HEX. SOCKET 5/16"X71.1L | 1 | FOR TPE |
| * | 505 | 317-671 | SUB STOPPER (B) FOR H5/16 HEX. SOCKET | 1 | FOR TPE |
| * | 506 | 323-351 | SUB STOPPER (F) | 1 | FOR HKG,NZL,AUS,USA,CAN |
| * | 507 | 310-904 | CASE | 1 | FOR ESP |
| Ī | 601 | 317-670 | SUB STOPPER (B) FOR H3/8 H10 HEX. SOCKET | 1 | |
| | 602 | 317-671 | SUB STOPPER (B) FOR H5/16 HEX. SOCKET | 1 | |
| Ī | 603 | 317-827 | SUB STOPPER (B) H1/4 HEX. SOCKET | 1 | |
| * | 604 | 985-330 | MAGNETIC HEX. SOCKET 3/8"X65L | 1 | EXCEPT FOR TPE,SIN,HKG |
| * | 605 | 985-321 | MAGNETIC HEX. SOCKET 10MMX65L | 1 | EXCEPT FOR TPE,SIN,HKG |
| * | 606 | 985-322 | MAGNETIC HEX. SOCKET 5/16"X65L | 1 | EXCEPT FOR TPE,SIN,HKG |

STANDARD ACCESSORIES

W6VA4

| | ITEM No. | CODE No. | DESCRIPTION | No. USED | REMARKS |
|---|-------------|----------|-------------------------------------|-------------|------------------------|
| * | 607 | 985-332 | MAGNETIC HEX. SOCKET 1/4"X65L | 1 | EXCEPT FOR TPE,SIN,HKG |
| * | 608 | 985-326 | NON-MAGNETIC HEX. SOCKET 3/8" 65L | 1 | EXCEPT FOR TPE,SIN,HKG |
| * | 609 | 985-329 | NON-MAGNETIC HEX. SOCKET 10MM 65L | 1 | EXCEPT FOR TPE,SIN,HKG |
| * | 610 | 985-327 | NON-MAGNETIC HEX. SOCKET 5/16" 65L | 1 | EXCEPT FOR TPE,SIN,HKG |
| * | 611 | 985-328 | NON-MAGNETIC HEX. SOCKET 1/4" 65L | 1 | EXCEPT FOR TPE,SIN,HKG |
| * | 612 | 982-563Z | NON-MAGNETIC BIT HOLDER | 1 | EXCEPT FOR TPE,SIN,HKG |
| * | 613 | 323-355 | MAGNETIC HEX. SOCKET 10MMX71.1L | 1 | FOR TPE,SIN,HKG |
| * | 614 | 323-356 | MAGNETIC HEX. SOCKET 5/16"X71.1L | 1 | FOR SIN,HKG |
| | 615 | 985-333 | + DRIVER BIT NO.1 25L | 1 | |
| Ī | 616 | 971-512Z | + DRIVER BIT (A) NO.3 25L | 1 | |
| | 617 | 985-334 | + DRIVER BIT NO.1 25L W/STEPPED ROD | 1 | |
| | 618 | 985-335 | + DRIVER BIT NO.2 25L W/STEPPED ROD | 1 | |
| | 619 | 985-336 | - DRIVER BIT 4MMX25 | 1 | |
| | 620 | 985-337 | - DRIVER BIT 5MMX25 | 1 | |
| | 621 | 985-338 | - DRIVER BIT 6MMX25 | 1 | |
| | 622 | 985-339 | - DRIVER BIT 8MMX25 | 1 | |
| | 623 | 985-340 | - DRIVER BIT 4MMX25 (W/STEPPED ROD) | 1 | |
| | 624 | 985-341 | - DRIVER BIT 5MMX25 (W/STEPPED ROD) | 1 | |
| | 625 | 985-342 | HEX. BIT 4MMX25L | 1 | |
| | 626 | 985-343 | HEX. BIT 5MMX25L | 1 | |
| | 627 | 985-344 | HEX. BIT 6MMX25L | 1 | |
| | 628 | 310-904 | CASE | 1 | |