

Figure 1: Access point name based on value of ssid*

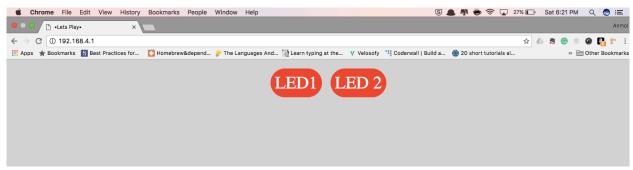


Figure 2: Initial Page



Figure 3: 1-ON/2-OFF



Figure 4: 1-ON/2-ON



Figure 5: 1-OFF/2-ON




Figure 6: 2-ON/1-ON




Figure 7: 2-OFF/1-ON