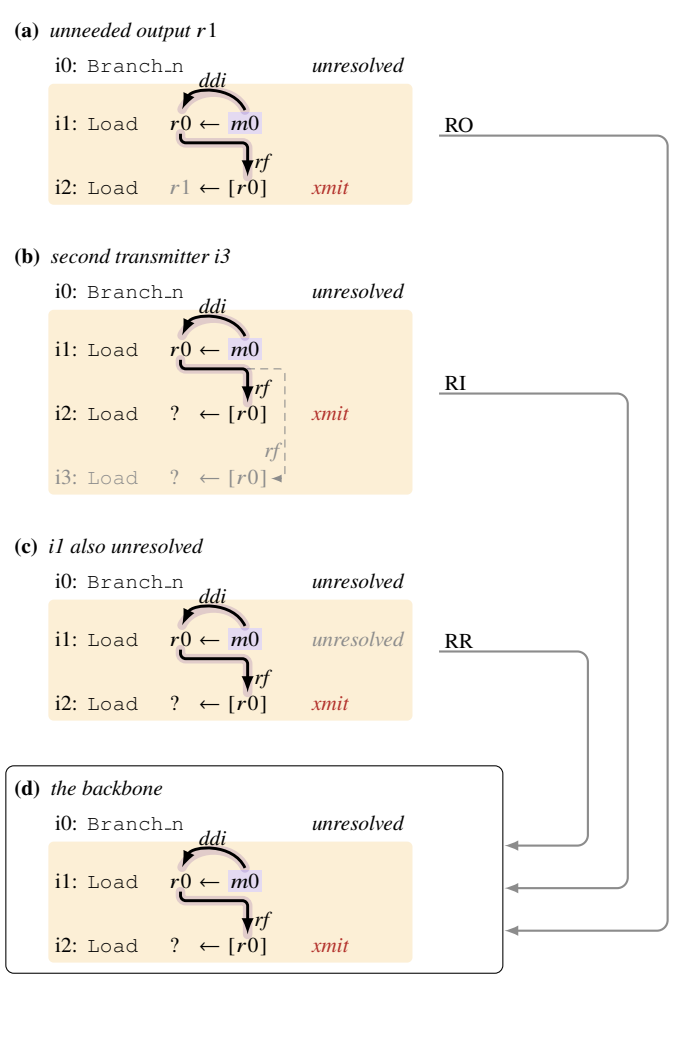

(a) unneeded output r1
i0: Branch_n
unresolved
ddi
i1: Load r0 ← m0
rf
i2: Load r1 ← [r0]
xmit
RO
(b) second transmitter i3
i0: Branch_n
unresolved
ddi
i1: Load r0 ← m0
rf
i2: Load ? ← [r0]
xmit
rf
i3: Load ? ← [r0]
RI
(c) i1 also unresolved
i0: Branch_n
unresolved
ddi
i1: Load r0 ← m0
unresolved
rf
i2: Load ? ← [r0]
xmit
RR
(d) the backbone
i0: Branch_n
unresolved
ddi
i1: Load r0 ← m0
rf
i2: Load ? ← [r0]
xmit