



SCHEMATIC LAYOUT

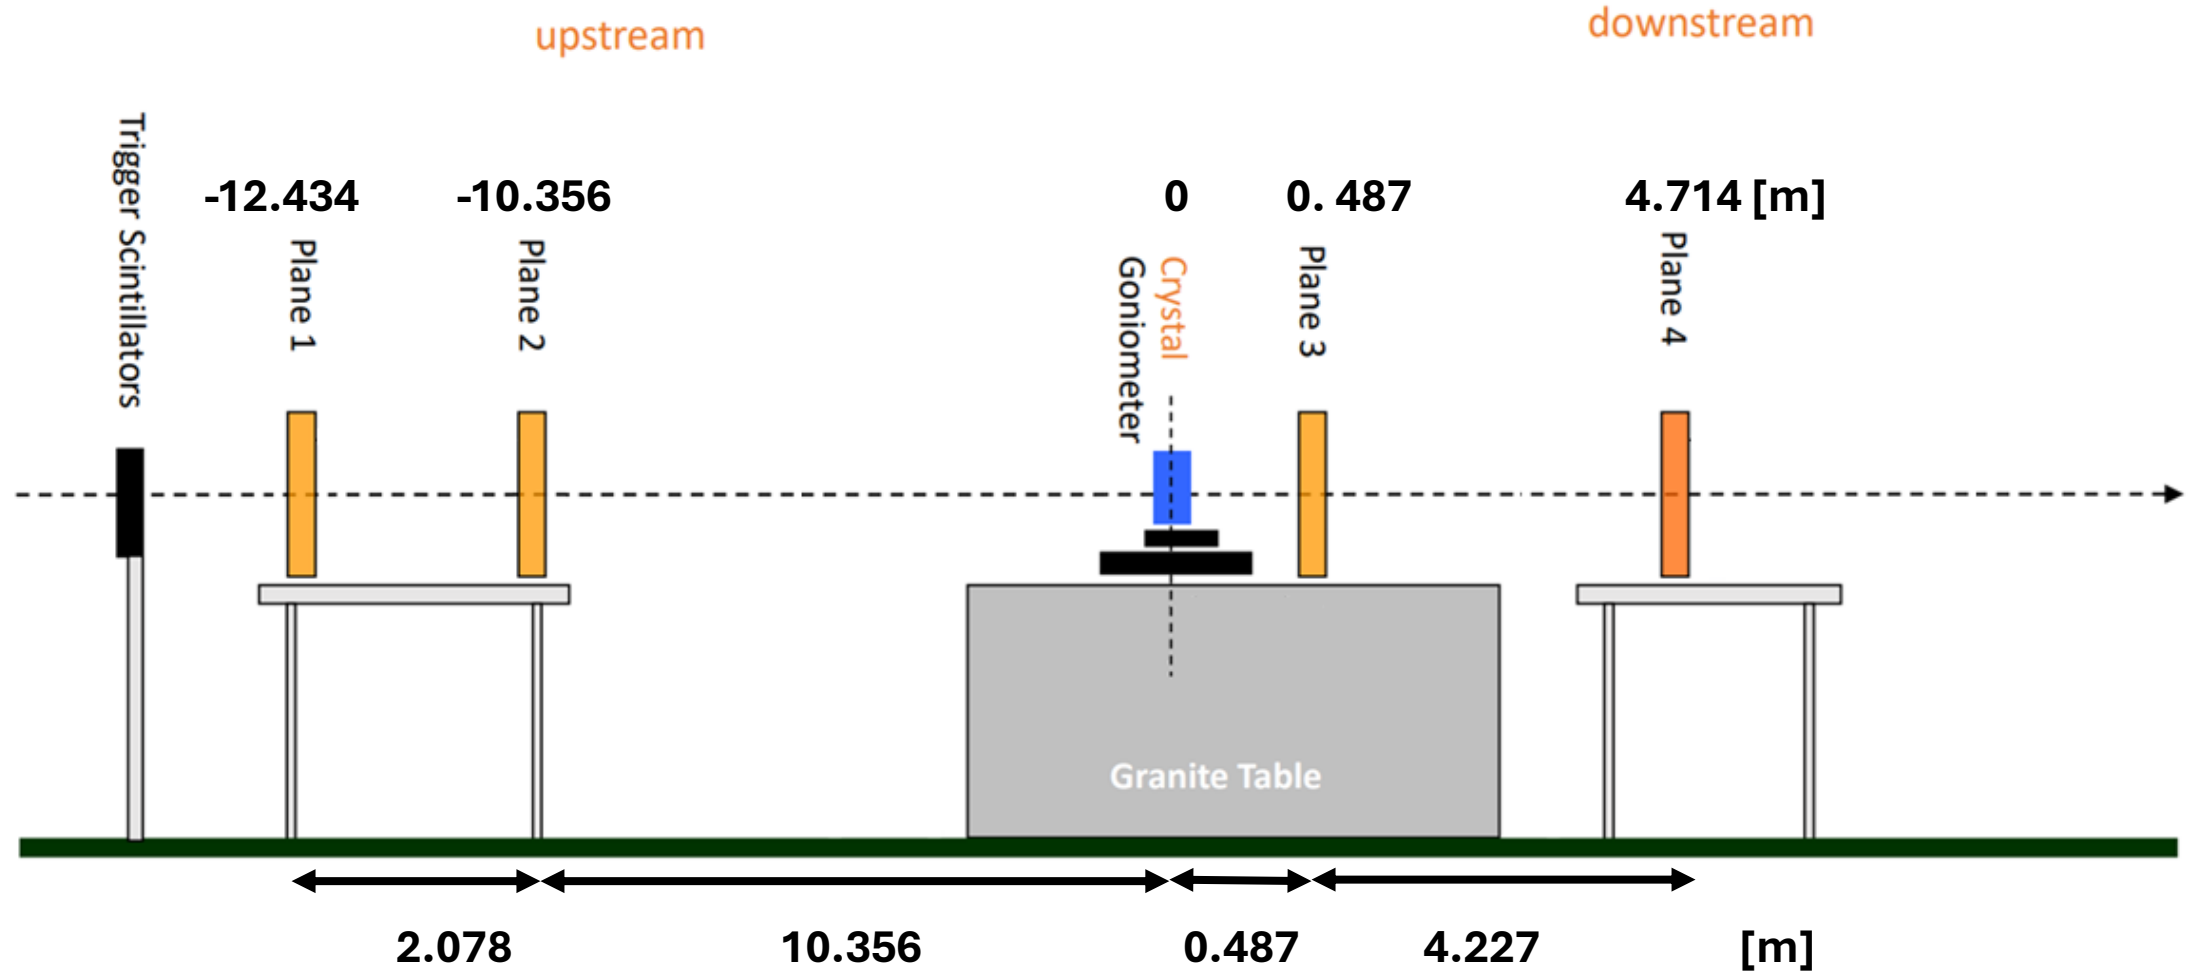



SCHEMATIC LAYOUT

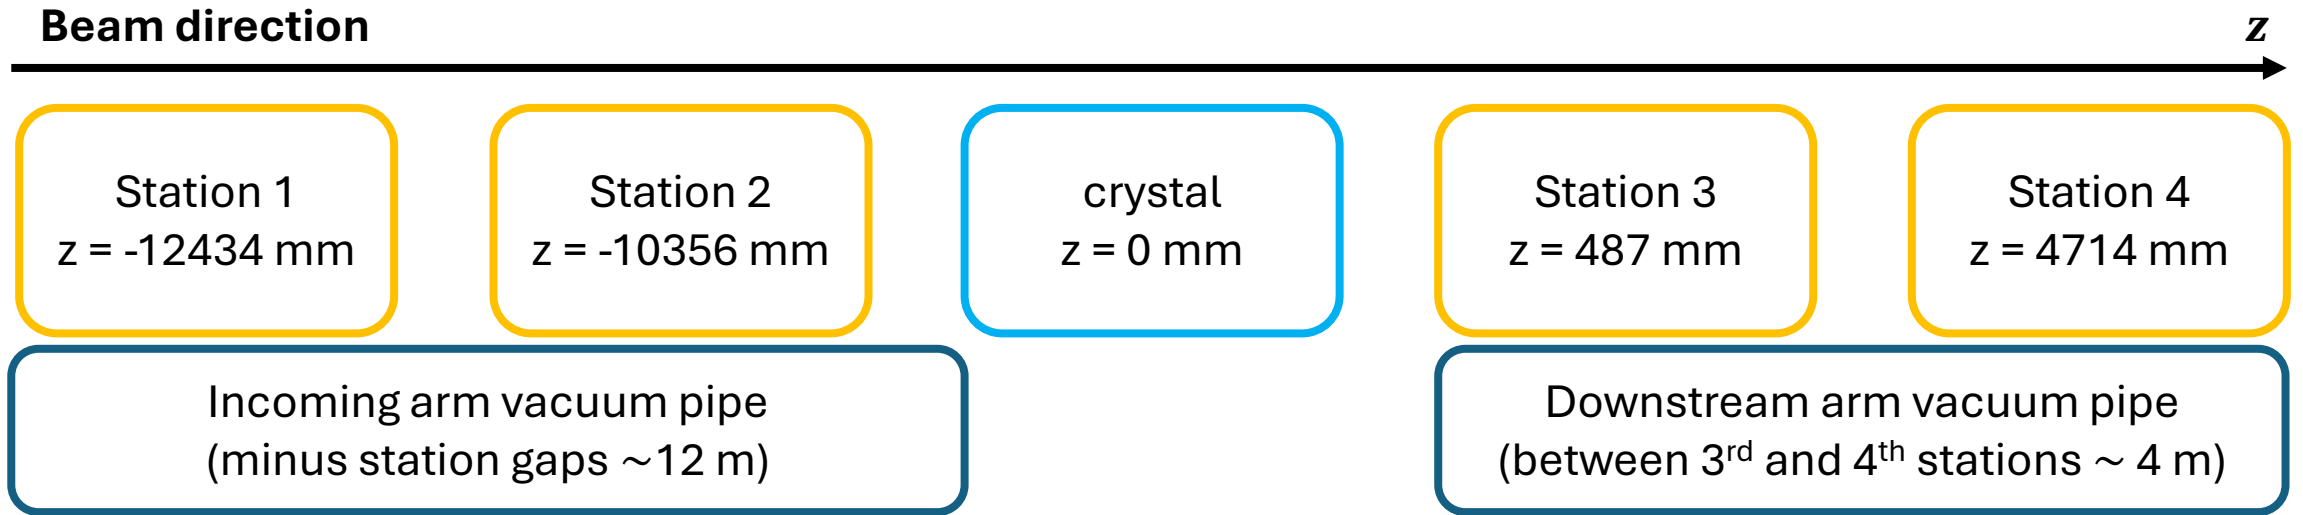

Each station:

Two orthogonal strip sensors, 38×38 mm² aperture, with ~ 7 μ m spatial resolution

SCHEMATIC LAYOUT

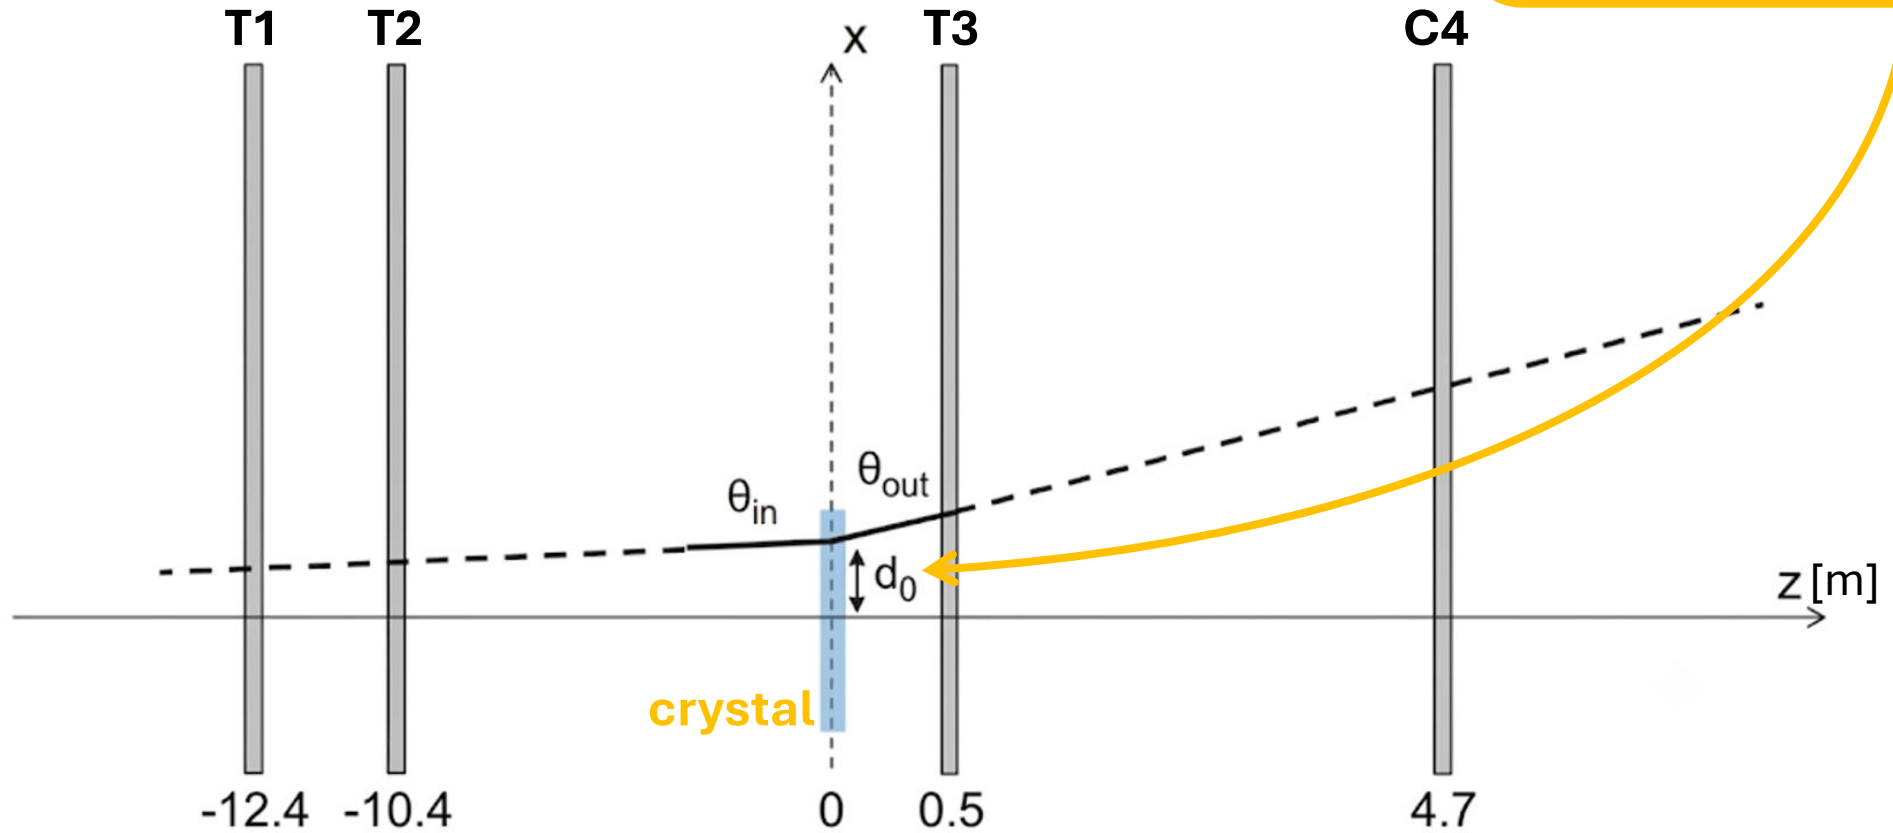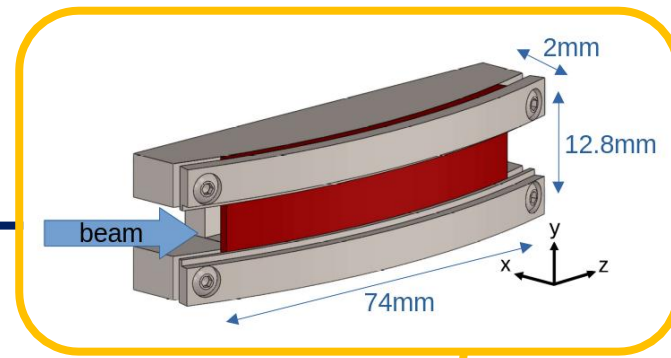

VACUUM PIPES

- Vacuum pipes segments fill the arm specifically to suppress MCS in air between stations, the tracker stations themselves sit in the short breaks where a pipe segment has been removed to house the plane
- In a standard UA9 5-plane layout, the longest pipe sections are between plane 1-2 and 4-5
- For large bending long crystals, only 4 planes are used, and the downstream is deliberately short

BEAM FEATURES

- H8 secondary beamline off the SPS, driven by 400 GeV protons.
- Beamline operates with a beryllium target, and a spectrometer selection 180 GeV hadrons (mixed 30% π^+ and 70% p)
- Beam divergence: order tens of μ rad

TRACKERS FEATURES

- 4 silicon detectors, 2 upstream and 2 downstream used to track
- Each station: two silicon microstrip sensors (each measures position in one dimension)
- Each sensor:
 - Active length 98 mm
 - 639 strips on a 60 μm pitch
 - 38 x 38 mm^2 aperture
 - $\sim 7 \mu\text{m}$ resolution
 - Nominal thickness $320 \pm 20 \mu\text{m}$
 - Measured thickness $328 \pm 2 \mu\text{m}$