




Lightest full-fidelity feasible design per gas, u_res_max = 1.0 m/s — impact transient

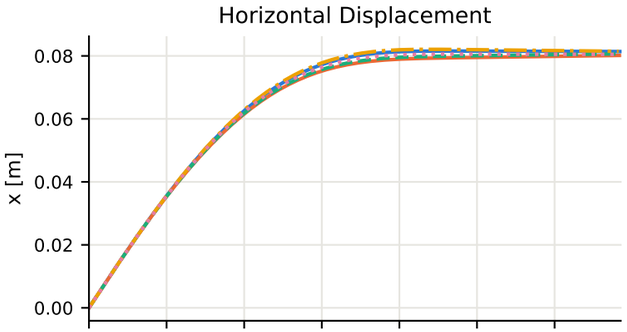


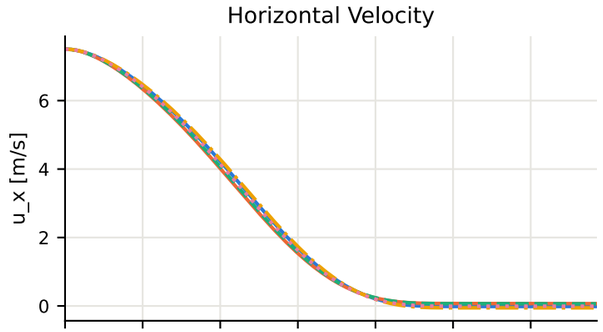


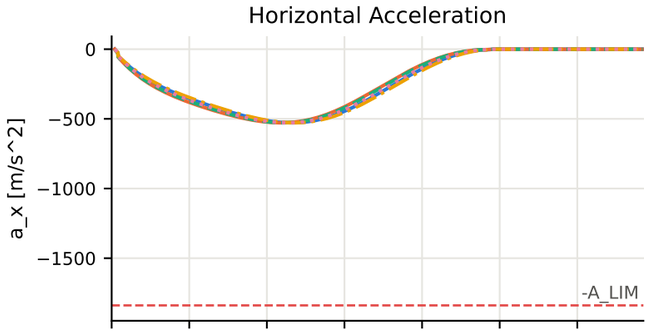


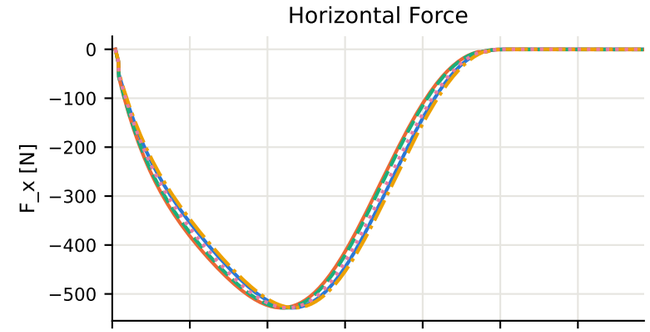


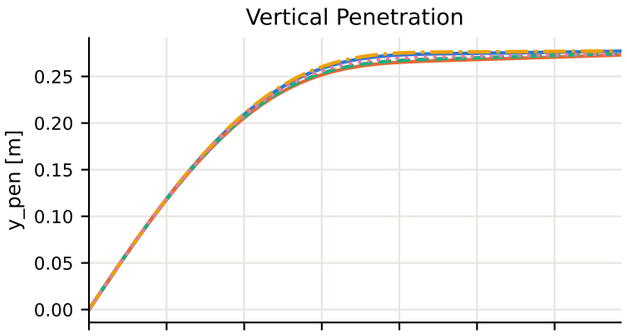


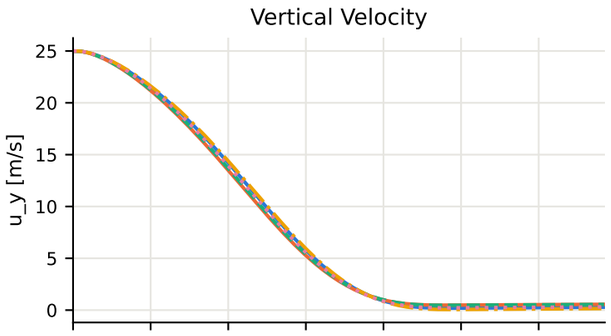


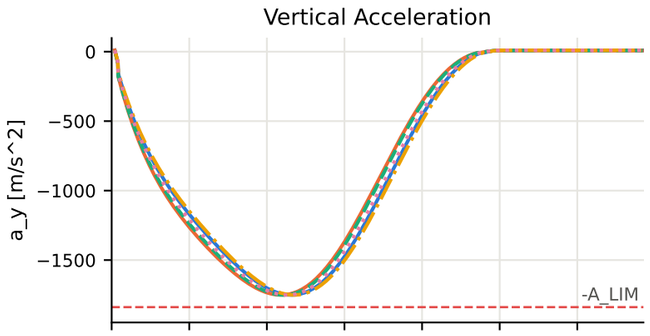


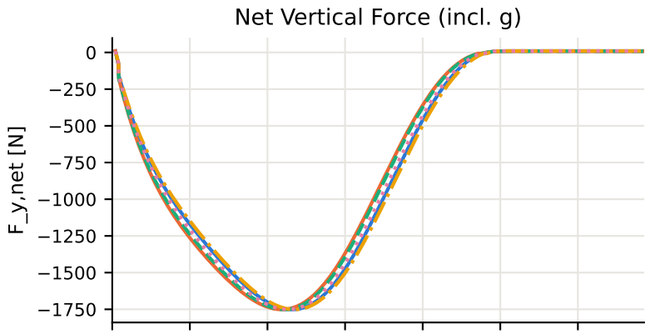

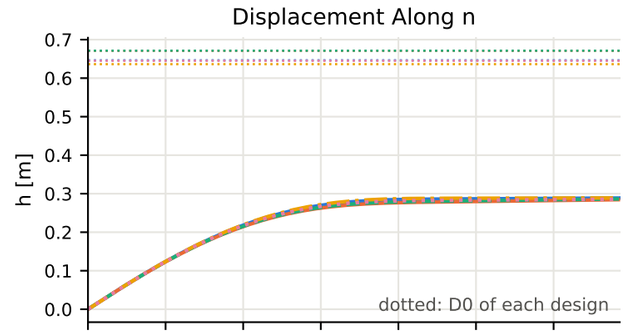

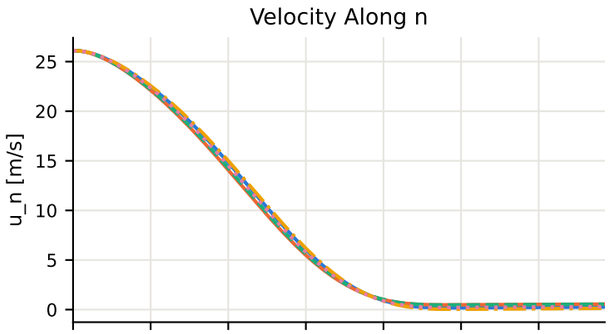

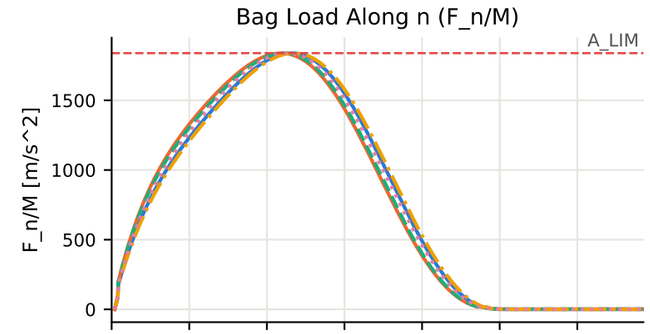

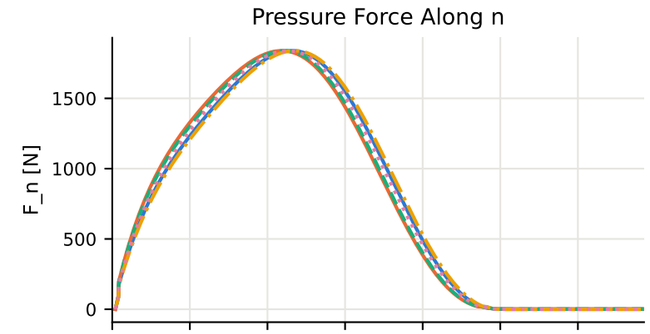

N2: cylinder / Nylon, m = 0.404 kg
He: cylinder / Nylon, m = 0.282 kg
Ar: cylinder / Nylon, m = 0.530 kg
CO2: cylinder / Nylon, m = 0.479 kg
dry air: cylinder / Nylon, m = 0.410 kg