ASP-130131-02

REVISION

0 BR P TOTMAN 1/9/2007 ECN-69823 ISSUE FOR REVIEW


P MASON A BR 2/5/2007 ECN-71049 RELEASE FOR PRODUCTION


ACCEPTANCE OF DRAWING ACCEPTED WITH DEVIATIONS LISTED


ITEM NO.


NOTES:


- 1. FILL TO A POST OF .134[3.40].
- 2. SHEAR TAILS TO .114[2.90]. 3. © REPRESENTS A CRITICAL DIMENSION.
- 4. MAXIMUM CUT FLASH: .010[.25].
- 5. MINIMUM PUSHOUT FORCE: .5 LB.
- 6. PARTS TO BE PACKAGED IN TUBES.






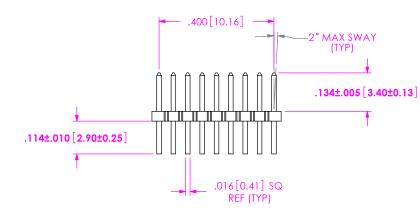





PACKAGING VIEW



UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES. TOLERANCES ARE: **ANGLES**

DECIMALS .XX: ±.01[.3] .XXX: ±.005[.13] .XXXX: ±.0020[.051]

PROPRIETARY NOTE THIS DOCUMENT CONTAINS INFORMATION CONFIDENTIAL AND PROPRIETARY TO
SAMTEC, INC. AND SHALL NOT BE REPRODUCED
OR TRANSFERRED TO OTHER DOCUMENTS OR DISCLOSED TO OTHERS OR USED FOR ANY PURPOSE OTHER THAN THAT WHICH IT WAS

OBTAINED WITHOUT THE EXPRESSED WRITTEN CONSENT OF SAMTEC, INC. SHEET SCALE: 3:1

DO NOT SCALE DRAWING

PLATING: ENTIRE PIN: .000200 REF TIN OVER .000050 NICKEL

520 PARK EAST BLVD, NEW ALBANY, IN 47150 * PHONE: 812.944.6733 FAX: 812.948.5047
e-Mail: INFO@SAMTEC.COM CODE: 5532

DESCRIPTION:

.050 X .050 C.L. PROFILE TERMINAL STRIP ASSEMBLY

DWG. NO.

ASP-130131-02

BY: B RAY 1/9/2007 SHEET 1 OF 1

1	FTS-50-DV	.18000	VECTRA E130i, COLOR: BLACK
2	T-1S15-04-T	18.000	PHOS BRONZE, 510 SPRING TEMPER
3	PT-1-24-01-43	.01900	ANTI STATIC PVC
4	TP-24	.03900	THERMOPLASTIC RUBBER

MATERIAL

PART NUMBER | QUANTITY

F:\DWG\SW\ASP\130000\ASP-130131-02.SLDDRW