


!!NOTE!!

- (1) The differential signals on both TX/RX should have equal length and be close to each other, if possible.
- (2) When MOD[2] is HIGH then W6100 operates with BUS mode. If LOW, W6100 operates in SPI mode.
- (3) Decoupling capacitors should be placed close to W6100.
- (4) To avoid the 100M overshoot, please place the 49.9 resistors and 0.1uF capacitor near the MDI pin of W6100.
- (5) RSET_BG is the most important analog pin and users should keep the noisy source away from this pin.
- (6) Option - Apply damping resistors for EMI reduction.
- (7) As close to transformer 2,7 pin as possible

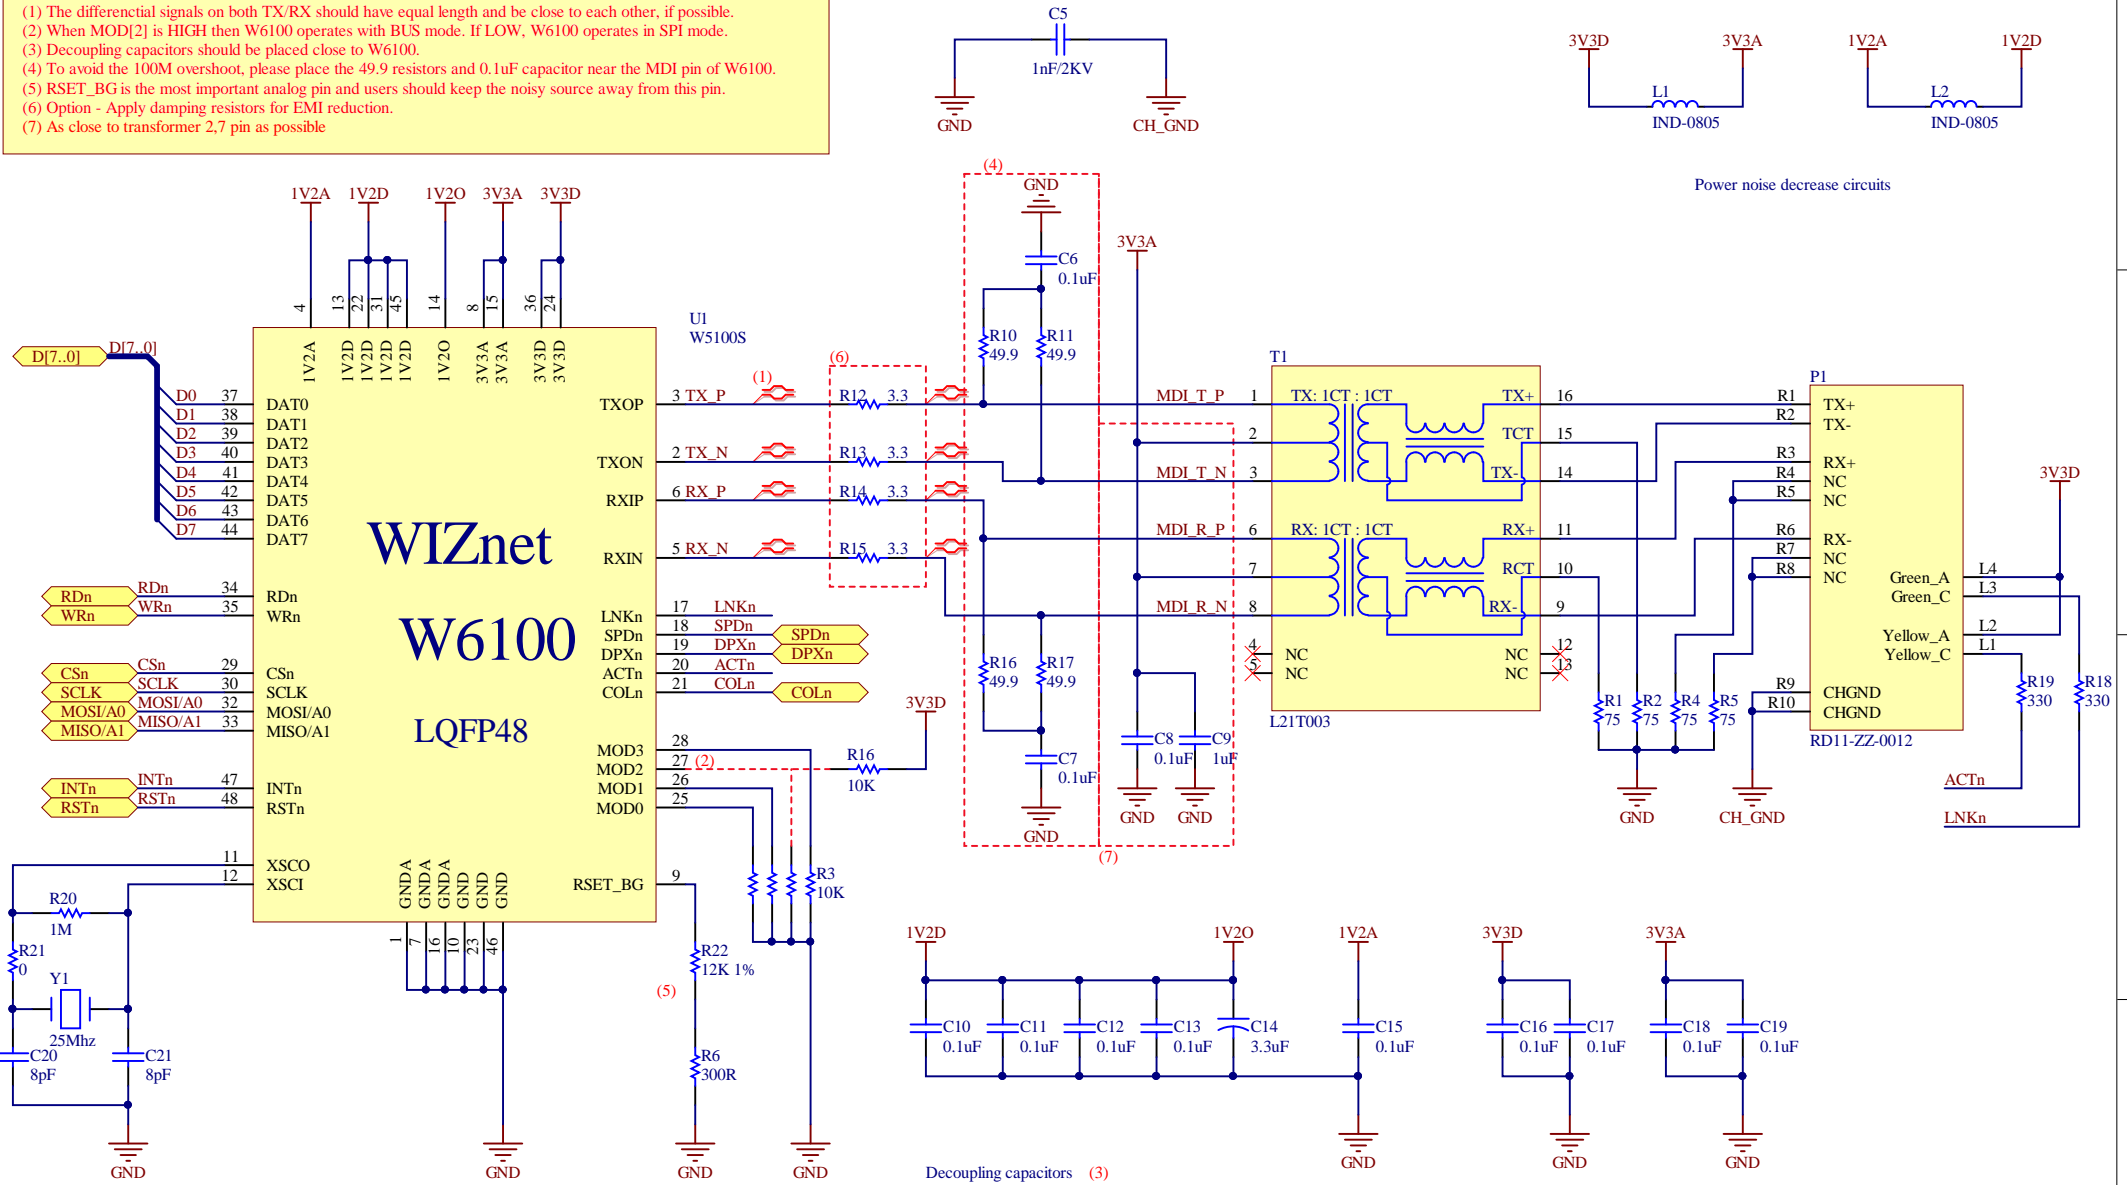

Title W6100 Reference Schematic			WIZnet Co., Ltd. 5F, Humax Village Hwangseaul-ro, Bundang-gu Seongnam-si, Gyeonggi-do South Korea	Cannot open file C:\Users\Public\Documents\Altium\AD14\Templates\IOP_IoT logo.png
Size: A4	Number:	Revision: R1		
Date: 2019-02-21		Sheet 1 of 1		
Team: CS		Drawn By: *		