
W7500 Reference Manual

Version 1.0.5



<http://www.wiznet.co.kr>

Table of Contents

1 Documentation conventions	27
1.1 Glossary	27
1.2 Register Bit Conventions	29
2 System and memory overview	30
2.1 System architecture	30
2.2 Memory organization	31
2.2.1 Introduction	31
2.2.2 Memory map	32
3 System configuration controller (SYSCFG).....	33
3.1 Introduction	33
3.2 Registers (Base address : 0x4001_F000).....	33
3.2.1 REMAP register	33
3.2.2 RESETOP register	33
3.2.3 RSTINFO register	34
4 Interrupt and events	34
4.1 Introduction	34
4.2 Interrupt assignments	35
4.3 Event	36
5 Power supply	36
5.1 Introduction	36
5.2 Voltage regulator	36
5.3 Power supply supervisor	36
5.4 Low-power modes	37
5.4.1 Sleep mode	37
5.4.2 Peripheral clock gating	37
6 System tick timer	38
6.1 Introduction	38
6.2 Features	38
6.3 Functional description	38
6.4 Registers (Base : 0xE000_E000).....	39
6.4.1 System Timer control and status register (SYST_CSR)	39
6.4.2 SysTick Reload Value Register (SYST_RVR)	39
6.4.3 SysTick Current Value Register (SYST_CVR)	40
6.4.4 SysTick Calibration Value Register (SYST_CALIB)	40
7 TCPIPCore Offload Engine (TOE)	41
7.1 Introduction	41
7.2 Features	41

7.3	Functional description	41
7.4	TOE Memory map.....	42
7.4.1	Common register map	44
7.4.2	Socket register map.....	44
7.4.3	Memory	45
7.5	Common register (Base : 0x4600_0000).....	46
7.5.1	VERSIONR (TOE Version Register)	46
7.5.2	TCKCNTR (Ticker Counter Register).....	47
7.5.3	IR (Interrupt Register)	47
7.5.4	IMR (Interrupt Mask Register)	48
7.5.5	IRCR (Interrupt Clear Register).....	49
7.5.6	SIR (Socket Interrupt Register).....	49
7.5.7	SIMR (Socket Interrupt Mask Register)	50
7.5.8	MD (Mode Register).....	50
7.5.9	PTIMER (PPP Link Control Protocol Request Timer Register).....	51
7.5.10	PMAGICR (PPP Link Control Protocol Magic number Register)	52
7.5.11	PHAR (Destination Hardware Address Register in PPPoE)	52
7.5.12	PSIDR (Session ID Register in PPPoE)	53
7.5.13	PMRUR (Maximum Receive Unit Register in PPPoE).....	53
7.5.14	SHAR (Source Hardware Address Register)	54
7.5.15	GAR (Gateway Address)	54
7.5.16	SUBR (Subnet Mask Register)	55
7.5.17	SIPR (Source IP address Register)	55
7.5.18	NCONFLR (Network Configuration Lock Register)	56
7.5.19	RTR (Retry Time Register).....	57
7.5.20	RCR (Retry Counter Register).....	57
7.5.21	UIPR (Unreachable IP address Register)	59
7.5.22	UPORTR (Unreachable Port Register)	59
7.6	Socket register (Base : 0x4601_0000 + 0x0004_000 x n)[n=0,...7, where n is socket number]	60
7.6.1	Sn_MR (Socket n Mode Register)	60
7.6.2	Sn_CR (Socket n Command Register).....	62
7.6.3	Sn_IR (Socket n Interrupt Register)	65
7.6.4	Sn_IMR (Socket n Interrupt Mask Register).....	65
7.6.5	Sn_ICR (Socket n Interrupt Clear Register)	66
7.6.6	Sn_SR (Socket n Status Register)	66
7.6.7	Sn_PNR (Socket n Protocol Number Register)	69
7.6.8	Sn_TOSR (Socket n IP Type of Service Register)	69
7.6.9	Sn_TTLR (Socket n TTL Register)	70

7.6.10	Sn_FRAGR (Socket n Fragment offset Register)	70
7.6.11	Sn_MSSR (Socket n Maximum Segment Register).....	71
7.6.12	Sn_PORTR (Socket n Source Port Register).....	71
7.6.13	Sn_DHAR (Socket n Destination Hardware address Register)	72
7.6.14	Sn_DPORTR (Socket n Destination Port Number Register).....	73
7.6.15	Sn_DIPR (Socket n Destination IP address Register)	73
7.6.16	Sn_KATMR (Socket n Keep Alive Timer Register)	74
7.6.17	Sn_RTR (Socket n Retry Time Register)	75
7.6.18	Sn_RCR (Socket n Retry Counter Register)	75
7.6.19	Sn_TXBUF_SIZE (Socket n TX Buffer Size Register)	76
7.6.20	Sn_TX_FSR (Socket n TX Free Size Register).....	77
7.6.21	Sn_TX_RD (Socket n TX Read Pointer Register)	78
7.6.22	Sn_TX_WR (Socket n TX Write Pointer Register)	78
7.6.23	Sn_RXBUF_SIZE (Socket n RX Buffer Size Register)	79
7.6.24	Sn_RX_RSR (Socket n RX Received Size Register)	80
7.6.25	Sn_RX_RD (Socket n RX Read Pointer Register)	80
7.6.26	Sn_RX_WR (Socket n RX Write Pointer Register)	81
8	Booting Sequence	82
9	Embedded Flash memory.....	83
9.1	Flash main features.....	83
9.2	Flash memory functional description.....	83
9.2.1	Flash memory organization	83
9.2.2	Read operations.....	85
9.2.3	Flash erase operations.....	86
9.2.4	Flash program operation	88
9.3	Memory protection.....	89
9.3.1	Read protection.....	89
9.3.2	Write protection	89
10	Clock Reset generator (CRG).....	89
10.1	Introduction	89
10.2	Features	90
10.2.1	Reset.....	90
10.2.2	Clock	90
10.3	Functional description	91
10.3.1	External Oscillator Clock.....	91
10.3.2	RC oscillator clock.....	92
10.3.3	PLL	92
10.3.4	Generated clock	92
10.4	Registers (Base address : 0x4100_1000).....	93

10.4.1	OSC power down register (OSC_PDR)	93
10.4.2	PLL power down register (PLL_PDR)	93
10.4.3	PLL frequency calculating register (PLL_FCR).....	93
10.4.4	PLL output enable register (PLL_OER)	94
10.4.5	PLL bypass register (PLL_BPR)	94
10.4.6	PLL input clock source select register (PLL_IFSR)	95
10.4.7	FCLK source select register (FCLK_SSR)	95
10.4.8	FCLK prescale value select register (FCLK_PVSR)	96
10.4.9	SSPCLK source select register (SSPCLK_SSR)	96
10.4.10	SSPCLK prescale value select register (SSPCLK_PVSR).....	97
10.4.11	ADCCLK source select register (ADCCLK_SSR)	97
10.4.12	ADCCLK prescale value select register (ADCCLK_PVSR)	98
10.4.13	TIMER0CLK source select register (TIMER0CLK_SSR)	98
10.4.14	TIMER0CLK prescale value select register (TIMER0CLK_PVSR)	98
10.4.15	TIMER1CLK source select register (TIMER1CLK_SSR)	99
10.4.16	TIMER1CLK prescale value select register (TIMER1CLK_PVSR)	99
10.4.17	PWM0CLK source select register (PWM0CLK_SSR)	100
10.4.18	PWM0CLK prescale value select register (PWM0CLK_PVSR).....	101
10.4.19	PWM1CLK source select register (PWM1CLK_SSR)	101
10.4.20	PWM1CLK prescale value select register (PWM1CLK_PVSR).....	102
10.4.21	PWM2CLK source select register (PWM2CLK_SSR)	102
10.4.22	PWM2CLK prescale value select register (PWM2CLK_PVSR).....	103
10.4.23	PWM3CLK source select register (PWM3CLK_SSR)	103
10.4.24	PWM3CLK prescale value select register (PWM3CLK_PVSR).....	104
10.4.25	PWM4CLK source select register (PWM4CLK_SSR)	104
10.4.26	PWM4CLK prescale value select register (PWM4CLK_PVSR).....	105
10.4.27	PWM5CLK source select register (PWM5CLK_SSR)	105
10.4.28	PWM5CLK prescale value select register (PWM5CLK_PVSR).....	106
10.4.29	PWM6CLK source select register (PWM6CLK_SSR)	106
10.4.30	PWM6CLK prescale value select register (PWM6CLK_PVSR).....	107
10.4.31	PWM7CLK source select register (PWM7CLK_SSR)	107
10.4.32	PWM7CLK prescale value select register (PWM7CLK_PVSR).....	108
10.4.33	WDOGCLK High Speed source select register (WDOGCLK_HS_SSR)	108
10.4.34	WDOGCLK High Speed prescale value select register (WDOGCLK_HS_PVSR)	
	109	
10.4.35	UARTCLK source select register (UARTCLK_SSR)	109
10.4.36	UARTCLK prescale value select register (UARTCLK_PVSR)	110
10.4.37	MIICLK enable control register (MIICLK_ECR).....	110
10.4.38	Monitoring Clock source select register (MONCLK_SSR)	111

10.5	Register map	113
11	Random number generator (RNG)	115
11.1	Introduction	115
11.2	Features	115
11.3	Functional description	115
11.3.1	Operation RNG	116
11.4	Registers (Base address : 0x4000_7000).....	117
11.4.1	RNG run register (RNG_RUN)	117
11.4.2	RNG SEED register (RNG_SEED)	117
11.4.3	RNG clock select register (RNG_CLKSEL).....	117
11.4.4	RNG manual mode select register (RNG_MODE)	118
11.4.5	RNG random number value register (RNG_RN).....	118
11.4.6	RNG polynomial register (RNG_POLY)	119
11.5	Register map	120
12	Alternate Function Controller (AFC).....	121
12.1	Introduction	121
12.2	Features	121
12.3	Functional description	121
12.4	Registers (Base address : 0x4100_2000).....	123
12.4.1	PA_00 pad alternate function select register (PA_00_AFR)	123
12.4.2	PA_01 pad alternate function select register (PA_01_AFR)	123
12.4.3	PA_02 pad alternate function select register (PA_02_AFR)	124
12.4.4	PA_03 pad alternate function select register (PA_03_AFR)	124
12.4.5	PA_04 pad alternate function select register (PA_04_AFR)	125
12.4.6	PA_05 pad alternate function select register (PA_05_AFR)	125
12.4.7	PA_06 pad alternate function select register (PA_06_AFR)	126
12.4.8	PA_07 pad alternate function select register (PA_07_AFR)	126
12.4.9	PA_08 pad alternate function select register (PA_08_AFR)	127
12.4.10	PA_09 pad alternate function select register (PA_09_AFR)	127
12.4.11	PA_10 pad alternate function select register (PA_10_AFR)	128
12.4.12	PA_11 pad alternate function select register (PA_11_AFR)	128
12.4.13	PA_12 pad alternate function select register (PA_12_AFR)	129
12.4.14	PA_13 pad alternate function select register (PA_13_AFR)	129
12.4.15	PA_14 pad alternate function select register (PA_14_AFR)	130
12.4.16	PA_15 pad alternate function select register (PA_15_AFR)	130
12.4.17	PB_00 pad alternate function select register (PB_00_AFR)	131
12.4.18	PB_01 pad alternate function select register (PB_01_AFR)	131
12.4.19	PB_02 pad alternate function select register (PB_02_AFR)	132
12.4.20	PB_03 pad alternate function select register (PB_03_AFR)	132

12.4.21	PB_04 pad alternate function select register (PB_04_AFR)	133
12.4.22	PB_05 pad alternate function select register (PB_05_AFR)	133
12.4.23	PB_06 pad alternate function select register (PB_06_AFR)	134
12.4.24	PB_07 pad alternate function select register (PB_07_AFR)	134
12.4.25	PB_08 pad alternate function select register (PB_08_AFR)	135
12.4.26	PB_09 pad alternate function select register (PB_09_AFR)	135
12.4.27	PB_10 pad alternate function select register (PB_10_AFR)	136
12.4.28	PB_11 pad alternate function select register (PB_11_AFR)	136
12.4.29	PB_12 pad alternate function select register (PB_12_AFR)	137
12.4.30	PB_13 pad alternate function select register (PB_13_AFR)	137
12.4.31	PB_14 pad alternate function select register (PB_14_AFR)	138
12.4.32	PB_15 pad alternate function select register (PB_15_AFR)	138
12.4.33	PC_00 pad alternate function select register (PC_00_AFR).....	139
12.4.34	PC_01 pad alternate function select register (PC_01_AFR).....	139
12.4.35	PC_02 pad alternate function select register (PC_02_AFR).....	140
12.4.36	PC_03 pad alternate function select register (PC_03_AFR).....	140
12.4.37	PC_04 pad alternate function select register (PC_04_AFR).....	141
12.4.38	PC_05 pad alternate function select register (PC_05_AFR).....	141
12.4.39	PC_06 pad alternate function select register (PC_06_AFR).....	142
12.4.40	PC_07 pad alternate function select register (PC_07_AFR).....	142
12.4.41	PC_08 pad alternate function select register (PC_08_AFR).....	143
12.4.42	PC_09 pad alternate function select register (PC_09_AFR).....	143
12.4.43	PC_10 pad alternate function select register (PC_10_AFR).....	144
12.4.44	PC_11 pad alternate function select register (PC_11_AFR).....	144
12.4.45	PC_12 pad alternate function select register (PC_12_AFR).....	145
12.4.46	PC_13 pad alternate function select register (PC_13_AFR).....	145
12.4.47	PC_14 pad alternate function select register (PC_14_AFR).....	146
12.4.48	PC_15 pad alternate function select register (PC_15_AFR).....	146
12.4.49	PD_00 pad alternate function select register (PD_00_AFR).....	147
12.4.50	PD_01 pad alternate function select register (PD_01_AFR).....	147
12.4.51	PD_02 pad alternate function select register (PD_02_AFR).....	148
12.4.52	PD_03 pad alternate function select register (PD_03_AFR).....	148
12.4.53	PD_04 pad alternate function select register (PD_04_AFR).....	149
12.5	Register map	150
13	External Interrupt (EXTI)	153
13.1	Introduction	153
13.2	Features	153
13.3	Functional description	153
13.4	Registers (Base address : 0x4100_2000).....	155

13.4.1	PA_00 external interrupt enable register (PA_00_EXTINT)	155
13.4.2	PA_01 external interrupt enable register (PA_01_EXTINT)	155
13.4.3	PA_02 external interrupt enable register (PA_02_EXTINT)	156
13.4.4	PA_03 external interrupt enable register (PA_03_EXTINT)	156
13.4.5	PA_04 external interrupt enable register (PA_04_EXTINT)	157
13.4.6	PA_05 external interrupt enable register (PA_05_EXTINT)	157
13.4.7	PA_06 external interrupt enable register (PA_06_EXTINT)	158
13.4.8	PA_07 external interrupt enable register (PA_07_EXTINT)	158
13.4.9	PA_08 external interrupt enable register (PA_08_EXTINT)	159
13.4.10	PA_09 external interrupt enable register (PA_09_EXTINT)	159
13.4.11	PA_10 external interrupt enable register (PA_10_EXTINT)	160
13.4.12	PA_11 external interrupt enable register (PA_11_EXTINT)	160
13.4.13	PA_12 external interrupt enable register (PA_12_EXTINT)	161
13.4.14	PA_13 external interrupt enable register (PA_13_EXTINT)	162
13.4.15	PA_14 external interrupt enable register (PA_14_EXTINT)	162
13.4.16	PA_15 external interrupt enable register (PA_15_EXTINT)	163
13.4.17	PB_00 external interrupt enable register (PB_00_EXTINT)	163
13.4.18	PB_01 external interrupt enable register (PB_01_EXTINT)	164
13.4.19	PB_02 external interrupt enable register (PB_02_EXTINT)	164
13.4.20	PB_03 external interrupt enable register (PB_03_EXTINT)	165
13.4.21	PB_04 external interrupt enable register (PB_04_EXTINT)	165
13.4.22	PB_05 external interrupt enable register (PB_05_EXTINT)	166
13.4.23	PB_06 external interrupt enable register (PB_06_EXTINT)	166
13.4.24	PB_07 external interrupt enable register (PB_07_EXTINT)	167
13.4.25	PB_08 external interrupt enable register (PB_08_EXTINT)	167
13.4.26	PB_09 external interrupt enable register (PB_09_EXTINT)	168
13.4.27	PB_10 external interrupt enable register (PB_10_EXTINT)	169
13.4.28	PB_11 external interrupt enable register (PB_11_EXTINT)	169
13.4.29	PB_12 external interrupt enable register (PB_12_EXTINT)	170
13.4.30	PB_13 external interrupt enable register (PB_13_EXTINT)	170
13.4.31	PB_14 external interrupt enable register (PB_14_EXTINT)	171
13.4.32	PB_15 external interrupt enable register (PB_15_EXTINT)	171
13.4.33	PC_00 external interrupt enable register (PC_00_EXTINT)	172
13.4.34	PC_01 external interrupt enable register (PC_01_EXTINT)	172
13.4.35	PC_02 external interrupt enable register (PC_02_EXTINT)	173
13.4.36	PC_03 external interrupt enable register (PC_03_EXTINT)	173
13.4.37	PC_04 external interrupt enable register (PC_04_EXTINT)	174
13.4.38	PC_05 external interrupt enable register (PC_05_EXTINT)	175
13.4.39	PC_06 external interrupt enable register (PC_06_EXTINT)	175

13.4.40	PC_07 external interrupt enable register (PC_07_EXTINT)	176
13.4.41	PC_08 external interrupt enable register (PC_08_EXTINT)	176
13.4.42	PC_09 external interrupt enable register (PC_09_EXTINT)	177
13.4.43	PC_10 external interrupt enable register (PC_10_EXTINT)	177
13.4.44	PC_11 external interrupt enable register (PC_11_EXTINT)	178
13.4.45	PC_12 external interrupt enable register (PC_12_EXTINT)	178
13.4.46	PC_13 external interrupt enable register (PC_13_EXTINT)	179
13.4.47	PC_14 external interrupt enable register (PC_14_EXTINT)	179
13.4.48	PC_15 external interrupt enable register (PC_15_EXTINT)	180
13.4.49	PD_00 external interrupt enable register (PD_00_EXTINT)	181
13.4.50	PD_01 external interrupt enable register (PD_01_EXTINT)	181
13.4.51	PD_02 external interrupt enable register (PD_02_EXTINT)	182
13.4.52	PD_03 external interrupt enable register (PD_03_EXTINT)	182
13.4.53	PD_04 external interrupt enable register (PD_04_EXTINT)	183
13.5	Register map	184
14	Pad Controller (PADCON)	187
14.1	Introduction	187
14.2	Features	187
14.3	Functional description	187
14.4	Registers (Base address : 0x4100_3000).....	188
14.4.1	PA_00 pad control register	188
14.4.2	PA_01 pad control register	189
14.4.3	PA_02 pad control register	190
14.4.4	PA_03 pad control register	190
14.4.5	PA_04 pad control register	191
14.4.6	PA_05 pad control register	192
14.4.7	PA_06 pad control register	192
14.4.8	PA_07 pad control register	193
14.4.9	PA_08 pad control register	194
14.4.10	PA_09 pad control register	194
14.4.11	PA_10 pad control register	195
14.4.12	PA_11 pad control register	196
14.4.13	PA_12 pad control register	197
14.4.14	PA_13 pad control register	197
14.4.15	PA_14 pad control register	198
14.4.16	PA_15 pad control register	199
14.4.17	PB_00 pad control register	199
14.4.18	PB_01 pad control register	200
14.4.19	PB_02 pad control register	201

14.4.20	PB_03 pad control register.....	201
14.4.21	PB_04 pad control register.....	202
14.4.22	PB_05 pad control register.....	203
14.4.23	PB_06 pad control register.....	203
14.4.24	PB_07 pad control register.....	204
14.4.25	PB_08 pad control register.....	205
14.4.26	PB_09 pad control register.....	206
14.4.27	PB_10 pad control register.....	206
14.4.28	PB_11 pad control register.....	207
14.4.29	PB_12 pad control register.....	208
14.4.30	PB_13 pad control register.....	208
14.4.31	PB_14 pad control register.....	209
14.4.32	PB_15 pad control register.....	210
14.4.33	PC_00 pad control register	210
14.4.34	PC_01 pad control register	211
14.4.35	PC_02 pad control register	212
14.4.36	PC_03 pad control register	212
14.4.37	PC_04 pad control register	213
14.4.38	PC_05 pad control register	214
14.4.39	PC_06 pad control register	214
14.4.40	PC_07 pad control register	215
14.4.41	PC_08 pad control register	216
14.4.42	PC_09 pad control register	217
14.4.43	PC_10 pad control register	217
14.4.44	PC_11 pad control register	218
14.4.45	PC_12 pad control register	219
14.4.46	PC_13 pad control register	219
14.4.47	PC_14 pad control register	220
14.4.48	PC_15 pad control register	221
14.4.49	PD_00 pad control register	221
14.4.50	PD_01 pad control register	222
14.4.51	PD_02 pad control register	223
14.4.52	PD_03 pad control register	223
14.4.53	PD_04 pad control register	224
14.5	Register map	226
15	General-purpose I/Os(GPIO)	230
15.1	Introduction	230
15.2	Features	230
15.3	Functional description	230

15.3.1	Masked access.....	231
15.4	GPIOA Registers(Address Base: 0x4200_0000).....	233
15.4.1	GPIOA Data Register(GPIOA_DATA)	233
15.4.2	GPIOA Output Latch Register(GPIOA_DATAOUT)	233
15.4.3	GPIOA Enable Set Register(GPIOA_OUTENSET)	233
15.4.4	GPIOA Enable Clear Register(GPIOA_OUTENCLR)	234
15.4.5	GPIOA Interrupt Enable Set Register(GPIOA_INTENSET)	234
15.4.6	GPIOA Interrupt Enable Clear Register(GPIOA_INTENCLR)	235
15.4.7	GPIOA Interrupt Type Set Register(GPIOA_INTTYPESET)	235
15.4.8	GPIOA Interrupt Type Clear Register(GPIOA_INTTYPECLR)	236
15.4.9	GPIOA Interrupt Polarity Set Register(GPIOA_INTPOLSET)	236
15.4.10	GPIOA Interrupt Polarity Clear Register(GPIOA_INTPOLCLR).....	237
15.4.11	GPIOA Interrupt Status/Interrupt Clear Register(GPIOA_INTSTATUS/INTCLEAR)	238
15.4.12	GPIOA Lower Byte Masked Access Register(GPIOA_LB_MASKED)	238
15.4.13	GPIOA Upper Byte Masked Access Register(GPIOA_UB_MASKED)	239
15.5	Register map	240
15.6	GPIOB Registers(Address Base: 0x4300_0000).....	241
15.6.1	GPIOB Data Register(GPIOB_DATA)	241
15.6.2	GPIOB Output Latch Register(GPIOB_DATAOUT)	241
15.6.3	GPIOB Enable Set Register(GPIOB_OUTENSET)	241
15.6.4	GPIOB Enable Clear Register(GPIOB_OUTENCLR)	242
15.6.5	GPIOB Interrupt Enable Set Register(GPIOB_INTENSET)	242
15.6.6	GPIOB Interrupt Enable Clear Register(GPIOB_INTENCLR)	243
15.6.7	GPIOB Interrupt Type Set Register(GPIOB_INTTYPESET)	243
15.6.8	GPIOB Interrupt Type Clear Register(GPIOB_INTTYPECLR)	244
15.6.9	GPIOB Interrupt Polarity Set Register(GPIOB_INTPOLSET)	244
15.6.10	GPIOB Interrupt Polarity Clear Register(GPIOB_INTPOLCLR).....	245
15.6.11	GPIOB Interrupt Status/Interrupt Clear Register(GPIOB_INTSTATUS/INTCLEAR)	246
15.6.12	GPIOB Lower Byte Masked Access Register(GPIOB_LB_MASKED)	246
15.6.13	GPIOB Upper Byte Masked Access Register(GPIOB_UB_MASKED)	246
15.7	Register map	248
15.8	GPIOC Registers(Address Base: 0x4400_0000).....	249
15.8.1	GPIOC Data Register(GPIOC_DATA)	249
15.8.2	GPIOC Output Latch Register(GPIOC_DATAOUT)	249
15.8.3	GPIOC Enable Set Register(GPIOC_OUTENSET).....	249
15.8.4	GPIOC Enable Clear Register(GPIOC_OUTENCLR)	250
15.8.5	GPIOC Interrupt Enable Set Register(GPIOC_INTENSET)	250

15.8.6	GPIOC Interrupt Enable Clear Register(GPIOC_ INTENCLR)	251
15.8.7	GPIOC Interrupt Type Set Register(GPIOC_ INTTYPESET).....	251
15.8.8	GPIOC Interrupt Type Clear Register(GPIOC_ INTTYPECLR)	252
15.8.9	GPIOC Interrupt Polarity Set Register(GPIOC_ INTPOLSET)	252
15.8.10	GPIOC Interrupt Polarity Clear Register(GPIOC_ INTPOLCLR)	253
15.8.11	GPIOC Interrupt Status/Interrupt Clear Register(GPIOC_ INTSTATUS/INTCLEAR)	254
15.8.12	GPIOC Lower Byte Masked Access Register(GPIOC_ LB_MASKED)	254
15.8.13	GPIOC Upper Byte Masked Access Register(GPIOC_ UB_MASKED)	255
15.9	Register map	256
15.10	GPIOD Registers(Address Base: 0x4500_0000)	257
15.10.1	GPIOD Data Register(GPIOD_DATA)	257
15.10.2	GPIOD Output Latch Register(GPIOD_DATAOUT)	257
15.10.3	GPIOD Enable Set Register(GPIOD_OUTENSET).....	257
15.10.4	GPIOD Enable Clear Register(GPIOD_OUTENCLR).....	258
15.10.5	GPIOD Interrupt Enable Set Register(GPIOD_ INTENSET)	258
15.10.6	GPIOD Interrupt Enable Clear Register(GPIOD_ INTENCLR)	259
15.10.7	GPIOD Interrupt Type Set Register(GPIOD_ INTTYPESET).....	259
15.10.8	GPIOD Interrupt Type Clear Register(GPIOD_ INTTYPECLR)	260
15.10.9	GPIOD Interrupt Polarity Set Register(GPIOD_ INTPOLSET)	260
15.10.10	GPIOD Interrupt Polarity Clear Register(GPIOD_ INTPOLCLR)	261
15.10.11	GPIOD Interrupt Status/Interrupt Clear Register(GPIOD_ INTSTATUS/INTCLEAR)	262
15.10.12	GPIOD Lower Byte Masked Access Register(GPIOD_ LB_MASKED)	262
15.10.13	GPIOD Upper Byte Masked Access Register(GPIOD_ UB_MASKED)	263
15.11	Register map	264
16	Direct memory access controller (DMA).....	265
16.1	Introduction	265
16.2	Features	265
16.3	Functional description	265
16.3.1	DMA request mapping.....	266
16.3.2	DMA arbitration	266
16.3.3	DMA cycle types.....	267
16.4	Registers (Base address : 0x4100_4000).....	271
16.4.1	DMA status register (DMA_STATUS)	271
16.4.2	DMA configuration register (DMA_CFG)	271
16.4.3	DMA control data base pointer register (DMA_CTRL_BASE_PTR)	272
16.4.4	DMA channel alternate control data base pointer register (DMA_ALT_CTRL_BASE_PTR)	272

16.4.5	DMA channel wait on request status register (DMA_WAITONREQ_STATUS)	273
16.4.6	DMA channel software request register (DMA_CHNL_SW_REQUEST)	273
16.4.7	DMA channel useburst set register (DMA_CHNL_USEBURST_SET)	274
16.4.8	DMA channel useburst clear register (DMA_CHNL_USEBURST_CLR)	275
16.4.9	DMA channel request mask set register (DMA_CHNL_REQ_MASK_SET) ...	275
16.4.10	DMA channel request mask clear register (DMA_CHNL_REQ_MASK_CLR)	276
16.4.11	DMA channel enable set register (DMA_CHNL_ENABLE_SET).....	276
16.4.12	DMA channel enable clear register (DMA_CHNL_ENABLE_CLR)	277
16.4.13	DMA channel primary-alternate set register (DMA_CHNL_PRI_ALT_SET)	277
16.4.14	DMA channel primary-alternate clear register (DMA_CHNL_PRI_ALT_CLR)	278
16.4.15	DMA channel priority set register (DMA_CHNL_PRIORITY_SET).....	279
16.4.16	DMA channel priority clear register (DMA_CHNL_PRIORITY_CLR)	279
16.4.17	DMA bus error clear register (DMA_ERR_CLR)	280
16.5	Register map	281
17	Analog-to-digital converter (ADC)	282
17.1	Introduction	282
17.2	Features	282
17.3	Functional description	283
17.3.1	Operation ADC with non-interrupt.....	283
17.3.2	Operation ADC with interrupt	285
17.4	Registers (Base address : 0x4100_0000).....	285
17.4.1	ADC control register (ADC_CTR)	285
17.4.2	ADC channel select register (ADC_CHSEL)	286
17.4.3	ADC start register (ADC_START).....	287
17.4.4	ADC conversion data register (ADC_DATA)	287
17.4.5	ADC Interrupt register (ADC_INT).....	287
17.4.6	ADC Interrupt Clear register (ADC_INTCLR)	288
17.5	Register map	289
18	Pulse-Width Modulation (PWM).....	290
18.1	Introduction	290
18.2	Features	290
18.3	Functional description	291
18.3.1	Timer/Counter control	291
18.3.2	Timer/Counter	291
18.3.3	PWM mode	295
18.3.4	Interrupt	296
18.3.5	Dead zone generation	297

18.3.6	Capture event	298
18.3.7	How to set the PWM	300
18.4	PWM Channel-0 Registers (Base address : 0x4000_5000).....	301
18.4.1	Channel-0 interrupt register(PWMCH0IR)	301
18.4.2	Channel-0 interrupt enable register(PWMCH0IER).....	301
18.4.3	Channel-0 interrupt clear register(PWMCH0ICR).....	302
18.4.4	Channel-0 Timer/Counter Register (PWMCH0TCR)	302
18.4.5	Channel-0 Prescale Counter Register (PWMCH0PCR).....	303
18.4.6	Channel-0 Prescale Register (PWMCH0PR)	303
18.4.7	Channel-0 Match Register (PWMCH0MR).....	304
18.4.8	Channel-0 Limit Register (PWMCH0LR)	304
18.4.9	Channel-0 Up-Down Mode Register (PWMCH0UDMR)	304
18.4.10	Channel-0 Timer/Counter Mode Register (PWMCH0TCMR)	305
18.4.11	Channel-0 PWM output Enable and External input Enable Register (PWMCH0PEEER) 305	
18.4.12	Channel-0 Capture Mode Register (PWMCH0CMR)	306
18.4.13	Channel-0 Capture Register (PWMCH0CR).....	306
18.4.14	Channel-0 Periodic Mode Register (PWMCH0PDMR)	307
18.4.15	Channel-0 Dead Zone Enable Register (PWMCH0DZER)	307
18.4.16	Channel-0 Dead Zone Counter Register (PWMCH0DZCR)	308
18.5	Register map	309
18.6	PWM Channel-1 Registers (Base address : 0x4000_5100).....	310
18.6.1	Channel-1 interrupt register(PWMCH1IR)	310
18.6.2	Channel-1 interrupt enable register(PWMCH1IER).....	310
18.6.3	Channel-1 interrupt clear register(PWMCH1ICR).....	311
18.6.4	Channel-1 Timer/Counter Register (PWMCH1TCR)	311
18.6.5	Channel-1 Prescale Counter Register (PWMCH1PCR).....	312
18.6.6	Channel-1 Prescale Register (PWMCH1PR)	312
18.6.7	Channel-1 Match Register (PWMCH1MR).....	313
18.6.8	Channel-1 Limit Register (PWMCH1LR)	313
18.6.9	Channel-1 Up-Down Mode Register (PWMCH1UDMR)	314
18.6.10	Channel-1 Timer/Counter Mode Register (PWMCH1TCMR)	314
18.6.11	Channel-1 PWM output Enable and External input Enable Register (PWMCH1PEEER) 315	
18.6.12	Channel-1 Capture Mode Register (PWMCH1CMR)	315
18.6.13	Channel-1 Capture Register (PWMCH1CR).....	315
18.6.14	Channel-1 Periodic Mode Register (PWMCH1PDMR)	316
18.6.15	Channel-1 Dead Zone Enable Register (PWMCH1DZER)	316
18.6.16	Channel-1 Dead Zone Counter Register (PWMCH1DZCR)	317

18.7	Register map	318
18.8	PWM Channel-2 Registers (Base address : 0x4000_5200).....	319
18.8.1	Channel-2 interrupt register(PWMCH2IR)	319
18.8.2	Channel-2 interrupt enable register(PWMCH2IER).....	319
18.8.3	Channel-2 interrupt clear register(PWMCH2ICR).....	320
18.8.4	Channel-2 Timer/Counter Register (PWMCH2TCR)	320
18.8.5	Channel-2 Prescale Counter Register (PWMCH2PCR).....	321
18.8.6	Channel-2 Prescale Register (PWMCH2PR)	321
18.8.7	Channel-2 Match Register (PWMCH2MR).....	322
18.8.8	Channel-2 Limit Register (PWMCH2LR)	322
18.8.9	Channel-2 Up-Down Mode Register (PWMCH2UDMR)	322
18.8.10	Channel-2 Timer/Counter Mode Register (PWMCH2TCMR)	323
18.8.11	Channel-2 PWM output Enable and External input Enable Register (PWMCH2PEEER) 323	
18.8.12	Channel-2 Capture Mode Register (PWMCH2CMR)	324
18.8.13	Channel-2 Capture Register (PWMCH2CR).....	324
18.8.14	Channel-2 Periodic Mode Register (PWMCH2PDMR)	325
18.8.15	Channel-2 Dead Zone Enable Register (PWMCH2DZER)	325
18.8.16	Channel-2 Dead Zone Counter Register (PWMCH2DZCR)	326
18.9	Register map	327
18.10	PWM Channel-3 Registers (Base address : 0x4000_5300).....	328
18.10.1	Channel-3 interrupt register(PWMCH3IR)	328
18.10.2	Channel-3 interrupt enable register(PWMCH3IER).....	328
18.10.3	Channel-3 interrupt clear register(PWMCH3ICR).....	329
18.10.4	Channel-3 Timer/Counter Register (PWMCH3TCR)	329
18.10.5	Channel-3 Prescale Counter Register (PWMCH3PCR).....	330
18.10.6	Channel-3 Prescale Register (PWMCH3PR)	330
18.10.7	Channel-3 Match Register (PWMCH3MR).....	331
18.10.8	Channel-3 Limit Register (PWMCH3LR)	331
18.10.9	Channel-3 Up-Down Mode Register (PWMCH3UDMR)	332
18.10.10	Channel-3 Timer/Counter Mode Register (PWMCH3TCMR)	332
18.10.11	Channel-3 PWM output Enable and External input Enable Register (PWMCH3PEEER) 333	
18.10.12	Channel-3 Capture Mode Register (PWMCH3CMR)	333
18.10.13	Channel-3 Capture Register (PWMCH3CR).....	333
18.10.14	Channel-3 Periodic Mode Register (PWMCH3PDMR)	334
18.10.15	Channel-3 Dead Zone Enable Register (PWMCH3DZER)	334
18.10.16	Channel-3 Dead Zone Counter Register (PWMCH3DZCR)	335
18.11	Register map	336

18.12	PWM Channel-4 Registers (Base address : 0x4000_5400).....	337
18.12.1	Channel-4 interrupt register(PWMCH4IR)	337
18.12.2	Channel-4 interrupt enable register(PWMCH4IER).....	337
18.12.3	Channel-4 interrupt clear register(PWMCH4ICR).....	338
18.12.4	Channel-4 Timer/Counter Register (PWMCH4TCR)	338
18.12.5	Channel-4 Prescale Counter Register (PWMCH4PCR).....	339
18.12.6	Channel-4 Prescale Register (PWMCH4PR)	339
18.12.7	Channel-4 Match Register (PWMCH4MR).....	340
18.12.8	Channel-4 Limit Register (PWMCH4LR)	340
18.12.9	Channel-4 Up-Down Mode Register (PWMCH4UDMR)	340
18.12.10	Channel-4 Timer/Counter Mode Register (PWMCH4TCMR)	341
18.12.11	Channel-4 PWM output Enable and External input Enable Register (PWMCH4PEEER) 341	
18.12.12	Channel-4 Capture Mode Register (PWMCH4CMR)	342
18.12.13	Channel-4 Capture Register (PWMCH4CR).....	342
18.12.14	Channel-4 Periodic Mode Register (PWMCH4PDMR)	343
18.12.15	Channel-4 Dead Zone Enable Register (PWMCH4DZER)	343
18.12.16	Channel-4 Dead Zone Counter Register (PWMCH4DZCR)	344
18.13	Register map	345
18.14	PWM Channel-5 Registers (Base address : 0x4000_5500).....	346
18.14.1	Channel-5 interrupt register(PWMCH5IR)	346
18.14.2	Channel-5 interrupt enable register(PWMCH5IER).....	346
18.14.3	Channel-5 interrupt clear register(PWMCH5ICR).....	347
18.14.4	Channel-5 Timer/Counter Register (PWMCH5TCR)	347
18.14.5	Channel-5 Prescale Counter Register (PWMCH5PCR).....	348
18.14.6	Channel-5 Prescale Register (PWMCH5PR)	348
18.14.7	Channel-5 Match Register (PWMCH5MR).....	349
18.14.8	Channel-5 Limit Register (PWMCH5LR)	349
18.14.9	Channel-5 Up-Down Mode Register (PWMCH5UDMR)	349
18.14.10	Channel-5 Timer/Counter Mode Register (PWMCH5TCMR)	350
18.14.11	Channel-5 PWM output Enable and External input Enable Register (PWMCH5PEEER) 350	
18.14.12	Channel-5 Capture Mode Register (PWMCH5CMR)	351
18.14.13	Channel-5 Capture Register (PWMCH5CR).....	351
18.14.14	Channel-5 Periodic Mode Register (PWMCH5PDMR)	352
18.14.15	Channel-5 Dead Zone Enable Register (PWMCH5DZER)	352
18.14.16	Channel-5 Dead Zone Counter Register (PWMCH5DZCR)	353
18.15	Register map	354
18.16	PWM Channel-6 Registers (Base address : 0x4000_5600).....	355

18.16.1	Channel-6 interrupt register(PWMCH6IR)	355
18.16.2	Channel-6 interrupt enable register(PWMCH6IER).....	355
18.16.3	Channel-6 interrupt clear register(PWMCH6ICR).....	356
18.16.4	Channel-6 Timer/Counter Register (PWMCH6TCR)	356
18.16.5	Channel-6 Prescale Counter Register (PWMCH6PCR).....	357
18.16.6	Channel-6 Prescale Register (PWMCH6PR)	357
18.16.7	Channel-6 Match Register (PWMCH6MR).....	358
18.16.8	Channel-6 Limit Register (PWMCH6LR)	358
18.16.9	Channel-6 Up-Down Mode Register (PWMCH6UDMR)	358
18.16.10	Channel-6 Timer/Counter Mode Register (PWMCH6TCMR)	359
18.16.11	Channel-6 PWM output Enable and External input Enable Register (PWMCH6PEEER) 359	
18.16.12	Channel-6 Capture Mode Register (PWMCH6CMR)	360
18.16.13	Channel-6 Capture Register (PWMCH6CR).....	360
18.16.14	Channel-6 Periodic Mode Register (PWMCH6PDMR)	361
18.16.15	Channel-6 Dead Zone Enable Register (PWMCH6DZER)	361
18.16.16	Channel-6 Dead Zone Counter Register (PWMCH6DZCR)	362
18.17	Register map	363
18.18	PWM Channel-7 Registers (Base address : 0x4000_5700).....	364
18.18.1	Channel-7 interrupt register(PWMCH7IR)	364
18.18.2	Channel-7 interrupt enable register(PWMCH7IER).....	364
18.18.3	Channel-7 interrupt clear register(PWMCH7ICR).....	365
18.18.4	Channel-7 Timer/Counter Register (PWMCH7TCR)	365
18.18.5	Channel-7 Prescale Counter Register (PWMCH7PCR).....	366
18.18.6	Channel-7 Prescale Register (PWMCH7PR)	366
18.18.7	Channel-7 Match Register (PWMCH7MR).....	367
18.18.8	Channel-7 Limit Register (PWMCH7LR)	367
18.18.9	Channel-7 Up-Down Mode Register (PWMCH7UDMR)	367
18.18.10	Channel-7 Timer/Counter Mode Register (PWMCH7TCMR)	368
18.18.11	Channel-7 PWM output Enable and External input Enable Register (PWMCH7PEEER) 368	
18.18.12	Channel-7 Capture Mode Register (PWMCH7CMR)	369
18.18.13	Channel-7 Capture Register (PWMCH7CR).....	369
18.18.14	Channel-7 Periodic Mode Register (PWMCH7PDMR)	370
18.18.15	Channel-7 Dead Zone Enable Register (PWMCH7DZER)	370
18.18.16	Channel-7 Dead Zone Counter Register (PWMCH7DZCR)	371
18.19	Register map	372
18.20	PWM Common Registers (Base address : 0x4000_5800)	373
18.20.1	Interrupt Enable Register (IER).....	373

18.20.2	Start/Stop Register (SSR)	374
18.20.3	Pause Register (PSR)	375
18.21	Register map	376
19	Dual timers	377
19.1	Introduction	377
19.2	Features	377
19.3	Functional description	378
19.3.1	Clock and clock enable	378
19.3.2	Timer size	378
19.3.3	Prescaler	378
19.3.4	Repetition mode	378
19.3.5	Interrupt	379
19.3.6	Operation	379
19.3.7	How to set the dual timers	380
19.4	Dual timer0_0 Registers (Base address : 0x4000_1000)	381
19.4.1	Timer0_0 Load Register(DUALTIMER0_0TimerLoad)	381
19.4.2	Timer0_0 Value Register(DUALTIMER0_0TimerValue).....	381
19.4.3	Timer0_0 Control Register(DUALTIMER0_0TimerControl).....	381
19.4.4	Timer0_0 Interrupt Clear Register (DUALTIMER0_0TimerIntClr).....	382
19.4.5	Timer0_0 Raw Interrupt Status Register (DUALTIMER0_0TimerRIS).....	383
19.4.6	Timer0_0 Masked Interrupt Status Register (DUALTIMER0_0TimerMIS) ..	383
19.4.7	Timer0_0 Background Load Register (DUALTIMER0_0TimerBGLoad).....	384
19.5	Register map	385
19.6	Dual timer0_1 Registers (Base address : 0x4000_1020)	386
19.6.1	Timer0_1 Load Register(DUALTIMER0_1TimerLoad)	386
19.6.2	Timer0_1 Value Register(DUALTIMER0_1TimerValue).....	386
19.6.3	Timer0_1 Control Register(DUALTIMER0_1TimerControl).....	386
19.6.4	Timer0_1 Interrupt Clear Register (DUALTIMER0_1TimerIntClr).....	387
19.6.5	Timer0_1 Raw Interrupt Status Register (DUALTIMER0_1TimerRIS).....	387
19.6.6	Timer0_1 Masked Interrupt Status Register (DUALTIMER0_1TimerMIS) ..	388
19.6.7	Timer0_1 Background Load Register (DUALTIMER0_1TimerBGLoad).....	388
19.7	Register map	390
19.8	Dual Timer 0 Clock Enable Register (Base address : 0x4000_1080)	391
19.8.1	Timer0_0 Clock Enable Register (TIMCLKENO_0)	391
19.8.2	Timer0_1 Clock Enable Register (TIMCLKENO_1)	391
19.9	Register map	392
19.10	Dual timer1_0 Registers (Base address : 0x4000_2000)	393
19.10.1	Timer1_0 Load Register(DUALTIMER1_0TimerLoad)	393
19.10.2	Timer1_0 Value Register(DUALTIMER1_0TimerValue).....	393

19.10.3	Timer1_0 Control Register(DUALTIMER1_0TimerControl).....	393
19.10.4	Timer1_0 Interrupt Clear Register (DUALTIMER1_0TimerIntClr).....	394
19.10.5	Timer1_0 Raw Interrupt Status Register (DUALTIMER1_0TimerRIS).....	394
19.10.6	Timer1_0 Masked Interrupt Status Register (DUALTIMER1_0TimerMIS) ..	395
19.10.7	Timer1_0 Background Load Register (DUALTIMER1_0TimerBGLoad).....	395
19.11	Register map	397
19.12	Dual timer1_1 Registers (Base address : 0x4000_2020)	398
19.12.1	Timer1_1 Load Register(DUALTIMER1_1TimerLoad)	398
19.12.2	Timer1_1 Value Register(DUALTIMER1_1TimerValue).....	398
19.12.3	Timer1_1 Control Register(DUALTIMER1_1TimerControl).....	398
19.12.4	Timer1_1 Interrupt Clear Register (DUALTIMER1_1TimerIntClr).....	399
19.12.5	Timer1_1 Raw Interrupt Status Register (DUALTIMER1_1TimerRIS).....	399
19.12.6	Timer1_1 Masked Interrupt Status Register (DUALTIMER1_1TimerMIS) ..	400
19.12.7	Timer1_1 Background Load Register (DUALTIMER1_1TimerBGLoad).....	400
19.13	Register map	402
19.14	Dual Timer 1 Clock Enable Register (Base address : 0x4000_2080)	403
19.14.1	Timer1_0 Clock Enable Register (TIMCLKEN1_0)	403
19.14.2	Timer1_1 Clock Enable Register (TIMCLKEN1_1)	403
19.15	Register map	404
20	Watchdog timer	405
20.1	Introduction	405
20.2	Features	405
20.3	Functional description	405
20.3.1	Clock	405
20.3.2	Interrupt and reset request.....	405
20.4	Watchdog timer Registers (Base address : 0x4000_0000)	406
20.4.1	Watchdog timer Load Register(WDTLoad).....	406
20.4.2	Watchdog timer Value Register(WDTValue)	406
20.4.3	Watchdog timer Control Register(WDTControl)	407
20.4.4	Watchdog timer Interrupt Clear Register (WDTIntClr)	407
20.4.5	Watchdog timer Raw Interrupt Status Register (WDTRIS)	407
20.4.6	Watchdog timer Masked Interrupt Status Register (WDTMIS)	408
20.4.7	Watchdog timer Lock Register(WDTLock)	408
20.5	Register map	410
21	Inter-integrated circuit interface (I2C).....	411
21.1	Introduction	411
22	Universal Asynchronous Receive Transmit(UART0,1)	411
22.1	Introduction	411
22.2	Features	411

22.3	Functional description	411
22.3.1	Baud rate calculation	412
22.3.2	Data transmission.....	414
22.3.3	Data receive	414
22.3.4	Hardware flow control.....	415
22.4	UART0 Registers(Base address: 0x4000_C000)	418
22.4.1	UART0DR (UART0 Data Register)	418
22.4.2	UART0RSR/ECR (UART0 Receive Status Register/Error Clear Register) ..	418
22.4.3	UART0FR (UART0 Flag Register).....	419
22.4.4	UART0ILPR (UART0 IrDA Low-Power Counter Register)	420
22.4.5	UART0IBRD (UART0 Integer Baud Rate Register)	421
22.4.6	UART0FBRD (UART0 Fractional Baud Rate Register).....	421
22.4.7	UART0LCR_H (UART0 Line Control Register).....	422
22.4.8	UART0CR (UART0 Control register)	423
22.4.9	UART0IFLS (UART0 Interrupt FIFO Level Select Register)	425
22.4.10	UART0IMSC (UART0 Interrupt Mask Set/Clear Register)	425
22.4.11	UART0RIS (UART0 Raw Interrupt Status Register).....	427
22.4.12	UART0MIS (UART0 Masked Interrupt Status Register)	428
22.4.13	UART0ICR (UART0 Interrupt Clear Register)	429
22.5	Register map	430
22.6	UART1 Registers(Base address: 0x4000_D000)	431
22.6.1	UART1DR (UART1 Data Register)	431
22.6.2	UART1RSR/ECR (UART1 Receive Status Register/Error Clear Register) ..	431
22.6.3	UART1FR (UART1 Flag Register)	432
22.6.4	UART1ILPR (UART1 IrDA Low-Power Counter Register)	433
22.6.5	UART1IBRD (UART1 Integer Baud Rate Register)	434
22.6.6	UART1FBRD (UART1 Fractional Baud Rate Register).....	434
22.6.7	UART1LCR_H (UART1 Line Control Register).....	435
22.6.8	UART1CR (UART1 Control register)	436
22.6.9	UART1IFLS (UART1 Interrupt FIFO Level Select Register)	438
22.6.10	UART1IMSC (UART1 Interrupt Mask Set/Clear Register)	438
22.6.11	UART1RIS (UART1 Raw Interrupt Status Register).....	440
22.6.12	UART1MIS (UART1 Masked Interrupt Status Register)	441
22.6.13	UART1ICR (UART1 Interrupt Clear Register)	441
22.7	Register map	443
23	Universal Asynchronous Receive Transmit(UART2)	444
23.1	Introduction	444
23.2	Feature.....	444
23.3	Functional description	444

23.3.1	Baud rate calculation	444
23.4	UART2 Registers(Base address: 0x4000_6000)	446
23.4.1	UART2DR (UART2 Data Register)	446
23.4.2	UART2SR (UART2 Status Register)	446
23.4.3	UART2CR (UART2 Control Register).....	447
23.4.4	UART2ISR/ICR (UART2 Interrupt Status/Interrupt Clear Register)	447
23.4.5	UART2BDR (UART2 Baud Rate Divider Register)	448
23.4.6	Register map	449
24	Synchronous Serial Port (SSP)	450
24.1	Introduction	450
24.2	Features	450
24.3	Functional description	451
24.3.1	Clock prescaler	451
24.3.2	Transmit FIFO	451
24.3.3	Receive FIFO.....	452
24.3.4	Interrupt generation logic	452
24.3.5	DMA interface	452
24.3.6	Interface reset	454
24.3.7	Configuring the SSP	454
24.3.8	Enable PrimeCell SSP operation.....	455
24.3.9	Clock ratios	455
24.3.10	Programming the SSPCR0 Control Register.....	456
24.3.11	Programming the SSPCR1 Control Register.....	456
24.3.12	Frame format	457
24.3.13	Texas Instruments synchronous serial frame format	458
24.3.14	Motorola SPI frame format.....	459
24.3.15	National Semiconductor Microwire frame format	465
24.3.16	Master and Slave configurations	467
24.3.17	SSP Flow chart	468
24.4	SSP0 Registers (Base Address : 0x4000_A000)	470
24.4.1	SSP0 Control register 0 (SSP0CR0)	470
24.4.2	SSP0 Control register 1 (SSP0CR1)	471
24.4.3	SSP0 Data register (SSP0DR)	471
24.4.4	SSP0 Status register (SSP0SR)	472
24.4.5	SSP0 Clock prescale register (SSP0CPSR)	473
24.4.6	SSP0 Interrupt mask set or clear register (SSP0IMSC)	473
24.4.7	SSP0 Raw interrupt status register (SSP0RIS).....	474
24.4.8	SSP0 Masked interrupt status register, (SSP0MIS)	474
24.4.9	SSP0 Interrupt clear register (SSP0ICR).....	475

24.4.10	SSP0 DMA control register, (SSP0DMACR)	475
24.5	Register map	477
24.6	SSP1 Registers (Base Address : 0x4000_B000)	478
24.6.1	SSP1 Control register 0 (SSP1CR0)	478
24.6.2	SSP1 Control register 1 (SSP1CR1)	479
24.6.3	SSP1 Data register (SSP1DR)	480
24.6.4	SSP1 Status register (SSP1SR)	480
24.6.5	SSP1 Clock prescale register (SSP1CPSR)	481
24.6.6	SSP1 Interrupt mask set or clear register (SSP1IMSC)	481
24.6.7	SSP1 Raw interrupt status register (SSP1RIS)	482
24.6.8	SSP1 Masked interrupt status register, (SSP1MIS)	482
24.6.9	SSP1 Interrupt clear register (SSP1ICR)	483
24.6.10	SSP1 DMA control register, (SSP1DMACR)	483
24.7	Register map	485
	Document History Information.....	486

List of table

Table 1 W7500 interrupt assignments	35
Table 2 W7500 sleep mode summary	37
Table 3. Offset Address for Common Register	44
Table 4. Offset Address in Socket n Register Block (n = 0,...,7, where n is Socket number).....	45
Table 5 operation of mode selection	82
Table 6 description of Flash memory.....	83
Table 7 External oscillator clock sources	91
Table 8 CRG register map and reset values	113
Table 9 RNG register map and reset values	120
Table 10 functional description table	121
Table 11 AFC register map and reset values	150
Table 12 EXTINT register map and reset values	184
Table 13 PAD controller register map and reset values	226
Table 14 GPIOA register map and reset values	240
Table 15 GPIOB register map and reset values	248
Table 16 GPIOC register map and reset values	256
Table 17 GPIOD register map and reset values	264
Table 18 Summary of the DMA requests for each channel.....	266
Table 19 DMA register map and reset values.....	281
Table 20 ADC register map and reset values	289
Table 21 PWM channel 0 register map and reset values	309
Table 22 PWM channel 1 register map and reset values	318
Table 23 PWM channel 2 register map and reset values	327
Table 24 PWM channel 3 register map and reset values	336
Table 25 PWM channel 4 register map and reset values	345
Table 26 PWM channel 5 register map and reset values	354
Table 27 PWM channel 6 register map and reset values	363
Table 28 PWM channel 7 register map and reset values	372
Table 29 PWM common register map and reset values.....	376
Table 30 Dual timer 0_0 register map and reset values	385
Table 31 Dual timer 0_1 register map and reset values	390
Table 32 Dual timer 0 clock enable register map and reset values	392
Table 33 Dual timer 1_0 register map and reset values	397
Table 34 Dual timer 1_1 register map and reset values	402
Table 35 Dual timer 1 clock enable register map and reset values	404
Table 36 Watchdog Timer register map and reset values.....	410

Table 37 UART0 register map and reset values	430
Table 38 UART1 register map and reset values	443
Table 39 UART2 register map and reset values	449
Table 40 DMA trigger points for the transmit and receive FIFOs.	453
Table 41 SSP0 register map and reset values	477
Table 42 SSP1 register map and reset values	485

List of figures

Figure 1 W7500 System Architecture	30
Figure 2 W7500 memory map.....	32
Figure 3 POR reset waveform.....	36
Figure 4 TOE block diagram.....	41
Figure 5. Register & Memory Organization	43
Figure 6. operation of boot code	82
Figure 7. Flash reading sequence	86
Figure 8. Flash erase operations	87
Figure 9. main Flash memory programming sequence	88
Figure 10 CRG block diagram	91
Figure 11. Random Number Generator block diagram	115
Figure 12. Flow chart of RNG operation	116
Figure 13. External Interrupt diagram	154
Figure 14. function schematic of digital I/O pad	187
Figure 15. function schematic of digital/analog mux IO pad	188
Figure 16. GPIO block diagram	230
Figure 17. GPIO Flow chart	231
Figure 18. MASK LOWBYTE access	232
Figure 19 MASK HIGHBYTE access.....	232
Figure 20. DMA Block diagram	266
Figure 21. DMA ping pong cycle	270
Figure 22. ADC block diagram	283
Figure 23. The ADC operation flowchart with non-interrupt.....	284
Figure 24. The ADC operation flowchart with interrupt	285
Figure 25 PWM block diagram	290
Figure 26 Periodic mode	291
Figure 27 one-shot mode	292
Figure 28 Up-count mode	292
Figure 29 Down-count mode	292
Figure 30 Counter mode with rising edge	293
Figure 31 Counter mode with falling edge	293
Figure 32 Counter mode with rising and falling edge	294
Figure 33 Timer/Counter timing diagram with match interrupt	294
Figure 34 Timer/Counter timing diagram with overflow interrupt	295
Figure 35 The PWM output up to match register.....	296
Figure 36 The PWM output up to limit register.....	296
Figure 37 PWM waveform with dead zone time	297

Figure 38 PWM waveform with dead zone counter	298
Figure 39 Capture event with no interrupt clear	298
Figure 40 Capture event with interrupt clear	299
Figure 41 The PWM setting flow	300
Figure 42 Block diagram of Dultimer	377
Figure 43 The Dual timer setting flow	380
Figure 44 Watchdog timer operation flow diagram	406
Figure 45. UART0,1 Block diagram.....	412
Figure 46. UART character frame	412
Figure 47. UART divider flow chart	413
Figure 48. UART Initial setting flow chart	414
Figure 49. Transmit and Receive data flow chart	415
Figure 50. Hardware flow control description.....	415
Figure 51. CTS Functional Timing	416
Figure 52. Algorithm for setting CTS/RTS flowchart	417
Figure 53. UART2 divider flow chart	444
Figure 54. UART2 Initial setting flow chart	445
Figure 55. SSP block diagram	451
Figure 56. DMA transfer waveforms	454
Figure 57. Texas Instruments synchronous serial frame format, single transfer	458
Figure 58. Texas Instruments synchronous serial frame format, continuous transfers	459
Figure 59 Motorola SPI frame format, single transfer, with SPO=0 and SPH=0.....	460
Figure 60 Motorola SPI frame format, continuous transfers, with SPO=0 and SPH=0	460
Figure 61 Motorola SPI frame format, single and continuous transfers, with SPO=0 and SPH=1.....	461
Figure 62 Motorola SPI frame format, single transfer, with SPO=1 and SPH=0.....	462
Figure 63. Motorola SPI frame format, continuous transfers, with SPO=1 and SPH=0	463
Figure 64. Motorola SPI frame format, single and continuous transfers, with SPO=1 and SPH=1	464
Figure 65. National Semiconductor Microwire frame format, single transfer	465
Figure 66. National Semiconductor Microwire frame format, continuous transfers .	466
Figure 67. PrimeCell SSP master coupled to an SPI slave.....	467
Figure 68. SPI master coupled to a PrimeCell SSP slave	467
Figure 69. how to setting TI or Microwire mode flow chart	468
Figure 70. how to setting SPI mode flow chart.....	469

1 Documentation conventions

1.1 Glossary

ARP	Address Resolution Protocol
AHB	Advanced High-performance Bus
AMBA	Advanced Microcontroller Bus Architecture
APB	Advanced Peripheral Bus
AFC	Alternate Function Controller
ADC	Analog-to-Digital Converter
BOD	BrownOut Detection
CPU	Central Processing Unit
CRG	Clock Reset generator
DMA	Direct Memory Access
EOP	End Of Packet
EXTINT	External Interrupt
GPIO	General Purpose Input/Output
IrDA	Infrared Data Association
I/O	Input/Output
ICMP	Internet Control Message Protocol
IGMP	Internet Group Management Protocol
IPv4	Internet Protocol version 4
IRQ	interrupt request
NMI	NonMaskable Interrupt
PADCON	Pad Controller
PLL	Phase-Locked Loop
PHY	Physical Layer
PPPoE	Point-to-Point Protocol over Ethernet
POR	Power Of Reset
PWM	Pulse Width Modulator
RAM	Random Access Memory
RNG	Random number generator
SR	Status Register
SSP	Synchronous Serial Port

SYSCFG	System configuration controller
TOE	TCP/IP Core Offload Engine
TTL	Transistor-Transistor Logic
TCP	Transmission Control Protocol
UART	Universal Asynchronous Receiver/Transmitter
USB	Universal Serial Bus
UDP	User Datagram Protocol
WOL	Wake On Lan
WDT	Watchdog Timer

1.2 Register Bit Conventions

Each register is shown with a key indicating the accessibility of the each individual bit, and the initial condition:

Key	Bit Accessibility
rw	Read/Write
r	Read Only
r0	Read as 0
r1	Read as 1
W	Write Only

2 System and memory overview

2.1 System architecture

Main system consists of :

- Two masters :
 - Cortex-M0 core
 - uDMAC (PL230, 6channel)
- Ten slaves :
 - Internal BOOT ROM
 - Internal SRAM
 - Internal Flash memory
 - Two AHB2APB bridge which connects all APB peripherals
 - Four AHB dedicated to 16bit GPIOs
 - TCPIP Hardware core

System architecture and AHB-Lite bus architecture shown in

Figure 1.

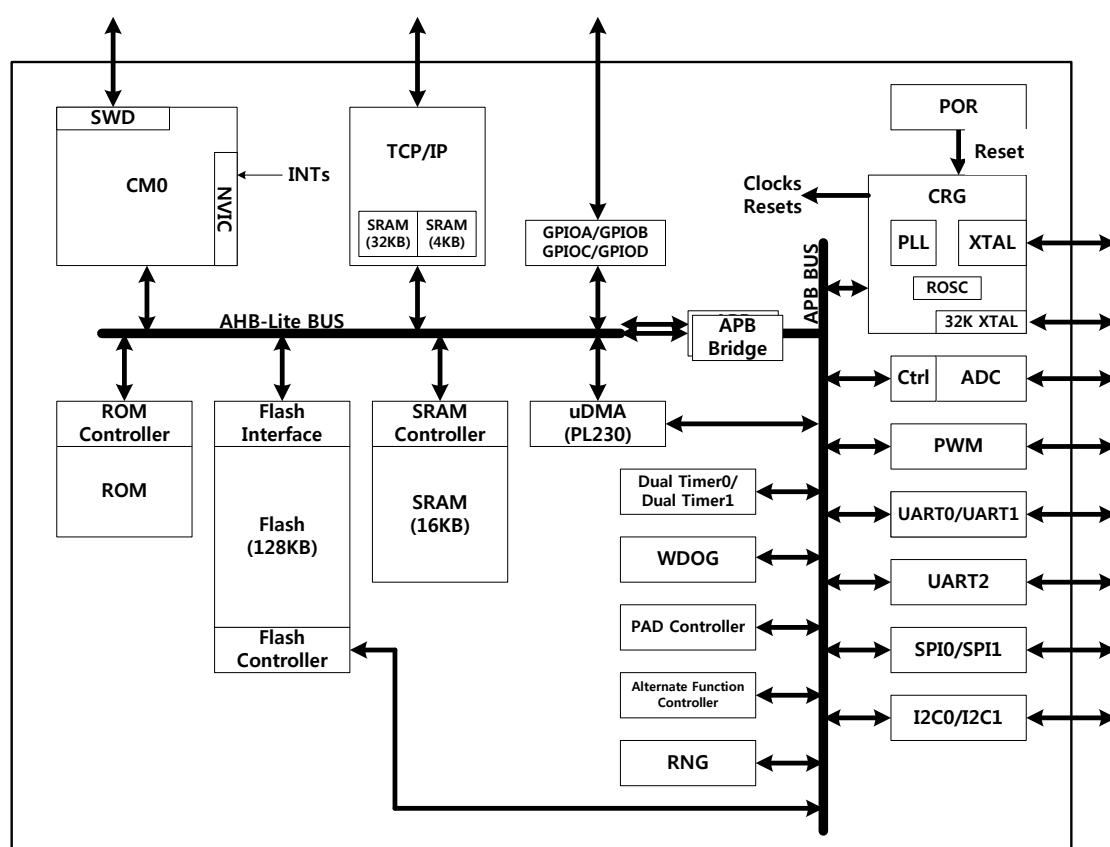


Figure 1 W7500 System Architecture

AHB-Lite BUS

- This bus connects the two masters (Cortex-M0 and uDMAC) and ten AHB slaves.

Two APB BUSs

- These buses connect Seventeen APB peripherals (Watchdog, two dual timers, pwm, two UARTs, simple UART, two I2Cs, two SSPs, random number generator, real time clock, 12bits analog digital converter, clock controller, IO configuration, PAD MUX controller)

2.2 Memory organization

2.2.1 Introduction

Program memory, data memory, registers and I/O ports are organized within the same linear 4-Gbyte address space.

The bytes are coded in memory in Little Endian format. The lowest numbered byte in a word is considered the word's least significant byte and the highest numbered byte the most significant.

2.2.2 Memory map

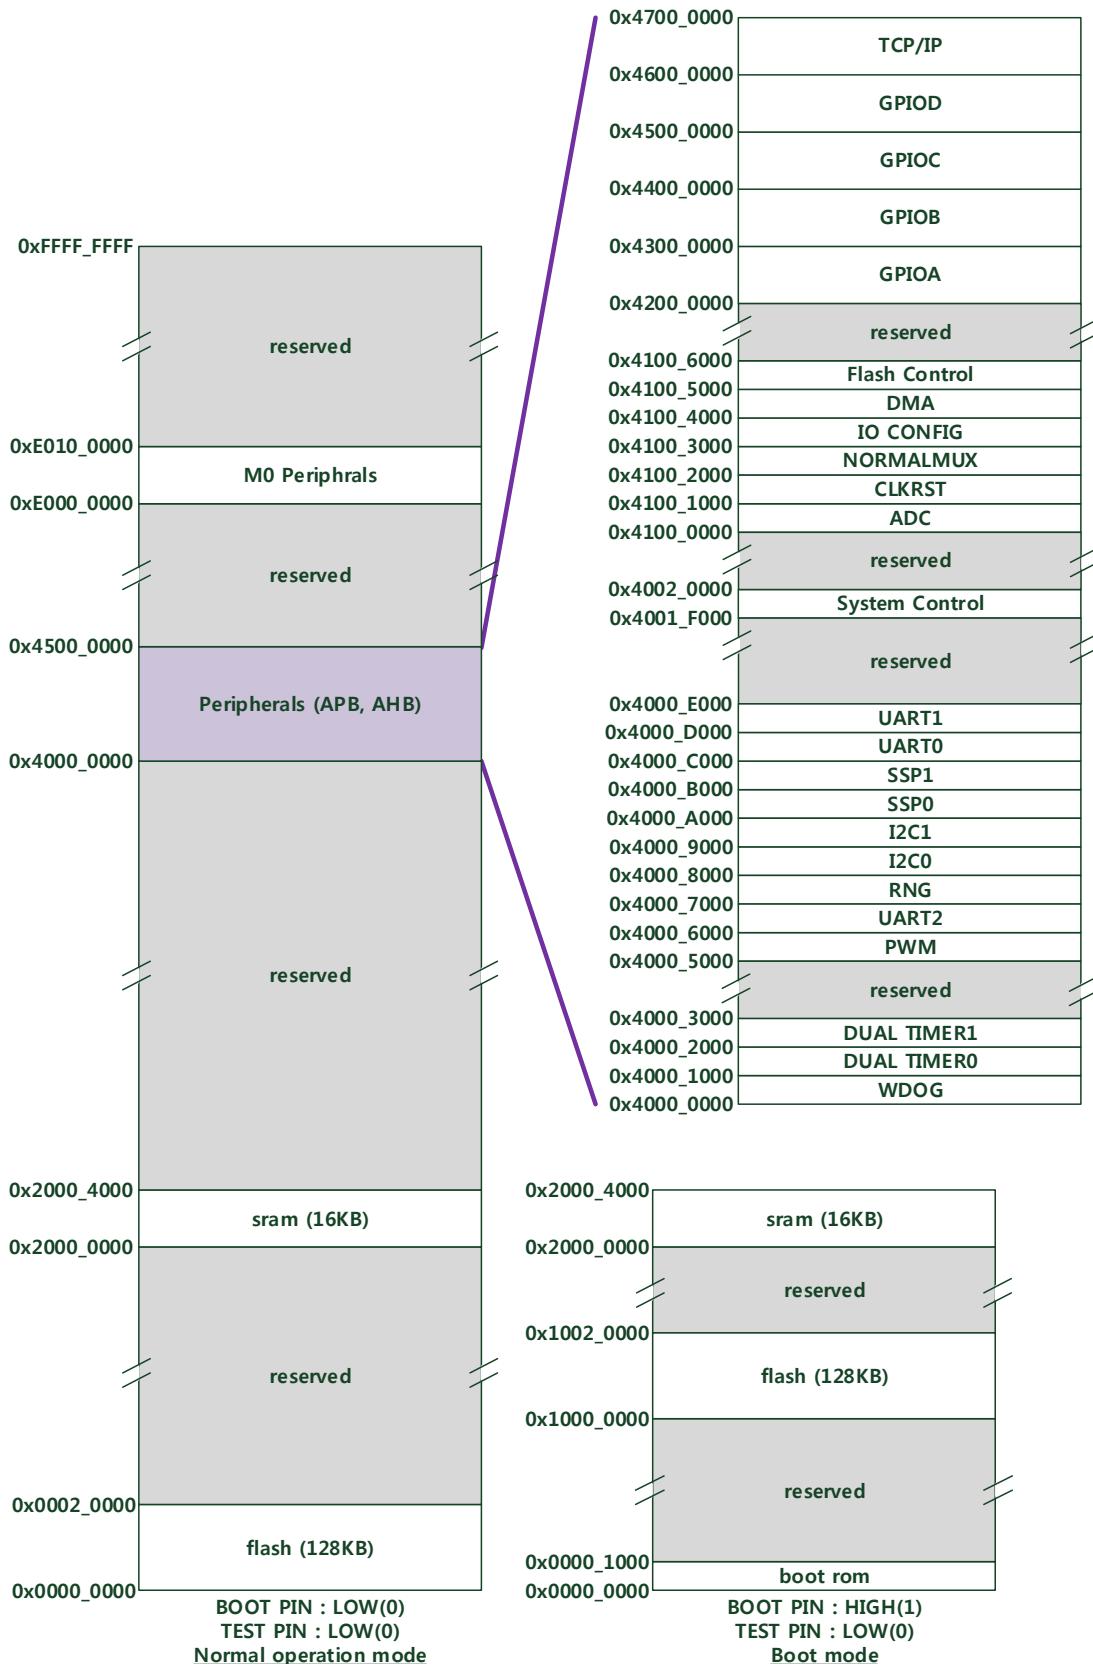


Figure 2 W7500 memory map

3 System configuration controller (SYSCFG)

3.1 Introduction

Main purposes of the system configuration controller are the following

- Control of the memory remap feature
- The ability to enable an automatic reset if the system locks up
- Information about the cause of the last reset

3.2 Registers (Base address : 0x4001_F000)

3.2.1 REMAP register

Address offset : 0x000

Reset value : 0x0000_0001

31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16
res															

15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
res	REMAP														
															R/W

[1:0] REMAP - Memory mapping selection bits

These bits are written by S/W to set memory mapping at address 0x0000_0000. These bits are only updated after CM0 executes system reset command.

And REMAP is restored to reset value (01) automatically after WDOG Reset.

00 : Flash memory mapped at 0x0000_0000

01 : Boot rom mapped at 0x0000_0000

10 : reserved

11 : Nothing mapped at 0x0000_0000

3.2.2 RESETOP register

Address offset : 0x008

Reset value : 0x0000_0000

31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16
res															

15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0

res	RESETOP														
															R/W

[0] RESETOP - Enable the reset controller to generate a system reset automatically if the system locks up.

This bit is written by S/W.

0 : Does not automatically generate reset when the processor is in the LOCKUP state.

1 : Automatically generates system reset if the processor is in the LOCKUP state.

3.2.3 RSTINFO register

Address offset : 0x010

Reset value : 0x0000_0000

31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16
res															

15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
res	R/CW1														

[2:0] RSTINFO - Information register about the cause of the last reset.

These bits are written by S/W; write 1 to each bit to clear

[0] : if 1, SYSRESETREQ caused the reset.

[1] : if 1, Watchdog caused the reset.

[2] : if 1, processor LOCKUP caused the reset.

4 Interrupt and events

4.1 Introduction

W7500 contains interrupt service and event service as below

- 26ea interrupt request (IRQ) lines.
- One NonMaskable Interrupt (NMI).
- One event signal

4.2 Interrupt assignments

Table 1 describes the W7500 interrupt assignments.

Table 1 W7500 interrupt assignments

IRQ/NMI	Device	Description	Address
NMI	Watchdog	Watchdog interrupt	0x0000_0008
IRQ[0]	SSP0	SSP0 global interrupt	0x0000_0040
IRQ[1]	SSP1	SSP1 global interrupt	0x0000_0044
IRQ[2]	UART0	UART0 global interrupt	0x0000_0048
IRQ[3]	UART1	UART1 global interrupt	0x0000_004C
IRQ[4]	UART2	UART2 global interrupt	0x0000_0050
IRQ[5]	I2C0	I2C0 global interrupt	0x0000_0054
IRQ[6]	I2C1	I2C1 global interrupt	0x0000_0058
IRQ[7]	GPIOA	GPIOA global interrupt	0x0000_005C
IRQ[8]	GPIOB	GPIOB global interrupt	0x0000_0060
IRQ[9]	GPIOC	GPIOC global interrupt	0x0000_0064
IRQ[10]	GPIOD	GPIOD global interrupt	0x0000_0068
IRQ[11]	DMA	DMA channel 1 ~ channel 5 interrupt	0x0000_006C
IRQ[12]	Dualtimer0	Dualtimer0 global interrupt	0x0000_0070
IRQ[13]	Dualtimer1	Dualtimer1 global interrupt	0x0000_0074
IRQ[14]	PWM0	PWM0 global interrupt	0x0000_0078
IRQ[15]	PWM1	PWM1 global interrupt	0x0000_007C
IRQ[16]	PWM2	PWM2 global interrupt	0x0000_0080
IRQ[17]	PWM3	PWM3 global interrupt	0x0000_0084
IRQ[18]	PWM4	PWM4 global interrupt	0x0000_0088
IRQ[19]	PWM5	PWM5 global interrupt	0x0000_008C
IRQ[20]	PWM6	PWM6 global interrupt	0x0000_0090
IRQ[21]	PWM7	PWM7 global interrupt	0x0000_0094
IRQ[22]	reserved		0x0000_0098
IRQ[23]	ADC	ADC acquisition end interrupt	0x0000_009C
IRQ[24]	TCPIP	TCPIP global interrupt	0x0000_00A0
IRQ[25]	EXT_INT	External pin interrupt	0x0000_00A4
IRQ[26]	reserved		0x0000_00A8
IRQ[27]	reserved		0x0000_00AC
IRQ[28]	reserved		0x0000_00B0
IRQ[29]	reserved		0x0000_00B4
IRQ[30]	reserved		0x0000_00B8
IRQ[31]	reserved		0x0000_00BC

4.3 Event

W7500 is able to handle internal events in order to wake up the core(WFE). The wakeup event can be generated by

- When after DMA process finished

5 Power supply

5.1 Introduction

W7500 embeds a voltage regulator in order to supply the internal 1.5V digital power domain.

- Require a 2.7V ~ 5.5V operating supply voltage (VDD)
- ADC ref voltage is same as VDD

5.2 Voltage regulator

The voltage regulator is always enabled after Reset and works in only one mode.

- In Run mode, the regulator supplies full power to the 1.5V domain.
- There is no power down or sleep mode

5.3 Power supply supervisor

W7500 has an integrated reset (POR) circuit which is always active and ensures proper operation above a threshold of 0.6V

- The POR monitors only the VDD supply voltage. During the startup phase VDD must arrive first and be greater or equal to 0.6V

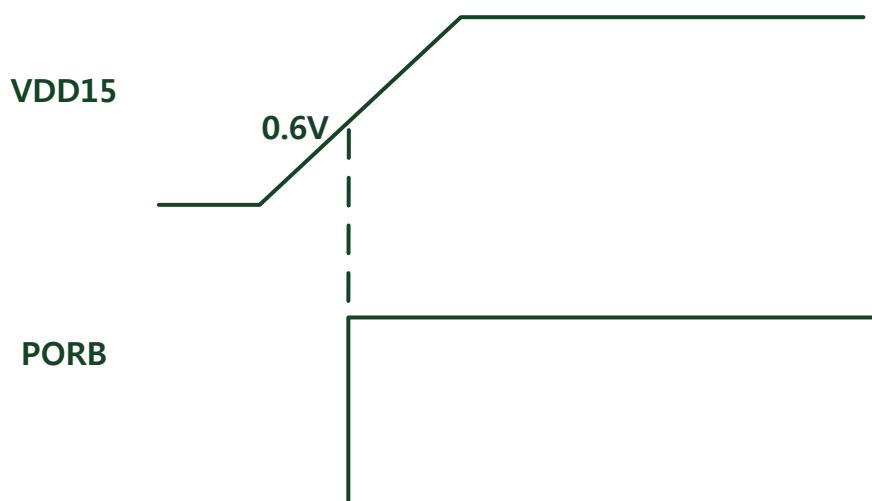


Figure 3 POR reset waveform

5.4 Low-power modes

W7500 is in RUN mode after a system or power reset. There are two low power modes to save power when the CPU does not need to be kept running. These modes are useful for instances like when the CPU is waiting for an external interrupt. Please note that there is no power-off mode for W7500.

The device features two low-power modes:

- Sleep mode
- Deep Sleep mode

Additionally, the power consumption can be reducing by following method:

- User can slow down the system clocks
- User can gate the clocks to the peripherals when they are unused.

5.4.1 Sleep mode

W7500 has two kinds of sleep modes. One is Sleep mode and the other is Deep sleep mode. Two of them are almost the same except the clock gated peripherals kinds. Table 2 shows the Sleep mode summary.

Table 2 W7500 sleep mode summary

Mode	Entry	Wakeup	Effect on clocks
Sleep mode	DEEPSLEEP = 0 Enable WFI	Any interrupt	CPU clock OFF APB Bus Clock ON AHB Bus clock ON Memory clocks ON
	DEEPSLEEP = 0 Enable WFE	Wakeup event	
Deep Sleep mode	DEEPSLEEP = 1 Enable WFI	Any interrupt	CPU clock OFF APB Bus Clock OFF AHB Bus clock OFF Memory clocks OFF
	DEEPSLEEP = 1 Enable WFE	Wakeup event	

5.4.2 Peripheral clock gating

In Run mode, individual clocks can be stopped at any time to reduce power.

Peripheral clock gating is controlled by the CRG block.

Below is the list of clocks which can be gating in CRG block.

- ADC clock (ADCCLK)

-
- SSP0, SSP1 clock (SSPCLK)
 - UART0, UART1 clock (UARTCLK)
 - Two Timer clocks (TIMCLK0, TIMCLK1)
 - 8ea PWM clocks (PWMCLK0 ~ PWMCLK7)
 - WDOG clock (WDOGCLK)
 - Random number generator clock (RNGCLK)

6 System tick timer

6.1 Introduction

System tick timer(SysTick) is part of the ARM Cortex-M0 core

6.2 Features

Simple 24bit timer.

Clocked internally by the system clock or the system clock/2.

6.3 Functional description

The SysTick timer is an integral part of Cortex-M0. The SysTick timer is intended to generate a fixed 10 millisecond interrupt for use by an operating system or other system management software.

Since the SysTick timer is a part of the Cortex-M0, it facilitates porting of software by providing a standard timer that is available on Cortex-M0 based devices. The SysTick timer can be used for :

- An RTOS tick timer which fires at a programmable rate (for example 100 Hz) and invokes a SysTick routine.
- A high-speed alarm timer using the core clock.
- A simple counter. Software can use this to measure time to completion and time used.
- An internal clock source control based on missing/meeting durations. The COUNTFLAG bit-field in the control and status register can be used to determine if an action completed within a set duration, as part of a dynamic clock management control loop.

6.4 Registers (Base : 0xE000_E000)

6.4.1 System Timer control and status register (SYST_CSR)

Address Offset : 0x010

Reset value : 0x0000_0000

31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16
res	CNTFLAG														

15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
res	TICKINT	ENABLE													

[0] ENABLE - Enables the counter

0 : Counter disabled

1 : Counter enabled

[1] TICKINT - Enables SysTick exception request

0 : Counting down to zero does not assert the SysTick exception request

1 : Counting down to zero asserts the SysTick exception request

[16] COUNTFLAG - Returns 1 if timer counted to 0 since the last read of this register.

6.4.2 SysTick Reload Value Register (SYST_RVR)

Address Offset : 0x014

Reset value : 0x0000_0000

31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16
res								RELOAD[23:16]							

15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
RELOAD[15:0]															
R															

[23:0] RELOAD - Value to load into the SYST_CVR when the counter is enabled and when it reaches 0

- The RELOAD value can be any value in the range 0x0000_0001 - 0x00FFFFFF. You can program a value of 0, but this has no effect because the SysTick exception request and COUNTFLAG are activated when count from 1 to 0.

- To generate a multi-short timer with a period of N processor clock cycles, use a RELOAD value of N-1. For example, if the SysTick interrupt is required every 100 clock pulses, set RELOAD to 99.

6.4.3 SysTick Current Value Register (SYST_CVR)

Address Offset : 0x018

Reset value : 0x0000_0000

31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16
res	CURRENT[23:16]														
								R/W							

15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
CURRENT [15:0]								R/W							

[23:0] CURRENT - Reads return the current value of the SysTick counter.

A write of any value clears the field to 0, and also clears the SYST_CSR.COUNTFLAG bit to 0.

6.4.4 SysTick Calibration Value Register (SYST_CALIB)

Address Offset : 0x01C

Reset value : 0x0000_0000

31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16
NORF	SKEW	res	res	res	res	res	res	TENMS[23:16]							
R	R							R							

15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
TENMS [15:0]								R							

[23:0] TENMS - Reads as zero. Indicates calibration value is not known.

[30] SKEW - Reads as one. Calibration value for the 10ms inexact timing is not known because TENMS is not known. This can affect the suitability of SysTick as a software real time clock.

[31] NORF - Reads as one. Indicates that no separate reference clock is provided.

7 TCPIPCore Offload Engine (TOE)

7.1 Introduction

The TCP/IPCore Offload Engine (TOE) is a Hardwired TCP/IP embedded Ethernet controller that provides easier Internet connection to embedded systems. TOE enables users to have Internet connectivity in their applications by using the TCP/IP stack.

WIZnet's Hardwired TCP/IP is the market-proven technology that supports TCP, UDP, IPv4, ICMP, ARP, IGMP, and PPPoE protocols. TOE embeds the 32Kbyte internal memory buffer for the Ethernet packet processing. Using TOE allows users to implement the Ethernet application by adding the simple socket program. It's faster and easier than using any other Embedded Ethernet solutions. 8 independent hardware sockets can be used simultaneously.

TOE also provides WOL (Wake on LAN) to reduce power consumption of the system.

7.2 Features

- Supports Hardwired TCP/IP Protocols : TCP, UDP, ICMP, IPv4, ARP, IGMP, PPPoE
- Supports 8 independent sockets simultaneously
- Supports Power down mode
- Supports Wake on LAN over UDP
- Internal 32Kbytes Memory for TX/RX Buffers
- Not supports IP Fragmentation

7.3 Functional description

Figure 4 shows the TOE block diagram.

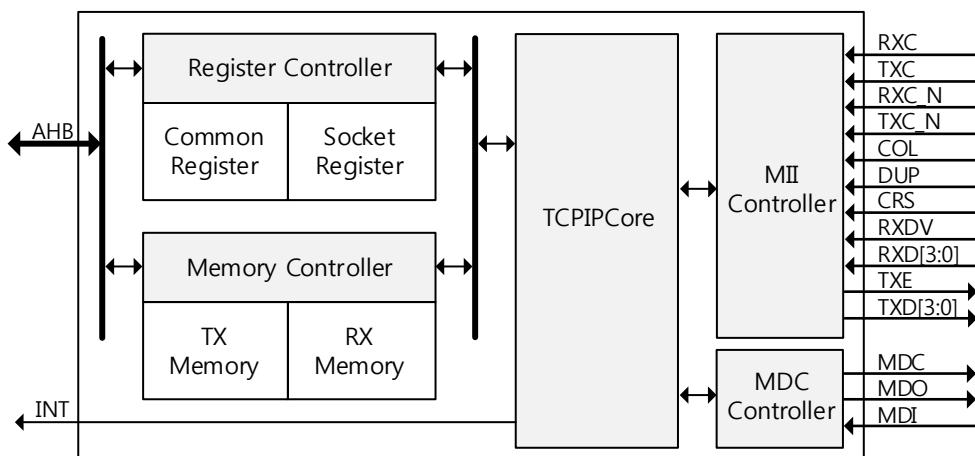


Figure 4 TOE block diagram

7.4 TOE Memory map

TOE has one Common Register Block, eight Socket Register Blocks, and TX/RX Buffer Blocks allocated to each Socket. Figure 5 shows the selected block by the base address and the available offset address range of Socket TX/RX Buffer Blocks. Each Socket's TX Buffer Block physically exists in one 16KB TX memory and is initially allocated with 2KB. Also, Each Socket's RX Buffer Block physically exists in one 16KB RX Memory and is initially allocated with 2KB. Regardless of the allocated size of each Socket TX/RX Buffer, it can be accessible within the 16 bits offset address range (From 0x0000 to 0xFFFF).

Refer to ‘Chapter 7.4.3’ for more information about 16KB TX/RX Memory organization and access method.

Blocks

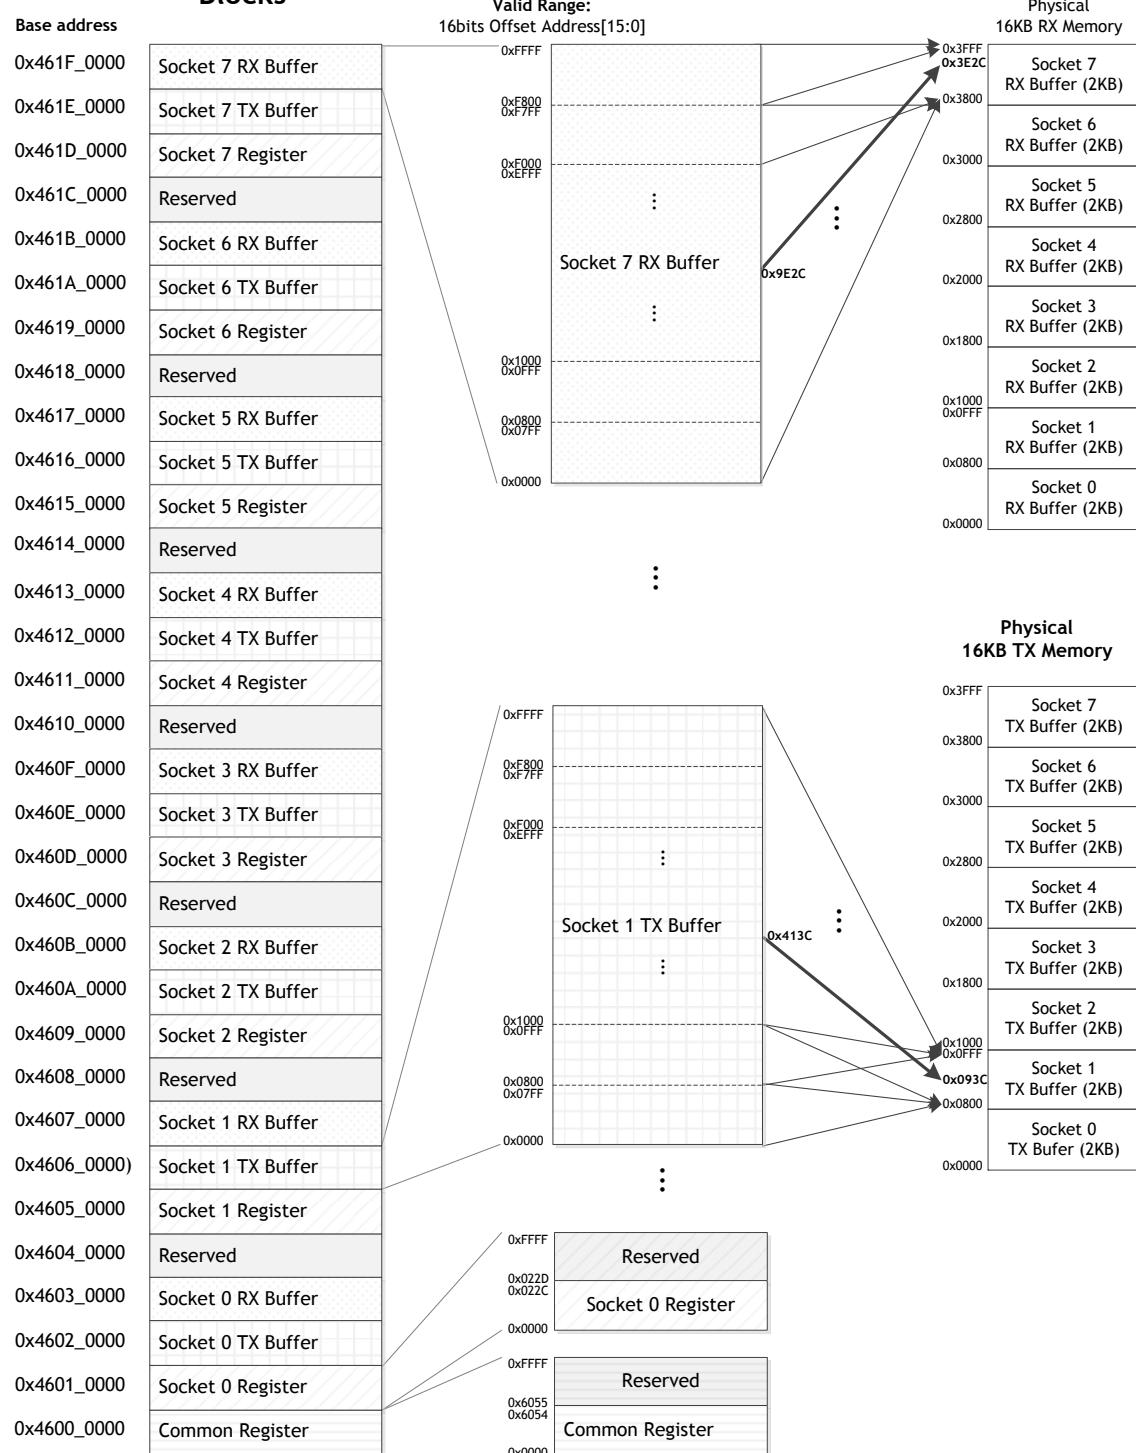


Figure 5. Register & Memory Organization

7.4.1 Common register map

Common Register Block configures the general information of TOE such as IP and MAC address. <Table 3> defines the offset address of registers in this block. Refer to ‘7.5 Common register (Base : 0x4600_0000)’ for more details about each register.

Table 3. Offset Address for Common Register

Address	Register
0x0000	TOE Version (VERSIONR)
0x2000	TICKCLOK (TCLKR)
0x2100	Interrupt (IR)
0x2104	Interrupt Mask (IMR)
0x2108	Interrupt Clear (IRCR)
0x2110	Socket Interrupt (SIR)
0x2114	Socket Mask (SIMR)
0x2300	Mode (MR)
0x2400	PPP Timer (PTIMER)
0x2404	PPP Magic (PMAGIC)
0x2408	PPP Destination MAC Address (PHAR1)
0x240C	PPP Destination MAC address (PHAR0)
0x2410	PPP Session Identification (PSIDR)
0x2414	PPP Maximum Segment Size (PMSS)
0x6000	Source Hardware Address (SHAR1)
0x6004	Source Hardware Address (SHAR0)
0x6008	Gateway Address (GA)
0x600C	Subnet Mask (SUB)
0x6010	Source IP Address (SIP)
0x6020	Network Configuration Lock (NCONFL)
0x6040	Retry Time (RTR)
0x6044	Retry Counter (RCR)
0x6050	Unreachable IP Address (UIP)
0x6054	Unreachable Port Address (UPORT)

7.4.2 Socket register map

TOE supports 8 Sockets for communication channel. Each Socket is controlled by Socket n Register (n = 0,...,7 , where n is socket number). <Table 2> defines the 16bits Offset Address of registers in Socket n Register Block.

Refer to ‘Chapter 7.4.2’ for more details about each register.

Table 4. Offset Address in Socket n Register Block (n = 0,...,7, where n is Socket number)

Offset	Register
0x0000	Socket Mode (Sn_MR)
0x0010	Socket Command (Sn_CR)
0x0020	Socket Interrupt (Sn_IR)
0x0024	Socket Interrupt Mask (Sn_IMR)
0x0028	Socket Interrupt Clear (Sn_ICR)
0x0030	Socket Status (Sn_SR)
0x0100	Socket Protocol Number (Sn_PNR)
0x0104	Socket IP Type of Service (Sn_TOS)
0x0108	Socket TTL (Sn_TTLR)
0x010C	Socket Fragment Offset (Sn_FRAG)
0x0110	Socket Maximum Segment (Sn_MSSR)
0x0114	Socket Port Number (Sn_PORT)
0x0118	Socket Destination Hardware address0 (Sn_DHAR0)
0x011C	Socket Destination Hardware address1 (Sn_DHAR1)
0x0120	Socket Destination Port Number (Sn_DPORTR)
0x0124	Socket Destination IP Address (Sn_DIPR)
0x0180	Socket Keep Alive Timer (Sn_KATMR)
0x0184	Socket Retry Time (Sn_RTR)
0x0188	Socket Retry Counter (Sn_RCR)
0x0200	Socket TX Memory Size (Sn_TXBUF_SIZE)
0x0204	Socket TX Free Size (Sn_TX_FSR)
0x0208	Socket TX Read Pointer (Sn_TX_RD)
0x020C	Socket TX Write Pointer (Sn_TX_WR)
0x0220	Socket RX Memory Size (Sn_RXBUF_SIZE)
0x0224	Socket RX Received Size (Sn_RX_RSR)
0x0228	Socket RX Read Pointer (Sn_RX_RD)
0x022C	Socket RX Write Pointer (Sn_RX_WR)

7.4.3 Memory

TOE has one 16KB TX memory for Socket n TX Buffer Blocks and one 16KB RX memory for Socket n RX buffer Blocks.

16KB TX memory is initially allocated in 2KB size for each Socket TX Buffer Block (2KB X 8 = 16KB). The initial allocated 2KB size of Socket n TX Buffer can be re-allocated by using ‘Socket n TX Buffer Size Register (Sn_TXBUF_SIZE)’.

Once all Sn_TXBUF_SIZE registers have been configured, Socket TX Buffer is allocated with the configured size of 16KB TX Memory and is assigned sequentially from Socket 0 to Socket 7. Its physical memory address is automatically determined in 16KB TX memory. Therefore, the total sum of Sn_TXBUF_SIZE should not exceed 16 in case of error in data transmission.

The 16KB RX memory allocation method is the same as the 16KB TX memory allocation method. 16KB RX memory is initially allocated into 2KB size for each Socket RX Buffer Block (2KB X 8 = 16KB). The initial allocated 2KB size of Socket n RX Buffer can be re-allocated by using ‘Socket n RX Buffer Size Register (Sn_RXBUF_SIZE)’.

When all Sn_RXBUF_SIZE registers have been configured, the Socket RX Buffer is allocated with the configured size in 16KB RX Memory and is assigned sequentially from Socket 0 to Socket 7. The physical memory address of the Socket RX Buffer is automatically determined in 16KB RX memory. Therefore, the total sum of Sn_RXBUF_SIZE should not exceed 16 or data reception error will occur.

For 16KB TX/RX memory allocation, refer to Sn_TXBUF_SIZE & Sn_RXBUF_SIZE in ‘Chapter 7.4.2’. The Socket n TX Buffer Block allocated in 16KB TX memory is buffer for saving data to be transmitted by host. The 16bits Offset Address of Socket n TX Buffer Block has 64KB address space ranged from 0x0000 to 0xFFFF, and is configured with reference to ‘Socket n TX Write Pointer Register (Sn_TX_WR)’ & ‘Socket n TX Read Pointer Register(Sn_RX_RD)’. However, the 16bits Offset Address automatically converts into the physical address to be accessible in 16KB TX memory such as Figure 5. Refer to ‘Chapter 7.4.2’ for Sn_TX_WR & Sn_RX_RD.

The Socket n RX Buffer Block allocated in 16KB RX memory is buffer for saving the received data through the Ethernet. The 16bits Offset Address of Socket n RX Buffer Block has 64KB address space ranged from 0x0000 to 0xFFFF, and is configured with reference to ‘Socket n RX RD Pointer Register (Sn_RX_RD)’ & ‘Socket n RX Write Pointer Register (Sn_RX_WR)’. However, the 16bits Offset Address automatically converts into the physical address to be accessible in 16KB RX memory such as Figure 5. Refer to ‘Chapter 7.4.2’ for Sn_RX_RD & Sn_RX_WR.

7.5 Common register (Base : 0x4600_0000)

7.5.1 VERSIONR (TOE Version Register)

Address Offset : 0x0000

Reset value : 0x0000_0005

31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16
res															

15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
res		R/W													

[7:0] VERSION - indicates the TOE version as 0x05.

7.5.2 TCKCNTR (Ticker Counter Register)

Address Offset : 0x2000

Reset value : 0x0000_07D0

31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16
res															

15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
TCKCNT[15:0]															
R/W															

[15:0] TCKCNT - Ticker counter register is used Tick counter of 100usec. for internal timer of TOE. The unit of tick is HCLK.

Ex) HCLK is 20MHz,

$$0.0001\text{sec.} / (1\text{sec.}/\text{HCLK} (=20000000)) = 2000(\text{dec}) = 0x7DC$$

7.5.3 IR (Interrupt Register)

Address Offset : 0x2100

Reset value : 0x0000_0000

31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16
res	es	res	res												

15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
res	R	R	R	R	res	res	res								

IR indicates the interrupt status. If IR is not equal to ‘0x00’, INTn PIN is asserted low until it is ‘0x00’.

[4] WOL - Magic Packet

When WOL mode is enabled and receives the magic packet over UDP, this bit is set.

[5] PPPoE - PPPoE Close

When PPPoE is disconnected during PPPoE mode, this bit is set.

[6] UNREACH - Destination unreachable

When receiving the ICMP (Destination port unreachable) packet, this bit is set as ‘1’.

When this bit is ‘1’, Destination Information such as IP address and Port number may be checked with the corresponding UIPR & UPORTR.

[7] Conflict - IP Conflict

Bit is set as ‘1’ when own source IP address is same with the sender IP address in the received ARP request.

7.5.4 IMR (Interrupt Mask Register)

Address Offset : 0x2104

Reset value : 0x0000_0000

31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16
res															

15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
res		IMR[7:4]				res	res	res							

IMR is used to mask interrupts. Each bit of IMR corresponds to each bit of IR. When a bit of IMR is ‘1’ and the corresponding bit of IR is ‘1’, an interrupt will be issued. In other words, if a bit of IMR is ‘0’, an interrupt will not be issued even if the corresponding bit of IR is ‘1’.

[4] Magic Packet

0: Disable Magic Packet Interrupt

1: Enable Magic Packet Interrupt

[5] PPPoE Close Interrupt Mask

0: Disable PPPoE Close Interrupt

1: Enable PPPoE Close Interrupt

[6] Destination unreachable Interrupt Mask

0: Disable Destination unreachable Interrupt

1: Enable Destination unreachable Interrupt

[7] IP Conflict Interrupt Mask

0: Disable IP Conflict Interrupt

1: Enable IP Conflict Interrupt

7.5.5 IRCR (Interrupt Clear Register)

Address Offset : 0x2108

Reset value : 0x0000_0000

31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16
res	res	res	res	res	res	res									
15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
res		IRC[8:4]		res	res	res	res								
									*R/C_W1						

IRCR is used to clear interrupts. Each bit of IR can be cleared when the host writes ‘1’ value to each bit of IRCR corresponding to each bit of IR.

* *ReadClearWrite1 (R/C_W1) : Software can read as well as clear this bit by writing ‘1’. Writing ‘0’ has no effect on the bit value.*

[4] Magic Packet Interrupt Clear

[5] PPPoE Close Interrupt Clear

[6] Destination unreachable Interrupt Clear

[7] IP Conflict Interrupt Clear

7.5.6 SIR (Socket Interrupt Register)

Address Offset : 0x2110

Reset value : 0x0000_0000

31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16
res															
15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
res	S7	S6	S5	S4	S3	S2	S1	S0							
								R/W							

SIR indicates the interrupt status of Socket. Each bit of SIR be still ‘1’ until Sn_IR is cleared by the host. If Sn_IR is not equal to ‘0x00’, the n-th bit of SIR is ‘1’ and INTn PIN is asserted until SIR is ‘0x00’

[7:0] SIR - When the interrupt of Socket n occurs, the n-th bit of SIR becomes ‘1’.

7.5.7 SIMR (Socket Interrupt Mask Register)

Address Offset : 0x2114

Reset value : 0x0000_0000

31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16
res															

15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
res	S7	S6	S5	S4	S3	S2	S1	S0							
								R/W							

Each bit of SIMR corresponds to each bit of SIR. When a bit of SIMR is ‘1’ and the corresponding bit of SIR is ‘1’, Interrupt will be issued. In other words, if a bit of SIMR is ‘0’, an interrupt will be not issued even if the corresponding bit of SIR is ‘1’.

[7:0] SIR - Socket n Interrupt Mast

0: Disable Socket n Interrupt

1: Enable Socket n Interrupt

7.5.8 MD (Mode Register)

Address Offset : 0x2300

Reset value : 0x0000_0000

31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16
res															

15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
res	RST	res	WOL	PB	PPP	res	FA	res							
								R/W		R/W	R/W	R/W		R/W	

MR is used for S/W reset, ping block mode and PPPoE mode

[3] PPP - PPPoE

If you use ADSL, this bit should be ‘1’.

0: Disable PPPoE mode

1: Enable PPPoE mode

[4] PB - Ping Block

If the bit is ‘1’, it blocks the response to a ping request.

0: Disable Ping block

1: Enable Ping block

[5] WOL - Wake on Lan

If WOL mode is enabled and the received magic packet over UDP has been normally processed, the Interrupt PIN (INTn) asserts to low. When using WOL mode, the UDP Socket should be opened with any source port number. (Refer to Socket n Mode Register (Sn_MR) for opening Socket.)

Notice: The magic packet over UDP supported by TOE consists of 6 bytes synchronization stream ('0xFFFFFFFFFFFF') and 16 times Target MAC address stream in UDP payload. The options such like password are ignored. You can use any UDP source port number for WOL mode.

0: Disable WOL mode

1: Enable WOL mode

[7] RST - Software Reset

If this bit is ‘1’, All internal registers will be initialized. It will be automatically cleared as ‘0’ after S/W reset.

7.5.9 PTIMER (PPP Link Control Protocol Request Timer Register)

Address Offset : 0x2400

Reset value : 0x0000_0028

31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16
res															

15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
res	R/W														

[7:0] PTIME configures the time for sending LCP echo request. The unit of time is 25ms

Ex) in case that PTIMER is 200,

$$200 * 25(\text{ms}) = 5000(\text{ms}) = 5 \text{ seconds}$$

7.5.10 PMAGICR (PPP Link Control Protocol Magic number Register)

Address Offset : 0x2404

Reset value : 0x0000_0000

31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16
res															

15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
res								PMAGIC[7:0]							
								R/W							

PMAGICR configures the 4bytes magic number to be used in LCP echo request.

[7:0] PMAGIC

Ex) PMAGIC = 0x01

0x001D

0x01

LCP Magic number = 0x01010101

7.5.11 PHAR (Destination Hardware Address Register in PPPoE)

Address Offset : 0x2408

Reset value : 0x0000_0000

31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16
PHAR[31:24]								PHAR1[23:16]							
R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W

15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
PHAR[15:8]								PHAR[7:0]							
R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W

Address Offset : 0x240C

Reset value : 0x0000_0000

31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16
PHAR[31:24]								PHAR[23:16]							
R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W

15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
res								res							

PHAR should be written to the PPPoE server hardware address acquired in PPPoE connection process.

PHAR0 and PHAR1 - configures Destination hardware address

Ex) In case that destination hardware address is 00:08:DC:12:34:56

PHAR0[32:24] PHAR0[23:16] PHAR0[15:8] PHAR0[32:24] PHAR1[32:24] PHAR1[23:16]

0x00	0x08	0xDC	0x12	0x34	0x56
------	------	------	------	------	------

7.5.12 PSIDR (Session ID Register in PPPoE)

Address Offset : 0x2410

Reset value : 0x0000_0000

31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16
res															

15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
PSID[15:0]															
R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W

[15:0] PSID - should be written to the PPPoE sever session ID acquired in PPPoE connection process.

7.5.13 PMRUR (Maximum Receive Unit Register in PPPoE)

Address Offset : 0x2414

Reset value : 0x0000_FFFF

31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16
res															

15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
PMSS[15:0]															
R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W

[15:0] PMRUR configures the maximum receive unit of PPPoE.

Ex) in case that maximum receive unit in PPPoE is 0x1234

PMSS[15:8] PMSS[7:0]

0x12	0x34
------	------

7.5.14 SHAR (Source Hardware Address Register)

Address Offset : 0x6000

Reset value : 0x0000_0000

31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16
SHAR0[31:24]								SHAR0[23:16]							
R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W

15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
SHAR0[15:8]								SPHAR0[7:0]							
R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W

Address Offset : 0x6004

Reset value : 0x0000_0000

31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16
SHA1[31:24]								SHAR1[23:16]							
R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W

15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
res								res							

SHAR configures the source hardware address.

Ex) In case of “00.08.DC.12.34.56”

SHAR0[32:24] SHAR0[23:16] SHAR0 [15:8] SHAR0 [32:24] SHAR1 [32:24] SHAR2 [23:16]

0x00	0x08	0xDC	0x12	0x34	0x56
------	------	------	------	------	------

7.5.15 GAR (Gateway Address)

Address Offset : 0x6008

Reset value : 0x0000_0000

31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16
----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----

GA[31:24]								GA[23:16]							
R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W

15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
----	----	----	----	----	----	---	---	---	---	---	---	---	---	---	---

GA[15:8]								GA[7:0]							
R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W

GAR[31:0] - configures the default gateway address

Ex) In case of “192.168.0.1”

GA[31:24]

GA[23:16]

GA[15:8]

GA[7:0]

192 (0xC0)	168 (0xA8)	0 (0x00)	1 (0x01)
------------	------------	----------	----------

7.5.16 SUBR (Subnet Mask Register)

Address Offset : 0x600C

Reset value : 0x0000_0000

31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16
----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----

SUB[31:24]								SUB[23:16]							
R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W

15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
----	----	----	----	----	----	---	---	---	---	---	---	---	---	---	---

SUBR[15:8]								SUBR[7:0]							
R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W

SUBR configures the subnet mask address.

Ex) In case of “255.255.255.0”

SUB[31:24]

SUB[23:16]

SUB[15:8]

SUB[7:0]

255 (0xFF)	255 (0xFF)	255 (0xFF)	0 (0x00)
------------	------------	------------	----------

7.5.17 SIPR (Source IP address Register)

Address Offset : 0x6010

Reset value : 0x0000_0000

31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16
----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----

SIPR[31:24]								SIPR[23:16]							
R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W

15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
----	----	----	----	----	----	---	---	---	---	---	---	---	---	---	---

SIPR[15:8]								SIPR[7:0]							
R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W

SIPR configures the source IP address.

Ex) In case of “192.168.0.2”

SIPR[31:24]	SIPR[23:16]	SIPR[15:8]	SIPR[7:0]
-------------	-------------	------------	-----------

192 (0xC0)	168 (0xA8)	0 (0x00)	2 (0x02)
------------	------------	----------	----------

7.5.18 NCONFLR (Network Configuration Lock Register)

Address Offset : 0x6020

Reset value : 0x0000_0000

31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16
----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----

NCONFL[31:24]								NCONFL [23:16]							
R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W

15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
----	----	----	----	----	----	---	---	---	---	---	---	---	---	---	---

NCONFL [15:8]								NCONFL [7:0]							
R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W

NCONFLR is used to unlock and lock the network configuration registers which are SIR, SUBR, GAR and SHAR. When LOCK is ‘ON’, the protected registers are not able to access. In this case a value of 0x01ACCE55 is written to NCONFLR. When LOCK is ‘OFF’, the protected registers are allowed to access. In this case any value except 0x01ACCE55 is written.

Ex) In case of ‘LOOK is ON’

NCONFL[31:24]	NCONFL [23:16]	NCONFL [15:8]	NCONFL [7:0]
---------------	----------------	---------------	--------------

1 (0x01)	172 (0xAC)	206 (0xCE)	85 (0x55)
----------	------------	------------	-----------

7.5.19 RTR (Retry Time Register)

Address Offset : 0x6040

Reset value : 0x0000_07D0

31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16
res															

15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
RTR[15:0]															
R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W

RTR configures the retransmission timeout period. The unit of timeout period is 100us and the default of RTR is ‘0x07D0’ or ‘2000’. And so the default timeout period is 200ms(100us X 2000).

During the time configured by RTR, WZTOE waits for the peer response to the packet that is transmitted by Sn_CR(CONNECT, DISCON, CLOSE, SEND, SEND_MAC, SEND_KEEP command). If the peer does not respond within the RTR time, WZTOE retransmits the packet or issues timeout.

When RTR is not ‘0x0000_0000’, RTR is used to configure the timeout period of all socket. When RTR is ‘0x0000_0000’, the timeout period of each socket could set by using Socket n Retry Time Register (Sn_RTR).

Ex) When timeout-period is set as 400ms, RTR = (400ms / 1ms) X 10 = 4000(0x0FA0)

RTR[15:8]

0x0F

7.5.20 RCR (Retry Counter Register)

Address Offset : 0x6044

Reset value : 0x0000_0008

31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16
res								res							

15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
res								RC[7:0]							
								R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W

RCR configures the number of time of retransmission. When retransmission occurs as many as ‘RCR+1’, Timeout interrupt is issued (Sn_IR[TIMEOUT] = ‘1’).

When RCR is not ‘0x0000_0000’, RCR is used to configure the timeout period of all socket.

When RCR is ‘0x0000_0000’, the timeout period of each socket could set by using Socket n Retry Counter Register (Sn_RCR).

Ex) RCR = 0x0007

RC[7:0]

0x07

The timeout of WZTOE can be configurable with RTR and RCR. WZTOE has two kind timeout such as Address Resolution Protocol (ARP) and TCP retransmission.

At the ARP (Refer to RFC 826, <http://www.ietf.org/rfc.html>) retransmission timeout, WZTOE automatically sends ARP-request to the peer’s IP address in order to acquire MAC address information (used for communication of IP, UDP, or TCP). While waiting for ARP-response from the peer, if there is no response during the configured RTR time, a temporary timeout is occurred and ARP-request is retransmitted. It is repeated as many as ‘RCR + 1’ times. Even after the ARP-request retransmissions are repeated as ‘RCR+1’ and there is no response to the ARP-request, the final timeout is occurred and Sn_IR(TIMEOUT) becomes ‘1’. The time of final timeout (ARP_{TO}) of ARP-request is as below.

$$ARP_{TO} = (RTR \times 0.1ms) \times (RCR + 1)$$

At the TCP packet retransmission timeout, WZTOE transmits TCP packets (SYN, FIN, RST, DATA packets) and waits for the acknowledgement (ACK) during the configured RTR time and RCR. If there is no ACK from the peer, a temporary timeout occurs and the TCP packet is retransmitted. The retransmission is repeated as many as ‘RCR+1’. Even after TCP retransmission is repeated as ‘RCR+1’ and there is no response to the TCP retransmission, the final timeout is occurred and Sn_IR(TIMEOUT) becomes ‘1’. The time of final timeout (TCP_{TO}) of TCP retransmission is as below.

$$TCP_{TO} = \left(\sum_{N=0}^M (RTR \times 2^N) + ((RCR - M) \times RTR_{MAX}) \right) \times 0.1ms$$

N : Retransmission count, $0 \leq N \leq M$

M : Minimum value when $RTR \times 2^{(M+1)} > 65535$ and $0 \leq M \leq RCR$

RTRMAX : $RTR \times 2^M$

Ex) When RTR = 2000(0x07D0), RCR = 8(0x0008),

$$\text{ARP}_{\text{TO}} = 2000 \times 0.1\text{ms} \times 9 = 1800\text{ms} = 1.8\text{s}$$

$$\text{TCP}_{\text{TO}} = (0x07D0+0x0FA0+0x1F40+0x3E80+0x7D00+0xFA00+0xFA00+0xFA00+0xFA00) \times 0.1\text{ms}$$

$$= (2000 + 4000 + 8000 + 16000 + 32000 + ((8 - 4) \times 64000)) \times 0.1\text{ms}$$

$$= 318000 \times 0.1\text{ms} = 31.8\text{s}$$

7.5.21 UIPR (Unreachable IP address Register)

Address Offset : 0x6050

Reset value : 0x0000_0000

31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16
UIP[31:24]								UIPR[23:16]							
R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W
15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
UIPR[15:8]								UIPR[7:0]							
R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W

TOE receives an ICMP packet(Destination port unreachable) when data is sent to a port number which socket is not open and UNREACH bit of IR becomes ‘1’ and UIPR indicates the destination IP address.

Ex) In case of “192.168.0.11”

UIP[31:24]	UIP[23:16]	UIP[15:8]	UIP[7:0]
------------	------------	-----------	----------

192 (0xC0)	168 (0xA8)	0 (0x00)	11 (0x0E)
------------	------------	----------	-----------

7.5.22 UPORTR (Unreachable Port Register)

Address Offset : 0x6054

Reset value : 0x0000_0000

31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16
res															

15 14 13 12 11 10 9 8 7 6 5 4 3 2 1 0

UPORT[15:0]															
R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W

TOE receives an ICMP packet(Destination port unreachable) when data is sent to a port number which socket is not open and UNREACH bit of IR becomes ‘1’ and UPORTR indicates the destination port number.

[15 :0] UPORT - Destination port number bits

Ex) In case of “0x1234”

UPORT[15:8] UPORT[7:0]

18 (0x12)	52(0x34)
-----------	----------

7.6 Socket register (Base : 0x4601_0000 + 0x0004_000 x n)[n=0,...7, where n is socket number]

7.6.1 Sn_MR (Socket n Mode Register)

Address Offset : 0x0000

Reset value : 0x0000_0000

31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16
res															

15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
res	R/W														

Sn_MR configures the option or protocol type of Socket n.

[3:0] These bits configures the protocol mode of Socket n as follows

Sn_MR[3:0]				Meaning
0	0	0	0	Closed
0	0	0	1	TCP
0	0	1	0	UDP

0	1	0	0	MACRAW
---	---	---	---	--------

- MACRAW mode should be only used in Socket 0.

[4] UNICAST Blocking and IPv6 packet Blocking

UNICAST Blocking in UDP mode

0 : disable Unicast Blocking

1 : enable Unicast Blocking

This bit blocks receiving the unicast packet during UDP mode(P[3:0] = ‘0010’) and MULTI = ‘1’.

IPv6 packet Blocking in MACRAW mode

0 : disable IPv6 Blocking

1 : enable IPv6 Blocking

This bit is applied only during MACRAW mode (P[3:0] = ‘0100’). It blocks to receiving the IPv6 packet.

[5] Use No Delayed ACK, Multicast and Multicast Blocking mode

Use No Delayed ACK

0 : Disable No Delayed ACK option

1 : Enable No Delayed ACK option

This bit is applied only during TCP mode (P[3:0] = ‘0001’). When this bit is ‘1’, It sends the ACK packet without delay as soon as a

Multicast

0 : using IGMP version 2

1 : using IGMP version 1

This bit is applied only during UDP mode(P[3:0] = ‘0010’) and MULTI = ‘1’. It configures the version for IGMP messages (Join/Leave/Report).

Multicast Blocking in MACRAW mode

0 : disable Multicast Blocking

1 : enable Multicast Blocking

This bit is applied only when MACRAW mode(P[3:0] = ‘0100’). It blocks to receive the packet with multicast MAC address.

[6] Broadcast Blocking in MACRAW and UDP mode

0 : disable Broadcast Blocking

1 : enable Broadcast Blocking

This bit blocks to receive broadcasting packet during UDP mode(P[3:0] = ‘0010’). In addition,

This bit does when MACRAW mode(P[3:0] = ‘0100’) Data packet is received from a peer. When
this bit is ‘0’, It sends the ACK packet after waiting for the timeout time configured by RTR.

[7] Multicasting and MAC Filter Enable mode

Multicasting in UDP mode

0 : disable Multicasting

1 : enable Multicasting

This bit is applied only during UDP mode(P[3:0] = '0010'). To use multicasting, Sn_DIPR & Sn_DPORT should be respectively configured with the multicast group IP address & port number before Socket n is opened by OPEN command of Sn_CR

MAC Filter Enable in MACRAW mode

0 : disable MAC Filtering

1 : enable MAC Filtering

This bit is applied only during MACRAW mode(P[3:0] = '0100'). When set as '1', WZTOE can only receive broadcasting packet or packet sent to itself. When this bit is '0', WZTOE can receive all packets on Ethernet. If user wants to implement Hybrid TCP/IP stack, it is recommended that this bit is set as '1' for reducing host overhead to process the all received packets.

7.6.2 Sn_CR (Socket n Command Register)

Address Offset : 0x0010

Reset value : 0x0000_0000

31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16
res															

15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
res	R/W														

This is used to set the command for Socket n such as OPEN, CLOSE, CONNECT, LISTEN, SEND, and RECEIVE. After WZTOE accepts the command, the Sn_CR register is automatically cleared to 0x00. Even though Sn_CR is cleared to 0x00, the command is still being processed. To check whether the command is completed or not, please check the Sn_IR or Sn_SR.

Value	Symbol	Description

		Socket n is initialized and opened according to the protocol selected in Sn_MR (P3:P0). The table below shows the value of Sn_SR corresponding to Sn_MR.										
0x01	OPEN	<table border="1"> <thead> <tr> <th>Sn_MR (P[3:0])</th><th>Sn_SR</th></tr> </thead> <tbody> <tr> <td>Sn_MR_CLOSE ('0000')</td><td>-</td></tr> <tr> <td>Sn_MR_TCP ('0001')</td><td>SOCK_INIT (0x13)</td></tr> <tr> <td>Sn_MR_UDP ('0010')</td><td>SOCK_UDP (0x22)</td></tr> <tr> <td>SO_MR_MACRAW ('0100')</td><td>SOCK_MACRAW (0x02)</td></tr> </tbody> </table>	Sn_MR (P[3:0])	Sn_SR	Sn_MR_CLOSE ('0000')	-	Sn_MR_TCP ('0001')	SOCK_INIT (0x13)	Sn_MR_UDP ('0010')	SOCK_UDP (0x22)	SO_MR_MACRAW ('0100')	SOCK_MACRAW (0x02)
Sn_MR (P[3:0])	Sn_SR											
Sn_MR_CLOSE ('0000')	-											
Sn_MR_TCP ('0001')	SOCK_INIT (0x13)											
Sn_MR_UDP ('0010')	SOCK_UDP (0x22)											
SO_MR_MACRAW ('0100')	SOCK_MACRAW (0x02)											
0x02	LISTEN	<p>This is valid only in TCP mode (Sn_MR(P3:P0) = Sn_MR_TCP). In this mode, Socket n operates as a ‘TCP server’ and waits for connection-request (SYN packet) from any ‘TCP client’.</p> <p>The Sn_SR changes the state from SOCK_INIT to SOCKET_LISTEN. When a ‘TCP client’ connection request is successfully established, the Sn_SR changes from SOCKET_LISTEN to SOCK_ESTABLISHED and the Sn_IR(0) becomes ‘1’. But when a ‘TCP client’ connection request is failed, Sn_IR(3) becomes ‘1’ and the status of Sn_SR changes to SOCK_CLOSED.</p>										
0x04	CONNECT	<p>This is valid only in TCP mode and operates when Socket n acts as ‘TCP client’. To connect, a connect-request (SYN packet) is sent to ‘TCP server’ configured by Sn_DIPR & Sn_DPORT(destination address & port). If the connect-request is successful, the Sn_SR is changed to SOCK_ESTABLISHED and the Sn_IR(0) becomes ‘1’.</p> <p>The connect-request fails in the following three cases.</p> <ol style="list-style-type: none"> When a ARP_{TO} occurs (Sn_IR(3)=‘1’) because the destination hardware address is not acquired through the ARP-process. When a SYN/ACK packet is not received and TCP_{TO} (Sn_IR(3) = ‘1’) When a RST packet is received instead of a SYN/ACK packet. <p>In these cases, Sn_SR is changed to SOCK_CLOSED.</p>										
0x08	DISCON	<p>Valid only in TCP mode.</p> <p>Regardless of ‘TCP server’ or ‘TCP client’, the DISCON command processes the disconnect-process (‘Active close’ or ‘Passive close’).</p>										

		<p>Active close: it transmits disconnect-request(FIN packet) to the connected peer</p> <p>Passive close: When FIN packet is received from peer, a FIN packet is replied back to the peer.</p> <p>When the disconnect-process is successful (that is, FIN/ACK packet is received successfully), Sn_SR is changed to SOCK_CLOSED. Otherwise, TCP_{T0} occurs (Sn_IR(3)='1)= and then Sn_SR is changed to SOCK_CLOSED.</p> <p>cf> If CLOSE is used instead of DISCON, only Sn_SR is changed to SOCK_CLOSED without disconnect-process.</p> <p>If a RST packet is received from a peer during communication, Sn_SR is unconditionally changed to SOCK_CLOSED.</p>
0x10	CLOSE	<p>Close Socket n.</p> <p>Sn_SR is changed to SOCK_CLOSED.</p>
0x20	SEND	<p>SEND transmits all the data in the Socket n TX buffer. For more details, please refer to Socket n TX Free Size Register (Sn_TX_FSR), Socket n, TX Write Pointer Register (Sn_TX_WR), and Socket n TX Read Pointer Register(Sn_TX_RD).</p>
0x21	SEND_MAC	<p>Valid only in UDP mode.</p> <p>The basic operation is same as SEND. Normally SEND transmits data after destination hardware address is acquired by the automatic ARP-process(Address Resolution Protocol). But SEND_MAC transmits data without the automatic ARP-process. In this case, the destination hardware address is acquired from Sn_DHAR configured by host, instead of APR-process.</p>
0x22	SEND_KEEP	<p>Valid only in TCP mode.</p> <p>It checks the connection status by sending 1byte keep-alive packet. If the peer cannot respond to the keep-alive packet during timeout time, the connection is terminated and the timeout interrupt will occur.</p>
0x40	RECV	<p>RECV completes the processing of the received data in Socket n RX Buffer by using a RX read pointer register (Sn_RX_RD).</p> <p>For more details, refer to Socket n RX Received Size Register (Sn_RX_RSR), Socket n RX Write Pointer Register (Sn_RX_WR), and Socket n RX Read Pointer Register (Sn_RX_RD).</p>

7.6.3 Sn_IR (Socket n Interrupt Register)

Address Offset : 0x0020

Reset value : 0x0000_0000

31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16
res															

15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
res				Sn_IR[4:0]											
												R	R	R	R

Sn_IR indicates the status of Socket Interrupt such as establishment, termination, receiving data, timeout). When an interrupt occurs and the corresponding bit of Sn_IMR is ‘1’, the corresponding bit of Sn_IR becomes ‘1’.

- [0] **CONNECT Interrupt** - This is issued one time when the connection with peer is successful and then Sn_SR is changed to SOCK_ESTABLISHED
- [1] **DISCONNECT Interrupt** - This is issued when FIN or FIN/ACK packet is received.
- [2] **RECV Interrupt** - This is issued whenever data is received from a peer.
- [3] **TIMEOUT Interrupt** - This is issued when ARP_{TO} or TCP_{TO} occurs.
- [4] **SENDOK Interrupt** - This is issued when SEND command is completed

7.6.4 Sn_IMR (Socket n Interrupt Mask Register)

Address Offset : 0x0024

Reset value: 0x0000_00FF

31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16
res															

15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
res				Sn_IMR[4:0]											
												R/W	R/W	R/W	R/W

Sn_IMR is used to mask interrupts. Each bit of Sn_IMR corresponds to each bit of Sn_IR. When a bit of Sn_IMR is ‘1’ and the corresponding bit of Sn_IR is ‘1’, an interrupt will be issued. In other words, if a bit of Sn_IMR is ‘0’, an interrupt will not be issued even if the corresponding bit of Sn_IR is ‘1’.

- [0] **CONNECT Interrupt Mask**

0: Disable CONNECT Interrupt

1: Enable CONNECT Interrupt

[1] DISCONNECT Interrupt Mask

0: Disable DISCONNECT Interrupt

1: Enable DISCONNECT Interrupt

[2] RECV Interrupt Mask

0: Disable RECV Interrupt

1: Enable RECV Interrupt

[3] TIMEOUT Interrupt Mask

0: Disable TIMEOUT Interrupt

1: Enable TIMEOUT Interrupt

[4] SENDOK Interrupt Mask

0: Disable SENDOK Interrupt

1: Enable SENDOK Interrupt

7.6.5 Sn_ICR (Socket n Interrupt Clear Register)

Address Offset : 0x0028

Reset value : 0x0000_0000

31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16
res															

15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
res								Sn_ICR[4:0]							

Sn_ICR is used to clear interrupts. Each bit of Sn_IR can be cleared when the host writes ‘1’ value to each bit of Sn_ICR corresponding to each bit of Sn_IR.

[0] CONNECT Interrupt Clear

[1] DISCONNECT Interrupt Clear

[2] RECV Interrupt Mask

[3] TIMEOUT Interrupt Mask

[4] SENDOK Interrupt Mask

* ReadClearWrite1 (R/C_W1) : Software can read as well as clear this bit by writing

1. Writing ‘0’ has no effect on the bit value.

7.6.6 Sn_SR (Socket n Status Register)

Address Offset : 0x0030

Reset value : 0x0000_0000

31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16
res															
15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
res		R/W													
								R/W							

Sn_SR indicates the status of Socket n. The status of Socket n is changed by Sn_CR or some special control packet as SYN, FIN packet in TCP.

Value	Symbol	Description
0x00	SOCK_CLOSED	This indicates that Socket n is released. When DISCON, CLOSE command is ordered, or when a timeout occurs, it is changed to SOCK_CLOSED regardless of previous status.
0x13	SOCK_INIT	This indicates Socket n is opened with TCP mode. It is changed to SOCK_INIT when Sn_MR (P[3:0]) = '0001' and OPEN command is ordered. After SOCK_INIT, user can use LISTEN /CONNECT command.
0x14	SOCK_LISTEN	This indicates Socket n is operating as 'TCP server' mode and waiting for connection-request (SYN packet) from a peer ('TCP client'). It will change to SOCK_ESTABLISHED when the connection-request is successfully accepted. Otherwise it will change to SOCK_CLOSED after TCPTO occurred (Sn_IR(TIMEOUT) = '1').
0x17	SOCK_ESTABLISHED	This indicates the status of the connection of Socket n. It changes to SOCK_ESTABLISHED when the 'TCP SERVER' processed the SYN packet from the 'TCP CLIENT' during SOCK_LISTEN, or when the CONNECT command is successful. During SOCK_ESTABLISHED, DATA packet can be transferred using SEND or RECV command.
0x1C	SOCK_CLOSE_WAIT	This indicates Socket n received the disconnect-request (FIN packet) from the connected peer. This is half-closing status, and data can be transferred. For full-closing, DISCON command is used. But For just-closing, CLOSE command is used.

0x22	SOCK_UDP	<p>This indicates Socket n is opened in UDP mode(Sn_MR(P[3:0]) = '0010').</p> <p>It changes to SOCK_UDP when Sn_MR(P[3:0]) = '0010' and OPEN command is ordered.</p> <p>Unlike TCP mode, data can be transferred without the connection-process.</p>
0x42	SOCK_MACRAW	<p>This indicates Socket 0 is opened in MACRAW mode (S0_MR(P[3:0]) = '0100') and is valid only in Socket 0.</p> <p>It changes to SOCK_MACRAW when S0_MR(P[3:0]) = '0100' and OPEN command is ordered.</p> <p>Like UDP mode socket, MACRAW mode Socket 0 can transfer a MAC packet (Ethernet frame) without the connection-process.</p>

The following table shows a temporary status indicated during changing the status of Socket n.

Value	Symbol	Description
0x15	SOCK_SYNSENT	<p>This indicates Socket n sent the connect-request packet (SYN packet) to a peer.</p> <p>It is temporarily shown when Sn_SR is changed from SOCK_INIT to SOCK_ESTABLISHED by CONNECT command.</p> <p>If connect-accept(SYN/ACK packet) is received from the peer at SOCK_SYNSENT, it changes to SOCK_ESTABLISHED.</p> <p>Otherwise, it changes to SOCK_CLOSED after TCPTO (Sn_IR[TIMEOUT] = '1') is occurred.</p>
0x16	SOCK_SYNRECV	<p>It indicates Socket n successfully received the connect-request packet (SYN packet) from a peer.</p> <p>If socket n sends the response (SYN/ACK packet) to the peer successfully, it changes to SOCK_ESTABLISHED. If not, it changes to SOCK_CLOSED after timeout occurs (Sn_IR[TIMEOUT] = '1').</p>
0x18	SOCK_FIN_WAIT	<p>These indicate Socket n is closing.</p>
0x1A	SOCK_CLOSING	<p>These are shown in disconnect-process such as active-close and passive-close.</p>
0X1B	SOCK_TIME_WAIT	<p>When Disconnect-process is successfully completed, or when timeout occurs, these change to SOCK_CLOSED.</p>

0X1D	SOCK_LAST_ACK	This indicates Socket n is waiting for the response (FIN/ACK packet) to the disconnect-request (FIN packet) by passive-close. It changes to SOCK_CLOSED when Socket n received the response successfully, or when timeout occurs (Sn_IR[TIMEOUT] = '1').
------	---------------	---

7.6.7 Sn_PNR (Socket n Protocol Number Register)

Address Offset : 0x0100

Reset value : 0x0000_0000

31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16
res															
15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
res	R/W														

This IP Protocol Register is user to set up the Protocol Field of IP Header at the IP layer RAW mode. There are several protocol number defined in advance by registering to IANA. For the overall list of upper level protocol identification number that IP is using, refer to online documents of IANA (<http://www.iana.org/assignments/protocol-numbers>).

Ex) Internet Control Message Protocol (ICMP) = 0x01, Internet Group Management Protocol = 0x02

7.6.8 Sn_TOSR (Socket n IP Type of Service Register)

Address Offset : 0x0104

Reset value : 0x0000_0000

31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16
res															
15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
res	R/W														

Sn_TOSR configures the TOS(Type Of Service field in IP Header) of Socket n. It is set before OPEN command.

For more the details, refer to <http://www.iana.org/assignments/ip-parameters>.

7.6.9 Sn_TTLR (Socket n TTL Register)

Address Offset : 0x0108

Reset value : 0x0000_0080

31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16
res															

15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
res		R/W													

Sn_TTL configures the TTL(Time To Live field in IP Header) of Socket n. It is set before OPEN command.

For more the details, refer to <http://www.iana.org/assignments/ip-parameters>.

7.6.10 Sn_FRAGR (Socket n Fragment offset Register)

Address Offset : 0x010C

Reset value : 0x0000_4000

31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16
res															

15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
Sn_FRAG[15:0]															
R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W

[15:0] Sn_FRAG configures the FRAG(Fragment field in IP header)

Ex) Sn_FRAGR = 0x0000 (Don't Fragment)

Sn_FRAG[15:8]

Sn_FRAG[7:0]



7.6.11 Sn_MSSR (Socket n Maximum Segment Register)

Address Offset : 0x0110

Reset value : 0x0000_0000

31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16
res	Res	Res	res	res	res	res	res	res	Res	res	res	res	res	res	res
15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
Sn_MSS[15:0]															
R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W

This register is used for MSS (Maximum Segment Size) of TCP, and the register displays MSS set by the other party when TCP is activated in Passive Mode.

Ex) In case of Socket 0 MSS = 1460 (0x05B4), configure as below,

0x4101_0110

0x05B4

7.6.12 Sn_PORTR (Socket n Source Port Register)

Address Offset : 0x0114

Reset value : 0x0000_0000

31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16
res	Res	Res	res	res	res	res	res	res	res	res	res	res	res	res	res
15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
Sn_PORT[15:0]															
R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W

Sn_PORTR configures the source port number of Socket n. It is valid when Socket n is used in TCP/UDP mode. It should be set before OPEN command is ordered.

Ex) In case of Socket 0 Port = 5000(0x1388), configure as below,

0x4101_0114

0x1388

7.6.13 Sn_DHAR (Socket n Destination Hardware address Register)

Address Offset : 0x0118

Reset value : 0x0000_0000

31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16
Sn_DHAR0[31:24]								Sn_DHAR0 [23:16]							
R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W

15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
Sn_DHAR0 [15:8]								Sn_DHAR0 [7:0]							
R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W

Address Offset : 0x011E

Reset value : 0x0000_0000

31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	
	Sn_DHAR1 [31:24]								Sn_DHAR1 [23:16]							
R	R	R	R	R		R	R	R	R	R	R	R	R	R	R	

Address Offset : 0x011C

Reset value : 0x0000_0000

15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
Sn_DHAR1 [15:8]								Sn_DHAR1 [7:0]							
W	W	W	W	W	W	W	W	W	W	W	W	W	W	W	W

Sn_DHAR configures the destination hardware address of Socket n when using SEND_MAC command in UDP mode or it indicates that it is acquired in ARP-process by CONNECT/SEND command.

Ex) In case of writing MAC address “00.08.DC.12.34.56”

Sn_DHAR0 Sn_DHAR0 Sn_DHAR0 Sn_DHAR0 Sn_DHAR1 Sn_DHAR1

[31:24] [23:16] [15:8] [7:0] [15:8] [7:0]

0x00	0x08	0xDC	0x12	0x34	0x56
------	------	------	------	------	------

Ex) In case of reading MAC address “00.08.DC.12.34.56”

Sn_DHAR0	Sn_DHAR0	Sn_DHAR0	Sn_DHAR0	Sn_DHAR1	Sn_DHAR1
[31:24]	[23:16]	[15:8]	[7:0]	[31:24]	[23:16]

0x00	0x08	0xDC	0x12	0x34	0x56
------	------	------	------	------	------

7.6.14 Sn_DPORTR (Socket n Destination Port Number Register)

Address Offset : 0x0120

Reset value : 0x0000_0000

31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16
Res	Res	Res	res	res	res	res	res	res	res	res	res	res	res	res	res
Sn_DPROT[15:0]															
R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W

Sn_DPORT configures or indicates the destination port number of Socket n. It is valid when Socket n is used in TCP/UDP mode.

In TCP client mode, it configures the listen port number of ‘TCP server’ before CONNECT command.

In TCP server mode, it indicates the port number of ‘TCP client’ after successfully establishing connection.

In UDP mode, it configures the port number of peer to be transmitted the UDP packet by SEND/SEND_MAC command.

Ex) In case of Socket 0 Destination Port = 5000(0x1388), configure as below,

0x4101_0120

0x1388

7.6.15 Sn_DIPR (Socket n Destination IP address Register)

Address Offset : 0x0124

Reset value : 0x0000_0000

31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16
----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----

Sn_DIPR[31:24]								Sn_DIPR [23:16]							
R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W

15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
----	----	----	----	----	----	---	---	---	---	---	---	---	---	---	---

Sn_DIPR [15:8]								Sn_DIPR [7:0]							
R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W

Sn_DIPR configures or indicates the destination IP address of Socket n. It is valid when Socket n is used in TCP/UDP mode.

In TCP client mode, it configures an IP address of ‘TCP server’ before CONNECT command.

In TCP server mode, it indicates an IP address of ‘TCP client’ after successfully establishing connection.

In UDP mode, it configures an IP address of peer to be received the UDP packet by SEND or SEND_MAC command.

Ex) In case of “192.168.0.2”

Sn_DIPR[31:24]	Sn_DIPR [23:16]	Sn_DIPR [15:8]	Sn_DIPR [7:0]
----------------	-----------------	----------------	---------------

192 (0xC0)	168 (0xA8)	0 (0x00)	2 (0x02)
------------	------------	----------	----------

7.6.16 Sn_KATMR (Socket n Keep Alive Timer Register)

Address Offset : 0x0180

Reset value : 0x0000_0000

31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16
----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----

Res															

15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
----	----	----	----	----	----	---	---	---	---	---	---	---	---	---	---

res	Sn_KATM[7:0]														
								R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W

Sn_KPALVTR configures the transmitting timer of ‘KEEP ALIVE(KA)’ packet of SOCKETn. It is valid only in TCP mode, and ignored in other modes. The time unit is 5s.


KA packet is transmittable after Sn_SR is changed to SOCK_ESTABLISHED and after the data is transmitted or received to/from a peer at least once. In case of ‘Sn_KPALVTR > 0’, WZTOE automatically transmits KA packet after time-period for checking the TCP connection (Auto-keepalive-process). In case of ‘Sn_KPALVTR = 0’, Auto-keep-alive-process will not operate, and

KA packet can be transmitted by SEND_KEEP command by the host (Manual-keep-alive-process).

Manual-keep-alive-process is ignored in case of 'Sn_KPALVTR > 0'.

Ex) Sn_KPALVTR = 10 (Keep Alive packet will be transmitted every 50 seconds.)

Sn_KATM[7:0]



7.6.17 Sn_RTR (Socket n Retry Time Register)

Address Offset : 0x0184

Reset value : 0x0000_0000


31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16
res	res	res	res	res	res	res	res	res	res	res	res	res	res	res	res
15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
Sn_RTR[15:0]															
R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W

Sn_RTR configures the retransmission timeout period of Socket n. When Retry Counter Register(RTR) is zero, Sn_RTR is valid. The unit of timeout period is 100us.

During the time configured by Sn_RTR, WZTOE waits for the peer response to the packet that is transmitted by Sn_CR(CONNECT, DISCON, CLOSE, SEND, SEND_MAC, SEND_KEEP command). If the peer does not respond within the RTR time, WZTOE retransmits the packet or issues timeout.

Ex) When timeout-period is set as 400ms, RTR = (400ms / 1ms) X 10 = 4000(0x0FA0)

RTR[15:0]



7.6.18 Sn_RCR (Socket n Retry Counter Register)

Address Offset : 0x0188

Reset value : 0x0000_0000

31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16
res								Res							

15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
res								Sn_RCR[7:0]							
								R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W

Sn_RCR configures the number of time of retransmission of Socket n. When Retry Counter Register(RCR) is zero, Sn_RCR is valid. When retransmission occurs as many as ‘Sn_RCR+1’, Timeout interrupt is issued (Sn_IR[TIMEOUT] = ‘1’).

Ex) Sn_RCR = 0x0007

Sn_RCR[7:0]

0x07

7.6.19 Sn_TXBUF_SIZE (Socket n TX Buffer Size Register)

Address Offset : 0x0200

Reset value : 0x0000_0000

31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16
Res															

15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
res	Sn_TMS[7:0]														
								R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W

Sn_TXBUF_SIZE configures the TX Buffer size of Socket n. Socket n TX Buffer size can be configured with 0,1,2,4,8 and 16 Kbytes. If a different size is configured, the data can't be normally transmitted to a peer.

Although Socket n TX Buffer size is initially configured to 2Kbytes, user can be re-configure its size using Sn_TXBUF_SIZE. The total sum of Sn_TXBUF_SIZE cannot be exceed 16Kbytes. When exceeded, the data transmission error is occurred.

When all Sn_TXBUF_SIZE have been configured, Socket n TX Buffer is allocated with the configured size in 16KB TX Buffer and is assigned sequentially from Socket 0 to Socket 7.

Socket n TX Buffer can be accessible with 16bits Offset Address ranged from 0x0000 to 0xFFFF regardless of the configured size. (Refer to Sn_TX_WR & Sn_TX_RD).

Value (dec)	0	1	2	4	8	16
-------------	---	---	---	---	---	----

Buffer size	0KB	1KB	2KB	4KB	8KB	16KB
-------------	-----	-----	-----	-----	-----	------

Ex) Socket 0 TX Buffer Size = 4KB

0x4600_0200

0x04

7.6.20 Sn_TX_FSR (Socket n TX Free Size Register)

Address Offset : 0x0204

Reset value : 0x0000_0800

31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16
Res															

15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
res		R/W													

Sn_TX_FSR indicates the free size of Socket n TX Buffer. It is initialized to the configured size by Sn_TX_SIZE. Data bigger than Sn_TX_SIZE should not be saved in the Socket n TX Buffer because the bigger data overwrites the previous saved data not yet sent. Therefore, check before saving the data to the Socket n TX Buffer, and if data is equal or smaller than its checked size, transmit the data with SEND/SEND_MAC command after saving the data in Socket n TX Buffer. But, if data is bigger than its checked size, transmit the data after dividing into the checked size and saving in the Socket n TX Buffer.

If Sn_MR(P[3:0]) is not TCP mode('0001'), it is automatically calculated as the difference between 'Socket n TX Write Pointer (Sn_TX_WR)' and 'Socket n TX Read Pointer (Sn_TX_RD)'. If Sn_MR(P[3:0]) is TCP mode('0001'), it is automatically calculated as the difference between Sn_TX_WR and the internal ACK pointer which indicates the point of data is received already by the connected peer.

Ex) In case of 2048(0x0800) in S0_TX_FSR,

0x4600_0204

0x0800

Note) Because this register for representing the size information is 16 bits, it is impossible to read all bytes at the same time. Before 16 bit-read operation is not completed, the value may be changed.

Therefore, it is recommended that you read all 16-bits twice or more until getting the same value.

7.6.21 Sn_TX_RD (Socket n TX Read Pointer Register)

Address Offset : 0x0208

Reset value : 0x0000_0000

31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16
Res	Res	Res	res	res	res	res	res	res	res	res	res	res	res	res	res
Sn_TXRP[15:0]															
R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W

Sn_TX_RD is initialized by OPEN command. However, if Sn_MR(P[3:0]) is TCP mode('0001'), it is re-initialized while connecting with TCP.

After its initialization, it is auto-increased by SEND command. SEND command transmits the saved data from the current Sn_TX_RD to the Sn_TX_WR in the Socket n TX Memory. After transmitting the saved data, the SEND command increases the Sn_TX_RD as same as the Sn_TX_WR. If its increment value exceeds the maximum value 0xFFFF, (greater than 0x10000 and the carry bit occurs), then the carry bit is ignored and will automatically update with the lower 16bits value.

7.6.22 Sn_TX_WR (Socket n TX Write Pointer Register)

Address Offset : 0x020C

Reset value : 0x0000_0000

31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16
Res	Res	Res	res	res	res	res	res	res	res	res	res	res	res	res	res
Sn_TXWP[15:0]															
R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W

Sn_TX_WR is initialized by OPEN command. However, if Sn_MR(P[3:0]) is TCP mode('0001'), it is re-initialized while connecting with TCP.

It should be read or to be updated like as follows.

1. Read the starting address for saving the transmitting data.
2. Save the transmitting data from the starting address of Socket n TX buffer.
3. After saving the transmitting data, update Sn_TX_WR to the increased value as many as transmitting data size. If the increment value exceeds the maximum value 0xFFFF (greater than 0x10000 and the carry bit occurs), then the carry bit is ignored and will automatically update with the lower 16bits value.
4. Transmit the saved data in Socket n TX Buffer by using SEND/SEND command

7.6.23 Sn_RXBUF_SIZE (Socket n RX Buffer Size Register)

Address Offset : 0x0220

Reset value : 0x0000_0000

31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16
Res															

15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
Res		R/W													

Sn_RXBUF_SIZE configures the RX Buffer size of Socket n. Socket n RX Buffer size can be configured with 1,2,4,8, and 16 Kbytes. If a different size is configured, the data cannot be normally received from a peer.

Although Socket n RX Buffer size is initially configured to 2Kbytes, user can re-configure its size using Sn_RXBUF_SIZE. The total sum of Sn_RX_SIZE cannot be exceed 16Kbytes. When exceeded, the data reception error is occurred.

When all Sn_RXBUF_SIZE have been configured, Socket n RX Memory is allocated with the configured size in 16KB RX Memory and is assigned sequentially from Socket 0 to Socket 7.

Socket n RX Buffer Block can be accessible with the 16bits Offset Address ranged from 0x0000 to 0xFFFF regardless of the configured size. (Refer to Sn_RX_RD & Sn_RX_WR).

Value (dec)	0	1	2	4	8	16
Buffer size	0KB	1KB	2KB	4KB	8KB	16KB

Ex) Socket 0 RX Buffer Size = 8KB

0x4101_0220

0x08

7.6.24 Sn_RX_RSR (Socket n RX Received Size Register)

Address Offset : 0x0224

Reset value : 0x0000_0000

31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16
Res	Res	Res	res	res	res	res	res	res	res	res	res	res	res	res	res
15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
Sn_RX_RSR[15:0]															
R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W

Sn_RX_RSR indicates the data size received and saved in Socket n RX Buffer. Sn_RX_RSR does not exceed the Sn_RXBUF_SIZE and is calculated as the difference between ‘Socket n RX Write Pointer (Sn_RX_WR)’ and ‘Socket n RX Read Pointer (Sn_RX_PD)’.

Ex) In case of 2048(0x0800) in S0_RXSR,

0x4101_0224

0x0800

Note) Because this register for representing the size information is 16 bits, it is impossible to read all bytes at the same time. Before 16 bit-read operation is not completed, the value may be changed.

Therefore, it is recommended that you read all 16-bits twice or more until getting the same value.

7.6.25 Sn_RX_RD (Socket n RX Read Pointer Register)

Address Offset : 0x0228

Reset value : 0x0000_0000

31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16
Res															

--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--

15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
Sn_RXRP[15:0]															
R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W

Sn_RX_RD is initialized by OPEN command. Make sure to be read or updated as follows.

1. Read the starting save address of the received data
2. Read data from the starting address of Socket n RX Buffer.
3. After reading the received data, Update Sn_RX_RD to the increased value as many as the reading size. If the increment value exceeds the maximum value 0xFFFF, that is, is greater than 0x10000 and the carry bit occurs, update with the lower 16bits value ignored the carry bit.
4. Order RECV command is for notifying the updated Sn_RX_RD to TOE.

Ex) In case of 2048(0x0800) in S0_RX_RD,

0x4101_0228

0x08

7.6.26 Sn_RX_WR (Socket n RX Write Pointer Register)

Address Offset : 0x022C

Reset value : 0x0000_0000


31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16
Res															

15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
Sn_RX_WR[15:0]															
R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W

Sn_RX_WR is initialized by OPEN command and it is auto-increased by the data reception.

If the increased value exceeds the maximum value 0xFFFF, (greater than 0x10000 and the carry bit occurs), then the carry bit is ignored and will automatically update with the lower 16bits value.

Ex) In case of 2048(0x0800) in S0_RX_WR,



8 Booting Sequence

W7500 has three different boot modes that can be selected through the BOOT pin and TEST pin as shown in Table 5.

Table 5 operation of mode selection

Mode selection		Mode	Aliasing
TEST	BOOT		
0	0	APP	User code execute in Main Flash memory.
0	1	ISP	In this mode, W7500 can support ISP function in order to control flash using serial interface.

When W7500 is reset by hardware, it will be operated as below in embedded boot code.

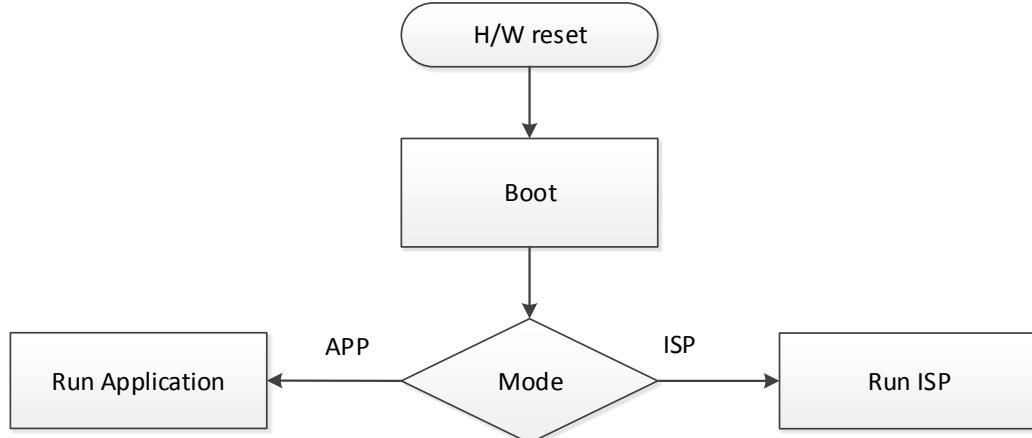


Figure 6. operation of boot code

9 Embedded Flash memory

9.1 Flash main features

- Up to 128Kbytes of Flash memory
- Memory organization:
 - Main Flash memory block:
Up to 128Kbytes
 - Information block:
Up to 512bytes
Information block is read only
 - Data block:
Up to 512bytes
- Flash memory interface features:
 - Read interface with prefetch buffer(1 x 32-bit words)
 - Flash Program / Erase operation
 - Read / Write protection

9.2 Flash memory functional description

9.2.1 Flash memory organization

The Flash memory is organized of 32-bit wide memory cells that can be used for storing both code and data constants.

The memory organization is based on a main Flash memory block containing 512 sectors of 256byte or 32 blocks of 4Kbyte. The block and sector provides read/write protection.

Table 6 description of Flash memory

Flash area	Flash memory address	Size (bytes)	Name	Description
Main Flash memory	0x0000 0000 ~ 0x0000 00FF	256	Sector 0	Block 0
	0x0000 0100 ~ 0x0000 01FF	256	Sector 1	
	0x0000 0200 ~ 0x0000 02FF	256	Sector 2	
	⋮	⋮	⋮	
	0x0000 0F00 ~ 0x0000 0FFF	256	Sector 15	
	⋮	⋮	⋮	
	0x0000 7000 ~ 0x0000 70FF	256	Sector112	
	0x0000 7100 ~ 0x0000 71FF	256	Sector113	
	0x0000 7200 ~ 0x0000 72FF	256	Sector114	

	⋮	⋮	⋮	
	0x0000 7F00 ~ 0x0000 7FFF	256	Sector127	
	⋮	⋮	⋮	⋮
	0x0001 FC00 ~ 0x0001 FCFF	256	Sector509	Block 32
	0x0001 FD00 ~ 0x0001 FDFF	256	Sector510	
	0x0001 FE00 ~ 0x0001 FEFF	256	Sector511	
	⋮	⋮	⋮	
	0x000 00 ~ 0x000 FF	256	Sector524	
Information block	0x0003 FC00 ~ 0x0003 FCFF	256		Lock info
	0x0003 FD00 ~ 0x0003 FDFF		Reserved	
Data block	0x0003 FE00 ~ 0x0003 FEFF	256		Data0
	0x0003 FF00 ~ 0x0003 FFFF	256		Data1
Flash memory Interface register	0x4100 5000 ~ 0x4100 5003	4		FACCR
	0x4100 5004 ~ 0x4100 5007	4		FADDR
	0x4100 5008 ~ 0x4100 500B	4		FDATAR
	0x4100 500C ~ 0x4100 500F	4		FCTRLR
	0x4100 5010 ~ 0x4100 5013	4		FSTATR
	0x4100 5014 ~ 0x4100 5017	4		FLOCKR0
	0x4100 5018 ~ 0x4100 501B	4		FLOCKR1
	0x4100 5030 ~ 0x4100 5033	4		FKEYR0
	0x4100 5034 ~ 0x4100 5037	4		FKEYR1
	0x4100 5038 ~ 0x4100 503B	4		BSADDR0
	0x4100 503C ~ 0x4100 503F	4		BSADDR1

The W7500 embedded Flash memory can be programmed using in-circuit programming or in-application programming.

The **in-circuit programming (ICP)** method is used to update the entire contents of the Flash memory using the SWD protocol or the boot loader to load the user application into the microcontroller. ICP offers quick and efficient design iterations and eliminates unnecessary package handling or socketing of devices.

In contrast to the ICP method, **in-application programming (IAP)** can use any communication interface supported by the microcontroller (I/Os, UART, I₂C, SPI, etc.) to download programming data into memory. IAP allows the user to re-program the Flash memory while the application is running. Nevertheless, part of the application has to have been previously programmed in the Flash memory using ICP.

The program and erase operations can be performed over the whole product voltage range.

They are managed through the following seven Flash registers:

-
- Flash access control register (FACCR)
 - Flash address register (FADDR)
 - Flash data register (FDATAR)
 - Flash control register (FCTRLR)
 - Flash status register (FSTATR)
 - Flash lock register (FLOCKR0/R1)
 - Flash key register (FKEYR0/R1)

Unlocking the Flash access Control register (FACCR)

After reset, the Flash memory is protected against unwanted write or erase operations. The FACCR register is not accessible in write mode. An unlocking sequence should be written to the FKEYR0/R1 register to open the access to the FACCR register. This sequence consists of two write operations:

- Write KEY 0 (FKEYR0) = 0x52537175
- Write KEY 1 (FKEYR1) = 0xA91875FC

Any wrong sequence locks up the FACCR register.

The FACCR register can be locked again by finishing flash control operation.

9.2.2 Read operations

The embedded Flash module can be addressed directly as a common memory space. The instruction fetch and the data access are both done through the same AHB bus. Read accesses can be performed with the following options managed through the Flash control register. (FCTRLR)

The Flash reading sequence using FCTRLR register is as below:

1. Check that no main Flash memory operation is ongoing by checking the RDY bit in the FSTATR register.
2. Set KEY in FKEYR0/R1 for setting FACCR register.
3. Set FEN and CTRL bits in the FACCR register.
4. Write main Flash memory address or Data block address to FADDR register.
5. Set RDI or RD bit in FCTRLR to 1. If use RDI bit, don't need to set FADDR again due to increase automatically by SZ bit in FACCR register.
6. Read data from FDATAR register.
7. Wait until the RDY bit is 1 in the FSTATR register.(it is set when the programming operation has succeeded)
8. Set KEY in FKEYR0/R1 for clearing FACCR register.
9. Clear FEN and CTRL bits in the FACCR register

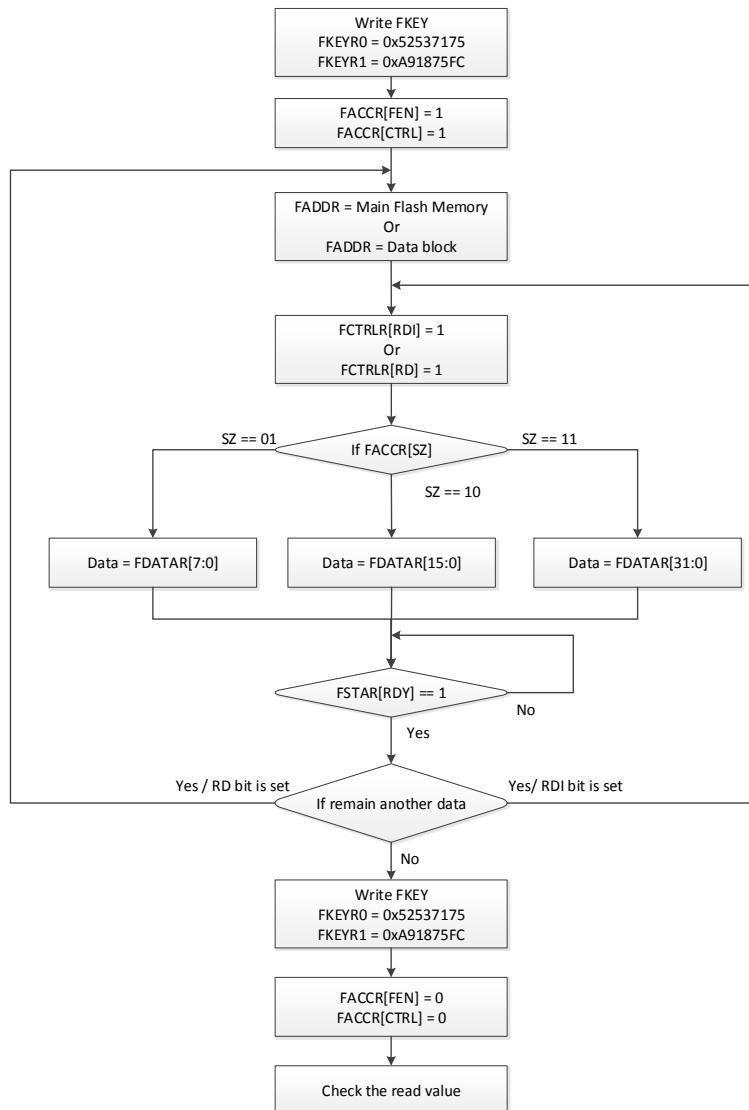


Figure 7. Flash reading sequence

9.2.3 Flash erase operations

Sector Erase

Follow the procedure below to erase a sector:

1. Check that no Flash memory operation is ongoing by checking the RDY bit in the FSTATR register.
2. Set KEY in FKEYR0/R1 for setting FACCR register.
3. Set FEN and CTRL bits in the FACCR register.
4. Write main Flash memory address to FADDA register to erase.
5. Set SER bit in FACTRLR to 1.
6. Wait until the RDY bit is 1 in the FSTATR register.
7. Set KEY in FKEYR0/R1 for clearing FACCR register.
8. Clear FEN and CTRL bits in the FACCR register

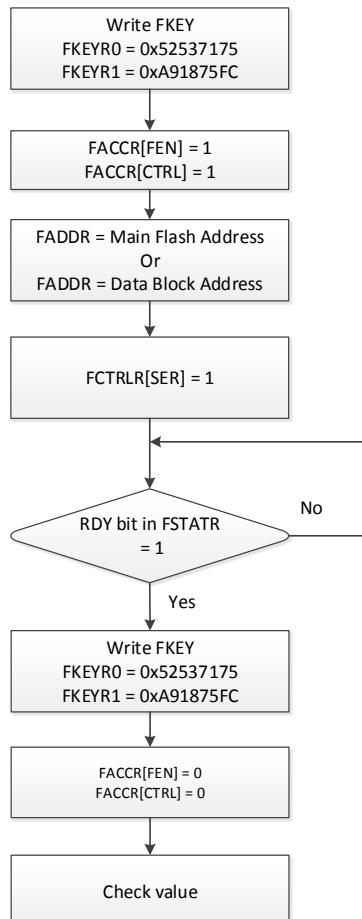


Figure 8. Flash erase operations

Block Erase

To erase a block, set BER bit in FACTRLR to 1. All other procedures are the same as the sector erase sequence.

Chip Erase (All main Flash memory erase)

To erase chip (Main Flash memory), Set CER bit in FACTRLR to 1. All other procedures are the same as the sector erase sequence.

Mass Erase (All main Flash memory erase + Data block erase)

To erase mass (Main Flash memory + Data block), Set MER bit in FACTRLR to 1. All other procedures are the same as the sector erase sequence.

9.2.4 Flash program operation

The main Flash memory can be programmed word, half word, or 1 byte at a time by SZ bit of FACC. The program operation is started when the CPU writes a data into a main Flash memory address with the WRI or WR bit of FCTRLR register set.

The main Flash memory programming sequence in standard mode is as below:

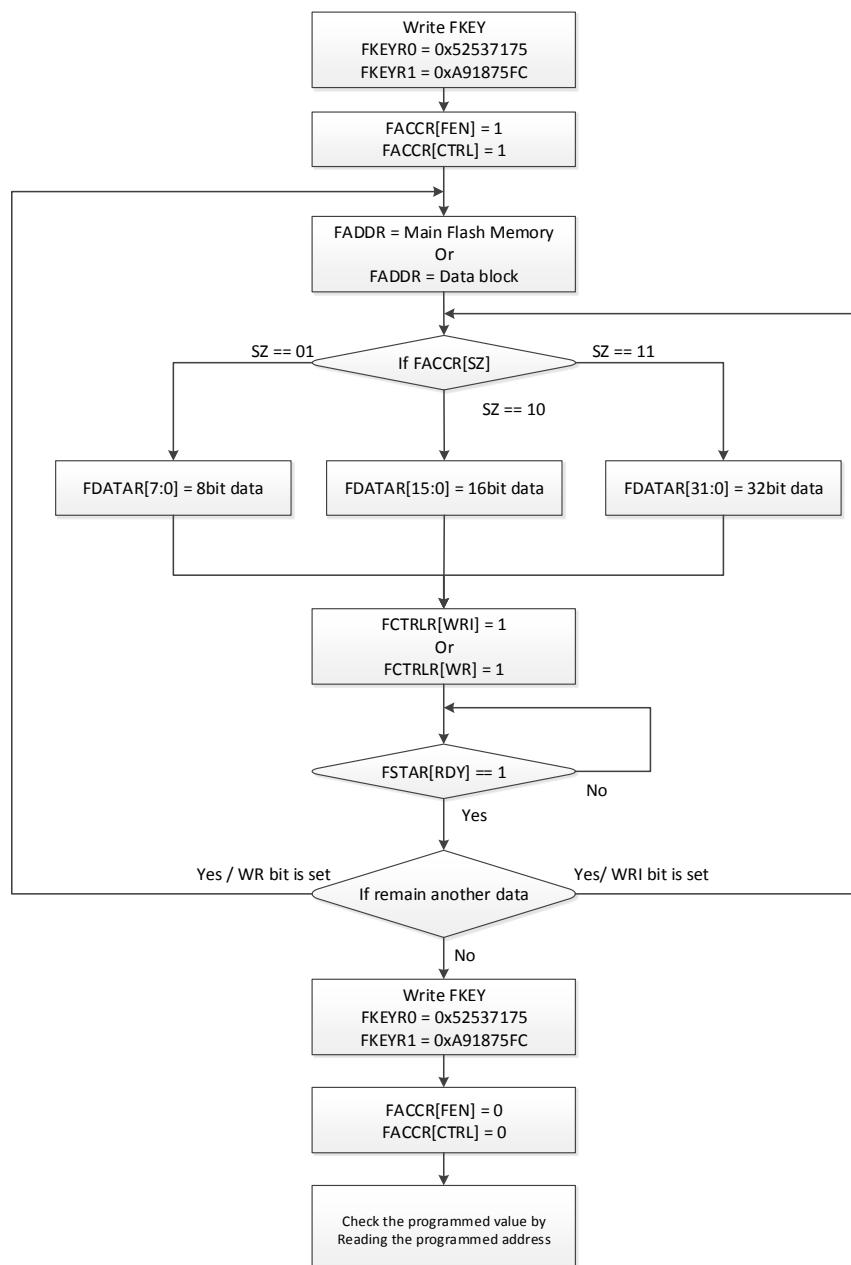


Figure 9. main Flash memory programming sequence

1. Check that no main Flash memory operation is ongoing by checking the RDY bit in the FSTARTR register.

-
2. Set KEY in FKEYR0/R1 for setting FACCR register.
 3. Set FEN and CTRL bits in the FACCR register.
 4. Write main Flash memory address or Data block address to FADDR register.
 5. Write data to FDATAR register.
 6. Set WRI or WR bit in FACTRLR to 1. If use WRI bit, don't need to set FADDR again due to increase automatically by SZ bit in FACCR register.
 7. Wait until the RDY bit is 1 in the FSTATR register.(it is set when the programming operation has succeeded)
 8. Set KEY in FKEYR0/R1 for clearing FACCR register.
 9. Clear FEN and CTRL bits in the FACCR register

9.3 Memory protection

The user area of the Flash memory can be protected against read by untrusted code. The blocks of the Flash memory can also be protected against unwanted write due to loss of program counter contexts. The write-protection granularity is one block (4Kbyte).

9.3.1 Read protection

The read protection is activated by DRL bit and CRL bit in FLOCKR0 register.

- DRL0 : read protection to Data0 area in Data block.
- DRL1 : read protection to Data1 area.in Data block
- CRL : read protection to main Flash memory

9.3.2 Write protection

The write protection is implemented with a granularity of one block. It is activated by configuring the FLOCKR1 register or DWL bit, CABWL bit in FLOCKR0 register.

- FLOCKR1 : write protection to main Flash memory with a granularity of one block.
- DWL0 : write protection to Data0 area in Data block.
- DWL1 : write protection to Data1 area in Data block.
- CABWL : write protection to main Flash memory all block.

10 Clock Reset generator (CRG)

10.1 Introduction

CRG is clock reset generator block for W7500 System. It provides every clock/reset for all other block include CPU and peripherals. CRG includes PLL and POR.

10.2 Features

10.2.1 Reset

- Three types of reset - external reset, Power reset, system reset
- External reset is generated by low level on the RSTn pin (external reset)
- Power reset is generated by Power-on reset (POR)
- Power on reset is generated by POR
- System reset is generated when one of the following events occurs
 - Watchdog event
 - After remapping
 - Software reset (SYSRESETREQ bit in Cortex-M0. Refer to the Cortex-M0 technical reference manual for more detail)
- Power reset sets all registers to their reset values.
- System reset sets all registers to their reset values except the CRG block registers and remap register to protect remap value

10.2.2 Clock

Two clock sources can be used to drive the system clock.

- External oscillator clock (8MHz ~ 24MHz) (OCLK)
- Internal 8MHz RC oscillator clock (RCLK)

One additional clock source

- 32.768KHz low speed external crystal which derives the real time clock.

There is a PLL

One PLL is integrated

- Input clock range is from 8MHz to 24MHz
- Frequency can be generated by M/N/OD registers. (refer register description)
- Bypass option enabled

There are many generated clocks for independent operating with system clock

- System clock (FCLK)
- ADC clock (ADCCLK)
- SSP0, SSP1 clock (SSPCLK)
- UART0, UART1 clock (UARTCLK)
- Two Timer clocks (TIMCLK0, TIMCLK1)
- 8ea PWM clocks (PWMCLK0 - PWMCLK7)
- Real time clock (RTCCLK)
- WDOG clock (WDOGCLK)
- Random number generator clock (RNGCLK)

RNGCLK have only one source (pll output) and no prescaler

Some of the generated clocks turn off automatically when CPU enters sleep mode.

- ADCCLK, RNGCLK

Generate two Hardware TCPIP Clocks (MII_RXC, MII_TXC) are from external PADs.

Hardware TCPIP Clocks can be gated by register control.

All clocks generated from CRG can be monitored.

10.3 Functional description

Figure 10 shows the CRG block diagram.

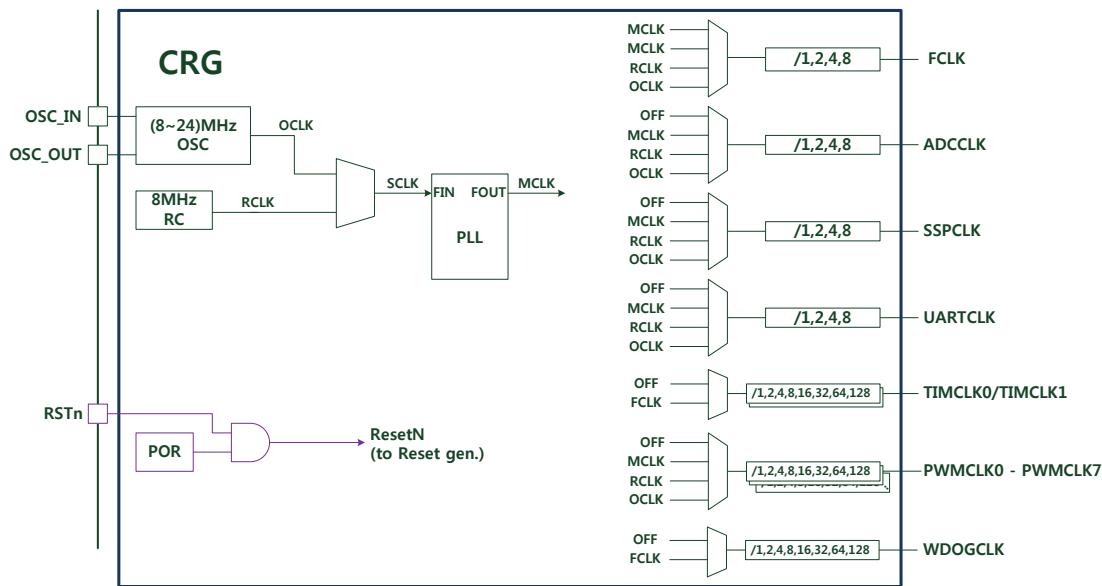


Figure 10 CRG block diagram

10.3.1 External Oscillator Clock


External oscillator clock (OCLK) can be generated from two possible clock source

- External crystal/ceramic resonator (8 to 24MHz external oscillator)
- User external clock

Table 7 shows the two clock sources of external oscillator clock

Table 7 External oscillator clock sources

	External clock	Crystal/ Ceramic resonators

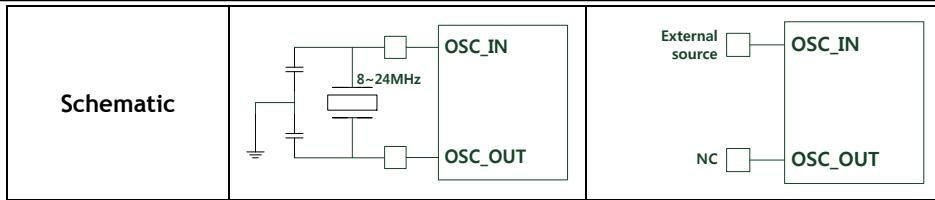

10.3.2RC oscillator clock

RC oscillator clock (RCLK) signal is generated from an internal 8MHz RC oscillator.

RC oscillator has the advantage of providing a clock source at low cost (no external components). However the RC oscillator is less accurate than the external crystal or ceramic resonator.

- Accuracy : 1% at $T_A = 25^\circ\text{C}$ (User don't need to calibration)

10.3.3PLL

The internal PLL can be used to multiply the External Oscillator Clock (OCLK) or RC Oscillator Clock (RCLK). PLL input can be selected by register.

PLL output clock can be generated by following the equations below.

- $F_{OUT} = F_{IN} \times M / N \times 1 / OD$
- Where:
- $M = M[5] \times 2^5 + M[4] \times 2^4 + M[3] \times 2^3 + M[2] \times 2^2 + M[1] \times 2 + M[0] \times 1$
- $N = N[5] \times 2^5 + N[4] \times 2^4 + N[3] \times 2^3 + N[2] \times 2^2 + N[1] \times 2 + N[0] \times 1$
- $OD = 2^{(2 \times OD[1])} \times 2^{(1 \times OD[0])}$

10.3.4Generated clock

Each generated clock source can be selected among 3 clock source as independent by each clock source select register.

- PLL output clock (MCLK)
- Internal 8MHz RC oscillator clock (RCLK)
- External oscillator clock (8MHz ~ 24MHz) (OCLK)

Each generated clock has own prescaler which can be selected individually by each prescale value register.

- FCLK, ADCCLK, SSPCLK, UARTCLK : 1/1, 1/2, 1/4, 1/8
 - TIMCLK0, TIMCLK1, PWMCLK0 - PWMCLK7, RTCCLK, WDOGCLK : 1/1, 1/2, 1/4, 1/8, 1/16, 1/32, 1/64, 1/128

10.4 Registers (Base address : 0x4100_1000)

10.4.1OSC power down register (OSC_PDR)

Address offset : 0x000

Reset value : 0x0000_0000

31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16
res															

15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
res	OSCPD														

[0] OSCPDP - Internal 8MHz RC oscillator power down register

This bit written by S/W to RCOSC enter sleep mode or not

0 : normal operation

1 : power down (enter sleep mode)

10.4.2PLL power down register (PLL_PDR)

Address offset : 0x010

Reset value : 0x0000_0001

31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16
res															

15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
res	PLLPD														

[0] PLLPD - PLL power down register

This bit written by S/W to PLL power down or not

0 : power down

1 : normal operation

10.4.3PLL frequency calculating register (PLL_FCR)

Address offset : 0x014

Reset value : 0x0005_0200

31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16
res	M														

													R/W
--	--	--	--	--	--	--	--	--	--	--	--	--	-----

15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
res	res			N			res	res	res	res	res	res	OD		
				R/W											R/W

[1:0] OD

[13:8] N

[21:16] M

These bits are written by S/W to set frequency of PLL output.

PLL output frequency FOUT is calculated by the following equations:

$$FOUT = FIN \times M / N \times 1 / OD$$

Where:

$$M = M[5] \times 32 + M[4] \times 16 + M[3] \times 8 + M[2] \times 4 + M[1] \times 2 + M[0] \times 1 \quad (2 \sim 63)$$

$$N = N[5] \times 32 + N[4] \times 16 + N[3] \times 8 + N[2] \times 4 + N[1] \times 2 + N[0] \times 1 \quad (1 \sim 63)$$

$$OD = 2^{(2 \times OD[1])} \times 2^{(1 \times OD[0])}$$

10.4.4PLL output enable register (PLL_OER)

Address offset : 0x018

Reset value : 0x0000_0001

31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16
res															

15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
res	PLLOEN														
															R/W

[0] PLLOEN - output enable register of PLL

This bit written by S/W to control output enable of PLL

0 : Clock out is disable. VCO is working but FOUT is low only.

1 : Clock out is enable.

10.4.5PLL bypass register (PLL_BPR)

Address offset : 0x01c

Reset value : 0x0000_0000

31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16
res															

--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--

15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0	
res	PLLBP															
															R/W	

[0] PLLBP - bypass register of PLL

This bit written by S/W to control bypass or not of PLL

0 : bypass disable. Normal operation

1 : bypass enable. Clock out is clock input

10.4.6PLL input clock source select register (PLL_IFSR)

Address offset : 0x020

Reset value : 0x0000_0000

31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	
res																

15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0	
res	PLLIS															
															R/W	

[0] PLLIS - select register of PLL input clock source

This bit written by S/W to select

0 : Internal 8MHz RC oscillator clock (RCLK)

1 : External oscillator clock (OCLK, 8MHz ~ 24MHz)

10.4.7FCLK source select register (FCLK_SSR)

Address offset : 0x030

Reset value : 0x0000_0001

31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	
res																

15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0	
res	FCKSRC															
															R/W	

[1:0] FCKSRC - select register of FCLK clock source

These bits are written by S/W to select

-
- 00, 01 : output clock of PLL (MCLK)
 10 : Internal 8MHz RC oscillator clock (RCLK)
 11 : External oscillator clock (OCLK, 8MHz ~ 24MHz)

10.4.8FCLK prescale value select register (FCLK_PVSR)

Address offset : 0x034

Reset value : 0x0000_0000

31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16
res															

15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
res	FCKPRE														
															R/W

[1:0] FCKPRE - select prescale value of FCLK clock

These bits are written by S/W to select

00 : 1/1 (bypass)

01 : 1/2

10 : 1/4

11 : 1/8

10.4.9SSPCLK source select register (SSPCLK_SSR)

Address offset : 0x040

Reset value : 0x0000_0001

31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16
res															

15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
res	SSPCSS														
															R/W

[1:0] SSPCSS - SSPCLK clock source select register.

These bits are written by S/W to select clock source

00 : disable clock

01 : PLL output clock (MCLK)

10 : Internal 8MHz RC oscillator clock (RCLK)

11 : External oscillator clock (OCLK, 8MHz ~ 24MHz)

10.4.10 SSPCLK prescale value select register (SSPCLK_PVSR)

Address offset : 0x044

Reset value : 0x0000_0000

31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16
res															

15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
res	SSPCP														
														R/W	

[1:0] SSPCP - select prescale value of SSPCLK clock

These bits are written by S/W to select

00 : 1/1 (bypass)

01 : 1/2

10 : 1/4

11 : 1/8

10.4.11 ADCCLK source select register (ADCCLK_SSR)

Address offset : 0x060

Reset value : 0x0000_0001

31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16
res															

15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
res	ADCSS														
															R/W

[1:0] ADCSS - ADCCLK clock source select register.

These bits are written by S/W to select clock source

00 : disable clock

01 : PLL output clock (MCLK)

10 : Internal 8MHz RC oscillator clock (RCLK)

11 : External oscillator clock (OCLK, 8MHz ~ 24MHz)

10.4.12 ADCCLK prescale value select register (ADCCLK_PVSR)

Address offset : 0x064

Reset value : 0x0000_0000

31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16
res															

15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
res	ADCCP														
														R/W	

[1:0] ADCCP - select prescale value of ADCCLK clock

These bits are written by S/W to select

00 : 1/1 (bypass)

01 : 1/2

10 : 1/4

11 : 1/8

10.4.13 TIMER0CLK source select register (TIMER0CLK_SSR)

Address offset : 0x070

Reset value : 0x0000_0001

31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16
res															

15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
res	TOCSS														
															R/W

[0] TOCSS - TIMCLK0 clock source select register.

These bits are written by S/W to select clock source

0 : disable clock

1 : FCLK

10.4.14 TIMER0CLK prescale value select register (TIMER0CLK_PVSR)

Address offset : 0x074

Reset value : 0x0000_0000

31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16
res	res														
15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
res	T0CPS														
														R/W	

[2:0] T0CPS - select prescale value of TIM0CLK clock

These bits are written by S/W to select

000 : 1/1 (bypass)

001 : 1/2

010 : 1/4

011 : 1/8

100 : 1/16

101 : 1/32

110 : 1/64

111 : 1/128

10.4.15 TIMER1CLK source select register (TIMER1CLK_SSR)

Address offset : 0x080

Reset value : 0x0000_0001

31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16
res															
15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0

res	T1CSS														
															R/W

[0] T1CSS - TIMCLK1 clock source select register.

These bits are written by S/W to select clock source

0 : disable clock

1 : FCLK

10.4.16 TIMER1CLK prescale value select register (TIMER1CLK_PVSR)

Address offset : 0x084

Reset value : 0x0000_0000

31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16
res	res														
15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
res	T1CPS														
														R/W	

[2:0] T1CPS - select prescale value of TIM1CLK clock

These bits are written by S/W to select

000 : 1/1 (bypass)

001 : 1/2

010 : 1/4

011 : 1/8

100 : 1/16

101 : 1/32

110 : 1/64

111 : 1/128

10.4.17 PWM0CLK source select register (PWM0CLK_SSR)

Address offset : 0x0b0

Reset value : 0x0000_0001

31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16
res	res														
15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
res	P0CSS														
														R/W	

[1:0] P0CSS - PWMCLK0 clock source select register.

These bits are written by S/W to select clock source

00 : disable clock

01 : PLL output clock (MCLK)

10 : Internal 8MHz RC oscillator clock (RCLK)

11 : External oscillator clock (OCLK, 8MHz ~ 24MHz)

10.4.18 PWM0CLK prescale value select register (PWM0CLK_PVSR)

Address offset : 0x0b4

Reset value : 0x0000_0000

31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16
res															

15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
res	P0CPS														
															R/W

[2:0] P0CPS - select prescale value of PWM0CLK clock

These bits are written by S/W to select

000 : 1/1 (bypass)

001 : 1/2

010 : 1/4

011 : 1/8

100 : 1/16

101 : 1/32

110 : 1/64

111 : 1/128

10.4.19 PWM1CLK source select register (PWM1CLK_SSR)

Address offset : 0x0c0

Reset value : 0x0000_0001

31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16
res															

15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
res	P1CSS														
															R/W

[1:0] P1CSS - PWMCLK1 clock source select register.

These bits are written by S/W to select clock source

00 : disable clock

01 : PLL output clock (MCLK)

10 : Internal 8MHz RC oscillator clock (RCLK)

11 : External oscillator clock (OCLK, 8MHz ~ 24MHz)

10.4.20 PWM1CLK prescale value select register (PWM1CLK_PVSR)

Address offset : 0x0c4

Reset value : 0x0000_0000

31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16
res															

15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
res	P1CPS														
														R/W	

[2:0] P1CPS - select prescale value of PWM1CLK clock

These bits are written by S/W to select

000 : 1/1 (bypass)

001 : 1/2

010 : 1/4

011 : 1/8

100 : 1/16

101 : 1/32

110 : 1/64

111 : 1/128

10.4.21 PWM2CLK source select register (PWM2CLK_SSR)

Address offset : 0x0d0

Reset value : 0x0000_0001

31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16
res															

15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
res	P2CSS														
														R/W	

[1:0] P2CSS - PWMCLK2 clock source select register.

These bits are written by S/W to select clock source

00 : disable clock

01 : PLL output clock (MCLK)

10 : Internal 8MHz RC oscillator clock (RCLK)

11 : External oscillator clock (OCLK, 8MHz ~ 24MHz)

10.4.22 PWM2CLK prescale value select register (PWM2CLK_PVSR)

Address offset : 0x0d4

Reset value : 0x0000_0000

31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16
res															

15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
res	P2CPS														
														R/W	

[2:0] PWM2CLK_PRE - select prescale value of PWM2CLK clock

These bits are written by S/W to select

000 : 1/1 (bypass)

001 : 1/2

010 : 1/4

011 : 1/8

100 : 1/16

101 : 1/32

110 : 1/64

111 : 1/128

10.4.23 PWM3CLK source select register (PWM3CLK_SSR)

Address offset : 0x0e0

Reset value : 0x0000_0001

31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16
res															

15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
res	P3CSS														
														R/W	

[1:0] P3CSS - PWMCLK3 clock source select register.

These bits are written by S/W to select clock source

00 : disable clock

01 : PLL output clock (MCLK)

10 : Internal 8MHz RC oscillator clock (RCLK)

11 : External oscillator clock (OCLK, 8MHz ~ 24MHz)

10.4.24 PWM3CLK prescale value select register (PWM3CLK_PVSR)

Address offset : 0x0e4

Reset value : 0x0000_0000

31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16
res															

15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
res	P3CPS														
														R/W	

[2:0] P3CPS - select prescale value of PWM3CLK clock

These bits are written by S/W to select

000 : 1/1 (bypass)

001 : 1/2

010 : 1/4

011 : 1/8

100 : 1/16

101 : 1/32

110 : 1/64

111 : 1/128

10.4.25 PWM4CLK source select register (PWM4CLK_SSR)

Address offset : 0x0f0

Reset value : 0x0000_0001

31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16
res															

15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
res	P4CSS														
														R/W	

[1:0] P4CSS - PWMCLK4 clock source select register.

These bits are written by S/W to select clock source

00 : disable clock

01 : PLL output clock (MCLK)

10 : Internal 8MHz RC oscillator clock (RCLK)

11 : External oscillator clock (OCLK, 8MHz ~ 24MHz)

10.4.26 PWM4CLK prescale value select register (PWM4CLK_PVSR)

Address offset : 0x0f4

Reset value : 0x0000_0000

31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16
res															

15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
res	P4CPS														
														R/W	

[2:0] P4CPS - select prescale value of PWM4CLK clock

These bits are written by S/W to select

000 : 1/1 (bypass)

001 : 1/2

010 : 1/4

011 : 1/8

100 : 1/16

101 : 1/32

110 : 1/64

111 : 1/128

10.4.27 PWM5CLK source select register (PWM5CLK_SSR)

Address offset : 0x100

Reset value : 0x0000_0001

31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16
res															

15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
res	P5CSS														
														R/W	

[1:0] P5CSS - PWMCLK5 clock source select register.

These bits are written by S/W to select clock source

00 : disable clock

01 : PLL output clock (MCLK)

10 : Internal 8MHz RC oscillator clock (RCLK)

11 : External oscillator clock (OCLK, 8MHz ~ 24MHz)

10.4.28 PWM5CLK prescale value select register (PWM5CLK_PVSR)

Address offset : 0x104

Reset value : 0x0000_0000

31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16
res															

15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
res	P5CPS														
														R/W	

[2:0] P5CPS - select prescale value of PWM5CLK clock

These bits are written by S/W to select

000 : 1/1 (bypass)

001 : 1/2

010 : 1/4

011 : 1/8

100 : 1/16

101 : 1/32

110 : 1/64

111 : 1/128

10.4.29 PWM6CLK source select register (PWM6CLK_SSR)

Address offset : 0x110

Reset value : 0x0000_0001

31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16
res															

15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
res	P6CSS														
														R/W	

[1:0] P6CSS - PWMCLK6 clock source select register.

These bits are written by S/W to select clock source

-
- 00 : disable clock
 01 : PLL output clock (MCLK)
 10 : Internal 8MHz RC oscillator clock (RCLK)
 11 : External oscillator clock (OCLK, 8MHz ~ 24MHz)

10.4.30 PWM6CLK prescale value select register (PWM6CLK_PVSR)

Address offset : 0x114

Reset value : 0x0000_0000

31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16
res															

15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
res	P6CPS	R/W													

[2:0] P6CPS - select prescale value of PWM6CLK clock

These bits are written by S/W to select

- 000 : 1/1 (bypass)
- 001 : 1/2
- 010 : 1/4
- 011 : 1/8
- 100 : 1/16
- 101 : 1/32
- 110 : 1/64
- 111 : 1/128

10.4.31 PWM7CLK source select register (PWM7CLK_SSR)

Address offset : 0x120

Reset value : 0x0000_0001

31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16
res															

15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
res	P7CSS	R/W													

[1:0] P7CSS - PWMCLK7 clock source select register.

These bits are written by S/W to select clock source

00 : disable clock

01 : PLL output clock (MCLK)

10 : Internal 8MHz RC oscillator clock (RCLK)

11 : External oscillator clock (OCLK, 8MHz ~ 24MHz)

10.4.32 PWM7CLK prescale value select register (PWM7CLK_PVSR)

Address offset : 0x124

Reset value : 0x0000_0000

31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16
res															

15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
res	P7CPS														
															R/W

[2:0] P7CPS - select prescale value of PWM7CLK clock

These bits are written by S/W to select

000 : 1/1 (bypass)

001 : 1/2

010 : 1/4

011 : 1/8

100 : 1/16

101 : 1/32

110 : 1/64

111 : 1/128

10.4.33 WDOGCLK High Speed source select register (WDOGCLK_HS_SSR)

Address offset : 0x140

Reset value : 0x0000_0001

31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16
res															

15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0	
res	WDHS															
															R/W	[1:0] WDHS - WDOGCLK_hs clock source select register.

These bits are written by S/W to select clock source

00 : disable clock

01 : PLL output clock (MCLK)

10 : Internal 8MHz RC oscillator clock (RCLK)

11 : External oscillator clock (OCLK, 8MHz ~ 24MHz)

10.4.34 WDOGCLK High Speed prescale value select register (WDOGCLK_HS_PVSR)

Address offset : 0x144

Reset value : 0x0000_0000

31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	
res																
															R/W	[2:0] WDPRE - select prescale value of WDOGCLK_hs clock

These bits are written by S/W to select

000 : 1/1 (bypass)

001 : 1/2

010 : 1/4

011 : 1/8

100 : 1/16

101 : 1/32

110 : 1/64

111 : 1/128

10.4.35 UARTCLK source select register (UARTCLK_SSR)

Address offset : 0x150

Reset value : 0x0000_0001

31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	
res																

--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--

15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
res	UCSS														
															R/W

[1:0] UCSS - UARTCLK clock source select register.

These bits are written by S/W to select clock source

00 : disable clock

01 : PLL output clock (MCLK)

10 : Internal 8MHz RC oscillator clock (RCLK)

11 : External oscillator clock (OCLK, 8MHz ~ 24MHz)

10.4.36 UARTCLK prescale value select register (UARTCLK_PVSR)

Address offset : 0x154

Reset value : 0x0000_0000

31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16
res															

15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
res	UCP														
															R/W

[1:0] UCP - select prescale value of UARTCLK clock

These bits are written by S/W to select

00 : 1/1 (bypass)

01 : 1/2

10 : 1/4

11 : 1/8

10.4.37 MIICLK enable control register (MIICLK_ECR)

Address offset : 0x160

Reset value : 0x0000_0003

31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16
res															

15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
res	MIITEN	MIIREN													
														R/W	R/W

[0] MIIREN - MII RX Clock source enable register

This bit is written by S/W to set enable or disable

0 : Disable MII_RCK and MII_RCK_N

1 : Enable MII_RCK and MII_RCK_N

[1] MIITEN - MII TX Clock source enable register

This bit is written by S/W to set enable or disable

0 : Disable MII_TCK and MII_TCK_N

1 : Enable MII_TCK and MII_TCK_N

10.4.38 Monitoring Clock source select register (MONCLK_SSR)

Address offset : 0x170

Reset value : 0x0000_0000

31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16
res															

15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
res															

[4:0] CLKMON_SEL - Select clock source for monitoring (monitoring pin : PA_02)

This bit is written by S/W to set enable or disable

00000 : PLL output clock (MCLK)

00001 : FCLK

00010 : Internal 8MHz RC oscillator clock (RCLK)

00011 : External oscillator clock (OCLK, 8MHz ~ 24MHz)

00100 : ADCCLK

00101 : SSPCLK

00110 : TIMCLK0

00111 : TIMCLK1

01000 : PWMCLK0

01001 : PWMCLK1

01010 : PWMCLK2

01011 : PWMCLK3

01100 : PWMCLK4

01101 : PWMCLK5

01110 : PWMCLK6

01111 : PWMCLK7

10000 : UARTCLK

10001 : MII_RCK

10010 : MII_TCK

10011 : RTCCLK

10.5 Register map

The following Table 8 summarizes the CRG registers.

Table 8 CRG register map and reset values

11 Random number generator (RNG)

11.1 Introduction

RNG is a 32bit random number generator. RNG generates power on random number when power on reset. RNG can run/stop by software. RNG seed value and polynomial of RNG can be modified by software.

11.2 Features

- 32bit pseudo random number generator
- Formula of pseudo random number generator (polynomial) can be modified.
- Seed value of random generator can be modified.
- Support power on reset random value.
- Random value can be obtained by control start/stop by software.

11.3 Functional description

Figure 11 shows the RNG block diagram.

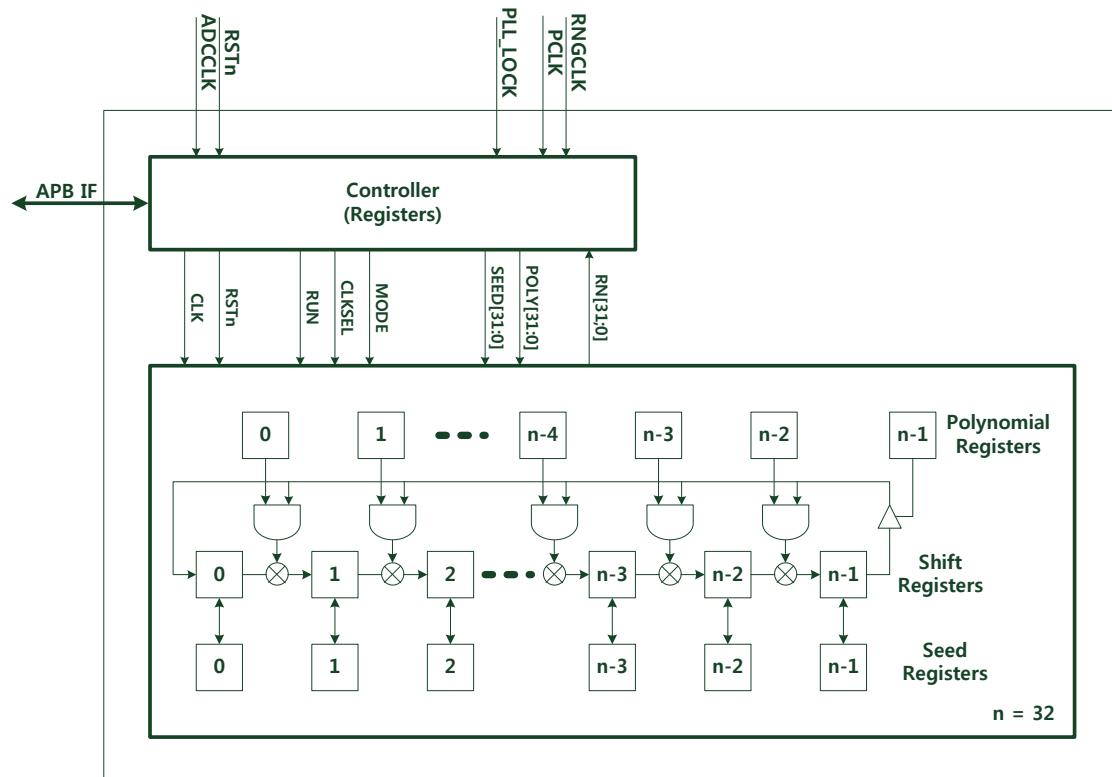


Figure 11. Random Number Generator block diagram

11.3.1 Operation RNG

Figure 12 shows the flowchart of RNG operation.

A random number is automatically generated after powering on reset,

Follow the procedure below to manually generate a random number.

1. Change MODE to start/stop by register.
2. Change clock source / seed value / polynomial value if need.
3. Run and Stop the RNG.
4. Read Random value.

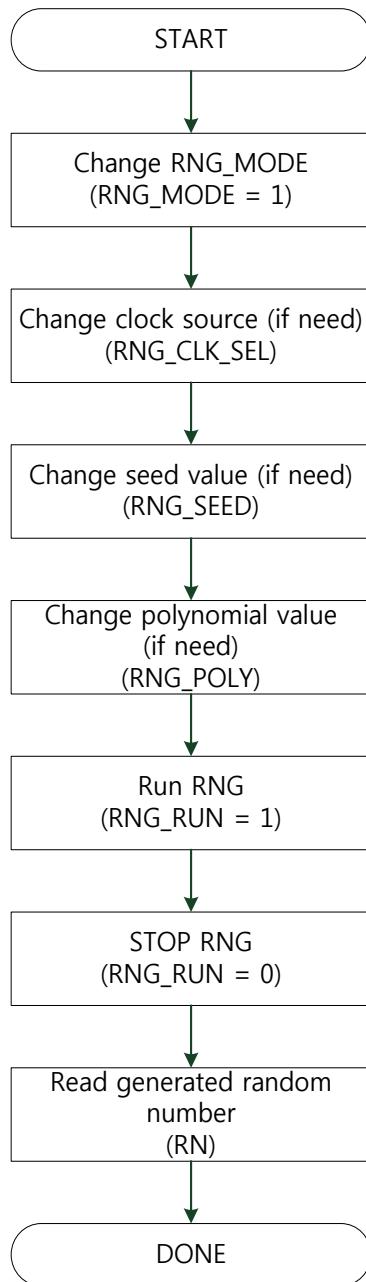


Figure 12. Flow chart of RNG operation

11.4 Registers (Base address : 0x4000_7000)

11.4.1 RNG run register (RNG_RUN)

Address offset : 0x000

Reset value : 0x0000_0000

31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16
res															
15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
res	R/W														

[0] RUN - run RNG shift register

This bit written by S/W to run or stop RNG

0 : stop random number generator shift register

1 : run random number generator shift register

11.4.2 RNG SEED register (RNG_SEED)

Address offset : 0x004

Reset value : 0x0000_0000

31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16
SEED[31:16]															
R/W															
15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0

15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
SEED[15:0]															
R/W															

[31:0] SEED - seed value of random number generator shift register

These bits written by S/W to set seed value of RNG before start(run) RNG shift register

11.4.3 RNG clock select register (RNG_CLKSEL)

Address offset : 0x008

Reset value : 0x0000_0000

31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16

res																

15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0	
res	CLKSEL	R/W														

[0] CLKSEL - select clock source register of RNG shift register

This bit written by S/W to select clock source of RNG shift register

0 : RNG clock (refer to clock generator block)

1 : PCLK

11.4.4 RNG manual mode select register (RNG_MODE)

Address offset : 0x00c

Reset value : 0x0000_0000

31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	
res																

15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0	
res	MODE															
																R/W

[0] MODE - RNG run mode select register

This bit written by S/W to select which mode

0 : run/stop by PLL_LOCK signal (which is for power on random number)

1 : run/stop by RNG_RUN register (refer 1.4.1)R

11.4.5 RNG random number value register (RNG_RN)

Address offset : 0x010

Reset value : 0x0000_0000

31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	
RN[31:16]																
R																

15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
RN[15:0]															
R															

[31:0] RN - random number of RNG shift register

These bits are read only registers.

11.4.6 RNG polynomial register (RNG_POLY)

Address offset : 0x014

Reset value : 0xE000_0202

31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16
POLY[31:16]															
R/W															

15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
POLY[15:0]															
R/W															

[31:0] POLY - 32bit polynomial of random number generator

These bits are written by S/W to modify the formula of random number generator

Default polynomial: $F(x) = x^{31} + x^{30} + x^{29} + x^9 + x$

11.5 Register map

The following Table 9 summarizes the RNG registers.

Table 9 RNG register map and reset values

Offset	Register	31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0	RUN	CLKSEL	MODE
0x000	RNG_RUN	res	res	res	res	res	res	res	res	res	res	res	res	res	res	res	res	res	res	res	res	res	res	res	res	res	res	res	res	res	0	0	0			
	reset value	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0			
0x004	RNG_SEED	SEED																																		
	reset value	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0			
0x008	RNG_CLKSEL	res	res	res	res	res	res	res	res	res	res	res	res	res	res	res	res	res	res	res	res	res	res	res	res	res	res	res	res	res	res	0	0	0		
	reset value	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0		
0x00C	RNG_MODE	res	res	res	res	res	res	res	res	res	res	res	res	res	res	res	res	res	res	res	res	res	res	res	res	res	res	res	res	res	res	0	0	0		
	reset value	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0		
0x010	RNG_RN	RN																																		
	reset value	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0		
0x014	RNG_POLY	POLY																																		
	reset value	1	1	1	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1	0	0		

12 Alternate Function Controller (AFC)

12.1 Introduction

Each functional PADs have several functions.

Users can select a function in Alternate Function Controller block.

12.2 Features

Each functional pad has 2 ~ 4 functions.

Pads can be selected by each registers individually.

Each pad can be used as an external interrupt source.

12.3 Functional description

Table 10 shows the function table of each functional pad.

Table 10 functional description table

PAD	PIN	function selection register value			
		00 (reset value)	01	10	11
PA_00	29	GPIOA_0	GPIOA_0	PWM6/CAP6	
PA_01	30	GPIOA_1	GPIOA_1	PWM7/CAP7	
PA_02	31	GPIOA_2	GPIOA_2	CLKOUT	
PA_03	49	SWCLK	GPIOA_3		
PA_04	50	SWDIO	GPIOA_4		
PA_05	33	SSEL0	GPIOA_5	SCL1	PWM2/CAP2
PA_06	34	SCLK0	GPIOA_6	SDA1	PWM3/CAP3
PA_07	35	MISO0	GPIOA_7	U_CTS1	PWM4/CAP4
PA_08	36	MOSI0	GPIOA_8	U_RTS1	PWM5/CAP5
PA_09	37	SCL0	GPIOA_9	U_TXD1	PWM6/CAP6
PA_10	38	SDA0	GPIOA_10	U_RXD1	PWM7/CAP7
PA_11	40	U_CTS0	GPIOA_11	SSEL1	
PA_12	41	U_RTS0	GPIOA_12	SCLK1	
PA_13	42	U_TXD0	GPIOA_13	MISO1	
PA_14	43	U_RXD0	GPIOA_14	MOSI1	
PA_15	44	GPIOA_15	GPIOA_15		
PB_00	45	SSEL1	GPIOB_0	U_CTS0	
PB_01	46	SCLK1	GPIOB_1	U_RTS0	
PB_02	47	MISO1	GPIOB_2	U_TXD0	

PB_03	48	MOSI1	GPIOB_3	U_RXD0	
PB_04	24	TXEN	GPIOB_4		
PB_05	25	COL	GPIOB_5		
PB_06	16	RXD3	GPIOB_6		
PB_07	17	RXCLK	GPIOB_7		
PB_08	18	DUP	GPIOB_8		
PB_09	19	TXCLK	GPIOB_9		
PB_10	20	TXD0	GPIOB_10		
PB_11	21	TXD1	GPIOB_11		
PB_12	22	TXD2	GPIOB_12		
PB_13	23	TXD3	GPIOB_13		
PB_14	26		GPIOB_14		
PB_15	27		GPIOB_15		
PC_00	53	U_CTS1	GPIOC_0	PWM0/CAP0	
PC_01	54	U_RTS1	GPIOC_1	PWM1/CAP1	
PC_02	55	U_TXD1	GPIOC_2	PWM2/CAP2	
PC_03	56	U_RXD1	GPIOC_3	PWM3/CAP3	
PC_04	57	SCL1	GPIOC_4	PWM4/CAP4	
PC_05	58	SDA1	GPIOC_5	PWM5/CAP5	
PC_06	51	GPIOC_6	GPIOC_6	U_TXD2	
PC_07	52	GPIOC_7	GPIOC_7	U_RXD2	
PC_08	1	PWM0/CAP0	GPIOC_8	SCL0	AIN7
PC_09	2	PWM1/CAP1	GPIOC_9	SDA0	AIN6
PC_10	3	U_TXD2	GPIOC_10	PWM2/CAP2	AIN5
PC_11	4	U_RXD2	GPIOC_11	PWM3/CAP3	AIN4
PC_12	5	AIN3	GPIOC_12	SSEL0	AIN3
PC_13	6	AIN2	GPIOC_13	SCLK0	AIN2
PC_14	7	AIN1	GPIOC_14	MISO0	AIN1
PC_15	8	AIN0	GPIOC_15	MOSI0	AIN0
PD_00	11	CRS	GPIOD_0		
PD_01	12	RXDV	GPIOD_1		
PD_02	13	RXD0	GPIOD_2		
PD_03	14	RXD1	GPIOD_3		
PD_04	15	RXD2	GPIOD_4		

12.4 Registers (Base address : 0x4100_2000)

12.4.1 PA_00 pad alternate function select register (PA_00_AFR)

Address offset : 0x000

Reset value : 0x0000_0000

31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16
res															

15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
res	PA00AF														

[1:0] PA00AF - PA_00 Pad alternate function selection register.

These bits are written by S/W.

00 : GPIOA_0

01 : GPIOA_0

10 : PWM6/CAP6

11 : None

12.4.2 PA_01 pad alternate function select register (PA_01_AFR)

Address offset : 0x004

Reset value : 0x0000_0000

31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16
res															

15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
res	PA01AF														

[1:0] PA01AF - PA_01 Pad function selection register.

These bits are written by S/W.

00 : GPIOA_1

01 : GPIOA_1

10 : PWM7/CAP7

11 : None

12.4.3 PA_02 pad alternate function select register (PA_02_AFR)

Address offset : 0x008

Reset value : 0x0000_0000

31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16
res															

15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
res	PA02AF														
															R/W

[1:0] PA02AF - PA_02 Pad function selection register.

These bits are written by S/W.

00 : GPIOA_2

01 : GPIOA_2

10 : CLKOUT

11 : None

12.4.4 PA_03 pad alternate function select register (PA_03_AFR)

Address offset : 0x00c

Reset value : 0x0000_0000

31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16
res															

15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
res	PA03AF														
															R/W

[1:0] PA03AF - PA_03 Pad function selection register.

These bits are written by S/W.

00 : SWCLK

01 : GPIOA_3

10 : None

11 : PWM0/CAP0

12.4.5 PA_04 pad alternate function select register (PA_04_AFR)

Address offset : 0x010

Reset value : 0x0000_0000

31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16
res															
15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
res	PA04AF														
															R/W

[1:0] PA04AF - PA_04 Pad function selection register.

These bits are written by S/W.

00 : SWDIO

01 : GPIOA_4

10 : None

11 : PWM1/CAP1

12.4.6 PA_05 pad alternate function select register (PA_05_AFR)

Address offset : 0x014

Reset value : 0x0000_0000

31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16
res															
15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
res	PA05AF														
															R/W

[1:0] PA05AF - PA_05 Pad function selection register.

These bits are written by S/W.

00 : SSELO

01 : GPIOA_5

10 : SCL1

11 : PWM2/CAP2

12.4.7 PA_06 pad alternate function select register (PA_06_AFR)

Address offset : 0x018

Reset value : 0x0000_0000

31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16
res															
15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
res	PA06AF														
															R/W

[1:0] PA06AF - PA_06 Pad function selection register.

These bits are written by S/W.

00 : SCLK0

01 : GPIOA_6

10 : SDA1

11 : PWM3/CAP3

12.4.8 PA_07 pad alternate function select register (PA_07_AFR)

Address offset : 0x01c

Reset value : 0x0000_0000

31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16
res															
15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
res	PA07AF														
															R/W

[1:0] PA07AF - PA_07 Pad function selection register.

These bits are written by S/W.

00 : MISO0

01 : GPIOA_7

10 : CTS1

11 : PWM4/CAP4

12.4.9 PA_08 pad alternate function select register (PA_08_AFR)

Address offset : 0x020

Reset value : 0x0000_0000

31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16
res															
15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
res	PA08AF														
															R/W

[1:0] PA08AF - PA_08 Pad function selection register.

These bits are written by S/W.

00 : MOSIO

01 : GPIOA_8

10 : RTS1

11 : PWM5/CAP5

12.4.10 PA_09 pad alternate function select register (PA_09_AFR)

Address offset : 0x024

Reset value : 0x0000_0000

31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16
res															
15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
res	PA09AF														
															R/W

[1:0] PA09AF - PA_09 Pad function selection register.

These bits are written by S/W.

00 : SCL0

01 : GPIOA_9

10 : TXD1

11 : PWM6/CAP6

12.4.11 PA_10 pad alternate function select register (PA_10_AFR)

Address offset : 0x028

Reset value : 0x0000_0000

31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16
res															
15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
res	PA10AF														
															R/W

[1:0] PA10AF - PA_10 Pad function selection register.

These bits are written by S/W.

00 : SDA0

01 : GPIOA_10

10 : RXD1

11 : PWM7/CAP7

12.4.12 PA_11 pad alternate function select register (PA_11_AFR)

Address offset : 0x02c

Reset value : 0x0000_0000

31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16
res															
15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
res	PA11AF														
															R/W

[1:0] PA11AF - PA_11 Pad function selection register.

These bits are written by S/W.

00 : CTS0

01 : GPIOA_11

10 : SSEL1

11 : None

12.4.13 PA_12 pad alternate function select register (PA_12_AFR)

Address offset : 0x030

Reset value : 0x0000_0000

31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16
res															
15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
res	PA12AF														
															R/W

[1:0] PA12AF - PA_12 Pad function selection register.

These bits are written by S/W.

00 : RTS0

01 : GPIOA_12

10 : SCLK1

11 : None

12.4.14 PA_13 pad alternate function select register (PA_13_AFR)

Address offset : 0x034

Reset value : 0x0000_0000

31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16
res															
15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
res	PA13AF														
															R/W

[1:0] PA13AF - PA_13 Pad function selection register.

These bits are written by S/W.

00 : TXD0

01 : GPIOA_13

10 : MISO1

11 : None

12.4.15 PA_14 pad alternate function select register (PA_14_AFR)

Address offset : 0x038

Reset value : 0x0000_0000

31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16
res															
15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
res	PA14AF														
															R/W

[1:0] PA14AF - PA_14 Pad function selection register.

These bits are written by S/W.

00 : RXD0

01 : GPIOA_14

10 : MOSI1

11 : None

12.4.16 PA_15 pad alternate function select register (PA_15_AFR)

Address offset : 0x03c

Reset value : 0x0000_0000

31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16
res															
15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
res	PA15AF														
															R/W

[1:0] PA15AF - PA_15 Pad function selection register.

These bits are written by S/W.

00 : GPIOA_15

01 : GPIOA_15

10 : None

11 : None

12.4.17 PB_00 pad alternate function select register (PB_00_AFR)

Address offset : 0x040

Reset value : 0x0000_0000

31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16
res															

15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
res	PB00AF														
															R/W

[1:0] PB00AF - PB_00 Pad function selection register.

These bits are written by S/W.

00 : SSEL1

01 : GPIOB_0

10 : CTS0

11 : None

12.4.18 PB_01 pad alternate function select register (PB_01_AFR)

Address offset : 0x044

Reset value : 0x0000_0000

31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16
res															

15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
res	PB01AF														
															R/W

[1:0] PB01AF - PB_01 Pad function selection register.

These bits are written by S/W.

00 : SCLK1

01 : GPIOB_1

10 : RTS0

11 : None

12.4.19 PB_02 pad alternate function select register (PB_02_AFR)

Address offset : 0x048

Reset value : 0x0000_0000

31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16
res															
15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
res	PB02AF														
															R/W

[1:0] PB02AF - PB_02 Pad function selection register.

These bits are written by S/W.

00 : MISO1

01 : GPIOB_2

10 : TXD0

11 : None

12.4.20 PB_03 pad alternate function select register (PB_03_AFR)

Address offset : 0x04c

Reset value : 0x0000_0000

31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16
res															
15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
res	PB03AF														
															R/W

[1:0] PB03AF - PB_03 Pad function selection register.

These bits are written by S/W.

00 : MOSI1

01 : GPIOB_3

10 : RXD0

11 : None

12.4.21 PB_04 pad alternate function select register (PB_04_AFR)

Address offset : 0x050

Reset value : 0x0000_0000

31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16
res															

15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
res	PB04AF														
															R/W

[1:0] PB04AF - PB_04 Pad function selection register.

These bits are written by S/W.

00 : TXEN

01 : GPIOB_4

10 : None

11 : None

12.4.22 PB_05 pad alternate function select register (PB_05_AFR)

Address offset : 0x054

Reset value : 0x0000_0000

31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16
res															

15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
res	PB05AF														
															R/W

[1:0] PB05AF - PB_05 Pad function selection register.

These bits are written by S/W.

00 : COL

01 : GPIOB_5

10 : None

11 : None

12.4.23 PB_06 pad alternate function select register (PB_06_AFR)

Address offset : 0x058

Reset value : 0x0000_0000

31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16
res															
15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
res	PB06AF														
															R/W

[1:0] PB06AF - PB_06 Pad function selection register.

These bits are written by S/W.

00 : RXD3

01 : GPIOB_6

10 : None

11 : None

12.4.24 PB_07 pad alternate function select register (PB_07_AFR)

Address offset : 0x05c

Reset value : 0x0000_0000

31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16
res															
15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
res	PB07AF														
															R/W

[1:0] PB07AF - PB_07 Pad function selection register.

These bits are written by S/W.

00 : RXCLK

01 : GPIOB_7

10 : None

11 : None

12.4.25 PB_08 pad alternate function select register (PB_08_AFR)

Address offset : 0x060

Reset value : 0x0000_0000

31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16
res															
15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
res	PB08AF														
															R/W

[1:0] PB08AF - PB_08 Pad function selection register.

These bits are written by S/W.

00 : DUP

01 : GPIOB_8

10 : None

11 : None

12.4.26 PB_09 pad alternate function select register (PB_09_AFR)

Address offset : 0x064

Reset value : 0x0000_0000

31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16
res															
15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
res	PB09AF														
															R/W

[1:0] PB09AF - PB_09 Pad function selection register.

These bits are written by S/W.

00 : TXCLK

01 : GPIOB_9

10 : None

11 : None

12.4.27 PB_10 pad alternate function select register (PB_10_AFR)

Address offset : 0x068

Reset value : 0x0000_0000

31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16
res															
15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
res	PB10AF														
															R/W

[1:0] PB10AF - PB_10 Pad function selection register.

These bits are written by S/W.

00 : TXD0

01 : GPIOB_10

10 : None

11 : None

12.4.28 PB_11 pad alternate function select register (PB_11_AFR)

Address offset : 0x06c

Reset value : 0x0000_0000

31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16
res															
15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
res	PB11AF														
															R/W

[1:0] PB11AF - PB_11 Pad function selection register.

These bits are written by S/W.

00 : TXD1

01 : GPIOB_11

10 : None

11 : None

12.4.29 PB_12 pad alternate function select register (PB_12_AFR)

Address offset : 0x070

Reset value : 0x0000_0000

31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16
res															
15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
res	PB12AF														
															R/W

[1:0] PB12AF - PB_12 Pad function selection register.

These bits are written by S/W.

00 : TXD2

01 : GPIOB_12

10 : None

11 : None

12.4.30 PB_13 pad alternate function select register (PB_13_AFR)

Address offset : 0x074

Reset value : 0x0000_0000

31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16
res															
15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
res	PB13AF														
															R/W

[1:0] PB13AF - PB_13 Pad function selection register.

These bits are written by S/W.

00 : TXD3

01 : GPIOB_13

10 : None

11 : None

12.4.31 PB_14 pad alternate function select register (PB_14_AFR)

Address offset : 0x078

Reset value : 0x0000_0000

31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16
res															
15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
res	PB14AF														
															R/W

[1:0] PB14AF - PB_14 Pad function selection register.

These bits are written by S/W.

00 : MDIO

01 : GPIOB_14

10 : None

11 : None

12.4.32 PB_15 pad alternate function select register (PB_15_AFR)

Address offset : 0x07c

Reset value : 0x0000_0000

31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16
res															
15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
res	PB15AF														
															R/W

[1:0] PB15AF - PB_15 Pad function selection register.

These bits are written by S/W.

00 : MDC

01 : GPIOB_15

10 : None

11 : None

12.4.33 PC_00 pad alternate function select register (PC_00_AFR)

Address offset : 0x080

Reset value : 0x0000_0000

31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16
res															

15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
res	PC00AF														
															R/W

[1:0] PC00AF - PC_00 Pad function selection register.

These bits are written by S/W.

00 : CTS1

01 : GPIOC_0

10 : PWM0/CAP0

11 : None

12.4.34 PC_01 pad alternate function select register (PC_01_AFR)

Address offset : 0x084

Reset value : 0x0000_0000

31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16
res															

15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
res	PC01AF														
															R/W

[1:0] PC01AF - PC_01 Pad function selection register.

These bits are written by S/W.

00 : RTS1

01 : GPIOC_1

10 : PWM1/CAP1

11 : None

12.4.35 PC_02 pad alternate function select register (PC_02_AFR)

Address offset : 0x088

Reset value : 0x0000_0000

31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16
res															

15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
res	PC02AF														
															R/W

[1:0] PC02AF - PC_02 Pad function selection register.

These bits are written by S/W.

00 : TXD1

01 : GPIOC_2

10 : PWM2/CAP2

11 : None

12.4.36 PC_03 pad alternate function select register (PC_03_AFR)

Address offset : 0x08c

Reset value : 0x0000_0000

31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16
res															

15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
res	PC03AF														
															R/W

[1:0] PC03AF - PC_03 Pad function selection register.

These bits are written by S/W.

00 : RXD1

01 : GPIOC_3

10 : PWM3/CAP3

11 : None

12.4.37 PC_04 pad alternate function select register (PC_04_AFR)

Address offset : 0x090

Reset value : 0x0000_0000

31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16
res															

15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
res	PC04AF														
															R/W

[1:0] PC04AF - PC_04 Pad function selection register.

These bits are written by S/W.

00 : SCL1

01 : GPIOC_4

10 : PWM4/CAP4

11 : None

12.4.38 PC_05 pad alternate function select register (PC_05_AFR)

Address offset : 0x094

Reset value : 0x0000_0000

31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16
res															

15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
res	PC05AF														
															R/W

[1:0] PC05AF - PC_05 Pad function selection register.

These bits are written by S/W.

00 : SDA1

01 : GPIOC_5

10 : PWM5/CAP5

11 : None

12.4.39 PC_06 pad alternate function select register (PC_06_AFR)

Address offset : 0x098

Reset value : 0x0000_0000

31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16
res															

15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
res	PC06AF														
															R/W

[1:0] PC06AF - PC_06 Pad function selection register.

These bits are written by S/W.

00 : GPIOC_6

01 : GPIOC_6

10 : TXD2

11 : None

12.4.40 PC_07 pad alternate function select register (PC_07_AFR)

Address offset : 0x09c

Reset value : 0x0000_0000

31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16
res															

15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
res	PC07AF														
															R/W

[1:0] PC07AF - PC_07 Pad function selection register.

These bits are written by S/W.

00 : GPIOC_7

01 : GPIOC_7

10 : RXD2

11 : None

12.4.41 PC_08 pad alternate function select register (PC_08_AFR)

Address offset : 0x0a0

Reset value : 0x0000_0000

31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16
res															

15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
res	PC08AF														
															R/W

[1:0] PC08AF - PC_08 Pad function selection register.

These bits are written by S/W.

00 : PWM0/CAP0

01 : GPIOC_8

10 : SCL0

11 : ADC_IN7

12.4.42 PC_09 pad alternate function select register (PC_09_AFR)

Address offset : 0x0a4

Reset value : 0x0000_0000

31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16
res															

15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
res	PC09AF														
															R/W

[1:0] PC09AF - PC_09 Pad function selection register.

These bits are written by S/W.

00 : PWM1/CAP1

01 : GPIOC_9

10 : SDA0

11 : ADC_IN6

12.4.43 PC_10 pad alternate function select register (PC_10_AFR)

Address offset : 0x0a8

Reset value : 0x0000_0000

31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16
res															

15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
res	PC10AF														
															R/W

[1:0] PC10AF - PC_10 Pad function selection register.

These bits are written by S/W.

00 : TXD2

01 : GPIOC_10

10 : PWM2/CAP2

11 : ADC_IN5

12.4.44 PC_11 pad alternate function select register (PC_11_AFR)

Address offset : 0x0ac

Reset value : 0x0000_0000

31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16
res															

15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
res	PC11AF														
															R/W

[1:0] PC11AF - PC_11 Pad function selection register.

These bits are written by S/W.

00 : RXD2

01 : GPIOC_11

10 : PWM3/CAP3

11 : ADC_IN4

12.4.45 PC_12 pad alternate function select register (PC_12_AFR)

Address offset : 0x0b0

Reset value : 0x0000_0000

31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16
res															
15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
res	PC12AF														
															R/W

[1:0] PC12AF - PC_12 Pad function selection register.

These bits are written by S/W.

00 : ADC_IN3

01 : GPIOC_12

10 : SSELO

11 : ADC_IN3

12.4.46 PC_13 pad alternate function select register (PC_13_AFR)

Address offset : 0x0b4

Reset value : 0x0000_0000

31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16
res															
15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
res	PC13AF														
															R/W

[1:0] PC13AF - PC_13 Pad function selection register.

These bits are written by S/W.

00 : ADC_IN2

01 : GPIOC_13

10 : SCLK0

11 : ADC_IN2

12.4.47 PC_14 pad alternate function select register (PC_14_AFR)

Address offset : 0x0b8

Reset value : 0x0000_0000

31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16
res															
15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
res	PC14AF														
															R/W

[1:0] PC14AF - PC_14 Pad function selection register.

These bits are written by S/W.

00 : ADC_IN1

01 : GPIOC_14

10 : MISO0

11 : ADC_IN1

12.4.48 PC_15 pad alternate function select register (PC_15_AFR)

Address offset : 0x0bc

Reset value : 0x0000_0000

31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16
res															
15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
res	PC15AF														
															R/W

[1:0] PC15AF - PC_15 Pad function selection register.

These bits are written by S/W.

00 : ADC_IN0

01 : GPIOC_15

10 : MOSI0

11 : ADC_IN0

12.4.49 PD_00 pad alternate function select register (PD_00_AFR)

Address offset : 0x0c0

Reset value : 0x0000_0000

31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16
res															

15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
res	PD00AF														
															R/W

[1:0] PD00AF - PD_00 Pad function selection register.

These bits are written by S/W.

00 : CRS

01 : GPIOD_0

10 : None

11 : None

12.4.50 PD_01 pad alternate function select register (PD_01_AFR)

Address offset : 0x0c4

Reset value : 0x0000_0000

31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16
res															

15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
res	PD01AF														
															R/W

[1:0] PD01AF - PD_01 Pad function selection register.

These bits are written by S/W.

00 : RXDV

01 : GPIOD_1

10 : None

11 : None

12.4.51 PD_02 pad alternate function select register (PD_02_AFR)

Address offset : 0x0c8

Reset value : 0x0000_0000

31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16
res															
15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
res	PD02AF														
															R/W

[1:0] PD02AF - PD_02 Pad function selection register.

These bits are written by S/W.

00 : RXD0

01 : GPIOD_2

10 : None

11 : None

12.4.52 PD_03 pad alternate function select register (PD_03_AFR)

Address offset : 0x0cc

Reset value : 0x0000_0000

31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16
res															
15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
res	PD03AF														
															R/W

[1:0] PD03AF - PD_03 Pad function selection register.

These bits are written by S/W.

00 : RXD1

01 : GPIOD_3

10 : None

11 : None

12.4.53 PD_04 pad alternate function select register (PD_04_AFR)

Address offset : 0x0d0

Reset value : 0x0000_0000

31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16
res															

15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
res	PD04AF														
															R/W

[1:0] PD04AF - PD_04 Pad function selection register.

These bits are written by S/W.

00 : RXD2

01 : GPIOD_4

10 : None

11 : None

12.5 Register map

The following Table 11 summarizes the AFC registers.

Table 11 AFC register map and reset values

13 External Interrupt (EXTI)

13.1 Introduction

Each functional pads are connected to the external interrupt(EXTINT) source.

13.2 Features

- All functional pads can be used as an external interrupt source regardless of any set of pad function.
- External Interrupt controller has the following functions and can be controlled by registers.
 - Interrupt mask (enable or disable, default : disable)
 - Interrupt polarity (rising or falling, default : rising)

13.3 Functional description

All pads are connected to the control register individually. (External interrupt mask register and External Interrupt polarity register)

External interrupt working as following expression:

- Each pad interrupt = Interrupt mask & (Interrupt polarity ^ Pad input)
- EXTINT = any Each pad interrupt

Figure 13 shows the External Interrupt diagram.

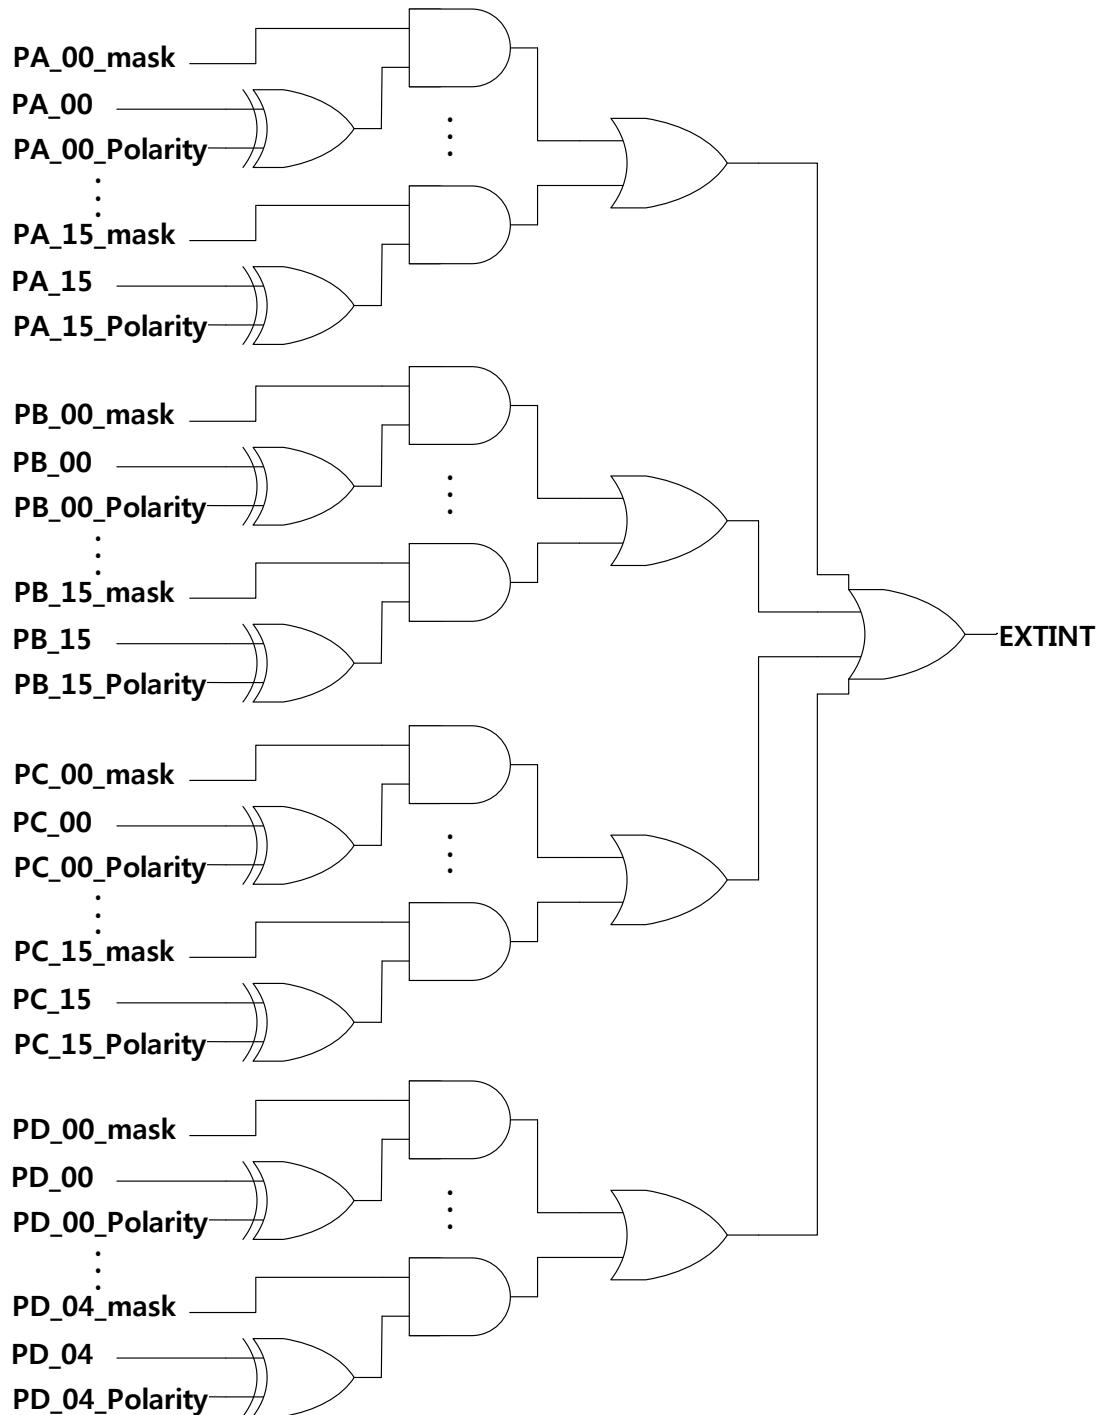


Figure 13. External Interrupt diagram

13.4 Registers (Base address : 0x4100_2000)

13.4.1 PA_00 external interrupt enable register (PA_00_EXTINT)

Address offset : 0x200

Reset value : 0x0000_0000

31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16
res	res														
15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
res	PA00IEN	PA00POL													
														R/W	R/W

[0] PA00POL - External interrupt polarity selection register of PA_00 PAD

These bits are written by S/W.

0 : interrupt occurs when pad detect HIGH level signal

1 : interrupt occurs when pad detect LOW level signal

[1] PA00IEN - External interrupt enable register of PA_00 PAD

These bits are written by S/W.

0 : external interrupt disable

1 : external interrupt enable

13.4.2 PA_01 external interrupt enable register (PA_01_EXTINT)

Address offset : 0x204

Reset value : 0x0000_0000

31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16
res	res														
15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
res	PA01IEN	PA01POL													
														R/W	R/W

[0] PA01POL - External interrupt polarity selection register of PA_01 PAD

These bits are written by S/W.

0 : interrupt occurs when pad detect HIGH level signal

1 : interrupt occurs when pad detect LOW level signal

[1] PA01IEN - External interrupt enable register of PA_01 PAD

These bits are written by S/W.

0 : external interrupt disable

1 : external interrupt enable

13.4.3 PA_02 external interrupt enable register (PA_02_EXTINT)

Address offset : 0x208

Reset value : 0x0000_0000

31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16
res	res														
15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
res	PA02IEN	PA02POL													
														R/W	R/W

[0] PA02POL - External interrupt polarity selection register of PA_02 PAD

These bits are written by S/W.

0 : interrupt occurs when pad detect HIGH level signal

1 : interrupt occurs when pad detect LOW level signal

[1] PA02IEN - External interrupt enable register of PA_02 PAD

These bits are written by S/W.

0 : external interrupt disable

1 : external interrupt enable

13.4.4 PA_03 external interrupt enable register (PA_03_EXTINT)

Address offset : 0x20c

Reset value : 0x0000_0000

31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16
res	res														
15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
res	PA03IEN	PA03POL													
														R/W	R/W

[0] PA03POL - External interrupt polarity selection register of PA_03 PAD

These bits are written by S/W.

0 : interrupt occurs when pad detect HIGH level signal

1 : interrupt occurs when pad detect LOW level signal

[1] PA03IEN - External interrupt enable register of PA_03 PAD

These bits are written by S/W.

0 : external interrupt disable

1 : external interrupt enable

13.4.5 PA_04 external interrupt enable register (PA_04_EXTINT)

Address offset : 0x210

Reset value : 0x0000_0000

31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16
res															

15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
res	PA04IEN	PA04POL													
														R/W	R/W

[0] PA04POL - External interrupt polarity selection register of PA_04 PAD

These bits are written by S/W.

0 : interrupt occurs when pad detect HIGH level signal

1 : interrupt occurs when pad detect LOW level signal

[1] PA04IEN - External interrupt enable register of PA_04 PAD

These bits are written by S/W.

0 : external interrupt disable

1 : external interrupt enable

13.4.6 PA_05 external interrupt enable register (PA_05_EXTINT)

Address offset : 0x214

Reset value : 0x0000_0000

31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16
res															

15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
res	PA05IEN	PA05POL													
														R/W	R/W

[0] PA05POL - External interrupt polarity selection register of PA_05 PAD

These bits are written by S/W.

0 : interrupt occurs when pad detect HIGH level signal

1 : interrupt occurs when pad detect LOW level signal

[1] PA05IEN - External interrupt enable register of PA_05 PAD

These bits are written by S/W.

0 : external interrupt disable

1 : external interrupt enable

13.4.7 PA_06 external interrupt enable register (PA_06_EXTINT)

Address offset : 0x218

Reset value : 0x0000_0000

31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16
res															

15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
res	PA06IEN	PA06POL													

[0] PA06POL - External interrupt polarity selection register of PA_06 PAD

These bits are written by S/W.

0 : interrupt occurs when pad detect HIGH level signal

1 : interrupt occurs when pad detect LOW level signal

[1] PA06IEN - External interrupt enable register of PA_06 PAD

These bits are written by S/W.

0 : external interrupt disable

1 : external interrupt enable

13.4.8 PA_07 external interrupt enable register (PA_07_EXTINT)

Address offset : 0x21c

Reset value : 0x0000_0000

31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16
res															

15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
----	----	----	----	----	----	---	---	---	---	---	---	---	---	---	---

res	PA07IEN	PA07POL													
														R/W	R/W

[0] PA07POL - External interrupt polarity selection register of PA_07 PAD

These bits are written by S/W.

0 : interrupt occurs when pad detect HIGH level signal

1 : interrupt occurs when pad detect LOW level signal

[1] PA07IEN - External interrupt enable register of PA_07 PAD

These bits are written by S/W.

0 : external interrupt disable

1 : external interrupt enable

13.4.9 PA_08 external interrupt enable register (PA_08_EXTINT)

Address offset : 0x220

Reset value : 0x0000_0000

31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16
res															

15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
res	PA08IEN	PA08POL													

[0] PA08POL - External interrupt polarity selection register of PA_08 PAD

These bits are written by S/W.

0 : interrupt occurs when pad detect HIGH level signal

1 : interrupt occurs when pad detect LOW level signal

[1] PA08IEN - External interrupt enable register of PA_08 PAD

These bits are written by S/W.

0 : external interrupt disable

1 : external interrupt enable

13.4.10 PA_09 external interrupt enable register (PA_09_EXTINT)

Address offset : 0x224

Reset value : 0x0000_0000

31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16
res															

--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--

15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0	
res	PA09IEN	PA09POL														
															R/W	R/W

[0] PA09POL - External interrupt polarity selection register of PA_09 PAD

These bits are written by S/W.

0 : interrupt occurs when pad detect HIGH level signal

1 : interrupt occurs when pad detect LOW level signal

[1] PA09IEN - External interrupt enable register of PA_09 PAD

These bits are written by S/W.

0 : external interrupt disable

1 : external interrupt enable

13.4.11 PA_10 external interrupt enable register (PA_10_EXTINT)

Address offset : 0x228

Reset value : 0x0000_0000

31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16
res															

15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0	
res	PA10IEN	PA10POL														
															R/W	R/W

[0] PA10POL - External interrupt polarity selection register of PA_10 PAD

These bits are written by S/W.

0 : interrupt occurs when pad detect HIGH level signal

1 : interrupt occurs when pad detect LOW level signal

[1] PA10IEN - External interrupt enable register of PA_10 PAD

These bits are written by S/W.

0 : external interrupt disable

1 : external interrupt enable

13.4.12 PA_11 external interrupt enable register (PA_11_EXTINT)

Address offset : 0x22c

Reset value : 0x0000_0000

31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16
res															

15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
res	PA11IEN	PA11POL													
														R/W	R/W

[0] PA11POL - External interrupt polarity selection register of PA_11 PAD

These bits are written by S/W.

0 : interrupt occurs when pad detect HIGH level signal

1 : interrupt occurs when pad detect LOW level signal

[1] PA11IEN - External interrupt enable register of PA_11 PAD

These bits are written by S/W.

0 : external interrupt disable

1 : external interrupt enable

13.4.13 PA_12 external interrupt enable register (PA_12_EXTINT)

Address offset : 0x230

Reset value : 0x0000_0000

31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16
res															

15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
res	PA12IEN	PA12POL													
														R/W	R/W

[0] PA12POL - External interrupt polarity selection register of PA_12 PAD

These bits are written by S/W.

0 : interrupt occurs when pad detect HIGH level signal

1 : interrupt occurs when pad detect LOW level signal

[1] PA12IEN - External interrupt enable register of PA_12 PAD

These bits are written by S/W.

0 : external interrupt disable

1 : external interrupt enable

13.4.14 PA_13 external interrupt enable register (PA_13_EXTINT)

Address offset : 0x234

Reset value : 0x0000_0000

31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16
res	res														
15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
res	PA13IEN	PA13POL													
														R/W	R/W

[0] PA13POL - External interrupt polarity selection register of PA_13 PAD

These bits are written by S/W.

0 : interrupt occurs when pad detect HIGH level signal

1 : interrupt occurs when pad detect LOW level signal

[1] PA13IEN - External interrupt enable register of PA_13 PAD

These bits are written by S/W.

0 : external interrupt disable

1 : external interrupt enable

13.4.15 PA_14 external interrupt enable register (PA_14_EXTINT)

Address offset : 0x238

Reset value : 0x0000_0000

31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16
res	res														
15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
res	PA14TIEN	PA14POL													
														R/W	R/W

[0] PA14POL - External interrupt polarity selection register of PA_14 PAD

These bits are written by S/W.

0 : interrupt occurs when pad detect HIGH level signal

1 : interrupt occurs when pad detect LOW level signal

[1] PA14IEN - External interrupt enable register of PA_14 PAD

These bits are written by S/W.

0 : external interrupt disable

1 : external interrupt enable

13.4.16 PA_15 external interrupt enable register (PA_15_EXTINT)

Address offset : 0x23c

Reset value : 0x0000_0000

31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16
res	res														
15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
res	PA15IEN	PA15POL													
														R/W	R/W

[0] PA15POL - External interrupt polarity selection register of PA_15 PAD

These bits are written by S/W.

0 : interrupt occurs when pad detect HIGH level signal

1 : interrupt occurs when pad detect LOW level signal

[1] PA15IEN - External interrupt enable register of PA_15 PAD

These bits are written by S/W.

0 : external interrupt disable

1 : external interrupt enable

13.4.17 PB_00 external interrupt enable register (PB_00_EXTINT)

Address offset : 0x240

Reset value : 0x0000_0000

31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16
res	res														
15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
res	PB00IEN	PB00POL													
														R/W	R/W

[0] PB00POL - External interrupt polarity selection register of PB_00 PAD

These bits are written by S/W.

0 : interrupt occurs when pad detect HIGH level signal

1 : interrupt occurs when pad detect LOW level signal

[1] PB00IEN - External interrupt enable register of PB_00 PAD

These bits are written by S/W.

0 : external interrupt disable

1 : external interrupt enable

13.4.18 PB_01 external interrupt enable register (PB_01_EXTINT)

Address offset : 0x244

Reset value : 0x0000_0000

31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16
res															

15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
res	PB01IEN	PB01POL													
														R/W	R/W

[0] PB01POL - External interrupt polarity selection register of PB_01 PAD

These bits are written by S/W.

0 : interrupt occurs when pad detect HIGH level signal

1 : interrupt occurs when pad detect LOW level signal

[1] PB01IEN - External interrupt enable register of PB_01 PAD

These bits are written by S/W.

0 : external interrupt disable

1 : external interrupt enable

13.4.19 PB_02 external interrupt enable register (PB_02_EXTINT)

Address offset : 0x248

Reset value : 0x0000_0000

31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16
res															

15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
res	PB02IEN	PB02POL													
														R/W	R/W

[0] PB02POL - External interrupt polarity selection register of PB_02 PAD

These bits are written by S/W.

0 : interrupt occurs when pad detect HIGH level signal

1 : interrupt occurs when pad detect LOW level signal

[1] PB02IEN - External interrupt enable register of PB_02 PAD

These bits are written by S/W.

0 : external interrupt disable

1 : external interrupt enable

13.4.20 PB_03 external interrupt enable register (PB_03_EXTINT)

Address offset : 0x24c

Reset value : 0x0000_0000

31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16
res															

15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
res	PB03IEN	PB03POL													
														R/W	R/W

[0] PB03POL - External interrupt polarity selection register of PB_03 PAD

These bits are written by S/W.

0 : interrupt occurs when pad detect HIGH level signal

1 : interrupt occurs when pad detect LOW level signal

[1] PB03IEN - External interrupt enable register of PB_03 PAD

These bits are written by S/W.

0 : external interrupt disable

1 : external interrupt enable

13.4.21 PB_04 external interrupt enable register (PB_04_EXTINT)

Address offset : 0x250

Reset value : 0x0000_0000

31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16
res															

15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
res	PB04IEN	PB04POL													

													R/W	R/W
--	--	--	--	--	--	--	--	--	--	--	--	--	-----	-----

[0] PB04POL - External interrupt polarity selection register of PB_04 PAD

These bits are written by S/W.

0 : interrupt occurs when pad detect HIGH level signal

1 : interrupt occurs when pad detect LOW level signal

[1] PB04IEN - External interrupt enable register of PB_04 PAD

These bits are written by S/W.

0 : external interrupt disable

1 : external interrupt enable

13.4.22 PB_05 external interrupt enable register (PB_05_EXTINT)

Address offset : 0x254

Reset value : 0x0000_0000

31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16
res															

15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
res	PB05IEN	PB05POL													
														R/W	R/W

[0] PB05POL - External interrupt polarity selection register of PB_05 PAD

These bits are written by S/W.

0 : interrupt occurs when pad detect HIGH level signal

1 : interrupt occurs when pad detect LOW level signal

[1] PB05IEN - External interrupt enable register of PB_05 PAD

These bits are written by S/W.

0 : external interrupt disable

1 : external interrupt enable

13.4.23 PB_06 external interrupt enable register (PB_06_EXTINT)

Address offset : 0x258

Reset value : 0x0000_0000

31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16
res															

15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
res	PB06IEN	PB06POL													
														R/W	R/W

[0] PB06POL - External interrupt polarity selection register of PB_06 PAD

These bits are written by S/W.

0 : interrupt occurs when pad detect HIGH level signal

1 : interrupt occurs when pad detect LOW level signal

[1] PB06IEN - External interrupt enable register of PB_06 PAD

These bits are written by S/W.

0 : external interrupt disable

1 : external interrupt enable

13.4.24 PB_07 external interrupt enable register (PB_07_EXTINT)

Address offset : 0x25c

Reset value : 0x0000_0000

31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16
res															

15 14 13 12 11 10 9 8 7 6 5 4 3 2 1 0

res	PB07IEN	PB07POL													
														R/W	R/W

[0] PB07POL - External interrupt polarity selection register of PB_07 PAD

These bits are written by S/W.

0 : interrupt occurs when pad detect HIGH level signal

1 : interrupt occurs when pad detect LOW level signal

[1] PB07IEN - External interrupt enable register of PB_07 PAD

These bits are written by S/W.

0 : external interrupt disable

1 : external interrupt enable

13.4.25 PB_08 external interrupt enable register (PB_08_EXTINT)

Address offset : 0x260

Reset value : 0x0000_0000

31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16
res															

15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
res	PB08IEN	PB08POL													
														R/W	R/W

[0] PB08POL - External interrupt polarity selection register of PB_08 PAD

These bits are written by S/W.

0 : interrupt occurs when pad detect HIGH level signal

1 : interrupt occurs when pad detect LOW level signal

[1] PB08IEN - External interrupt enable register of PB_08 PAD

These bits are written by S/W.

0 : external interrupt disable

1 : external interrupt enable

13.4.26 PB_09 external interrupt enable register (PB_09_EXTINT)

Address offset : 0x264

Reset value : 0x0000_0000

31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16
res															

15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
res	PB09IEN	PB09POL													
														R/W	R/W

[0] PB09POL - External interrupt polarity selection register of PB_09 PAD

These bits are written by S/W.

0 : interrupt occurs when pad detect HIGH level signal

1 : interrupt occurs when pad detect LOW level signal

[1] PB09IEN - External interrupt enable register of PB_09 PAD

These bits are written by S/W.

0 : external interrupt disable

1 : external interrupt enable

13.4.27 PB_10 external interrupt enable register (PB_10_EXTINT)

Address offset : 0x268

Reset value : 0x0000_0000

31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16
res	res														
15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
res	PB10IEN	PB10POL													
														R/W	R/W

[0] PB10POL - External interrupt polarity selection register of PB_10 PAD

These bits are written by S/W.

0 : interrupt occurs when pad detect HIGH level signal

1 : interrupt occurs when pad detect LOW level signal

[1] PB10IEN - External interrupt enable register of PB_10 PAD

These bits are written by S/W.

0 : external interrupt disable

1 : external interrupt enable

13.4.28 PB_11 external interrupt enable register (PB_11_EXTINT)

Address offset : 0x26c

Reset value : 0x0000_0000

31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16
res	res														
15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
res	PB11IEN	PB11POL													
														R/W	R/W

[0] PB11POL - External interrupt polarity selection register of PB_11 PAD

These bits are written by S/W.

0 : interrupt occurs when pad detect HIGH level signal

1 : interrupt occurs when pad detect LOW level signal

[1] PB11IEN - External interrupt enable register of PB_11 PAD

These bits are written by S/W.

0 : external interrupt disable

1 : external interrupt enable

13.4.29 PB_12 external interrupt enable register (PB_12_EXTINT)

Address offset : 0x270

Reset value : 0x0000_0000

31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16
res															

15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
res	PB12IEN	PB12POL													
														R/W	R/W

[0] PB12POL - External interrupt polarity selection register of PB_12 PAD

These bits are written by S/W.

0 : interrupt occurs when pad detect HIGH level signal

1 : interrupt occurs when pad detect LOW level signal

[1] PB12IEN - External interrupt enable register of PB_12 PAD

These bits are written by S/W.

0 : external interrupt disable

1 : external interrupt enable

13.4.30 PB_13 external interrupt enable register (PB_13_EXTINT)

Address offset : 0x274

Reset value : 0x0000_0000

31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16
res															

15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
res	PB13IEN	PB13POL													
														R/W	R/W

[0] PB13POL - External interrupt polarity selection register of PB_13 PAD

These bits are written by S/W.

0 : interrupt occurs when pad detect HIGH level signal

1 : interrupt occurs when pad detect LOW level signal

[1] PB13IEN - External interrupt enable register of PB_13 PAD

These bits are written by S/W.

0 : external interrupt disable

1 : external interrupt enable

13.4.31 PB_14 external interrupt enable register (PB_14_EXTINT)

Address offset : 0x278

Reset value : 0x0000_0000

31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16
res															

15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
res	PB14IEN	PB14POL													
														R/W	R/W

[0] PB14POL - External interrupt polarity selection register of PB_14 PAD

These bits are written by S/W.

0 : interrupt occurs when pad detect HIGH level signal

1 : interrupt occurs when pad detect LOW level signal

[1] PB14IEN - External interrupt enable register of PB_14 PAD

These bits are written by S/W.

0 : external interrupt disable

1 : external interrupt enable

13.4.32 PB_15 external interrupt enable register (PB_15_EXTINT)

Address offset : 0x27c

Reset value : 0x0000_0000

31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16
res															

15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
res	PB15IEN	PB15POL													

													R/W	R/W
--	--	--	--	--	--	--	--	--	--	--	--	--	-----	-----

[0] PB15POL - External interrupt polarity selection register of PB_15 PAD

These bits are written by S/W.

0 : interrupt occurs when pad detect HIGH level signal

1 : interrupt occurs when pad detect LOW level signal

[1] PB15IEN - External interrupt enable register of PB_15 PAD

These bits are written by S/W.

0 : external interrupt disable

1 : external interrupt enable

13.4.33 PC_00 external interrupt enable register (PC_00_EXTINT)

Address offset : 0x280

Reset value : 0x0000_0000

31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16
res															

15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
res	PC00IEN	PC00POL													
														R/W	R/W

[0] PC00POL - External interrupt polarity selection register of PC_00 PAD

These bits are written by S/W.

0 : interrupt occurs when pad detect HIGH level signal

1 : interrupt occurs when pad detect LOW level signal

[1] PC00IEN - External interrupt enable register of PC_00 PAD

These bits are written by S/W.

0 : external interrupt disable

1 : external interrupt enable

13.4.34 PC_01 external interrupt enable register (PC_01_EXTINT)

Address offset : 0x284

Reset value : 0x0000_0000

31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16
res															

15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
res	PC01IEN	PC01POL													
														R/W	R/W

[0] PC01POL - External interrupt polarity selection register of PC_01 PAD

These bits are written by S/W.

0 : interrupt occurs when pad detect HIGH level signal

1 : interrupt occurs when pad detect LOW level signal

[1] PC01IEN - External interrupt enable register of PC_01 PAD

These bits are written by S/W.

0 : external interrupt disable

1 : external interrupt enable

13.4.35 PC_02 external interrupt enable register (PC_02_EXTINT)

Address offset : 0x288

Reset value : 0x0000_0000

31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16
res															

15 14 13 12 11 10 9 8 7 6 5 4 3 2 1 0

res	PC02IEN	PC02POL													
														R/W	R/W

[0] PC02POL - External interrupt polarity selection register of PC_02 PAD

These bits are written by S/W.

0 : interrupt occurs when pad detect HIGH level signal

1 : interrupt occurs when pad detect LOW level signal

[1] PC02IEN - External interrupt enable register of PC_02 PAD

These bits are written by S/W.

0 : external interrupt disable

1 : external interrupt enable

13.4.36 PC_03 external interrupt enable register (PC_03_EXTINT)

Address offset : 0x28c

Reset value : 0x0000_0000

31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16
res															

15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
res	PC03IEN	PC03POL													
														R/W	R/W

[0] PC03POL - External interrupt polarity selection register of PC_03 PAD

These bits are written by S/W.

0 : interrupt occurs when pad detect HIGH level signal

1 : interrupt occurs when pad detect LOW level signal

[1] PC03IEN - External interrupt enable register of PC_03 PAD

These bits are written by S/W.

0 : external interrupt disable

1 : external interrupt enable

13.4.37 PC_04 external interrupt enable register (PC_04_EXTINT)

Address offset : 0x290

Reset value : 0x0000_0000

31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16
res															

15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
res	PC04IEN	PC04POL													
														R/W	R/W

[0] PC04POL - External interrupt polarity selection register of PC_04 PAD

These bits are written by S/W.

0 : interrupt occurs when pad detect HIGH level signal

1 : interrupt occurs when pad detect LOW level signal

[1] PC04IEN - External interrupt enable register of PC_04 PAD

These bits are written by S/W.

0 : external interrupt disable

1 : external interrupt enable

13.4.38 PC_05 external interrupt enable register (PC_05_EXTINT)

Address offset : 0x294

Reset value : 0x0000_0000

31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16
res	res														
15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
res	PC05IEN	PC05POL													
														R/W	R/W

[0] PC05POL - External interrupt polarity selection register of PC_05 PAD

These bits are written by S/W.

0 : interrupt occurs when pad detect HIGH level signal

1 : interrupt occurs when pad detect LOW level signal

[1] PC05IEN - External interrupt enable register of PC_05 PAD

These bits are written by S/W.

0 : external interrupt disable

1 : external interrupt enable

13.4.39 PC_06 external interrupt enable register (PC_06_EXTINT)

Address offset : 0x298

Reset value : 0x0000_0000

31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16
res	res														
15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
res	PC06IEN	PC06POL													
														R/W	R/W

[0] PC06POL - External interrupt polarity selection register of PC_06 PAD

These bits are written by S/W.

0 : interrupt occurs when pad detect HIGH level signal

1 : interrupt occurs when pad detect LOW level signal

[1] PC06IEN - External interrupt enable register of PC_06 PAD

These bits are written by S/W.

0 : external interrupt disable

1 : external interrupt enable

13.4.40 PC_07 external interrupt enable register (PC_07_EXTINT)

Address offset : 0x29c

Reset value : 0x0000_0000

31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16
res															

15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
res	PC07IEN	PC07POL													
														R/W	R/W

[0] PC07POL - External interrupt polarity selection register of PC_07 PAD

These bits are written by S/W.

0 : interrupt occurs when pad detect HIGH level signal

1 : interrupt occurs when pad detect LOW level signal

[1] PC07IEN - External interrupt enable register of PC_07 PAD

These bits are written by S/W.

0 : external interrupt disable

1 : external interrupt enable

13.4.41 PC_08 external interrupt enable register (PC_08_EXTINT)

Address offset : 0x2a0

Reset value : 0x0000_0000

31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16
res															

15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
res	PC08IEN	PC08POL													
														R/W	R/W

[0] PC08POL - External interrupt polarity selection register of PC_08 PAD

These bits are written by S/W.

0 : interrupt occurs when pad detect HIGH level signal

1 : interrupt occurs when pad detect LOW level signal

[1] PC08IEN - External interrupt enable register of PC_08 PAD

These bits are written by S/W.

0 : external interrupt disable

1 : external interrupt enable

13.4.42 PC_09 external interrupt enable register (PC_09_EXTINT)

Address offset : 0x2a4

Reset value : 0x0000_0000

31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16
res															

15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
res	PC09IEN	PC09POL													
														R/W	R/W

[0] PC09POL - External interrupt polarity selection register of PC_09 PAD

These bits are written by S/W.

0 : interrupt occurs when pad detect HIGH level signal

1 : interrupt occurs when pad detect LOW level signal

[1] PC09IEN - External interrupt enable register of PC_09 PAD

These bits are written by S/W.

0 : external interrupt disable

1 : external interrupt enable

13.4.43 PC_10 external interrupt enable register (PC_10_EXTINT)

Address offset : 0x2a8

Reset value : 0x0000_0000

31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16
res															

15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
res	PC10IEN	PC10POL													

													R/W	R/W
--	--	--	--	--	--	--	--	--	--	--	--	--	-----	-----

[0] PC10POL - External interrupt polarity selection register of PC_10 PAD

These bits are written by S/W.

0 : interrupt occurs when pad detect HIGH level signal

1 : interrupt occurs when pad detect LOW level signal

[1] PC10IEN - External interrupt enable register of PC_10 PAD

These bits are written by S/W.

0 : external interrupt disable

1 : external interrupt enable

13.4.44 PC_11 external interrupt enable register (PC_11_EXTINT)

Address offset : 0x2ac

Reset value : 0x0000_0000

31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16
res															

15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
res	PC11IEN	PC11POL													
														R/W	R/W

[0] PC11POL - External interrupt polarity selection register of PC_11 PAD

These bits are written by S/W.

0 : interrupt occurs when pad detect HIGH level signal

1 : interrupt occurs when pad detect LOW level signal

[1] PC11IEN - External interrupt enable register of PC_11 PAD

These bits are written by S/W.

0 : external interrupt disable

1 : external interrupt enable

13.4.45 PC_12 external interrupt enable register (PC_12_EXTINT)

Address offset : 0x2b0

Reset value : 0x0000_0000

31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16
res															

15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
res	PC12IEN	PC12POL													
														R/W	R/W

[0] PC12POL - External interrupt polarity selection register of PC_12 PAD

These bits are written by S/W.

0 : interrupt occurs when pad detect HIGH level signal

1 : interrupt occurs when pad detect LOW level signal

[1] PC12IEN - External interrupt enable register of PC_12 PAD

These bits are written by S/W.

0 : external interrupt disable

1 : external interrupt enable

13.4.46 PC_13 external interrupt enable register (PC_13_EXTINT)

Address offset : 0x2b4

Reset value : 0x0000_0000

31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16
res															

15 14 13 12 11 10 9 8 7 6 5 4 3 2 1 0

res	PC13IEN	PC13POL													
														R/W	R/W

[0] PC13POL - External interrupt polarity selection register of PC_13 PAD

These bits are written by S/W.

0 : interrupt occurs when pad detect HIGH level signal

1 : interrupt occurs when pad detect LOW level signal

[1] PC13IEN - External interrupt enable register of PC_13 PAD

These bits are written by S/W.

0 : external interrupt disable

1 : external interrupt enable

13.4.47 PC_14 external interrupt enable register (PC_14_EXTINT)

Address offset : 0x2b8

Reset value : 0x0000_0000

31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16
res															

15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
res	PC14IEN	PC14POL													
														R/W	R/W

[0] PC14POL - External interrupt polarity selection register of PC_14 PAD

These bits are written by S/W.

0 : interrupt occurs when pad detect HIGH level signal

1 : interrupt occurs when pad detect LOW level signal

[1] PC14IEN - External interrupt enable register of PC_14 PAD

These bits are written by S/W.

0 : external interrupt disable

1 : external interrupt enable

13.4.48 PC_15 external interrupt enable register (PC_15_EXTINT)

Address offset : 0x2bc

Reset value : 0x0000_0000

31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16
res															

15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
res	PC15IEN	PC15POL													
														R/W	R/W

[0] PC15POL - External interrupt polarity selection register of PC_15 PAD

These bits are written by S/W.

0 : interrupt occurs when pad detect HIGH level signal

1 : interrupt occurs when pad detect LOW level signal

[1] PC15IEN - External interrupt enable register of PC_15 PAD

These bits are written by S/W.

0 : external interrupt disable

1 : external interrupt enable

13.4.49 PD_00 external interrupt enable register (PD_00_EXTINT)

Address offset : 0x2c0

Reset value : 0x0000_0000

31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16
res	res														
15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
res	PD00IEN	PD00POL													
														R/W	R/W

[0] PD00POL - External interrupt polarity selection register of PD_00 PAD

These bits are written by S/W.

0 : interrupt occurs when pad detect HIGH level signal

1 : interrupt occurs when pad detect LOW level signal

[1] PD00IEN - External interrupt enable register of PD_00 PAD

These bits are written by S/W.

0 : external interrupt disable

1 : external interrupt enable

13.4.50 PD_01 external interrupt enable register (PD_01_EXTINT)

Address offset : 0x2c4

Reset value : 0x0000_0000

31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16
res	res														
15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
res	PD01IEN	PD01POL													
														R/W	R/W

[0] PD01POL - External interrupt polarity selection register of PD_01 PAD

These bits are written by S/W.

0 : interrupt occurs when pad detect HIGH level signal

1 : interrupt occurs when pad detect LOW level signal

[1] PD01IEN - External interrupt enable register of PD_01 PAD

These bits are written by S/W.

0 : external interrupt disable

1 : external interrupt enable

13.4.51 PD_02 external interrupt enable register (PD_02_EXTINT)

Address offset : 0x2c8

Reset value : 0x0000_0000

31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16
res															

15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
res	PD02IEN	PD02POL													
														R/W	R/W

[0] PD02POL - External interrupt polarity selection register of PD_02 PAD

These bits are written by S/W.

0 : interrupt occurs when pad detect HIGH level signal

1 : interrupt occurs when pad detect LOW level signal

[1] PD02IEN - External interrupt enable register of PD_02 PAD

These bits are written by S/W.

0 : external interrupt disable

1 : external interrupt enable

13.4.52 PD_03 external interrupt enable register (PD_03_EXTINT)

Address offset : 0x2cc

Reset value : 0x0000_0000

31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16
res															

15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
res	PD03IEN	PD03POL													
														R/W	R/W

[0] PD03POL - External interrupt polarity selection register of PD_03 PAD

These bits are written by S/W.

0 : interrupt occurs when pad detect HIGH level signal

1 : interrupt occurs when pad detect LOW level signal

[1] PD03IEN - External interrupt enable register of PD_03 PAD

These bits are written by S/W.

0 : external interrupt disable

1 : external interrupt enable

13.4.53 PD_04 external interrupt enable register (PD_04_EXTINT)

Address offset : 0x2d0

Reset value : 0x0000_0000

31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16
res															

15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
res	PD04IEN	PD04POL													
														R/W	R/W

[0] PD04POL - External interrupt polarity selection register of PD_04 PAD

These bits are written by S/W.

0 : interrupt occurs when pad detect HIGH level signal

1 : interrupt occurs when pad detect LOW level signal

[1] PD04IEN - External interrupt enable register of PD_04 PAD

These bits are written by S/W.

0 : external interrupt disable

1 : external interrupt enable

13.5 Register map

The following Table 12 summarizes the EXTINT registers.

Table 12 EXTINT register map and reset values

0x294	PC_05_EXTINT		res	res																		
	reset value																					
0x298	PC_06_EXTINT		res	res																		
	reset value																					
0x29c	PC_07_EXTINT		res	res																		
	reset value																					
0x2a0	PC_08_EXTINT		res	res																		
	reset value																					
0x2a4	PC_09_EXTINT		res	res																		
	reset value																					
0x2a8	PC_10_EXTINT		res	res																		
	reset value																					
0x2ac	PC_11_EXTINT		res	res																		
	reset value																					
0x2b0	PC_12_EXTINT		res	res																		
	reset value																					
0x2b4	PC_13_EXTINT		res	res																		
	reset value																					
0x2b8	PC_14_EXTINT		res	res																		
	reset value																					
0x2bc	PC_15_EXTINT		res	res																		
	reset value																					
0x2c0	PD_00_EXTINT		res	res																		
	reset value																					
0x2c4	PD_01_EXTINT		res	res																		
	reset value																					
0x2c8	PD_02_EXTINT		res	res																		
	reset value																					
0x2cc	PD_03_EXTINT		res	res																		
	reset value																					
0x2d0	PD_04_EXTINT		res	res																		
	reset value																					
	○ PDO4IEN	○ PDO3IEN	○ PDO2IEN	○ PDO1IEN	○ PC09IEN	○ PC10IEN	○ PC11IEN	○ PC12IEN	○ PC13IEN	○ PC14IEN	○ PC15IEN	○ PC16IEN	○ PC08IEN	○ PC09IEN	○ PC10IEN	○ PC11IEN	○ PC12IEN	○ PC13IEN	○ PC14IEN	○ PC15IEN	○ PC16IEN	
	○ PDO4POL	○ PDO3POL	○ PDO2POL	○ PDO1POL	○ PC09POL	○ PC10POL	○ PC11POL	○ PC12POL	○ PC13POL	○ PC14POL	○ PC15POL	○ PC16POL										

14 Pad Controller (PADCON)

14.1 Introduction

Pads of W7500 are controllable. User can control pad's characteristic.

14.2 Features

- W7500 has digital I/O pads and digital/analog mux I/O pads
- Controllable characteristics of pads are pull-up, pull-down, driving strength, input enable, and CMOS/Schmitt trigger input buffer
- Each pad can be controlled individually by register.

14.3 Functional description

Figure 14 shows the function schematic of digital I/O pad of W7500.

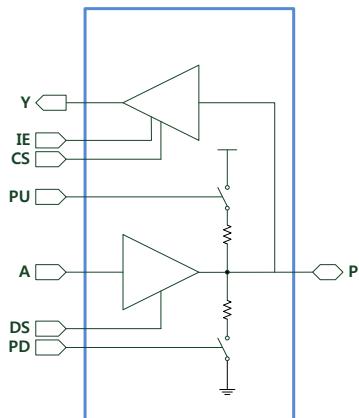


Figure 14. function schematic of digital I/O pad

Figure 15 shows the function schematic of digital/analog mux IO pad of W7500

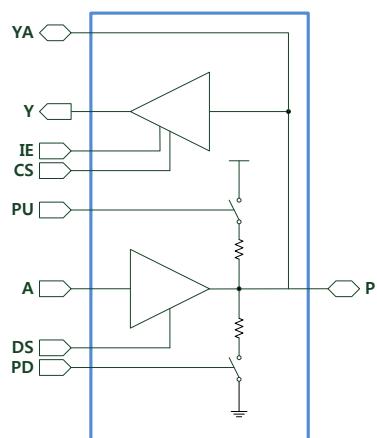


Figure 15. function schematic of digital/analog mux IO pad

Initials of Pad diagram is same as below.

P - PAD

YA - Analog Input (connect to ADC input)

Y - Digital Input

IE - Input buffer enable

Condition		A	Y	P
Input buffer enable (IE = 1)	Output mode	OUT	OUT	OUT
	Input mode	No use	IN	IN
Input buffer disable (IE = 0)	Output mode	OUT	Low (0)	OUT
	Input mode	No use	IN	IN

CS - CMOS/Schmitt trigger input buffer select

PU - Pull-up enable

A - Digital Output

DS - Driving strength select

Condition		Rise/Fall Time (nSec)		Propagation Delay (nSec)	
Driving Strength	Capacitance loading	Min	Max	Min	Max
High (DS = 1)	25pF	4	18	7	27
	100pF	11	53	11	44
Low (DS = 0)	25pF	1	8	4	16
	100pF	4	23	7	24

PD - Pull-down enable

User can set pad condition with IE, CS, PU/PD, DS by register.

And pads are can be controlled individually.

14.4 Registers (Base address : 0x4100_3000)

14.4.1 PA_00 pad control register

Address offset : 0x000

Reset value : 0x0000_0030

31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16
res															

15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
res	PA00_CS	PA00_IE	res	res	PA00_DS	PA00_PUPD									

								R/W	R/W			R/W	R/W
--	--	--	--	--	--	--	--	-----	-----	--	--	-----	-----

[1:0] PA00_PUPD - Pull-up, Pull-down selection register of Pad PA_00

These bits are written by S/W.

00 : Neither

01 : pull-down

10 : pull-up

11 : Neither

[2] PA00_DS - Driving strength selection register of Pad PA_00

0 : Low driving strength

1 : High driving strength

[5] PA00_IE : Input buffer enable selection register of Pad PA_00

0 : Input buffer disable

1 : Input buffer enable

[6] PA00_CS - CMOS input or Summit trigger input selection register of Pad PA_00

0 : CMOS input buffer

1 : Summit trigger input buffer

14.4.2PA_01 pad control register

Address offset : 0x004

Reset value : 0x0000_0030

31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16
res															

15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
res	PA01_CS	PA01_IE	res	res	PA01_DS	PA01_PUPD									

[1:0] PA01_PUPD - Pull-up, Pull-down selection register of Pad PA_01

These bits are written by S/W.

00 : Neither

01 : pull-down

10 : pull-up

11 : Neither

[2] PA01_DS - Driving strength selection register of Pad PA_01

0 : Low driving strength

1 : High driving strength

[5] PA01_IE : Input buffer enable selection register of Pad PA_01

0 : Input buffer disable

1 : Input buffer enable

[6] PA01_CS - CMOS input or Summit trigger input selection register of Pad PA_01

0 : CMOS input buffer

1 : Summit trigger input buffer

14.4.3PA_02 pad control register

Address offset : 0x008

Reset value : 0x0000_0030

31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16
res															

15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
res	PA02_CS	PA02_IE	res	res	PA02_DS	PA02_PUPD									
									R/W	R/W			R/W	R/W	

[1:0] PA02_PUPD - Pull-up, Pull-down selection register of Pad PA_02

These bits are written by S/W.

00 : Neither

01 : pull-down

10 : pull-up

11 : Neither

[2] PA02_DS - Driving strength selection register of Pad PA_02

0 : Low driving strength

1 : High driving strength

[5] PA02_IE : Input buffer enable selection register of Pad PA_02

0 : Input buffer disable

1 : Input buffer enable

[6] PA02_CS - CMOS input or Summit trigger input selection register of Pad PA_02

0 : CMOS input buffer

1 : Summit trigger input buffer

14.4.4PA_03 pad control register

Address offset : 0x00c

Reset value : 0x0000_0030

31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16
res															

15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
res	PA03_CS	PA03_IE	res	res	PA03_DS	PA03_PUPD									

[1:0] PA03_PUPD - Pull-up, Pull-down selection register of Pad PA_03

These bits are written by S/W.

00 : Neither

01 : pull-down

10 : pull-up

11 : Neither

[2] PA03_DS - Driving strength selection register of Pad PA_03

0 : Low driving strength

1 : High driving strength

[5] PA03_IE : Input buffer enable selection register of Pad PA_03

0 : Input buffer disable

1 : Input buffer enable

[6] PA03_CS - CMOS input or Summit trigger input selection register of Pad PA_03

0 : CMOS input buffer

1 : Summit trigger input buffer

14.4.5PA_04 pad control register

Address offset : 0x010

Reset value : 0x0000_0030

31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16
res															

15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
res	PA04_CS	PA04_IE	res	res	PA04_DS	PA04_PUPD									

[1:0] PA04_PUPD - Pull-up, Pull-down selection register of Pad PA_04

These bits are written by S/W.

00 : Neither

01 : pull-down

10 : pull-up

11 : Neither

[2] PA04_DS - Driving strength selection register of Pad PA_04

0 : Low driving strength

1 : High driving strength

[5] PA04_IE : Input buffer enable selection register of Pad PA_04

0 : Input buffer disable

1 : Input buffer enable

[6] PA04_CS - CMOS input or Summit trigger input selection register of Pad PA_04

0 : CMOS input buffer

1 : Summit trigger input buffer

14.4.6PA_05 pad control register

Address offset : 0x014

Reset value : 0x0000_0030

31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16
res															

15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
res	PA05_CS	PA05_IE	res	res	PA05_DS	PA05_PUPD									
									R/W	R/W			R/W	R/W	

[1:0] PA05_PUPD - Pull-up, Pull-down selection register of Pad PA_05

These bits are written by S/W.

00 : Neither

01 : pull-down

10 : pull-up

11 : Neither

[2] PA05_DS - Driving strength selection register of Pad PA_05

0 : Low driving strength

1 : High driving strength

[5] PA05_IE : Input buffer enable selection register of Pad PA_05

0 : Input buffer disable

1 : Input buffer enable

[6] PA05_CS - CMOS input or Summit trigger input selection register of Pad PA_05

0 : CMOS input buffer

1 : Summit trigger input buffer

14.4.7PA_06 pad control register

Address offset : 0x018

Reset value : 0x0000_0030

31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16
res															

--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--

15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
res	PA06_CS	PA06_IE	res	res	PA06_DS	PA06_PUPD									
									R/W	R/W			R/W	R/W	

[1:0] PA06_PUPD - Pull-up, Pull-down selection register of Pad PA_06

These bits are written by S/W.

00 : Neither

01 : pull-down

10 : pull-up

11 : Neither

[2] PA06_DS - Driving strength selection register of Pad PA_06

0 : Low driving strength

1 : High driving strength

[5] PA06_IE : Input buffer enable selection register of Pad PA_06

0 : Input buffer disable

1 : Input buffer enable

[6] PA06_CS - CMOS input or Summit trigger input selection register of Pad PA_06

0 : CMOS input buffer

1 : Summit trigger input buffer

14.4.8PA_07 pad control register

Address offset : 0x01c

Reset value : 0x0000_0030

31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16
res															

15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
res	PA07_CS	PA07_IE	res	res	PA07_DS	PA07_PUPD									
									R/W	R/W			R/W	R/W	

[1:0] PA07_PUPD - Pull-up, Pull-down selection register of Pad PA_07

These bits are written by S/W.

00 : Neither

01 : pull-down

10 : pull-up

11 : Neither

[2] PA07_DS - Driving strength selection register of Pad PA_07

0 : Low driving strength

1 : High driving strength

[5] PA07_IE : Input buffer enable selection register of Pad PA_07

0 : Input buffer disable

1 : Input buffer enable

[6] PA07_CS - CMOS input or Summit trigger input selection register of Pad PA_07

0 : CMOS input buffer

1 : Summit trigger input buffer

14.4.9PA_08 pad control register

Address offset : 0x020

Reset value : 0x0000_0030

31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16
res															

15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
res	PA08_CS	PA08_IE	res	res	PA08_DS	PA08_PUPD									
									R/W	R/W			R/W	R/W	

[1:0] PA08_PUPD - Pull-up, Pull-down selection register of Pad PA_08

These bits are written by S/W.

00 : Neither

01 : pull-down

10 : pull-up

11 : Neither

[2] PA08_DS - Driving strength selection register of Pad PA_08

0 : Low driving strength

1 : High driving strength

[5] PA08_IE : Input buffer enable selection register of Pad PA_08

0 : Input buffer disable

1 : Input buffer enable

[6] PA08_CS - CMOS input or Summit trigger input selection register of Pad PA_08

0 : CMOS input buffer

1 : Summit trigger input buffer

14.4.10 PA_09 pad control register

Address offset : 0x024

Reset value : 0x0000_0030

31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16
res															

15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
res	PA09_CS	PA09_IE	res	res	PA09_DS	PA09_PUPD									
									R/W	R/W			R/W	R/W	

[1:0] PA09_PUPD - Pull-up, Pull-down selection register of Pad PA_09

These bits are written by S/W.

00 : Neither

01 : pull-down

10 : pull-up

11 : Neither

[2] PA09_DS - Driving strength selection register of Pad PA_09

0 : Low driving strength

1 : High driving strength

[5] PA09_IE : Input buffer enable selection register of Pad PA_09

0 : Input buffer disable

1 : Input buffer enable

[6] PA09_CS - CMOS input or Summit trigger input selection register of Pad PA_09

0 : CMOS input buffer

1 : Summit trigger input buffer

14.4.11 PA_10 pad control register

Address offset : 0x028

Reset value : 0x0000_0030

31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16
res															

15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
res	PA10_CS	PA10_IE	res	res	PA10_DS	PA10_PUPD									
									R/W	R/W			R/W	R/W	

[1:0] PA10_PUPD - Pull-up, Pull-down selection register of Pad PA_10

These bits are written by S/W.

00 : Neither

01 : pull-down

10 : pull-up

11 : Neither

[2] PA10_DS - Driving strength selection register of Pad PA_10

0 : Low driving strength

1 : High driving strength

[5] PA10_IE : Input buffer enable selection register of Pad PA_10

0 : Input buffer disable

1 : Input buffer enable

[6] PA10_CS - CMOS input or Summit trigger input selection register of Pad PA_10

0 : CMOS input buffer

1 : Summit trigger input buffer

14.4.12 PA_11 pad control register

Address offset : 0x02c

Reset value : 0x0000_0030

31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16
res															

15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
res	PA11_CS	PA11_IE	res	res	PA11_DS	PA11_PUPD									

[1:0] PA11_PUPD - Pull-up, Pull-down selection register of Pad PA_11

These bits are written by S/W.

00 : Neither

01 : pull-down

10 : pull-up

11 : Neither

[2] PA11_DS - Driving strength selection register of Pad PA_11

0 : Low driving strength

1 : High driving strength

[5] PA11_IE : Input buffer enable selection register of Pad PA_11

0 : Input buffer disable

1 : Input buffer enable

[6] PA11_CS - CMOS input or Summit trigger input selection register of Pad PA_11

0 : CMOS input buffer

1 : Summit trigger input buffer

14.4.13 PA_12 pad control register

Address offset : 0x030

Reset value : 0x0000_0030

31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16
res															

15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
res	PA12_CS	PA12_IE	res	res	PA12_DS	PA12_PUPD									
									R/W	R/W			R/W	R/W	

[1:0] PA12_PUPD - Pull-up, Pull-down selection register of Pad PA_12

These bits are written by S/W.

00 : Neither

01 : pull-down

10 : pull-up

11 : Neither

[2] PA12_DS - Driving strength selection register of Pad PA_12

0 : Low driving strength

1 : High driving strength

[5] PA12_IE : Input buffer enable selection register of Pad PA_12

0 : Input buffer disable

1 : Input buffer enable

[6] PA12_CS - CMOS input or Summit trigger input selection register of Pad PA_12

0 : CMOS input buffer

1 : Summit trigger input buffer

14.4.14 PA_13 pad control register

Address offset : 0x034

Reset value : 0x0000_0030

31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16
res															

15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
res	PA13_CS	PA13_IE	res	res	PA13_DS	PA13_PUPD									
									R/W	R/W			R/W	R/W	

[1:0] PA13_PUPD - Pull-up, Pull-down selection register of Pad PA_13

These bits are written by S/W.

00 : Neither

01 : pull-down

10 : pull-up

11 : Neither

[2] PA13_DS - Driving strength selection register of Pad PA_13

0 : Low driving strength

1 : High driving strength

[5] PA13_IE : Input buffer enable selection register of Pad PA_13

0 : Input buffer disable

1 : Input buffer enable

[6] PA13_CS - CMOS input or Summit trigger input selection register of Pad PA_13

0 : CMOS input buffer

1 : Summit trigger input buffer

14.4.15 PA_14 pad control register

Address offset : 0x038

Reset value : 0x0000_0030

31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16
res															

15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
res	PA14_CS	PA14_IE	res	res	PA14_DS	PA14_PUPD									
									R/W	R/W			R/W	R/W	

[1:0] PA14_PUPD - Pull-up, Pull-down selection register of Pad PA_14

These bits are written by S/W.

00 : Neither

01 : pull-down

10 : pull-up

11 : Neither

[2] PA14_DS - Driving strength selection register of Pad PA_14

0 : Low driving strength

1 : High driving strength

[5] PA14_IE : Input buffer enable selection register of Pad PA_14

0 : Input buffer disable

1 : Input buffer enable

[6] PA14_CS - CMOS input or Summit trigger input selection register of Pad PA_14

0 : CMOS input buffer

1 : Summit trigger input buffer

14.4.16 PA_15 pad control register

Address offset : 0x03c

Reset value : 0x0000_0030

31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16
res															

15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
res	PA15_CS	PA15_IE	res	res	PA15_DS	PA15_PUPD									

[1:0] PA15_PUPD - Pull-up, Pull-down selection register of Pad PA_15

These bits are written by S/W.

00 : Neither

01 : pull-down

10 : pull-up

11 : Neither

[2] PA15_DS - Driving strength selection register of Pad PA_15

0 : Low driving strength

1 : High driving strength

[5] PA15_IE : Input buffer enable selection register of Pad PA_15

0 : Input buffer disable

1 : Input buffer enable

[6] PA15_CS - CMOS input or Summit trigger input selection register of Pad PA_15

0 : CMOS input buffer

1 : Summit trigger input buffer

14.4.17 PB_00 pad control register

Address offset : 0x040

Reset value : 0x0000_0030

31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16
res															

15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
res	PB00_CS	PB00_IE	res	res	PB00_DS	PB00_PUPD									
									R/W	R/W			R/W	R/W	

[1:0] PB00_PUPD - Pull-up, Pull-down selection register of Pad PB_00

These bits are written by S/W.

00 : Neither

01 : pull-down

10 : pull-up

11 : Neither

[2] PB00_DS - Driving strength selection register of Pad PB_00

0 : Low driving strength

1 : High driving strength

[5] PB00_IE : Input buffer enable selection register of Pad PB_00

0 : Input buffer disable

1 : Input buffer enable

[6] PB00_CS - CMOS input or Summit trigger input selection register of Pad PB_00

0 : CMOS input buffer

1 : Summit trigger input buffer

14.4.18 PB_01 pad control register

Address offset : 0x044

Reset value : 0x0000_0030

31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16
res															

15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
res	PB01_CS	PB01_IE	res	res	PB01_DS	PB01_PUPD									
									R/W	R/W			R/W	R/W	

[1:0] PB01_PUPD - Pull-up, Pull-down selection register of Pad PB_01

These bits are written by S/W.

00 : Neither

01 : pull-down

10 : pull-up

11 : Neither

[2] PB01_DS - Driving strength selection register of Pad PB_01

0 : Low driving strength

1 : High driving strength

[5] PB01_IE : Input buffer enable selection register of Pad PB_01

0 : Input buffer disable

1 : Input buffer enable

[6] PB01_CS - CMOS input or Summit trigger input selection register of Pad PB_01

0 : CMOS input buffer

1 : Summit trigger input buffer

14.4.19 PB_02 pad control register

Address offset : 0x048

Reset value : 0x0000_0030

31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16
res															

15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
res	PB02_CS	PB02_IE	res	res	PB02_DS	PB02_PUPD									
									R/W	R/W			R/W	R/W	

[1:0] PB02_PUPD - Pull-up, Pull-down selection register of Pad PB_02

These bits are written by S/W.

00 : Neither

01 : pull-down

10 : pull-up

11 : Neither

[2] PB02_DS - Driving strength selection register of Pad PB_02

0 : Low driving strength

1 : High driving strength

[5] PB02_IE : Input buffer enable selection register of Pad PB_02

0 : Input buffer disable

1 : Input buffer enable

[6] PB02_CS - CMOS input or Summit trigger input selection register of Pad PB_02

0 : CMOS input buffer

1 : Summit trigger input buffer

14.4.20 PB_03 pad control register

Address offset : 0x04c

Reset value : 0x0000_0030

31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16
res															

--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--

15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
res	PB03_CS	PB03_IE	res	res	PB03_DS	PB03_PUPD									
									R/W	R/W			R/W	R/W	

[1:0] PB03_PUPD - Pull-up, Pull-down selection register of Pad PB_03

These bits are written by S/W.

00 : Neither

01 : pull-down

10 : pull-up

11 : Neither

[2] PB03_DS - Driving strength selection register of Pad PB_03

0 : Low driving strength

1 : High driving strength

[5] PB03_IE : Input buffer enable selection register of Pad PB_03

0 : Input buffer disable

1 : Input buffer enable

[6] PB03_CS - CMOS input or Summit trigger input selection register of Pad PB_03

0 : CMOS input buffer

1 : Summit trigger input buffer

14.4.21 PB_04 pad control register

Address offset : 0x050

Reset value : 0x0000_0030

31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16
res															

15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
res	PB04_CS	PB04_IE	res	res	PB04_DS	PB04_PUPD									
									R/W	R/W			R/W	R/W	

[1:0] PB04_PUPD - Pull-up, Pull-down selection register of Pad PB_04

These bits are written by S/W.

00 : Neither

01 : pull-down

10 : pull-up

11 : Neither

[2] PB04_DS - Driving strength selection register of Pad PB_04

0 : Low driving strength

1 : High driving strength

[5] PB04_IE : Input buffer enable selection register of Pad PB_04

0 : Input buffer disable

1 : Input buffer enable

[6] PB04_CS - CMOS input or Summit trigger input selection register of Pad PB_04

0 : CMOS input buffer

1 : Summit trigger input buffer

14.4.22 PB_05 pad control register

Address offset : 0x054

Reset value : 0x0000_0030

31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16
res															

15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
res	PB05_CS	PB05_IE	res	res	PB05_DS	PB05_PUPD									
									R/W	R/W			R/W	R/W	

[1:0] PB05_PUPD - Pull-up, Pull-down selection register of Pad PB_05

These bits are written by S/W.

00 : Neither

01 : pull-down

10 : pull-up

11 : Neither

[2] PB05_DS - Driving strength selection register of Pad PB_05

0 : Low driving strength

1 : High driving strength

[5] PB05_IE : Input buffer enable selection register of Pad PB_05

0 : Input buffer disable

1 : Input buffer enable

[6] PB05_CS - CMOS input or Summit trigger input selection register of Pad PB_05

0 : CMOS input buffer

1 : Summit trigger input buffer

14.4.23 PB_06 pad control register

Address offset : 0x058

Reset value : 0x0000_0030

31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16
res															

15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
res	PB06_CS	PB06_IE	res	res	PB06_DS	PB06_PUPD									
									R/W	R/W			R/W	R/W	

[1:0] PB06_PUPD - Pull-up, Pull-down selection register of Pad PB_06

These bits are written by S/W.

00 : Neither

01 : pull-down

10 : pull-up

11 : Neither

[2] PB06_DS - Driving strength selection register of Pad PB_06

0 : Low driving strength

1 : High driving strength

[5] PB06_IE : Input buffer enable selection register of Pad PB_06

0 : Input buffer disable

1 : Input buffer enable

[6] PB06_CS - CMOS input or Summit trigger input selection register of Pad PB_06

0 : CMOS input buffer

1 : Summit trigger input buffer

14.4.24 PB_07 pad control register

Address offset : 0x05c

Reset value : 0x0000_0030

31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16
res															

15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
res	PB07_CS	PB07_IE	res	res	PB07_DS	PB07_PUPD									
									R/W	R/W			R/W	R/W	

[1:0] PB07_PUPD - Pull-up, Pull-down selection register of Pad PB_07

These bits are written by S/W.

00 : Neither

01 : pull-down

10 : pull-up

11 : Neither

[2] PB07_DS - Driving strength selection register of Pad PB_07

0 : Low driving strength

1 : High driving strength

[5] PB07_IE : Input buffer enable selection register of Pad PB_07

0 : Input buffer disable

1 : Input buffer enable

[6] PB07_CS - CMOS input or Summit trigger input selection register of Pad PB_07

0 : CMOS input buffer

1 : Summit trigger input buffer

14.4.25 PB_08 pad control register

Address offset : 0x060

Reset value : 0x0000_0030

31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16
res															

15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
res	PB08_CS	PB08_IE	res	res	PB08_DS	PB08_PUPD									

[1:0] PB08_PUPD - Pull-up, Pull-down selection register of Pad PB_08

These bits are written by S/W.

00 : Neither

01 : pull-down

10 : pull-up

11 : Neither

[2] PB08_DS - Driving strength selection register of Pad PB_08

0 : Low driving strength

1 : High driving strength

[5] PB08_IE : Input buffer enable selection register of Pad PB_08

0 : Input buffer disable

1 : Input buffer enable

[6] PB08_CS - CMOS input or Summit trigger input selection register of Pad PB_08

0 : CMOS input buffer

1 : Summit trigger input buffer

14.4.26 PB_09 pad control register

Address offset : 0x064

Reset value : 0x0000_0030

31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16
res															

15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
res	PB09_CS	PB09_IE	res	res	PB09_DS	PB09_PUPD									
									R/W	R/W			R/W	R/W	

[1:0] PB09_PUPD - Pull-up, Pull-down selection register of Pad PB_09

These bits are written by S/W.

00 : Neither

01 : pull-down

10 : pull-up

11 : Neither

[2] PB09_DS - Driving strength selection register of Pad PB_09

0 : Low driving strength

1 : High driving strength

[5] PB09_IE : Input buffer enable selection register of Pad PB_09

0 : Input buffer disable

1 : Input buffer enable

[6] PB09_CS - CMOS input or Summit trigger input selection register of Pad PB_09

0 : CMOS input buffer

1 : Summit trigger input buffer

14.4.27 PB_10 pad control register

Address offset : 0x068

Reset value : 0x0000_0030

31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16
res															

15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
res	PB10_CS	PB10_IE	res	res	PB10_DS	PB10_PUPD									
									R/W	R/W			R/W	R/W	

[1:0] PB10_PUPD - Pull-up, Pull-down selection register of Pad PB_10

These bits are written by S/W.

00 : Neither

01 : pull-down

10 : pull-up

11 : Neither

[2] PB10_DS - Driving strength selection register of Pad PB_10

0 : Low driving strength

1 : High driving strength

[5] PB10_IE : Input buffer enable selection register of Pad PB_10

0 : Input buffer disable

1 : Input buffer enable

[6] PB10_CS - CMOS input or Summit trigger input selection register of Pad PB_10

0 : CMOS input buffer

1 : Summit trigger input buffer

14.4.28 PB_11 pad control register

Address offset : 0x06c

Reset value : 0x0000_0030

31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16
res															

15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
res	PB11_CS	PB11_IE	res	res	PB11_DS	PB11_PUPD									
									R/W	R/W			R/W	R/W	

[1:0] PB11_PUPD - Pull-up, Pull-down selection register of Pad PB_11

These bits are written by S/W.

00 : Neither

01 : pull-down

10 : pull-up

11 : Neither

[2] PB11_DS - Driving strength selection register of Pad PB_11

0 : Low driving strength

1 : High driving strength

[5] PB11_IE : Input buffer enable selection register of Pad PB_11

0 : Input buffer disable

1 : Input buffer enable

[6] PB11_CS - CMOS input or Summit trigger input selection register of Pad PB_11

0 : CMOS input buffer

1 : Summit trigger input buffer

14.4.29 PB_12 pad control register

Address offset : 0x070

Reset value : 0x0000_0030

31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16
res															

15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
res	PB12_CS	PB12_IE	res	res	PB12_DS	PB12_PUPD									
									R/W	R/W			R/W	R/W	

[1:0] PB12_PUPD - Pull-up, Pull-down selection register of Pad PB_12

These bits are written by S/W.

00 : Neither

01 : pull-down

10 : pull-up

11 : Neither

[2] PB12_DS - Driving strength selection register of Pad PB_12

0 : Low driving strength

1 : High driving strength

[5] PB12_IE : Input buffer enable selection register of Pad PB_12

0 : Input buffer disable

1 : Input buffer enable

[6] PB12_CS - CMOS input or Summit trigger input selection register of Pad PB_12

0 : CMOS input buffer

1 : Summit trigger input buffer

14.4.30 PB_13 pad control register

Address offset : 0x074

Reset value : 0x0000_0030

31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16
res															

15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
res	PB13_CS	PB13_IE	res	res	PB13_DS	PB13_PUPD									

								R/W	R/W			R/W	R/W
--	--	--	--	--	--	--	--	-----	-----	--	--	-----	-----

[1:0] PB13_PUPD - Pull-up, Pull-down selection register of Pad PB_13

These bits are written by S/W.

00 : Neither

01 : pull-down

10 : pull-up

11 : Neither

[2] PB13_DS - Driving strength selection register of Pad PB_13

0 : Low driving strength

1 : High driving strength

[5] PB13_IE : Input buffer enable selection register of Pad PB_13

0 : Input buffer disable

1 : Input buffer enable

[6] PB13_CS - CMOS input or Summit trigger input selection register of Pad PB_13

0 : CMOS input buffer

1 : Summit trigger input buffer

14.4.31 PB_14 pad control register

Address offset : 0x078

Reset value : 0x0000_0030

31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16
res															

15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
res	PB14_CS	PB14_IE	res	res	PB14_DS	PB14_PUPD									

[1:0] PB14_PUPD - Pull-up, Pull-down selection register of Pad PB_14

These bits are written by S/W.

00 : Neither

01 : pull-down

10 : pull-up

11 : Neither

[2] PB14_DS - Driving strength selection register of Pad PB_14

0 : Low driving strength

1 : High driving strength

[5] PB14_IE : Input buffer enable selection register of Pad PB_14

0 : Input buffer disable

1 : Input buffer enable

[6] PB14_CS - CMOS input or Summit trigger input selection register of Pad PB_14

0 : CMOS input buffer

1 : Summit trigger input buffer

14.4.32 PB_15 pad control register

Address offset : 0x07c

Reset value : 0x0000_0030

31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16
res															

15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
res	PB15_CS	PB15_IE	res	res	PB15_DS	PB15_PUPD									
									R/W	R/W			R/W	R/W	

[1:0] PB15_PUPD - Pull-up, Pull-down selection register of Pad PB_15

These bits are written by S/W.

00 : Neither

01 : pull-down

10 : pull-up

11 : Neither

[2] PB15_DS - Driving strength selection register of Pad PB_15

0 : Low driving strength

1 : High driving strength

[5] PB15_IE : Input buffer enable selection register of Pad PB_15

0 : Input buffer disable

1 : Input buffer enable

[6] PB15_CS - CMOS input or Summit trigger input selection register of Pad PB_15

0 : CMOS input buffer

1 : Summit trigger input buffer

14.4.33 PC_00 pad control register

Address offset : 0x080

Reset value : 0x0000_0030

31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16
res															

15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
res	PC00_CS	PC00_IE	res	res	PC00_DS	PC00_PUPD									
									R/W	R/W			R/W	R/W	

[1:0] PC00_PUPD - Pull-up, Pull-down selection register of Pad PC_00

These bits are written by S/W.

00 : Neither

01 : pull-down

10 : pull-up

11 : Neither

[2] PC00_DS - Driving strength selection register of Pad PC_00

0 : Low driving strength

1 : High driving strength

[5] PC00_IE : Input buffer enable selection register of Pad PC_00

0 : Input buffer disable

1 : Input buffer enable

[6] PC00_CS - CMOS input or Summit trigger input selection register of Pad PC_00

0 : CMOS input buffer

1 : Summit trigger input buffer

14.4.34 PC_01 pad control register

Address offset : 0x084

Reset value : 0x0000_0030

31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16
res															

15 14 13 12 11 10 9 8 7 6 5 4 3 2 1 0

res	PC01_CS	PC01_IE	res	res	PC01_DS	PC01_PUPD									
									R/W	R/W			R/W	R/W	

[1:0] PC01_PUPD - Pull-up, Pull-down selection register of Pad PC_01

These bits are written by S/W.

00 : Neither

01 : pull-down

10 : pull-up

11 : Neither

[2] PC01_DS - Driving strength selection register of Pad PC_01

0 : Low driving strength

1 : High driving strength

[5] PC01_IE : Input buffer enable selection register of Pad PC_01

0 : Input buffer disable

1 : Input buffer enable

[6] PC01_CS - CMOS input or Summit trigger input selection register of Pad PC_01

0 : CMOS input buffer

1 : Summit trigger input buffer

14.4.35 PC_02 pad control register

Address offset : 0x088

Reset value : 0x0000_0030

31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16
res															

15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
res	PC02_CS	PC02_IE	res	res	PC02_DS	PC02_PUPD									
									R/W	R/W			R/W	R/W	

[1:0] PC02_PUPD - Pull-up, Pull-down selection register of Pad PC_02

These bits are written by S/W.

00 : Neither

01 : pull-down

10 : pull-up

11 : Neither

[2] PC02_DS - Driving strength selection register of Pad PC_02

0 : Low driving strength

1 : High driving strength

[5] PC02_IE : Input buffer enable selection register of Pad PC_02

0 : Input buffer disable

1 : Input buffer enable

[6] PC02_CS - CMOS input or Summit trigger input selection register of Pad PC_02

0 : CMOS input buffer

1 : Summit trigger input buffer

14.4.36 PC_03 pad control register

Address offset : 0x08C

Reset value : 0x0000_0030

31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16
res															

--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--

15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
res	PC03_CS	PC03_IE	res	res	PC03_DS	PC03_PUPD									
									R/W	R/W			R/W	R/W	

[1:0] PC03_PUPD - Pull-up, Pull-down selection register of Pad PC_03

These bits are written by S/W.

00 : Neither

01 : pull-down

10 : pull-up

11 : Neither

[2] PC03_DS - Driving strength selection register of Pad PC_03

0 : Low driving strength

1 : High driving strength

[5] PC03_IE : Input buffer enable selection register of Pad PC_03

0 : Input buffer disable

1 : Input buffer enable

[6] PC03_CS - CMOS input or Summit trigger input selection register of Pad PC_03

0 : CMOS input buffer

1 : Summit trigger input buffer

14.4.37 PC_04 pad control register

Address offset : 0x090

Reset value : 0x0000_0030

31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16
res															

15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
res	PC04_CS	PC04_IE	res	res	PC04_DS	PC04_PUPD									
									R/W	R/W			R/W	R/W	

[1:0] PC04_PUPD - Pull-up, Pull-down selection register of Pad PC_04

These bits are written by S/W.

00 : Neither

01 : pull-down

10 : pull-up

11 : Neither

[2] PC04_DS - Driving strength selection register of Pad PC_04

0 : Low driving strength

1 : High driving strength

[5] PC04_IE : Input buffer enable selection register of Pad PC_04

0 : Input buffer disable

1 : Input buffer enable

[6] PC04_CS - CMOS input or Summit trigger input selection register of Pad PC_04

0 : CMOS input buffer

1 : Summit trigger input buffer

14.4.38 PC_05 pad control register

Address offset : 0x094

Reset value : 0x0000_0030

31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16
res															

15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
res	PC05_CS	PC05_IE	res	res	PC05_DS	PC05_PUPD									
									R/W	R/W			R/W	R/W	

[1:0] PC05_PUPD - Pull-up, Pull-down selection register of Pad PC_05

These bits are written by S/W.

00 : Neither

01 : pull-down

10 : pull-up

11 : Neither

[2] PC05_DS - Driving strength selection register of Pad PC_05

0 : Low driving strength

1 : High driving strength

[5] PC05_IE : Input buffer enable selection register of Pad PC_05

0 : Input buffer disable

1 : Input buffer enable

[6] PC05_CS - CMOS input or Summit trigger input selection register of Pad PC_05

0 : CMOS input buffer

1 : Summit trigger input buffer

14.4.39 PC_06 pad control register

Address offset : 0x098

Reset value : 0x0000_0030

31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16
res															

15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
res	PC06_CS	PC06_IE	res	res	PC06_DS	PC06_PUPD									
									R/W	R/W			R/W	R/W	

[1:0] PC06_PUPD - Pull-up, Pull-down selection register of Pad PC_06

These bits are written by S/W.

00 : Neither

01 : pull-down

10 : pull-up

11 : Neither

[2] PC06_DS - Driving strength selection register of Pad PC_06

0 : Low driving strength

1 : High driving strength

[5] PC06_IE : Input buffer enable selection register of Pad PC_06

0 : Input buffer disable

1 : Input buffer enable

[6] PC06_CS - CMOS input or Summit trigger input selection register of Pad PC_06

0 : CMOS input buffer

1 : Summit trigger input buffer

14.4.40 PC_07 pad control register

Address offset : 0x09C

Reset value : 0x0000_0030

31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16
res															

15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
res	PC07_CS	PC07_IE	res	res	PC07_DS	PC07_PUPD									
									R/W	R/W			R/W	R/W	

[1:0] PC07_PUPD - Pull-up, Pull-down selection register of Pad PC_07

These bits are written by S/W.

00 : Neither

01 : pull-down

10 : pull-up

11 : Neither

[2] PC07_DS - Driving strength selection register of Pad PC_07

0 : Low driving strength

1 : High driving strength

[5] PC07_IE : Input buffer enable selection register of Pad PC_07

0 : Input buffer disable

1 : Input buffer enable

[6] PC07_CS - CMOS input or Summit trigger input selection register of Pad PC_07

0 : CMOS input buffer

1 : Summit trigger input buffer

14.4.41 PC_08 pad control register

Address offset : 0x0A0

Reset value : 0x0000_0030

31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16
res															

15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
res	PC08_CS	PC08_IE	res	res	PC08_DS	PC08_PUPD									

[1:0] PC08_PUPD - Pull-up, Pull-down selection register of Pad PC_08

These bits are written by S/W.

00 : Neither

01 : pull-down

10 : pull-up

11 : Neither

[2] PC08_DS - Driving strength selection register of Pad PC_08

0 : Low driving strength

1 : High driving strength

[5] PC08_IE : Input buffer enable selection register of Pad PC_08

0 : Input buffer disable

1 : Input buffer enable

[6] PC08_CS - CMOS input or Summit trigger input selection register of Pad PC_08

0 : CMOS input buffer

1 : Summit trigger input buffer

14.4.42 PC_09 pad control register

Address offset : 0x0A4

Reset value : 0x0000_0030

31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16
res															

15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
res	PC09_CS	PC09_IE	res	res	PC09_DS	PC09_PUPD									
									R/W	R/W			R/W	R/W	

[1:0] PC09_PUPD - Pull-up, Pull-down selection register of Pad PC_09

These bits are written by S/W.

00 : Neither

01 : pull-down

10 : pull-up

11 : Neither

[2] PC09_DS - Driving strength selection register of Pad PC_09

0 : Low driving strength

1 : High driving strength

[5] PC09_IE : Input buffer enable selection register of Pad PC_09

0 : Input buffer disable

1 : Input buffer enable

[6] PC09_CS - CMOS input or Summit trigger input selection register of Pad PC_09

0 : CMOS input buffer

1 : Summit trigger input buffer

14.4.43 PC_10 pad control register

Address offset : 0x0A8

Reset value : 0x0000_0030

31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16
res															

15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
res	PC10_CS	PC10_IE	res	res	PC10_DS	PC10_PUPD									
									R/W	R/W			R/W	R/W	

[1:0] PC10_PUPD - Pull-up, Pull-down selection register of Pad PC_10

These bits are written by S/W.

00 : Neither

01 : pull-down

10 : pull-up

11 : Neither

[2] PC10_DS - Driving strength selection register of Pad PC_10

0 : Low driving strength

1 : High driving strength

[5] PC10_IE : Input buffer enable selection register of Pad PC_10

0 : Input buffer disable

1 : Input buffer enable

[6] PC10_CS - CMOS input or Summit trigger input selection register of Pad PC_10

0 : CMOS input buffer

1 : Summit trigger input buffer

14.4.44 PC_11 pad control register

Address offset : 0x0AC

Reset value : 0x0000_0030

31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16
res															

15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
res	PC11_CS	PC11_IE	res	res	PC11_DS	PC11_PUPD									
									R/W	R/W			R/W	R/W	

[1:0] PC11_PUPD - Pull-up, Pull-down selection register of Pad PC_11

These bits are written by S/W.

00 : Neither

01 : pull-down

10 : pull-up

11 : Neither

[2] PC11_DS - Driving strength selection register of Pad PC_11

0 : Low driving strength

1 : High driving strength

[5] PC11_IE : Input buffer enable selection register of Pad PC_11

0 : Input buffer disable

1 : Input buffer enable

[6] PC11_CS - CMOS input or Summit trigger input selection register of Pad PC_11

0 : CMOS input buffer

1 : Summit trigger input buffer

14.4.45 PC_12 pad control register

Address offset : 0x0B0

Reset value : 0x0000_0030

31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16
res															

15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
res	PC12_CS	PC12_IE	res	res	PC12_DS	PC12_PUPD									
									R/W	R/W			R/W	R/W	

[1:0] PC12_PUPD - Pull-up, Pull-down selection register of Pad PC_12

These bits are written by S/W.

00 : Neither

01 : pull-down

10 : pull-up

11 : Neither

[2] PC12_DS - Driving strength selection register of Pad PC_12

0 : Low driving strength

1 : High driving strength

[5] PC12_IE : Input buffer enable selection register of Pad PC_12

0 : Input buffer disable

1 : Input buffer enable

[6] PC12_CS - CMOS input or Summit trigger input selection register of Pad PC_12

0 : CMOS input buffer

1 : Summit trigger input buffer

14.4.46 PC_13 pad control register

Address offset : 0x0B4

Reset value : 0x0000_0030

31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16
res															

15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
res	PC13_CS	PC13_IE	res	res	PC13_DS	PC13_PUPD									

								R/W	R/W			R/W	R/W
--	--	--	--	--	--	--	--	-----	-----	--	--	-----	-----

[1:0] PC13_PUPD - Pull-up, Pull-down selection register of Pad PC_13

These bits are written by S/W.

00 : Neither

01 : pull-down

10 : pull-up

11 : Neither

[2] PC13_DS - Driving strength selection register of Pad PC_13

0 : Low driving strength

1 : High driving strength

[5] PC13_IE : Input buffer enable selection register of Pad PC_13

0 : Input buffer disable

1 : Input buffer enable

[6] PC13_CS - CMOS input or Summit trigger input selection register of Pad PC_13

0 : CMOS input buffer

1 : Summit trigger input buffer

14.4.47 PC_14 pad control register

Address offset : 0x0B8

Reset value : 0x0000_0030

31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16
res															

15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
res	PC14_CS	PC14_IE	res	res	PC14_DS	PC14_PUPD									

[1:0] PC14_PUPD - Pull-up, Pull-down selection register of Pad PC_14

These bits are written by S/W.

00 : Neither

01 : pull-down

10 : pull-up

11 : Neither

[2] PC14_DS - Driving strength selection register of Pad PC_14

0 : Low driving strength

1 : High driving strength

[5] PC14_IE : Input buffer enable selection register of Pad PC_14

0 : Input buffer disable

1 : Input buffer enable

[6] PC14_CS - CMOS input or Summit trigger input selection register of Pad PC_14

0 : CMOS input buffer

1 : Summit trigger input buffer

14.4.48 PC_15 pad control register

Address offset : 0x0BC

Reset value : 0x0000_0030

31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16
res															

15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
res	PC15_CS	PC15_IE	res	res	PC15_DS	PC15_PUPD									

[1:0] PC15_PUPD - Pull-up, Pull-down selection register of Pad PC_15

These bits are written by S/W.

00 : Neither

01 : pull-down

10 : pull-up

11 : Neither

[2] PC15_DS - Driving strength selection register of Pad PC_15

0 : Low driving strength

1 : High driving strength

[5] PC15_IE : Input buffer enable selection register of Pad PC_15

0 : Input buffer disable

1 : Input buffer enable

[6] PC15_CS - CMOS input or Summit trigger input selection register of Pad PC_15

0 : CMOS input buffer

1 : Summit trigger input buffer

14.4.49 PD_00 pad control register

Address offset : 0x0C0

Reset value : 0x0000_0030

31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16
res															

15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
res	PD00_CS	PD00_IE	res	res	PD00_DS	PD00_PUPD									
									R/W	R/W			R/W	R/W	

[1:0] PD00_PUPD - Pull-up, Pull-down selection register of Pad PD_00

These bits are written by S/W.

00 : Neither

01 : pull-down

10 : pull-up

11 : Neither

[2] PD00_DS - Driving strength selection register of Pad PD_00

0 : Low driving strength

1 : High driving strength

[5] PD00_IE : Input buffer enable selection register of Pad PD_00

0 : Input buffer disable

1 : Input buffer enable

[6] PD00_CS - CMOS input or Summit trigger input selection register of Pad PD_00

0 : CMOS input buffer

1 : Summit trigger input buffer

14.4.50 PD_01 pad control register

Address offset : 0x0C4

Reset value : 0x0000_0030

31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16
res															

15 14 13 12 11 10 9 8 7 6 5 4 3 2 1 0

res	PD01_CS	PD01_IE	res	res	PD01_DS	PD01_PUPD									
									R/W	R/W			R/W	R/W	

[1:0] PD01_PUPD - Pull-up, Pull-down selection register of Pad PD_01

These bits are written by S/W.

00 : Neither

01 : pull-down

10 : pull-up

11 : Neither

[2] PD01_DS - Driving strength selection register of Pad PD_01

0 : Low driving strength

1 : High driving strength

[5] PD01_IE : Input buffer enable selection register of Pad PD_01

0 : Input buffer disable

1 : Input buffer enable

[6] PD01_CS - CMOS input or Summit trigger input selection register of Pad PD_01

0 : CMOS input buffer

1 : Summit trigger input buffer

14.4.51 PD_02 pad control register

Address offset : 0x0C8

Reset value : 0x0000_0030

31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16
res															

15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
res	PD02_CS	PD02_IE	res	res	PD02_DS	PD02_PUPD									
									R/W	R/W			R/W	R/W	

[1:0] PD02_PUPD - Pull-up, Pull-down selection register of Pad PD_02

These bits are written by S/W.

00 : Neither

01 : pull-down

10 : pull-up

11 : Neither

[2] PD02_DS - Driving strength selection register of Pad PD_02

0 : Low driving strength

1 : High driving strength

[5] PD02_IE : Input buffer enable selection register of Pad PD_02

0 : Input buffer disable

1 : Input buffer enable

[6] PD02_CS - CMOS input or Summit trigger input selection register of Pad PD_02

0 : CMOS input buffer

1 : Summit trigger input buffer

14.4.52 PD_03 pad control register

Address offset : 0x0CC

Reset value : 0x0000_0030

31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16
res															

--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--

15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
res	PD03_CS	PD03_IE	res	res	PD03_DS	PD03_PUPD									
									R/W	R/W			R/W	R/W	

[1:0] PD03_PUPD - Pull-up, Pull-down selection register of Pad PD_03

These bits are written by S/W.

00 : Neither

01 : pull-down

10 : pull-up

11 : Neither

[2] PD03_DS - Driving strength selection register of Pad PD_03

0 : Low driving strength

1 : High driving strength

[5] PD03_IE : Input buffer enable selection register of Pad PD_03

0 : Input buffer disable

1 : Input buffer enable

[6] PD03_CS - CMOS input or Summit trigger input selection register of Pad PD_03

0 : CMOS input buffer

1 : Summit trigger input buffer

14.4.53 PD_04 pad control register

Address offset : 0x0D0

Reset value : 0x0000_0030

31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16
res															

15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
res	PD04_CS	PD04_IE	res	res	PD04_DS	PD04_PUPD									
									R/W	R/W			R/W	R/W	

[1:0] PD04_PUPD - Pull-up, Pull-down selection register of Pad PD_04

These bits are written by S/W.

00 : Neither

01 : pull-down

10 : pull-up

11 : Neither

[2] PD04_DS - Driving strength selection register of Pad PD_04

0 : Low driving strength

1 : High driving strength

[5] PD04_IE : Input buffer enable selection register of Pad PD_04

0 : Input buffer disable

1 : Input buffer enable

[6] PD04_CS - CMOS input or Summit trigger input selection register of Pad PD_04

0 : CMOS input buffer

1 : Summit trigger input buffer

14.5 Register map

The following Table 13 summarizes the PAD controller registers.

Table 13 PAD controller register map and reset values

0x0b0	PCR_PC12	res	res	res	res	res	res											
		res	res	res	res	res	res											
0x0b4	PCR_PC13	res	res	res	res	res	res											
		res	res	res	res	res	res											
0x0b8	PCR_PC14	res	res	res	res	res	res											
		res	res	res	res	res	res											
0x0bc	PCR_PC15	res	res	res	res	res	res											
		res	res	res	res	res	res											
0x0c0	PCR_PD00	res	res	res	res	res	res											
		res	res	res	res	res	res											
0x0c4	PCR_PD01	res	res	res	res	res	res											
		res	res	res	res	res	res											
0x0c8	PCR_PD02	res	res	res	res	res	res											
		res	res	res	res	res	res											
0x0cc	PCR_PD03	res	res	res	res	res	res											
		res	res	res	res	res	res											
0x0d0	PCR_PD04	res	res	res	res	res	res											
		res	res	res	res	res	res											
1	PD04_CS	1	PD03_CS	1	PD01_CS	1	PC15_CS	1	PC14_CS	1	PC13_CS	1	PC12_CS	1				
1	PD04_IE	1	PD03IE	1	PD02IE	1	PD01IE	1	PC15IE	1	PC14IE	1	PC13IE	1	PC12IE	1		
0	res	0	res	0	res	0	res	0	res	0	res	0	res	0	res	0		
0	PD04_DS	0	PD03_DS	0	PD02_DS	0	PD01_DS	0	PD00_DS	0	PC15_DS	0	PC14_DS	0	PC13_DS	0	PC12_DS	0
0	PD04_PUPD	0	PD03_PUPD	0	PD02_PUPD	0	PD01_PUPD	0	PD00_PUPD	0	PC15_PUPD	0	PC14_PUPD	0	PC13_PUPD	0	PC12_PUPD	0

15 General-purpose I/Os(GPIO)

15.1 Introduction

The GPIO(General-Purpose I/O Port) is composed of four physical GPIO blocks, each corresponding to an individual GPIO port(PORT A, PORT B, PORT C, PORT D). The GPIO supports up to 53 programmable input/output pins, depending on the peripherals being used.

15.2 Features

- The GPIO peripheral consists the following features.
 - GPIO_DATAOUT can SET/CLEAR by the SET register and CLEAR register. (1 for set and 0 for clear)
 - Mask registers allow treating sets of port bits as a group leaving other bits unchanged.
 - Up to 53 GPIOs depending on configuration
 - Programmable control for GPIO interrupts
 - Interrupt generation masking
 - Edge-triggered on rising, falling, or both

15.3 Functional description

Figure 16 shows the GPIO block diagram.

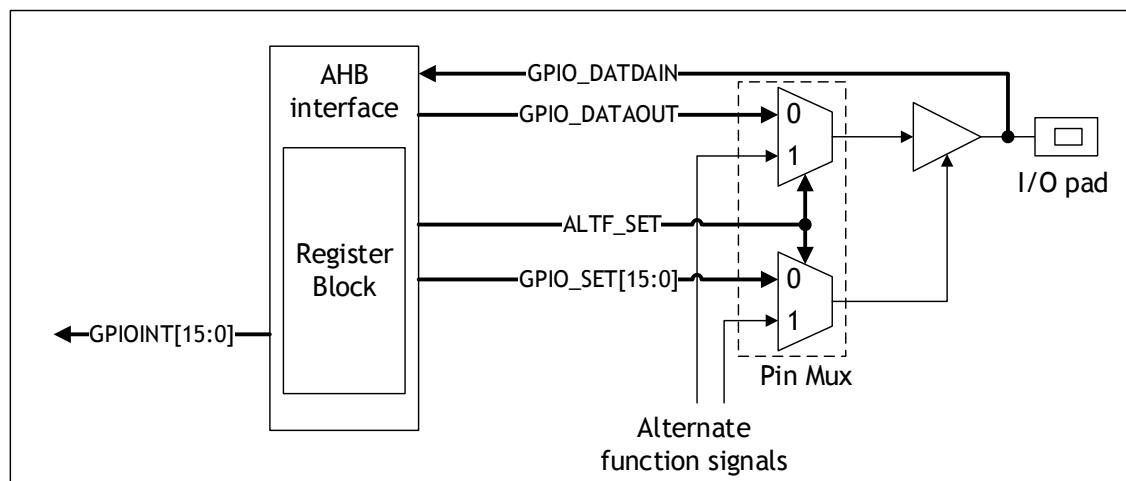


Figure 16. GPIO block diagram

Figure 17 shows the operation sequences available for the GPIO.

The pad alternate function is using the pad alternate function select register.

Refer to ‘12.Alternate Function Controller (AFC)’ for more details about each register.

The pad control supports pull-down, pull-up, input buffer, and summit trigger input buffer.

Refer to ‘14.Pad Controller (PADCON)’ for more details about each register.

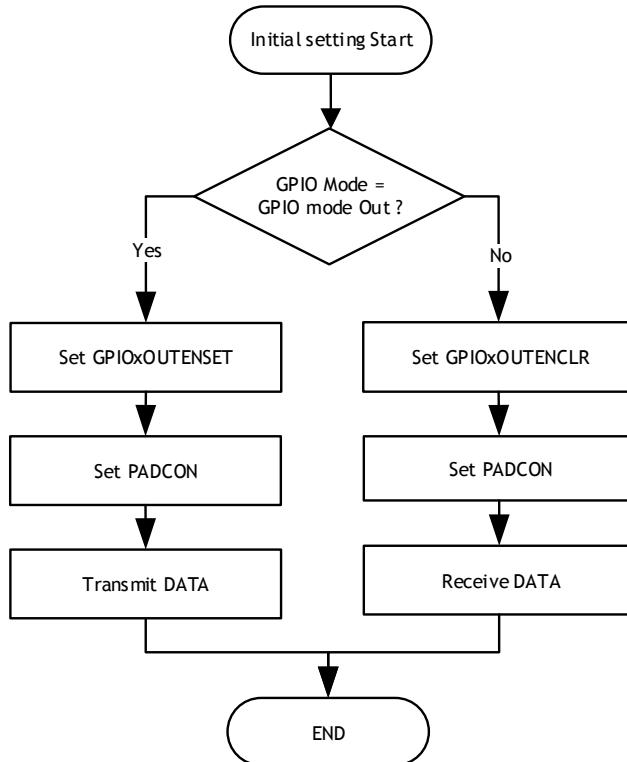


Figure 17. GPIO Flow chart

15.3.1 Masked access

The masked access feature permits individual bits or multiple bits to be read from or written to in a single transfer. This avoids software-based read-modify-write operations that are not thread safe. With the masked access operations, the 16-bit I/O is divided into two halves, lower byte and upper byte. The bit mask address spaces are defined as two arrays each containing 256 words.

For example, to set bits[1:0] to 1 and clear bits[7:6] in a single operation, users can carry out the write to the lower byte mask access address space. The required bit mask is 0xC3, and users can write the operation as MASKLOWBYTE[0xC3] = 0x03. Refer to Figure 18 below.

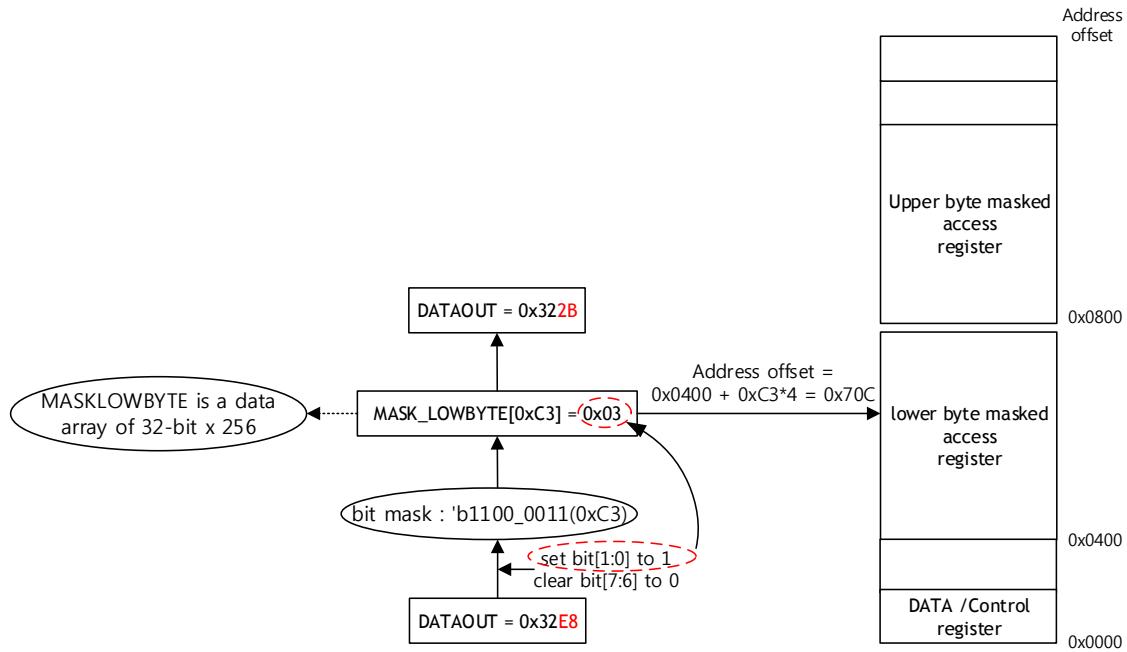


Figure 18. MASK LOWBYTE access

To update some of the bits in the upper eight bits of the GPIO port, users can use the MASKHIGHBYTE array as Figure 19 below.

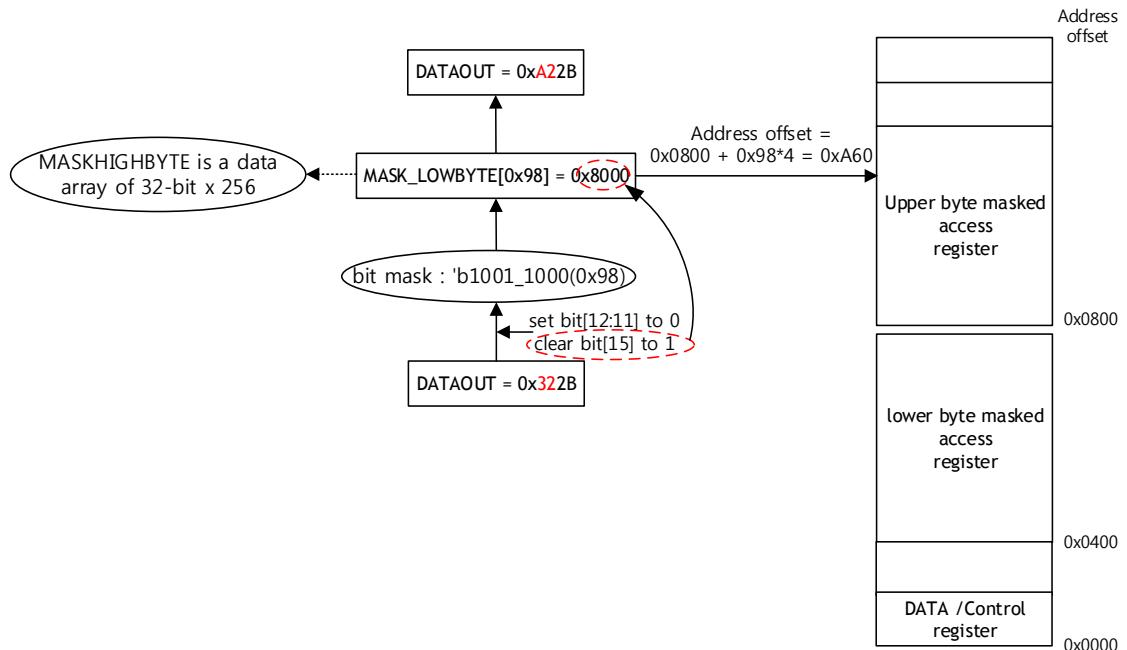


Figure 19 MASK HIGHBYTE access

15.4 GPIOA Registers(Address Base: 0x4200_0000)

15.4.1 GPIOA Data Register(GPIOA_DATA)

Address offset: 0x0000

Reset value: 0x----

31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16
res															

15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
DAT15	DAT14	DAT13	DAT12	DAT11	DAT10	DAT9	DAT8	DAT7	DAT6	DAT5	DAT4	DAT3	DAT2	DAT1	DAT0
R	R	R	R	R	R	R	R	R	R	R	R	R	R	R	R

[15:0] DATy(y = 0..15)

READ as : Port input data bit

15.4.2 GPIOA Output Latch Register(GPIOA_DATAOUT)

Address offset: 0x0004

Reset value: 0x----

31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16
res															

15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
DAO15	DAO14	DAO13	DAO12	DAO11	DAO10	DAO9	DAO8	DAO7	DAO6	DAO5	DAO4	DAO3	DAO2	DAO1	DAO0
R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W

[15:0] DAOy(y = 0..15)

READ as : Port out data bit

WRITE as : WRITE to GPIOA_DATAOUT register

15.4.3 GPIOA Enable Set Register(GPIOA_OUTENSET)

Address offset: 0x0010

Reset value: 0x0000

31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16
res															

--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--

15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
ES15	ES14	ES13	ES12	ES11	ES10	ES9	ES8	ES7	ES6	ES5	ES4	ES3	ES2	ES1	ES0
R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W

[15:0] ESy(y = 0..15)

WRITE as :

'0' is no effect

'1' is sets the corresponding output enable bit

READ as :

'0' is indicates the signal direction as input

'1' is indicates the signal direction as output

15.4.4 GPIOA Enable Clear Register(GPIOA_OUTENCLR)

Address offset: 0x0014

Reset value: 0x0000

31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16
res															

15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
EC15	EC14	EC13	EC12	EC11	EC10	EC9	EC8	EC7	EC6	EC5	EC4	EC3	EC2	EC1	EC0
R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W

[15:0] ECy(y = 0..15)

WRITE as :

'0' is no effect

'1' is clears the output enable bit

READ as :

'0' is indicates the signal direction as input

'1' is indicates the signal direction as output

15.4.5 GPIOA Interrupt Enable Set Register(GPIOA_INTENSET)

Address offset: 0x0020

Reset value: 0x0000

31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16
res															

15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
IES15	IES14	IES13	IES12	IES11	IES10	IES9	IES8	IES7	IES6	IES5	IES4	IES3	IES2	IES1	IES0
R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W

[15:0] IESy(y = 0..15)

WRITE as :

'0' is no effect

'1' is sets the interrupt enable bit

READ as :

'0' is indicates the interrupt disable

'1' is indicates the interrupt enable

15.4.6 GPIOA Interrupt Enable Clear Register(GPIOA_INTENCLR)

Address offset: 0x0024

Reset value: 0x----

31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16
res															

15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
IEC15	IEC14	IEC13	IEC12	IEC11	IEC10	IEC9	IEC8	IEC7	IEC6	IEC5	IEC4	IEC3	IEC2	IEC1	IEC0
R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W

[15:0] IECy(y = 0..15)

WRITE as :

'0' is no effect

'1' is clears the interrupt enable bit

READ as :

'0' is indicates the interrupt disable

'1' is indicates the interrupt enable

15.4.7 GPIOA Interrupt Type Set Register(GPIOA_INTTYPESET)

Address offset: 0x0028

Reset value: 0x----

31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16
res															

15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
ITS15	ITS14	ITS13	ITS12	ITS11	ITS10	ITS9	ITS8	ITS7	ITS6	ITS5	ITS4	ITS3	ITS2	ITS1	ITS0
R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W

[15:0] ITS_y(y = 0..15)

WRITE as :

'0' is no effect

'1' is sets the interrupt type bit

READ as :

'0' is indicates for LOW or HIGH level

'1' is indicates for falling edge or rising edge

15.4.8 GPIOA Interrupt Type Clear Register(GPIOA_INTTYPECLR)

Address offset: 0x002c

Reset value: 0x----

31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16
res															

15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
ITC15	ITC14	ITC13	ITC12	ITC11	ITC10	ITC9	ITC8	ITC7	ITC6	ITC5	ITC4	ITC3	ITC2	ITC1	ITC0
R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W

[15:0] ITC_y(y = 0..15)

WRITE as :

'0' is no effect

'1' is clears the interrupt type bit

READ as :

'0' is indicates for LOW or HIGH level

'1' is indicates for falling edge or rising edge

15.4.9 GPIOA Interrupt Polarity Set Register(GPIOA_INTPOLSET)

Address offset: 0x0030

Reset value: 0x----

31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16
res															

15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
IPS15	IPS14	IPS13	IPS12	IPS11	IPS10	IPS9	IPS8	IPS7	IPS6	IPS5	IPS4	IPS3	IPS2	IPS1	IPSO
R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W

[15:0] IPSy(y = 0..15)

WRITE as :

'0' is no effect

'1' is sets the interrupt polarity bit

READ as :

'0' is indicates for LOW level or falling edge

'1' is indicates for HIGH level or rising edge

15.4.10 GPIOA Interrupt Polarity Clear Register(GPIOA_INTPOLCLR)

Address offset: 0x0034

Reset value: 0x----

31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16
res															

15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
IPC15	IPC14	IPC13	IPC12	IPC11	IPC10	IPC9	IPC8	IPC7	IPC6	IPC5	IPC4	IPC3	IPC2	IPC1	IPCO
R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W

[15:0] IPCy(y = 0..15)

WRITE as :

'0' is no effect

'1' is clears the interrupt polarity bit

READ as :

'0' is indicates for LOW level or falling edge

'1' is indicates for HIGH level or rising edge

15.4.11 GPIOA Interrupt Status/Interrupt Clear Register(GPIOA_INTSTATUS/ INTCLEAR)

Address offset: 0x0038

Reset value: 0x----

31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16
res															

15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
ISC15	ISC14	ISC13	ISC12	ISC11	ISC10	ISC9	ISC8	ISC7	ISC6	ISC5	ISC4	ISC3	ISC2	ISC1	ISC0
R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W

[15:0] ISC_y(y = 0..15)

WRITE as :

'0' is no effect

'1' is request to clear the interrupt

READ as : IRQ status Register

15.4.12 GPIOA Lower Byte Masked Access Register(GPIOA_LB_MASKED)

Address offset: 0x0400 - 0x07FC

Reset value: 0x----

31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16
res															

15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
res	LBM														
R/W															

Lower eight bits masked access

[15:8] Not used

[7:0] Data for lower byte access, with bits[9:2] of address value used as enable bit mask for each bit

15.4.13 GPIOA Upper Byte Masked Access Register(GPIOA_UB_MASKED)

Address offset: 0x0800-0x0FC

Reset value: 0x----

31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16
res															

15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
HBM								res							
R/W															

Higher eight bits masked access

[15:8] Data for higher byte access, with bits[9:2] of address value used as enable bit mask for each bit

[7:0] Not used

15.5 Register map

The following Table 14 summarizes the GPIOA registers.

Table 14 GPIOA register map and reset values

Offset	Register	Reset Value	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31
0x00	GPIOA DATA	0x00000000	res																														
0x04	GPIOA DATAOUT	0x00000000	res																														
0x10	GPIOA OUTENSET	0x00000000	res																														
0x14	GPIOA OUTENCLR	0x00000000	res																														
0x20	GPIOA INTENSET	0x00000000	res																														
0x24	GPIOA INTENCLR	0x00000000	res																														
0x28	GPIOA INTTYPESET	0x00000000	res																														
0x2C	GPIOA INTTYPECLR	0x00000000	res																														
0x30	GPIOA INTPOLSET	0x00000000	res																														
0x34	GPIOA INTPOLCLR	0x00000000	res																														
0x38	GPIOA INTSTATUS/ GPIOA INTCLEAR	0x00000000	res																														
0x0400 - 0x07FC	GPIOA LB_MASKED	0x00000000	res																														
0x0800 - 0x0BFC	GPIOA UB_MASKED	0x00000000	res																														
0 0 0 0	HBM	0x00000000	res																														
	LBM	0x00000000	res																														
	Interrupt status register/ Interrupt clear register	0x00000000	res																														
	Lower byte masked access register	0x00000000	res																														
	Upper byte masked access register	0x00000000	res																														

15.6 GPIOB Registers(Address Base: 0x4300_0000)

15.6.1 GPIOB Data Register(GPIOB_DATA)

Address offset: 0x0000

Reset value: 0x----

31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16
res															

15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
DAT15	DAT14	DAT13	DAT12	DAT11	DAT10	DAT9	DAT8	DAT7	DAT6	DAT5	DAT4	DAT3	DAT2	DAT1	DAT0
R	R	R	R	R	R	R	R	R	R	R	R	R	R	R	R

[15:0] DATy(y = 0..15)

READ as : Port input data bit

15.6.2 GPIOB Output Latch Register(GPIOB_DATAOUT)

Address offset: 0x0004

Reset value: 0x----

31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16
res															

15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
DAO15	DAO14	DAO13	DAO12	DAO11	DAO10	DAO9	DAO8	DAO7	DAO6	DAO5	DAO4	DAO3	DAO2	DAO1	DAO0
R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W

[15:0] DAOy(y = 0..15)

READ as : Port out data bit

WRITE as : WRITE to GPIOB_DATAOUT register

15.6.3 GPIOB Enable Set Register(GPIOB_OUTENSET)

Address offset: 0x0010

Reset value: 0x0000

31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16
res															

--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--

15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
ES15	ES14	ES13	ES12	ES11	ES10	ES9	ES8	ES7	ES6	ES5	ES4	ES3	ES2	ES1	ES0
R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W

[15:0] ESy(y = 0..15)

WRITE as :

'0' is no effect

'1' is sets the corresponding output enable bit

READ as :

'0' is indicates the signal direction as input

'1' is indicates the signal direction as output

15.6.4 GPIOB Enable Clear Register(GPIOB_OUTENCLR)

Address offset: 0x0014

Reset value: 0x0000

31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16
res															

15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
EC15	EC14	EC13	EC12	EC11	EC10	EC9	EC8	EC7	EC6	EC5	EC4	EC3	EC2	EC1	EC0
R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W

[15:0] ECy(y = 0..15)

WRITE as :

'0' is no effect

'1' is clears the output enable bit

READ as :

'0' is indicates the signal direction as input

'1' is indicates the signal direction as output

15.6.5 GPIOB Interrupt Enable Set Register(GPIOB_INTENSET)

Address offset: 0x0020

Reset value: 0x0000

31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16
res															

15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
IES15	IES14	IES13	IES12	IES11	IES10	IES9	IES8	IES7	IES6	IES5	IES4	IES3	IES2	IES1	IES0
R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W

[15:0] IESy(y = 0..15)

WRITE as :

'0' is no effect

'1' is sets the interrupt enable bit

READ as :

'0' is indicates the interrupt disable

'1' is indicates the interrupt enable

15.6.6 GPIOB Interrupt Enable Clear Register(GPIOB_INTENCLR)

Address offset: 0x0024

Reset value: 0x----

31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16
res															

15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
IEC15	IEC14	IEC13	IEC12	IEC11	IEC10	IEC9	IEC8	IEC7	IEC6	IEC5	IEC4	IEC3	IEC2	IEC1	IEC0
R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W

[15:0] IECy(y = 0..15)

WRITE as :

'0' is no effect

'1' is clears the interrupt enable bit

READ as :

'0' is indicates the interrupt disable

'1' is indicates the interrupt enable

15.6.7 GPIOB Interrupt Type Set Register(GPIOB_INTPTYPESET)

Address offset: 0x0028

Reset value: 0x----

31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16
res	res	res	res	res	res	res	res	res	res	res	res	res	res	res	res
15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
ITS15	ITS14	ITS13	ITS12	ITS11	ITS10	ITS9	ITS8	ITS7	ITS6	ITS5	ITS4	ITS3	ITS2	ITS1	ITS0
R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W

[15:0] ITS_y(y = 0..15)

WRITE as :

'0' is no effect

'1' is sets the interrupt type bit

READ as :

'0' is indicates for LOW or HIGH level

'1' is indicates for falling edge or rising edge

15.6.8 GPIOB Interrupt Type Clear Register(GPIOB_INTTYPECLR)

Address offset: 0x002c

Reset value: 0x----

31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16
res	res	res	res	res	res	res	res	res	res	res	res	res	res	res	res
15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
ITC15	ITC14	ITC13	ITC12	ITC11	ITC10	ITC9	ITC8	ITC7	ITC6	ITC5	ITC4	ITC3	ITC2	ITC1	ITC0
R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W

[15:0] ITC_y(y = 0..15)

WRITE as :

'0' is no effect

'1' is clears the interrupt type bit

READ as :

'0' is indicates for LOW or HIGH level

'1' is indicates for falling edge or rising edge

15.6.9 GPIOB Interrupt Polarity Set Register(GPIOB_INTPOLSET)

Address offset: 0x0030

Reset value: 0x----

31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16
res															

15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
IPS15	IPS14	IPS13	IPS12	IPS11	IPS10	IPS9	IPS8	IPS7	IPS6	IPS5	IPS4	IPS3	IPS2	IPS1	IPS0
R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W

[15:0] IPSy(y = 0..15)

WRITE as :

'0' is no effect

'1' is sets the interrupt polarity bit

READ as :

'0' is indicates for LOW level or falling edge

'1' is indicates for HIGH level or rising edge

15.6.10 GPIOB Interrupt Polarity Clear Register(GPIOB_INTPOLCLR)

Address offset: 0x0034

Reset value: 0x----

31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16
res															

15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
IPC15	IPC14	IPC13	IPC12	IPC11	IPC10	IPC9	IPC8	IPC7	IPC6	IPC5	IPC4	IPC3	IPC2	IPC1	IPC0
R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W

[15:0] IPCy(y = 0..15)

WRITE as :

'0' is no effect

'1' is clears the interrupt polarity bit

READ as :

'0' is indicates for LOW level or falling edge

'1' is indicates for HIGH level or rising edge

15.6.11 GPIOB Interrupt Status/Interrupt Clear Register(GPIOB_INTSTATUS/ INTCLEAR)

Address offset: 0x0038

Reset value: 0x----

31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16
res															

15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
ISC15	ISC14	ISC13	ISC12	ISC11	ISC10	ISC9	ISC8	ISC7	ISC6	ISC5	ISC4	ISC3	ISC2	ISC1	ISC0
R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W

[15:0] ISC_y(y = 0..15)

WRITE as :

'0' is no effect

'1' is request to clear the interrupt

READ as : IRQ status Register

15.6.12 GPIOB Lower Byte Masked Access Register(GPIOB_LB_MASKED)

Address offset: 0x0400 - 0x07FC

Reset value: 0x----

31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16
res															

15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
res								LBM							
R/W															

Lower eight bits masked access

[15:8] Not used

[7:0] Data for lower byte access, with bits[9:2] of address value used as enable bit mask for each bit

15.6.13 GPIOB Upper Byte Masked Access Register(GPIOB_UB_MASKED)

Address offset: 0x0800-0x0FC

Reset value: 0x----

31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16
res															

15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
HBM								res							
R/W															

Higher eight bits masked access

[15:8] Data for higher byte access, with bits[9:2] of address value used as enable bit mask for each bit

[7:0] Not used

15.7 Register map

The following Table 15 summarizes the GPIOB registers.

Table 15 GPIOB register map and reset values

15.8 GPIOC Registers(Address Base: 0x4400_0000)

15.8.1 GPIOC Data Register(GPIOC_DATA)

Address offset: 0x0000

Reset value: 0x----

31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16
res															

15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
DAT15	DAT14	DAT13	DAT12	DAT11	DAT10	DAT9	DAT8	DAT7	DAT6	DAT5	DAT4	DAT3	DAT2	DAT1	DAT0
R	R	R	R	R	R	R	R	R	R	R	R	R	R	R	R

[15:0] DATy(y = 0..15)

READ as : Port input data bit

15.8.2 GPIOC Output Latch Register(GPIOC_DATAOUT)

Address offset: 0x0004

Reset value: 0x----

31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16
res															

15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
DAO15	DAO14	DAO13	DAO12	DAO11	DAO10	DAO9	DAO8	DAO7	DAO6	DAO5	DAO4	DAO3	DAO2	DAO1	DAO0
R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W

[15:0] DAOy(y = 0..15)

READ as : Port out data bit

WRITE as : WRITE to GPIOC_DATAOUT register

15.8.3 GPIOC Enable Set Register(GPIOC_OUTENSET)

Address offset: 0x0010

Reset value: 0x0000

31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16
res															

15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
ES15	ES14	ES13	ES12	ES11	ES10	ES9	ES8	ES7	ES6	ES5	ES4	ES3	ES2	ES1	ES0
R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W

[15:0] ESy(y = 0..15)

WRITE as :

'0' is no effect

'1' is sets the corresponding output enable bit

READ as :

'0' is indicates the signal direction as input

'1' is indicates the signal direction as output

15.8.4 GPIOC Enable Clear Register(GPIOC_OUTENCLR)

Address offset: 0x0014

Reset value: 0x0000

31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16
res															

15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
EC15	EC14	EC13	EC12	EC11	EC10	EC9	EC8	EC7	EC6	EC5	EC4	EC3	EC2	EC1	EC0
R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W

[15:0] ECy(y = 0..15)

WRITE as :

'0' is no effect

'1' is clears the output enable bit

READ as :

'0' is indicates the signal direction as input

'1' is indicates the signal direction as output

15.8.5 GPIOC Interrupt Enable Set Register(GPIOC_INTENSET)

Address offset: 0x0020

Reset value: 0x0000

31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16
res															

15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
IES15	IES14	IES13	IES12	IES11	IES10	IES9	IES8	IES7	IES6	IES5	IES4	IES3	IES2	IES1	IES0
R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W

[15:0] IESy(y = 0..15)

WRITE as :

'0' is no effect

'1' is sets the interrupt enable bit

READ as :

'0' is indicates the interrupt disable

'1' is indicates the interrupt enable

15.8.6 GPIOC Interrupt Enable Clear Register(GPIOC_INTENCLR)

Address offset: 0x0024

Reset value: 0x----

31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16
res															

15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
IEC15	IEC14	IEC13	IEC12	IEC11	IEC10	IEC9	IEC8	IEC7	IEC6	IEC5	IEC4	IEC3	IEC2	IEC1	IEC0
R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W

[15:0] IECy(y = 0..15)

WRITE as :

'0' is no effect

'1' is clears the interrupt enable bit

READ as :

'0' is indicates the interrupt disable

'1' is indicates the interrupt enable

15.8.7 GPIOC Interrupt Type Set Register(GPIOC_INTPTYPESET)

Address offset: 0x0028

Reset value: 0x----

31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16
res															

15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
ITS15	ITS14	ITS13	ITS12	ITS11	ITS10	ITS9	ITS8	ITS7	ITS6	ITS5	ITS4	ITS3	ITS2	ITS1	ITS0
R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W

[15:0] ITS_y(y = 0..15)

WRITE as :

'0' is no effect

'1' is sets the interrupt type bit

READ as :

'0' is indicates for LOW or HIGH level

'1' is indicates for falling edge or rising edge

15.8.8 GPIOC Interrupt Type Clear Register(GPIOC_INTTYPECLR)

Address offset: 0x002c

Reset value: 0x----

31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16
res															

15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
ITC15	ITC14	ITC13	ITC12	ITC11	ITC10	ITC9	ITC8	ITC7	ITC6	ITC5	ITC4	ITC3	ITC2	ITC1	ITC0
R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W

[15:0] ITC_y(y = 0..15)

WRITE as :

'0' is no effect

'1' is clears the interrupt type bit

READ as :

'0' is indicates for LOW or HIGH level

'1' is indicates for falling edge or rising edge

15.8.9 GPIOC Interrupt Polarity Set Register(GPIOC_INTPOLSET)

Address offset: 0x0030

Reset value: 0x----

31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16
res															

15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
IPS15	IPS14	IPS13	IPS12	IPS11	IPS10	IPS9	IPS8	IPS7	IPS6	IPS5	IPS4	IPS3	IPS2	IPS1	IPS0
R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W

[15:0] IPSy(y = 0..15)

WRITE as :

'0' is no effect

'1' is sets the interrupt polarity bit

READ as :

'0' is indicates for LOW level or falling edge

'1' is indicates for HIGH level or rising edge

15.8.10 GPIOC Interrupt Polarity Clear Register(GPIOC_INTPOLCLR)

Address offset: 0x0034

Reset value: 0x----

31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16
res															

15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
IPC15	IPC14	IPC13	IPC12	IPC11	IPC10	IPC9	IPC8	IPC7	IPC6	IPC5	IPC4	IPC3	IPC2	IPC1	IPC0
R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W

[15:0] IPCy(y = 0..15)

WRITE as :

'0' is no effect

'1' is clears the interrupt polarity bit

READ as :

'0' is indicates for LOW level or falling edge

'1' is indicates for HIGH level or rising edge

15.8.11 GPIOC Interrupt Status/Interrupt Clear Register(GPIOC_INTSTATUS/ INTCLEAR)

Address offset: 0x0038

Reset value: 0x----

31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16
res															

15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
ISC15	ISC14	ISC13	ISC12	ISC11	ISC10	ISC9	ISC8	ISC7	ISC6	ISC5	ISC4	ISC3	ISC2	ISC1	ISC0
R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W

[15:0] ISC_y(y = 0..15)

WRITE as :

'0' is no effect

'1' is request to clear the interrupt

READ as : IRQ status Register

15.8.12 GPIOC Lower Byte Masked Access Register(GPIOC_LB_MASKED)

Address offset: 0x0400 - 0x07FC

Reset value: 0x----

31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16
res															

15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
res							LBM								
R/W															

Lower eight bits masked access

[15:8] Not used

[7:0] Data for lower byte access, with bits[9:2] of address value used as enable bit mask for each bit

15.8.13 GPIOC Upper Byte Masked Access Register(GPIOC_UB_MASKED)

Address offset: 0x0800-0x0FC

Reset value: 0x----

31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16
res															

15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
HBM								res							
R/W															

Higher eight bits masked access

[15:8] Data for higher byte access, with bits[9:2] of address value used as enable bit mask for each bit

[7:0] Not used

15.9 Register map

The following Table 16 summarizes the GPIOC registers.

Table 16 GPIOC register map and reset values

15.10 GPIOD Registers(Address Base: 0x4500_0000)

15.10.1 GPIOD Data Register(GPIOD_DATA)

Address offset: 0x0000

Reset value: 0x----

31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16
res															

15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
DAT15	DAT14	DAT13	DAT12	DAT11	DAT10	DAT9	DAT8	DAT7	DAT6	DAT5	DAT4	DAT3	DAT2	DAT1	DAT0
R	R	R	R	R	R	R	R	R	R	R	R	R	R	R	R

[15:0] DATy(y = 0..15)

READ as : Port input data bit

15.10.2 GPIOD Output Latch Register(GPIOD_DATAOUT)

Address offset: 0x0004

Reset value: 0x----

31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16
res															

15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
DAO15	DAO14	DAO13	DAO12	DAO11	DAO10	DAO9	DAO8	DAO7	DAO6	DAO5	DAO4	DAO3	DAO2	DAO1	DAO0
R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W

[15:0] DAOy(y = 0..15)

READ as : Port out data bit

WRITE as : WRITE to GPIOD_DATAOUT register

15.10.3 GPIOD Enable Set Register(GPIOD_OUTENSET)

Address offset: 0x0010

Reset value: 0x0000

31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16
res															

15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
ES15	ES14	ES13	ES12	ES11	ES10	ES9	ES8	ES7	ES6	ES5	ES4	ES3	ES2	ES1	ES0
R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W

[15:0] ESy(y = 0..15)

WRITE as :

'0' is no effect

'1' is sets the corresponding output enable bit

READ as :

'0' is indicates the signal direction as input

'1' is indicates the signal direction as output

15.10.4 GPIOD Enable Clear Register(GPIOD_OUTENCLR)

Address offset: 0x0014

Reset value: 0x0000

31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16
res															

15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
EC15	EC14	EC13	EC12	EC11	EC10	EC9	EC8	EC7	EC6	EC5	EC4	EC3	EC2	EC1	EC0
R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W

[15:0] ECy(y = 0..15)

WRITE as :

'0' is no effect

'1' is clears the output enable bit

READ as :

'0' is indicates the signal direction as input

'1' is indicates the signal direction as output

15.10.5 GPIOD Interrupt Enable Set Register(GPIOD_INTENSET)

Address offset: 0x0020

Reset value: 0x0000

31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16
res															

15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
IES15	IES14	IES13	IES12	IES11	IES10	IES9	IES8	IES7	IES6	IES5	IES4	IES3	IES2	IES1	IES0
R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W

[15:0] IESy(y = 0..15)

WRITE as :

'0' is no effect

'1' is sets the interrupt enable bit

READ as :

'0' is indicates the interrupt disable

'1' is indicates the interrupt enable

15.10.6 GPIOD Interrupt Enable Clear Register(GPIOD_INTENCLR)

Address offset: 0x0024

Reset value: 0x----

31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16
res															

15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
IEC15	IEC14	IEC13	IEC12	IEC11	IEC10	IEC9	IEC8	IEC7	IEC6	IEC5	IEC4	IEC3	IEC2	IEC1	IEC0
R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W

[15:0] IECy(y = 0..15)

WRITE as :

'0' is no effect

'1' is clears the interrupt enable bit

READ as :

'0' is indicates the interrupt disable

'1' is indicates the interrupt enable

15.10.7 GPIOD Interrupt Type Set Register(GPIOD_INTPSET)

Address offset: 0x0028

Reset value: 0x----

31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16
res															

15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
ITS15	ITS14	ITS13	ITS12	ITS11	ITS10	ITS9	ITS8	ITS7	ITS6	ITS5	ITS4	ITS3	ITS2	ITS1	ITS0
R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W

[15:0] ITS_y(y = 0..15)

WRITE as :

'0' is no effect

'1' is sets the interrupt type bit

READ as :

'0' is indicates for LOW or HIGH level

'1' is indicates for falling edge or rising edge

15.10.8 GPIOD Interrupt Type Clear Register(GPIOD_INTTYPECLR)

Address offset: 0x002c

Reset value: 0x----

31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16
res															

15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
ITC15	ITC14	ITC13	ITC12	ITC11	ITC10	ITC9	ITC8	ITC7	ITC6	ITC5	ITC4	ITC3	ITC2	ITC1	ITC0
R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W

[15:0] ITC_y(y = 0..15)

WRITE as :

'0' is no effect

'1' is clears the interrupt type bit

READ as :

'0' is indicates for LOW or HIGH level

'1' is indicates for falling edge or rising edge

15.10.9 GPIOD Interrupt Polarity Set Register(GPIOD_INTPOLSET)

Address offset: 0x0030

Reset value: 0x----

31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16
res															

15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
IPS15	IPS14	IPS13	IPS12	IPS11	IPS10	IPS9	IPS8	IPS7	IPS6	IPS5	IPS4	IPS3	IPS2	IPS1	IPS0
R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W

[15:0] IPSy(y = 0..15)

WRITE as :

'0' is no effect

'1' is sets the interrupt polarity bit

READ as :

'0' is indicates for LOW level or falling edge

'1' is indicates for HIGH level or rising edge

15.10.10 GPIOD Interrupt Polarity Clear Register(GPIOD_INTPOLCLR)

Address offset: 0x0034

Reset value: 0x----

31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16
res															

15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
IPC15	IPC14	IPC13	IPC12	IPC11	IPC10	IPC9	IPC8	IPC7	IPC6	IPC5	IPC4	IPC3	IPC2	IPC1	IPC0
R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W

[15:0] IPCy(y = 0..15)

WRITE as :

'0' is no effect

'1' is clears the interrupt polarity bit

READ as :

'0' is indicates for LOW level or falling edge

'1' is indicates for HIGH level or rising edge

15.10.11 GPIOD Interrupt Status/Interrupt Clear Register(GPIOD_INTSTATUS/INTCLEAR)

Address offset: 0x0038

Reset value: 0x----

31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16
res															

15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
ISC15	ISC14	ISC13	ISC12	ISC11	ISC10	ISC9	ISC8	ISC7	ISC6	ISC5	ISC4	ISC3	ISC2	ISC1	ISC0
R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W

[15:0] ISC_y(y = 0..15)

WRITE as :

'0' is no effect

'1' is request to clear the interrupt

READ as : IRQ status Register

15.10.12 GPIOD Lower Byte Masked Access Register(GPIOD_LB_MASKED)

Address offset: 0x0400 - 0x07FC

Reset value: 0x----

31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16
res															

15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
res							LBM								
R/W															

Lower eight bits masked access

[15:8] Not used

[7:0] Data for lower byte access, with bits[9:2] of address value used as enable bit mask for each bit

15.10.13 GPIOD Upper Byte Masked Access Register(GPIOD_UB_MASKED)

Address offset: 0x0800-0x0FC

Reset value: 0x----

31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16
res															

15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
HBM										res	res	res	res	res	res
R/W															

Higher eight bits masked access

[15:8] Data for higher byte access, with bits[9:2] of address value used as enable bit mask for each bit

[7:0] Not used

15.11 Register map

The following Table 17 summarizes the GPIOD registers.

Table 17 GPIOD register map and reset values

16 Direct memory access controller (DMA)

16.1 Introduction

Direct memory access (DMA) is used in order to provide high-speed data transfer between peripherals and memory as well as memory to memory. Data can be quickly moved by DMA without any CPU actions. This keeps CPU resources free for other operations.

The DMA controller has up to 6 channels in total, each dedicated to managing memory access requests from one or more peripherals. It has an arbiter for handling the priority between DMA requests. For more details, refer to “PrimeCell® µDMA Controller (PL230)” from the Technical Reference Manual

16.2 Features

- 6 channels
- Each channel is connected to dedicated hardware DMA requests and software trigger is also supported on each channel.
- Priorities between requests from the DMA channels are software programmable (2 levels consisting of high, default)
- Memory-to-memory transfer (software request only)
- TCP/IP-to-memory transfer (software request only)
- SPI/UART-to-memory transfer (hardware request and software request)
- Access to Flash, SRAM, APB and AHB peripherals as source and destination

16.3 Functional description

Figure 20 shows the DMA block diagram.

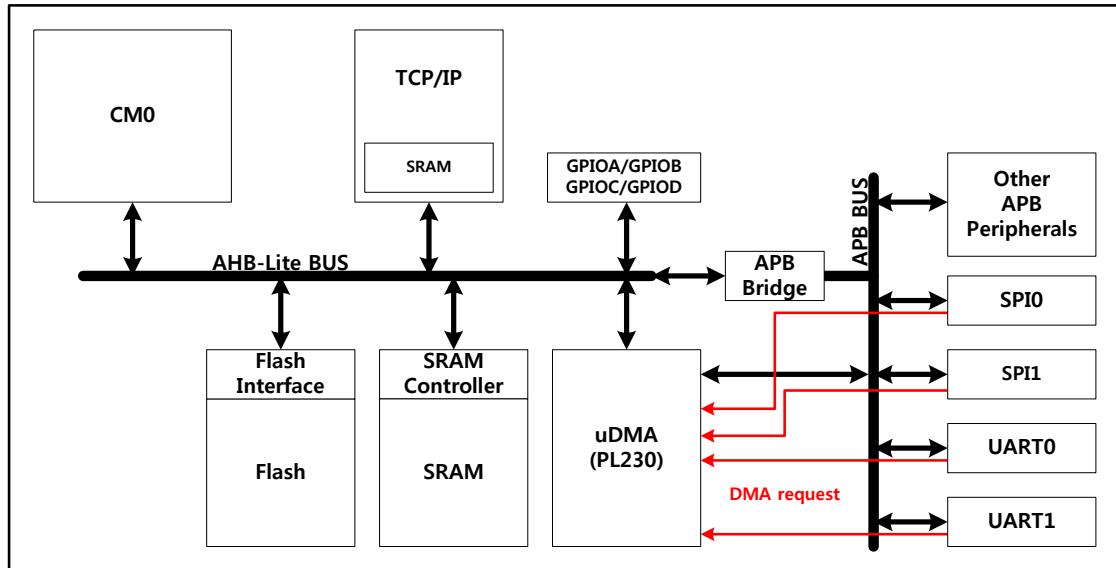


Figure 20. DMA Block diagram

16.3.1 DMA request mapping

The hardware requests from the peripherals (UART0, UART1, SSP0, SSP1) are simply connected to the DMA. Refer to Table 1 which lists the DMA requests for each channel.

Table 18 Summary of the DMA requests for each channel

	Channel 1	Channel 2	Channel 3	Channel 4	Channel 5	Channel 6
Hardware Request	SSP0_TX SSP0_RX	SSP1_TX SSP1_RX	UART0_TX UART0_RX	UART1_TX UART1_RX	NONE	NONE
Software Request ⁽¹⁾	Support	Support	Support	Support	Support	Support

1. Software request is the only way to use DMA for memory-to-memory or TCP/IP-to-memory.

16.3.2 DMA arbitration

The controller can be configured to perform arbitration during a DMA cycle before and after a programmable number of transfers. This reduces the latency for servicing a higher priority channel.

The controller uses four bits in the channel control data structure that configures how many AHB bus transfers occur before the controller re-arbitrates. These bits are known as the R_power bits because the value R is raised to the power of two and this determines the arbitration rate. For example, if R = 4, then the arbitration rate is 2⁴, which means the controller arbitrates every 16 DMA transfers.

Remark: Do not assign a low-priority channel with a large R_power value because this prevents the controller from servicing high-priority requests until it re-arbitrates.

When $N > 2^R$ and is not an integer multiple of 2^R , then the controller always performs sequences of 2^R transfers until $N < 2^R$ remain to be transferred. The controller performs the remaining N transfers at the end of the DMA cycle.

16.3.3 DMA cycle types

The cycle_ctrl bits in the channel control data structure controls how the DMA controller performs a cycle.

The controller uses four cycle types described in this manual:

- Invalid
- Basic
- Auto-request
- Ping-pong

See ARM micro DMA (PL230) documentation for additional cycle types.

For all cycle types, the controller arbitrates after 2^R DMA transfers. If a low-priority channel is set to a large 2^R value then it prevents all other channels from performing a DMA transfer until the low-priority DMA transfer completes. Therefore, the user must take care when setting the R_power bit in the channel_cfg data structure, that the latency for high-priority channels is not significantly increased.

16.3.3.1 Invalid cycle

After the controller completes a DMA cycle, it sets the cycle type to invalid to prevent it from repeating the same DMA cycle.

16.3.3.2 Basic cycle

In this mode, the controller can be configured to use either the primary or the alternate channel control data structure. After the channel is enabled and the controller receives a request for this channel, the flow for basic cycle is as below:

1. The controller performs 2^R transfers.
If the number of transfers remaining is zero the flow continues at step 3.
2. The controller arbitrates:
 - If a higher-priority channel is requesting service, then the controller services that channel.

- If the peripheral or software signals a request to the controller, then it continues at step 1.
3. The controller sets `dma_done[c]` signal for this channel HIGH for one system clock cycle. This indicates to the host processor that the DMA cycle is complete.

16.3.3.3 Auto-request cycle

When the controller operates in this mode, it is only necessary to receive a single request to enable the controller to complete the entire DMA cycle. This enables a large data transfer to occur, without significantly increasing the latency for servicing higher priority requests or requiring multiple requests from the processor or peripheral.

The auto-request cycle is typically used for memory-to-memory requests. In this case, software generates the starting request for the 2^R transfers after setting up the DMA control data structure.

In this mode, the controller can be configured to use either the primary or the alternate channel control data structure. After the channel is enabled and the controller receives a request for this channel, the flow for the auto-request cycle is as below:

1. The controller performs 2^R transfers. If the number of transfers remaining is zero the flow continues at step 3.
2. The controller arbitrates if there are any transfers remaining after 2^R transfers. If the current channel c has the highest priority, the cycle continues at step 1.

The controller sets `dma_done[c]` signal for this channel HIGH for one system clock cycle. This indicates to the host processor that the DMA cycle is complete.

16.3.3.4 Ping-pong cycle

In this mode, the controller performs a DMA cycle using one of the data structures and then performs a DMA cycle using the other data structure. The controller continues to switch between primary and alternate structures until it reads a data structure that is invalid, until the user reprograms the `cycle_type` to basic, or until the host processor disables the channel.

In ping-pong mode, the user can program or reprogram one of the two channel data structures (primary or alternate) while using the other channel data structure for the active transfer. When a transfer is done, the next transfer can be started immediately using the prepared channel data structure - provided that a higher priority channel does not require servicing. If the user does not reprogram the channel control data structure not in use for a transfer, the cycle type remains invalid (which is the value at the end of the last transfer using that structure), and the ping-pong cycle completes.

The ping-pong cycle can be used for transfers to or from peripherals or for memory- to-memory transfers.

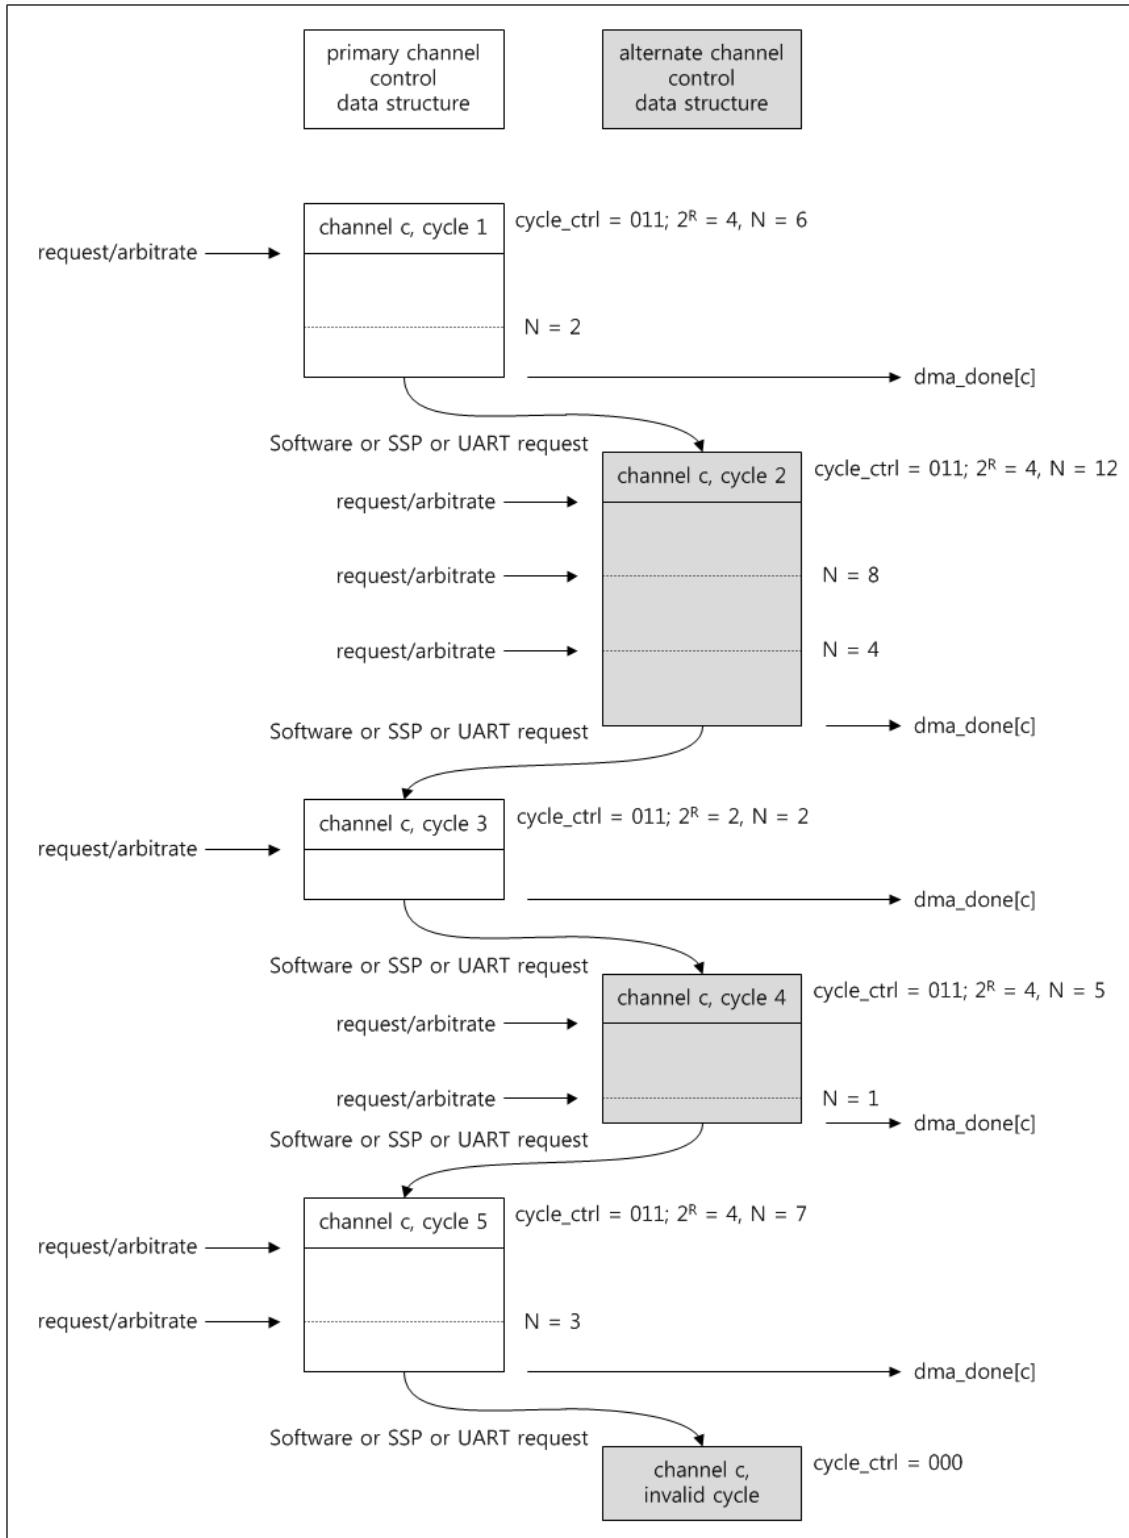


Figure 21. DMA ping pong cycle

16.4 Registers (Base address : 0x4100_4000)

16.4.1 DMA status register (DMA_STATUS)

Address offset : 0x000

Reset value : 0x0005_0000

31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16
res	res	res	res	res	res	res									
15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
res		STATE		res	res	res	ENABLE								
									RO					RO	

[0] ENABLE - Enable status of the controller

This bit is read only register to check enable status of DMA controller

0 : controller is disabled

1 : controller is enabled

[7:4] STATE - Current state of the control state machine.

These bits are read only register to check current state of controller. State can be one of the following

0000 : idle

0001 : reading channel controller data

0010 : reading source data end pointer

0011 : reading destination data end pointer

0100 : reading source data

0101 : writing destination data

0110 : waiting channel controller data

1000 : stalled

1001 : done

1010 : peripheral scatter-gather transition

1011 - 1111 : undefined.

16.4.2 DMA configuration register (DMA_CFG)

Address offset : 0x004

Reset value : -

31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16
res															

15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
res	ENABLE														
									WO						WO

[0] ENABLE - Enable for the controller

This bit is write only register to enable of DMA controller

0 : disable the controller

1 : enable the controller

[7:5] PROT_CTRL - Set the AHB-Lite protection by controlling the HPROT[3:1] signal levels

These bits are write only register to set HPROT[3:1] signal as follows

[7] : controls HPROT[3] to indicate if a cacheable access is occurring.

[6] : controls HPROT[2] to indicate if a bufferable access is occurring.

[5] : controls HPROT[1] to indicate if a privileged access is occurring.

16.4.3 DMA control data base pointer register (DMA_CTRL_BASE_PTR)

Address offset : 0x008

Reset value : 0x0000_0000

31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16
CTRL_BASE_PTR[31:16]															
R/W															

15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
CTRL_BASE_PTR[15:8]								res							
R/W															

[31:8] CTRL_BASE_PTR - Pointer to the base address of the primary data structure

These bits are read/write register. User must configure this register so that the base pointer points to a location in system memory.

16.4.4 DMA channel alternate control data base pointer register (DMA_ALT_CTRL_BASE_PTR)

Address offset : 0x00c

Reset value : 0x0000_0000

31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16
ALT_CTRL_BASE_PTR[31:16]															

[31:0] ALT_CTRL_BASE_PTR : Base address of the alternate data structure

This read only register returns the base address of the alternate data structure.

16.4.5 DMA channel wait on request status register (DMA_WAITONREQ_STATUS)

Address offset : 0x010

Reset value : 0x0000_0000

15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
res	DMA_WAITONREQ[5:0]														
												RO			

[Channel-1] DMA_WAITONREQ - Channel wait on request status

This read-only register returns the status of dma_waitonreq[Channel-1].

0 : dma_waitonreq is low

1 : dma_waitonreq is high

16.4.6 DMA channel software request register (DMA_CHNL_SW_REQUEST)

Address offset : 0x014

Reset value : -

15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
res		CHNL_SW_REQUEST[5:0]													

															WO
--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	----

[Channel-1] CHNL_SW_REQUEST - Set the appropriate bit to generate a software DMA request on the corresponding DMA channel

This read-only register enables to generate a software DMA request.

0 : dose not create a DMA request for [Channel-1]

1 : creates a DMA request for [Channel -1]

16.4.7 DMA channel useburst set register (DMA_CHNL_USEBURST_SET)

Address offset : 0x018

Reset value : 0x0000_0000

31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16
res															

15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
res															
															RW

[Channel-1] CHNL_USEBURST_SET - Returns the useburst status, or disable dma_sreq[Channel-1] form generating DMA requests.

This read/write register disables the single request dma_sreq[Channel-1] input from generating requests, and therefore only the request, dma_req[Channel-1], generates requests. Reading the register returns the useburst status.

Read as :

0 : DMA [Channel-1] responds to requests that it receives on
dma_req[Channel-1] or dma_sreq[Channel-1]

1 : DMA [Channel-1] does not responds to requests that it receives on
dma_sreq[Channel-1]. The controller only responds to dma_req[Channel-1]
requests

Write as :

0 : No effect. Use the CHNL_USEBURST_CLR register to set bit [Channel-1] to 0

1 : Disables dma_sreq[Channel-1] form generating DMA requests.

16.4.8 DMA channel useburst clear register (DMA_CHNL_USEBURST_CLR)

Address offset : 0x01c

Reset value : -

31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16
res															

15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
res						CHNL_USEBURST_CLR[5:0]									
															WO

[Channel-1] CHNL_USEBURST_CLR - Set the appropriate bit to enable dma_sreq[Channel-1] to generate requests.

This Write register enables dma_sreq[Channel-1] to generate requests.

0 - No effect. User the CHNL_USEBURST_SET register to disable dma_sreq[Channel-1] from generating requests.

1 - Enable dma_sreq[Channel-1] to generate DMA requests.

16.4.9 DMA channel request mask set register (DMA_CHNL_REQ_MASK_SET)

Address offset : 0x020

Reset value : 0x0000_0000

31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16
res															

15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
res						CHNL_REQ_MASK_SET[5:0]									
															R/W

[Channel-1] CHNL_REQ_MASK_SET - Returns the request mask status of dma_req[Channel-1] and dma_sreq[Channel-1], or disables the corresponding channel from generating DMA requests.

This read/write register disables a HIGH on dma_req[Channel-1], for dma_sreq[Channel-1], from generating a request. Reading the register returns the request mask status for dma_req[Channel-1] and dma_sreq[Channel-1].

Read as :

0 - External requests are enabled for channel [Channel-1]

1 - External requests are disabled for channel [Channel-1]

Write as :

0 - No effect. Use the CHNL_REQ_MASK_CLR register to enable DMA requests.

1 - Disables dma_req[Channel-1] and dma_sreq[Channel-1] from generating DMA requests.

16.4.10 DMA channel request mask clear register (DMA_CHNL_REQ_MASK_CLR)

Address offset : 0x024

Reset value : -

31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16
res	res	res	res	res											
15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
res	CHNL_REQ_MASK_CLR[5:0]														
											WO				

[Channel-1] CHNL_REQ_MASK_CLR - Set the appropriate bit to enable DMA requests for the channel corresponding to dma_req[Channel-1] and dma_sreq[Channel-1]

This write only register enables a HIGH on dma_req[Channel-1], or dma_sreq[Channel-1].

0 : No effect. Use the CHNL_REQ_MASK_SET register to disable dma_req[Channel-1] and dma_sreq[Channel-1] from generating requests.

1 : Enables dma_req[Channel-1] or dma_sreq[Channel] to generate DMA requests.

16.4.11 DMA channel enable set register (DMA_CHNL_ENABLE_SET)

Address offset : 0x028

Reset value : 0x0000_0000

31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16
res	res	res	res	res											
15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
res	CHNL_ENABLE_SET[5:0]														
											WO				

													R/W
--	--	--	--	--	--	--	--	--	--	--	--	--	-----

[Channel-1] CHNL_ENABLE_SET - Returns the enable status of channels or enables the corresponding channels.

This read/write register enables a DMA channel. Reading the register returns the enable status of the channels.

Read as :

0 - Channel [Channel-1] is disabled

1 - Channel [Channel-1] is enabled

Write as :

0 - No effect. Use the CHNL_ENABLE_CLR register to disable a channel.

1 - Enables channels [Channel-1]

16.4.12 DMA channel enable clear register (DMA_CHNL_ENABLE_CLR)

Address offset : 0x02c

Reset value : -

31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16
res															

15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
res	CHNL_ENABLE_CLR[5:0]														
											WO				

[Channel-1] CHNL_ENABLE_CLR - Set the appropriate bit to disable the corresponding DMA channel.

This write only register disable a DMA channel.

0 : No effect. Use the CHNL_ENABLE_SET register to enable DMA channel.

1 : Disable channel [Channel-1]

16.4.13 DMA channel primary-alternate set register (DMA_CHNL_PRI_ALT_SET)

Address offset : 0x030

Reset value : 0x0000_0000

31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16
res															

--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--

15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
res	CHNL_PRI_ALT_SET[5:0]														
															R/W

[Channel-1] CHNL_PRI_ALT_SET - Returns the channel control data structure status, or selects the alternate data structure for the corresponding DMA channels.

This read/write register configures a DMA channel to use the alternate data structure.

Reading the register returns the status of which data structure is in use for the corresponding DMA channel.

Read as :

0 - DMA Channel [Channel-1] is using the primary data structure.

1 - DMA Channel [Channel-1] is using the alternate data structure.

Write as :

0 - No effect. Use the CHNL_PRI_ALT_CLR register to set bit [Channel-1] to 0

1 - Selects the alternate data structure for channel [Channel-1]

16.4.14 DMA channel primary-alternate clear register (DMA_CHNL_PRI_ALT_CLR)

Address offset : 0x034

Reset value : -

31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16
res															

15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
res	CHNL_PRI_ALT_CLR[5:0]														
															WO

[Channel-1] CHNL_PRI_ALT_CLR - Set the appropriate bit to select the primary data structure for the corresponding DMA channel.

This write only register configures a DMA channels to use the primary data structure.

0 : No effect. Use the CHNL_PRI_ALT_SET register to select the alternate data structure.

1 : Selects the primary data structure for channel [Channel-1]

16.4.15 DMA channel priority set register (DMA_CHNL_PRIORITY_SET)

Address offset : 0x038

Reset value : 0x0000_0000

31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16
res															

15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
res															
															R/W

[Channel-1] CHNL_PRIORITY_SET - Returns the channel priority mask status, or set the channel priority to high.

This read/write register configures a DMA channel to use the high priority level. Reading the register returns the status of channel priority mask

Read as :

0 - DMA Channel [Channel-1] is using the default priority level.

1 - DMA Channel [Channel-1] is using a high priority level.

Write as :

0 - No effect. Use the CHNL_PRIORITY_CLR register to set bit [Channel-1] to default priority level

1 - Channel [Channel-1] uses the high priority level.

16.4.16 DMA channel priority clear register (DMA_CHNL_PRIORITY_CLR)

Address offset : 0x03C

Reset value : -

31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16
res															

15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
res															
															WO

[Channel-1] CHNL_PRIORITY_CLR - Set the appropriate bit to select the default priority level for the specified DMA channel.

This write only register configures a DMA channels to use the default priority level.

0 : No effect. Use the CHNL_PRIORITY_SET register to set channel [Channel-1] to the high priority level.

1 : channel [Channel-1] uses the default priority level.

16.4.17 DMA bus error clear register (DMA_ERR_CLR)

Address offset : 0x04C

Reset value : 0x0000_0000

31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16
res															

15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
res	ERR_CLR														
															R/W

[0] ERR_CLR - Returns the status of DMA_ERR, or set the signal LOW.

This read/write register returns the status of DMA_ERR, and enables set DMA_ERR LOW.

Read as :

0 : DMA_ERR is LOW

1 : DMA_ERR is HIGH

Write as :

0 : No effect, status of DMA_ERR is unchanged.

1 : Sets DMA_ERR LOW.

16.5 Register map

The following Table 19 summarizes the DMA registers.

Table 19 DMA register map and reset values

17 Analog-to-digital converter (ADC)

17.1 Introduction

ADC is a 12bit analog-to-digital converter. It has up to 9 multiplexed channels allowing it to measure signals from 8 externals and 1 internal source.

ADC of various channels can be performed in single mode. The result of the ADC is stored in 12 bit register.

17.2 Features

- 12bit configuration resolution
- Conversion time : Max 10MHz (Sampling time can be programmable)

8 channel for external analog inputs

- CH0 : PC_15
- CH1 : PC_14
- CH2 : PC_13
- CH3 : PC_12
- CH4 : PC_11
- CH5 : PC_10
- CH6 : PC_09
- CH7 : PC_08

1 channel for internal LDO(1.5v) voltage.

- CH15 : Internal voltage

- Start of conversion can be initiated by software.
- Convert selected inputs once per trigger.
- Interrupt generation at the end of conversion.

17.3 Functional description

Figure 22 shows the ADC block diagram.

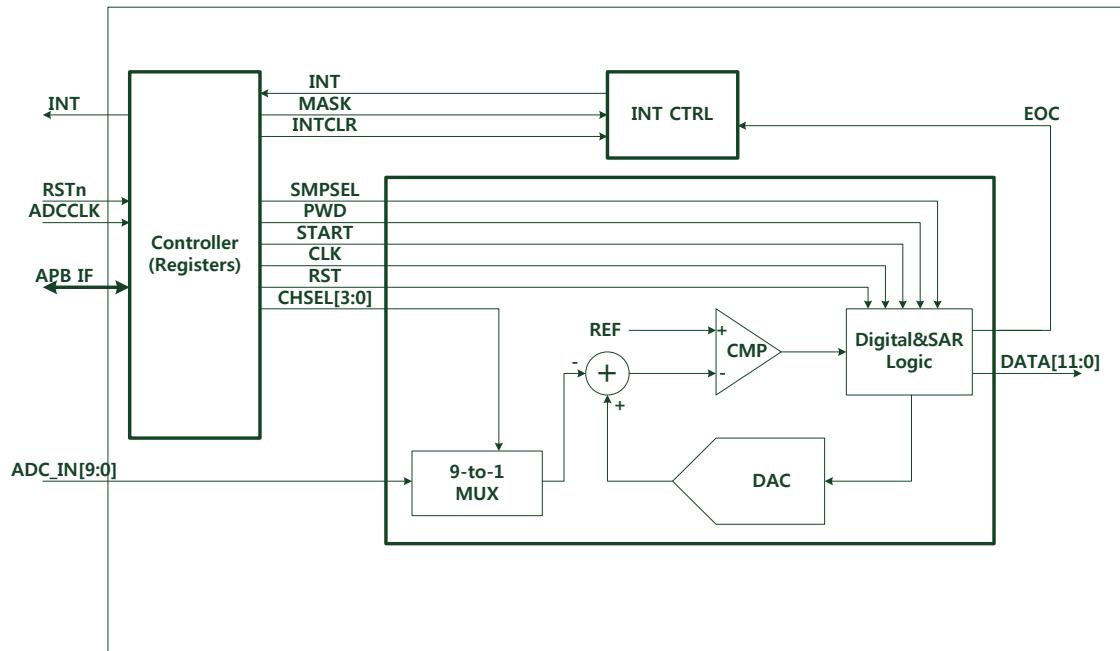


Figure 22. ADC block diagram

17.3.1 Operation ADC with non-interrupt

Figure 23 shows the flowchart of ADC operation with non-interrupt.

ADC can be used as below:

1. ADC needs to be initialized before operation.
To initialize the ADC, clear the PWD bit first.
2. Select the ADC channel from 0 to 7 and 15 (initial core voltage).
3. Run start ADC conversion by set ADC_SRT bit.
4. Check INT bit to know finish of conversion.
5. If INT bit is high (1), read ADC conversion data.
6. Finally, ADC operation is finished by setting the PWD bit.

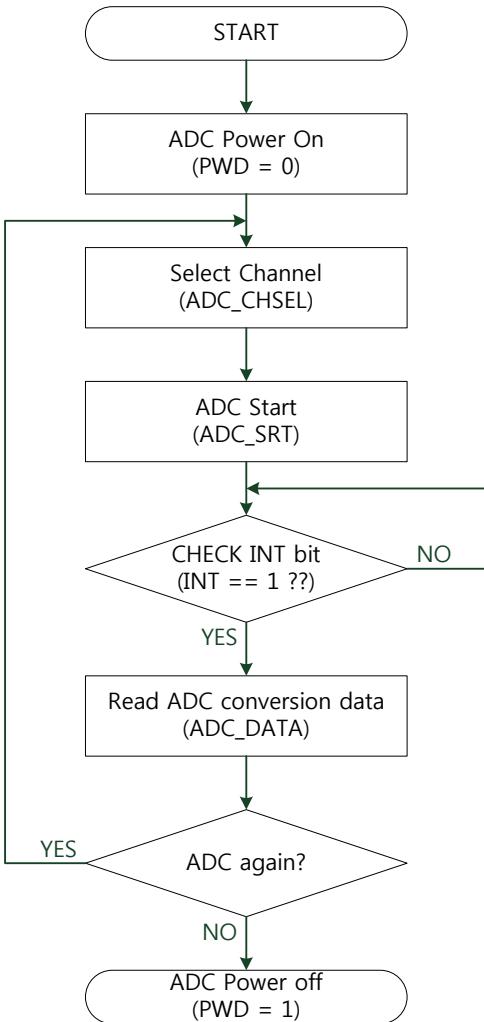


Figure 23. The ADC operation flowchart with non-interrupt

17.3.2 Operation ADC with interrupt

Figure 24 shows the flowchart of ADC operation with interrupt.

Operation is almost the same as the non-interrupt mode except checking INT register to know when enabling interrupt mask bit and conversion is completed.

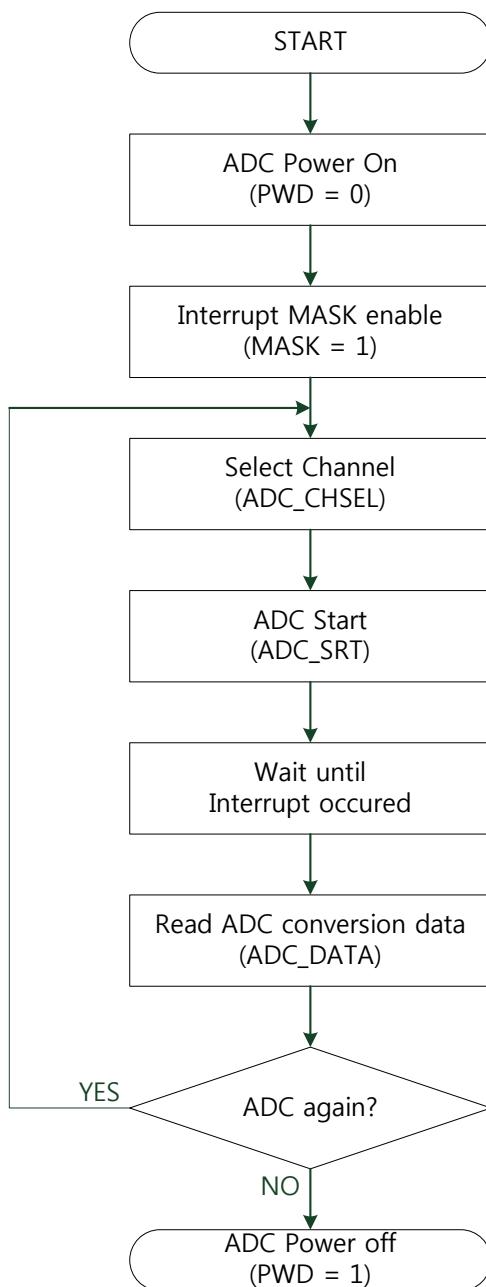


Figure 24. The ADC operation flowchart with interrupt

17.4 Registers (Base address : 0x4100_0000)

17.4.1 ADC control register (ADC_CTR)

Address offset : 0x000

Reset value : 0x0000_0003

31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16
res															

15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
res	PWD	SMPSEL													
														R/W	R/W

[0] SMPSEL - Sampling mode select

This bit written by S/W to select sampling mode

0 : Abnormal mode

1 : Normal mode

[1] PWD - Power down

This bit set and cleared by S/W to enable/disable power down mode

0 : Active

1 : Power down

17.4.2 ADC channel select register (ADC_CHSEL)

Address offset : 0x004

Reset value : 0x0000_0000

31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16
res															

15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
res	CHSEL														
														R/W	

[3:0] CHSEL - ADC Channel Select

These bits are written by S/W to define which channel is selected to be converted.

0000 : Channel 0 select

0001 : Channel 1 select

0010 : Channel 2 select

0011 : Channel 3 select

0100 : Channel 4 select

0101 : Channel 5 select

0110 : Channel 6 select

0111 : Channel 7 select

1000 ~ 1000 : no select
1111 : LDO output(1.5V) select

17.4.3 ADC start register (ADC_START)

Address offset : 0x008

Reset value : 0x0000_0000

31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16
res															
15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
res	ADC_SRT														
															W

[0] ADC_SRT - ADC Start bit

This bit set by S/W to start ADC for conversion. This bit is write-only.

0 : ready to start

1 : start ADC for conversion (This bit clear automatically after conversion)

17.4.4 ADC conversion data register (ADC_DATA)

Address offset : 0x00C

Reset value : 0x0000_0000

31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16
res															
15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
res	res	res	res												ADC_DATA
															R

[11:0] ADC_DATA - ADC conversion result data

It contains ADC conversion result data of last converted channel. These bits are read-only.

17.4.5 ADC Interrupt register (ADC_INT)

Address offset : 0x010

Reset value : 0x0000_0000

31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16
res															

15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
res	MASK	INT													
														R/W	R

[0] DONE - Interrupt bit

This bit indicates that conversion is done or not. This bit is set after conversion is done and this bit is cleared by set of Interrupt clear bit. This bit is read-only.

[1] MASK - Interrupt mask signal.

This bit is interrupt mask bit of ADC. This bit can be set and cleared by S/W to enable/disable interrupt mask.

0 : Interrupt disable

1 : Interrupt enable

17.4.6 ADC Interrupt Clear register (ADC_INTCLR)

Address offset : 0x01c

Reset value : 0x0000_0000

31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16
res															

15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
res	INTCLR														
															w

[0] INTCLR - Interrupt Clear bit.

This bit set by S/W to clear interrupt signal to CM0. This bit is write-only.

0 - nothing

1 - Clear interrupt signal (This bit clear automatically after clear interrupt)

17.5 Register map

The following Table 20 summarizes the ADC registers.

Table 20 ADC register map and reset values

18 Pulse-Width Modulation (PWM)

18.1 Introduction

The PWM consists a 8-channel 32-bit Timer/Counter driven by a programmable prescaler. The function of the PWM is based on the basic Timer. Each timer and counter runs independently.

The PWM can be used to control the width of the pulse, formally the pulse duration, to generate output waveform or to count the counter triggered by external input.

18.2 Features

- Counter or Timer operation can use the peripheral clock, external clock source, or one of the capture inputs as the clock source.
- Eight independent 32-bit Timer/Counter driven by a programmable 6 bits prescaler runs as the PWM or standard timer if the PWM mode is not enabled.
- Eight PWM output waveforms.
- Each of Timer/Counter can have different or same clock source.
- Counter or timer operation.
- Eight capture registers that can take the timer value when an external input signal. A capture event can generate an interrupt signal optionally.
- 32-bit match register and limit register.

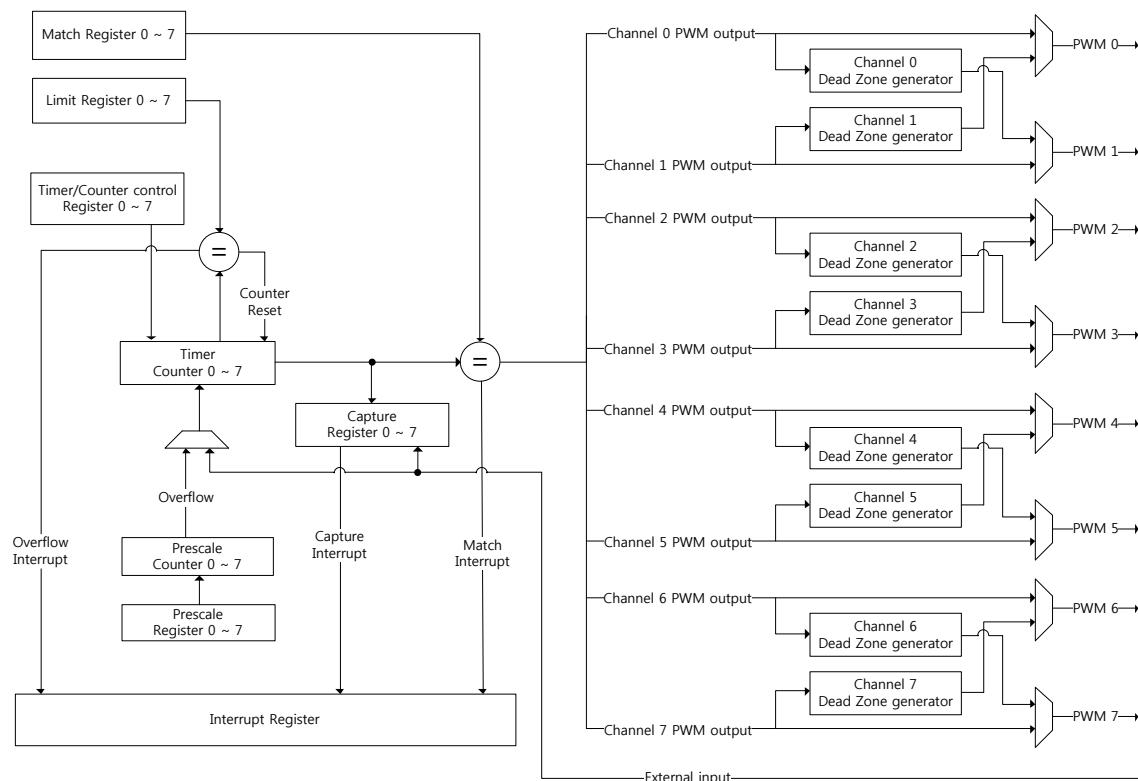


Figure 25 PWM block diagram

18.3 Functional description

18.3.1 Timer/Counter control

The PWM has Start/Stop register. It controls start or stop of the Timer/Counter. If you set this register, the Timer/Counter starts to run. If you reset this register, the Timer/Counter stops immediately. Also there is a pause register. The pause register is used to stop temporarily after one period. Although you set this register while the Timer/Counter is running, the Timer/Counter will stop when the period ends.

The registers of PWM can be updated when it stops or pauses. Users cannot update the registers while PWM is running.

18.3.2 Timer/Counter

The PWM has 8 Timer/Counter clocks, which can be divided by a prescaler. Each Timer/Counter runs independently. The Timer/Counter is designed to count cycles of the clocks or external input signal and generate interrupts when specified timer values are occurred based on match register and limit register. The Timer/Counter can count up or down.

The PWM has match registers and limit registers. The match registers control the duty cycle of PWM output waveform. The limit registers control the period of the PWM output waveform. The Timer/Counter becomes 0 when it reaches value of the limit register. If PDMR(Periodic Mode Register) is set, the Timer/Counter counts repeatedly and if PDMR is reset, the Timer/Counter stops counting.

Match register should be smaller than limit register(LR). If not, match interrupt is not occurred and PWM output waveform is always 1.

Repetition mode

The Timer/Counter has two repetition mode: periodic and one-shot mode. In periodic mode, the Timer/Counter recycles and then restarts when the Timer/Counter reaches the value of limit register. Figure 26 shows periodic mode timing diagram.

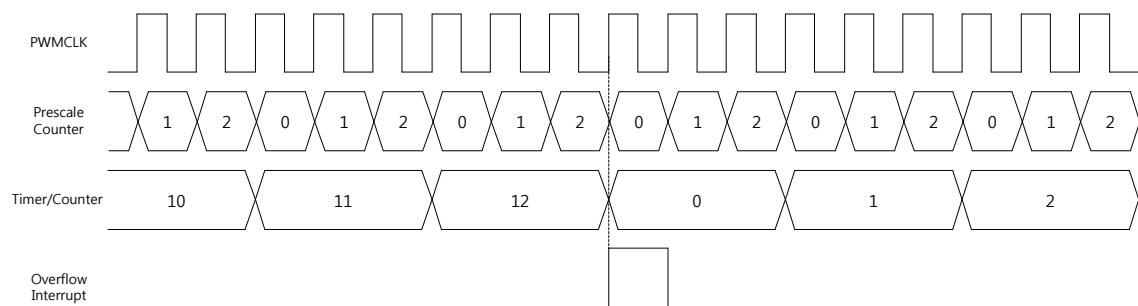


Figure 26 Periodic mode

In one-shot mode, the Timer /Counter reset to the initial value and then stops when the Timer/Counter reaches the value of limit register. Figure 27 shows one-shot mode timing diagram.

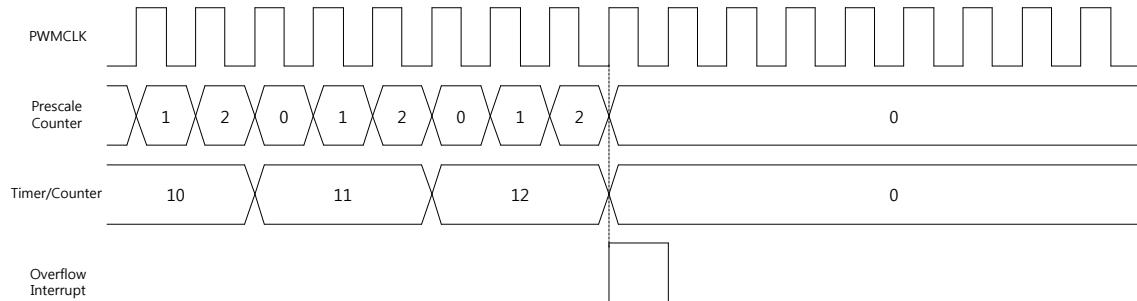


Figure 27 one-shot mode

Counting mode

The Timer/Counter has two counting mode: Up-count and Down-count mode. In up-count mode, the Timer/Counter counts up from 0 to the limit register value, then recycles. If repetition mode is periodic, the Timer/Counter restarts, if repetition mode is one-shot mode, the Timer/Counter stops. Figure 28 shows up-count mode timing diagram.

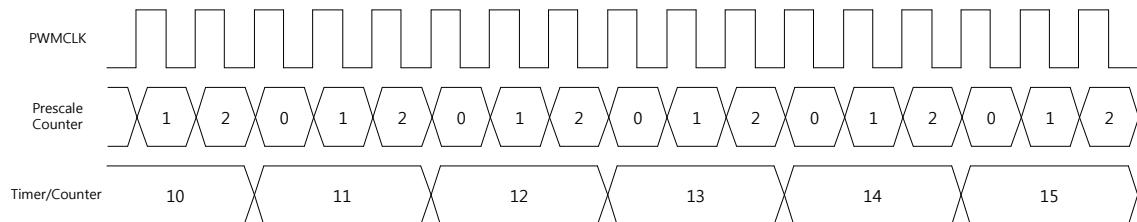


Figure 28 Up-count mode

In Down-count mode, the Timer/Counter counts from 0xFFFF_FFFF, then recycles. If repetition mode is periodic, the Timer/Counter restarts, if repetition mode is one-shot mode, the Timer/Counter stops. Figure 29 shows down-count mode timing diagram.

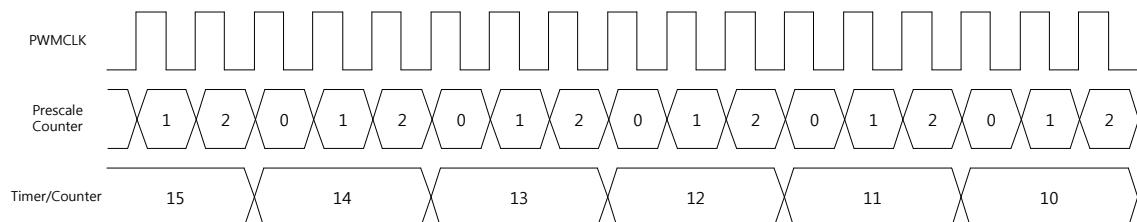


Figure 29 Down-count mode

Timer and Counter mode

The Timer/Counter can run in timer mode or counter mode. In timer mode, the Timer/Counter is counted by PWMCLK after Prescale counter is overflowed. If prescale is set by 0, the

Timer/Counter counts every PWMCLK period. In counter mode, the Timer/Counter is counted by external input signal. There are three counting method: rising edge, falling edge, and both edge. The counter mode has up-count or down-count mode and also has periodic or one-shot mode. The external input pin and PWM output pin are the same, so PWM output is disabled in counter mode.

Figure 30 is counter mode example with rising edge mode,

Figure 31 is with falling edge mode and

Figure 32 is with both rising and falling edge mode.

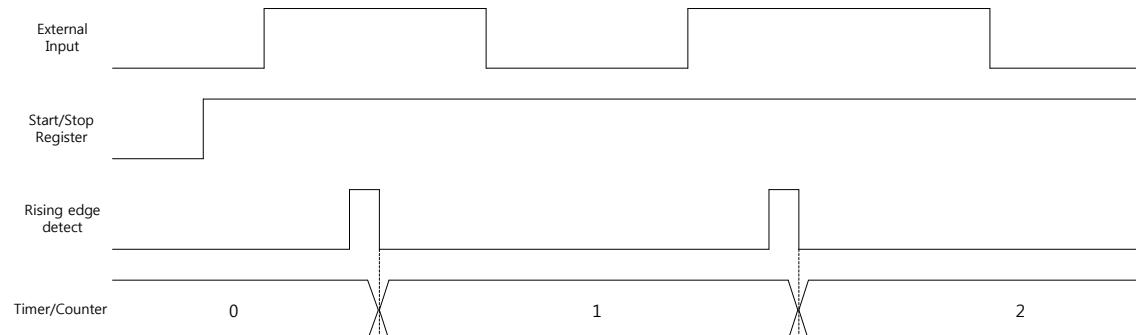


Figure 30 Counter mode with rising edge

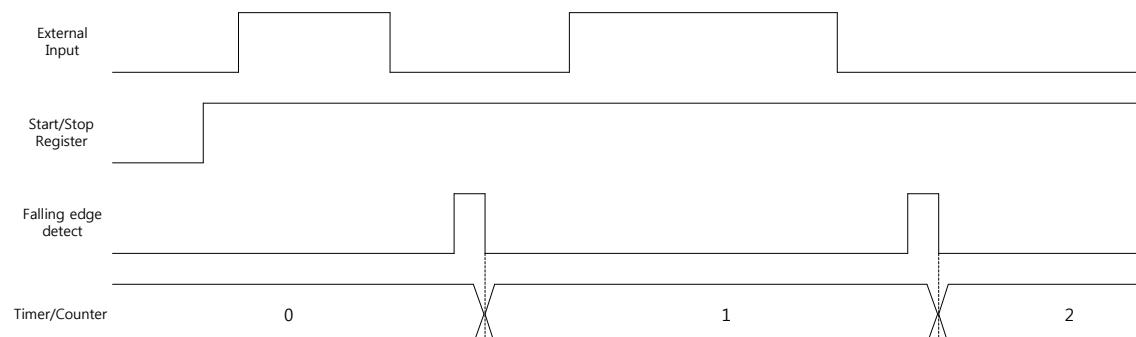


Figure 31 Counter mode with falling edge

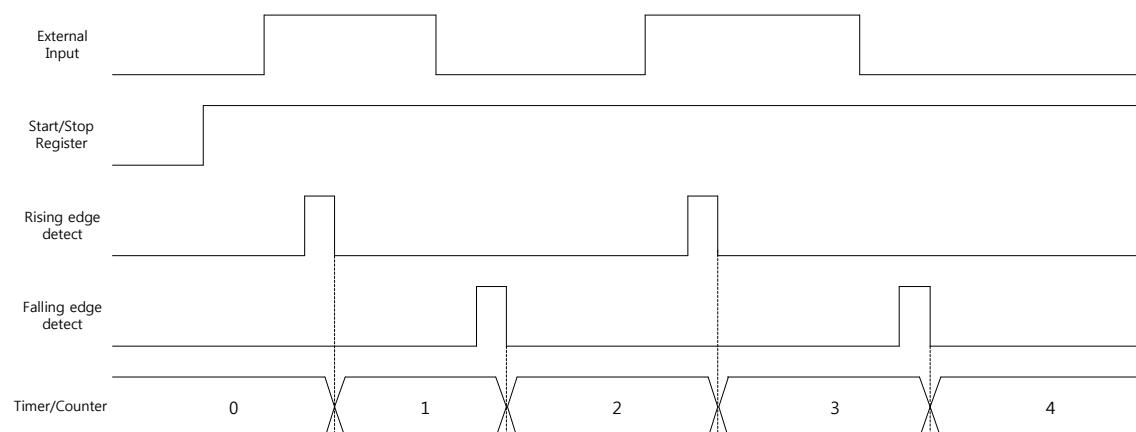


Figure 32 Counter mode with rising and falling edge

Prescaler description

The PWM has 6-bit prescale counter(PC) and the prescaler can divide the Timer/Counter clock frequency. Users can control it by Prescale Register(PR).

Figure 33 and Figure 34 shows some examples of the Timer/Counter timing with prescale register is 2, match register is 2, limit register is 12, timer mode, periodic mode, up-count mode, and no interrupt clear.

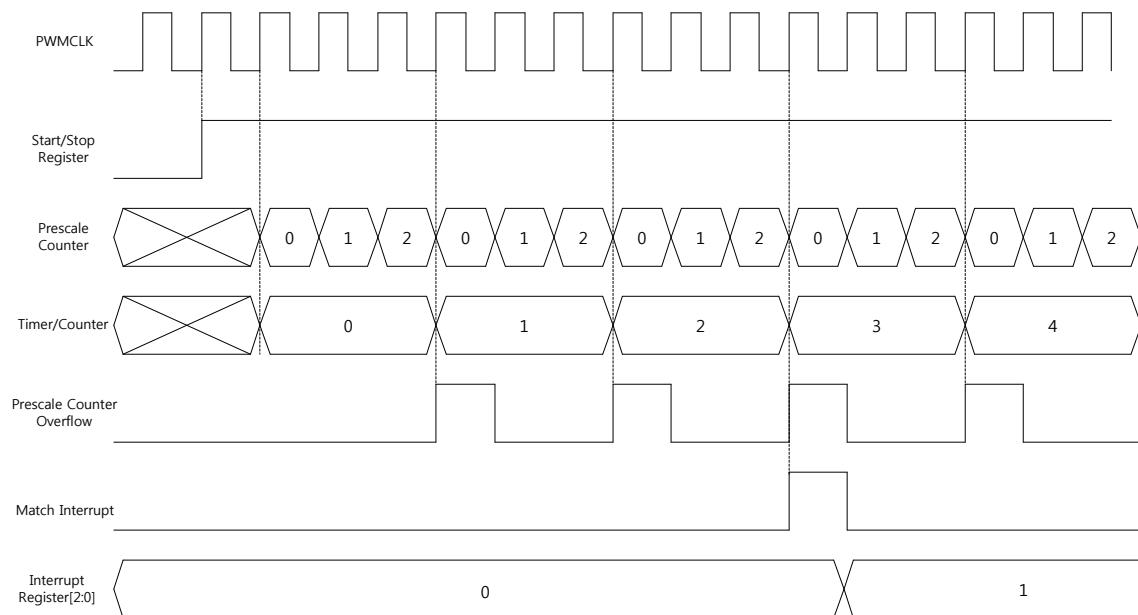


Figure 33 Timer/Counter timing diagram with match interrupt

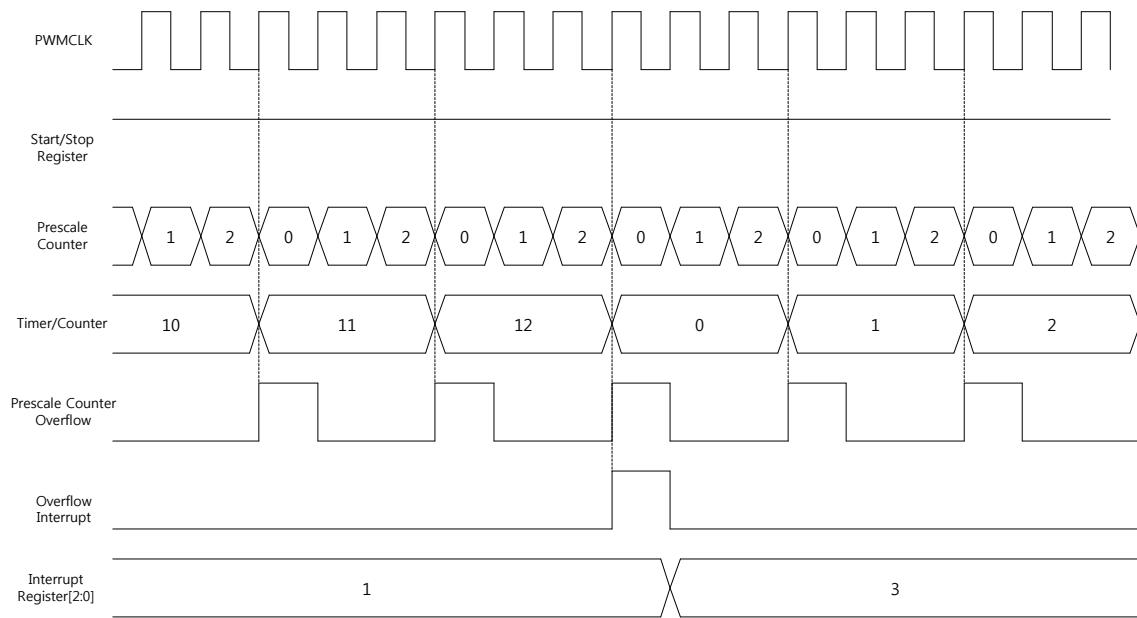


Figure 34 Timer/Counter timing diagram with overflow interrupt

18.3.3 PWM mode

Pulse Width Modulation mode generates a waveform with a period determined by the value of limit register and a duty cycle determined by the value of the match register.

The PWM output becomes always 1 when the Timer/Counter starts to count. Then the PWM output becomes 0 when the Timer/Counter reaches the value of match register. If the Timer/Counter is in periodic mode, the PWM output becomes 1 again when the Timer/Counter reaches the value of limit register. In one-shot mode, the PWM output does not change to 1 but stays 0 and the Timer/Counter stops.

The PWM mode can be selected independently on each channel(0~7) by PWM output enable and external input enable register. The external input pin and PWM output pin are the same, so external input is disabled in PWM mode.

Figure 35 is an example of the PWM output waveform when the Timer/Counter is reached to the value of match register.

Figure 36 is example of the PWM output waveform when to the Timer/Counter is reached to the value of limit register.

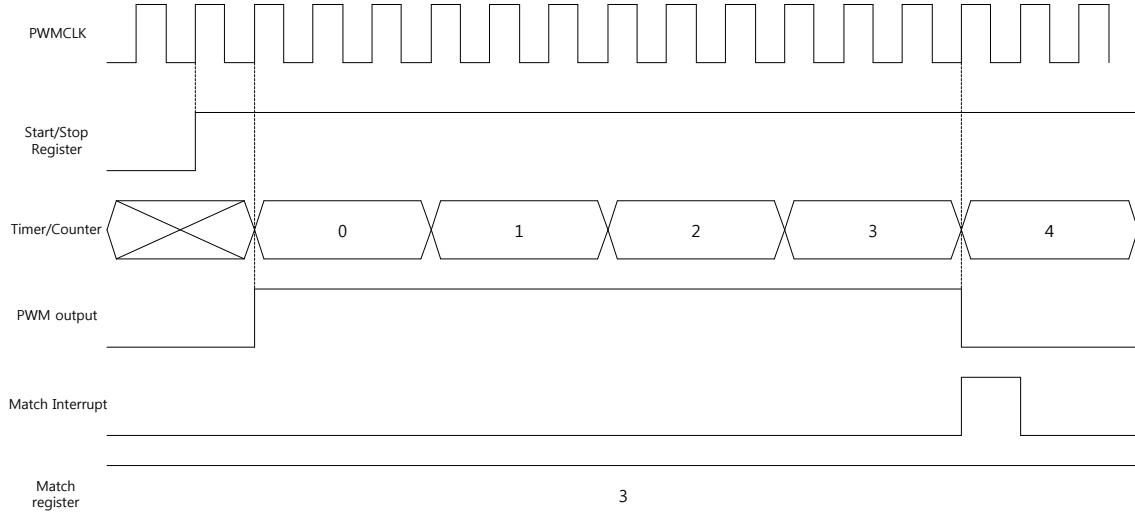


Figure 35 The PWM output up to match register

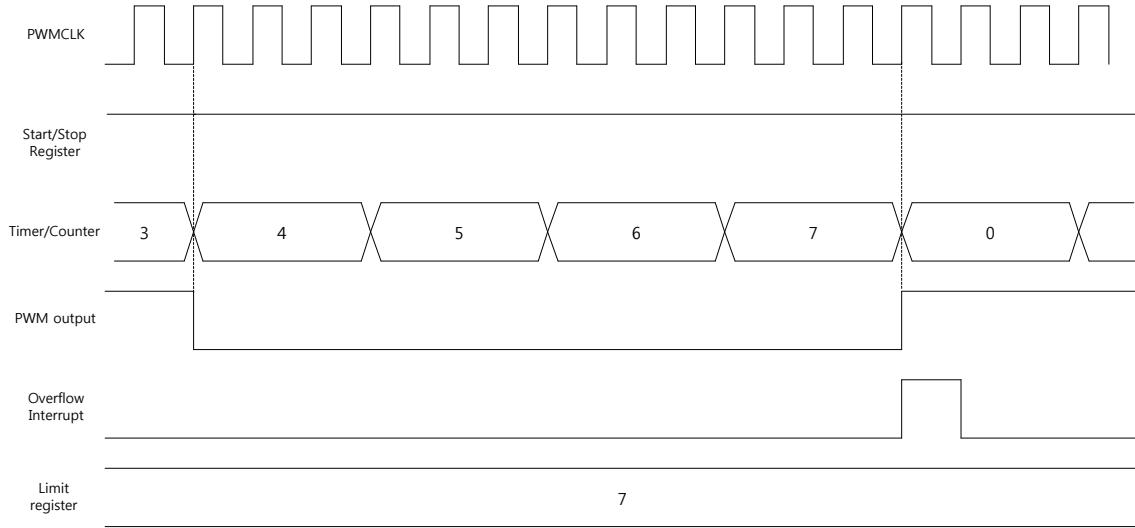


Figure 36 The PWM output up to limit register

If match register is set as 0, the PWM output will be 1 while the Timer/Counter is 0.

If the match register is bigger than the limit register, the PWM output is always 1.

18.3.4 Interrupt

The PWM has 8-bit interrupt enable register(IER) and each bit of IER corresponds to each interrupt of channel. Each PWM channel has Channel-n Interrupt Enable register(CHn_IER). The CHn_IER includes three types of interrupt: match, overflow, and capture. The match interrupt occurs when the Timer/Counter is reached to value of match register. The overflow interrupt occurs when the Timer/Counter is reached to value of limit register. The capture interrupt occurs when external input is entered for capture.

If interrupt occurs, corresponded bit of Channel-x interrupt register(CHn_IR) bit is set and PWM channel-n interrupt signal is generated. All CHn_IR is cleared by channel-n interrupt clear register(CHn_ICR) and then PWM channel-n interrupt signal is cleared.

18.3.5 Dead zone generation

Each PWM channel can output two complementary signals with dead zone time and it can be enabled by Channel-n Dead Zone Enable Register(CHn_DZER). Only 4 channels can be enabled because there are 8 PWM output pins. Channel 0 and 1 are a pair, channel 2 and 3 are a pair, channel 4 and 5 are a pair, and channel 6 and 7 are a pair. If users want to use channel-0 dead zone generation, channel-1 should be disabled. If channel 0 and 1 dead zone generation are enabled both, all outputs are 0. In that case, users should choose 1 channel.

Dead zone time are generated by the value of Channel-n Dead Zone Counter Register(DZCR). The dead zone counter counts up to value of DZCR. During the dead zone time, both complementary signals are both 0. Users have to adjust the signal depending on the devices that are connected to the outputs and their characteristics. If DZCR is bigger than the limit register, main output signal is toggled 0 to 1 and then 1 to 0 while 1 PWMCLK and inverted output signal is always 0.

Figure 37 shows two complementary PWM outputs with dead zone time. During dead zone time, both outputs are 0. Figure 38 shows a more detailed timing with dead zone counter. The dead zone counter and the Timer/Counter starts to count together and PWM output is 0 until dead zone counter is reached to value of dead zone counter register. The PWM output becomes 1 and 0 when the Timer/Counter is reached to value of match register. The inverted PWM output is also 0 until dead zone counter is reached to value of dead zone counter register. Then inverted PWM output becomes 1 after dead zone counter is reached to the value of dead zone counter register.

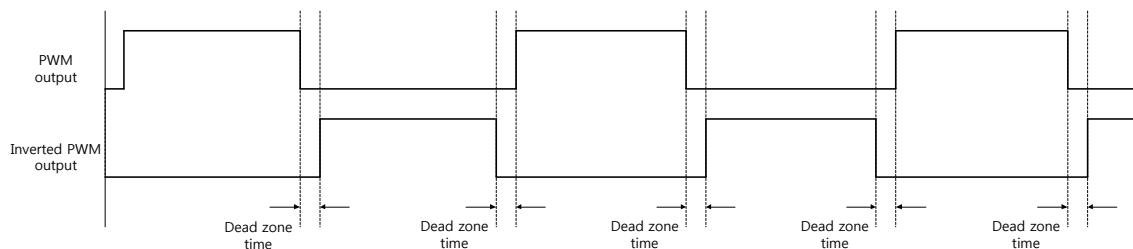


Figure 37 PWM waveform with dead zone time

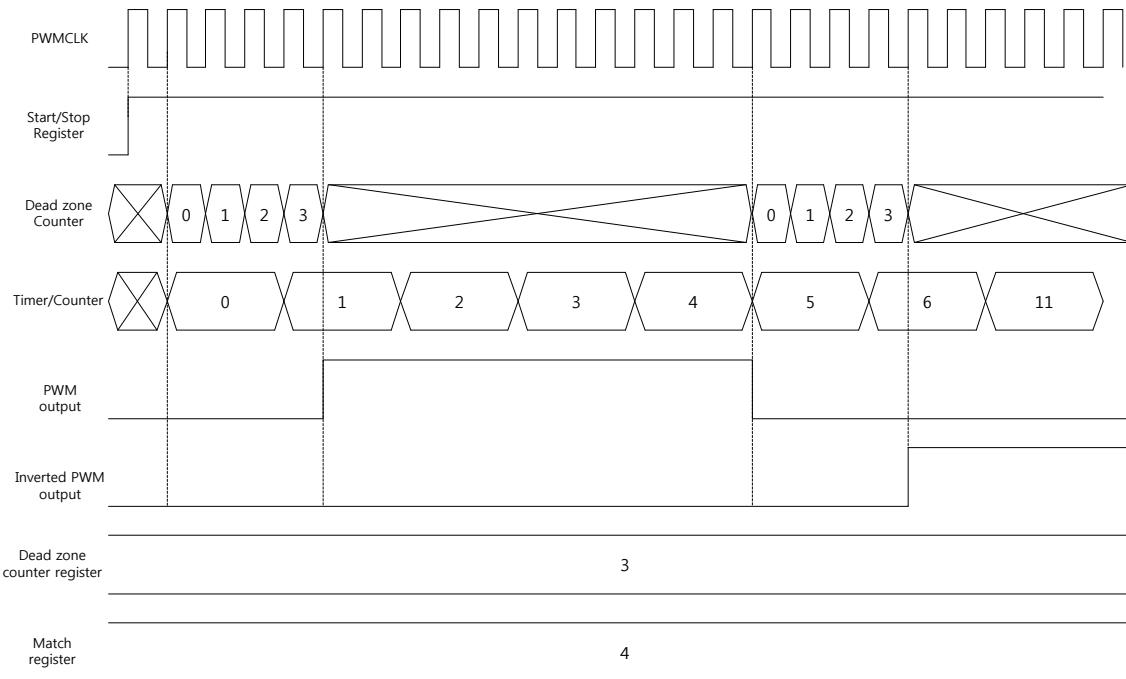


Figure 38 PWM waveform with dead zone counter

18.3.6 Capture event

Each PWM channel can capture its Timer/Counter value when an external input signal changes. Any channel could use any method of rising or falling edges. If capture interrupt is enabled, capture interrupt occurs when the external input signal is toggled. The Timer/Counter value is saved in Channel-n Capture Register(CHn_CR) and the capture register is not overwritten until capture interrupt is cleared. Figure 39 shows the capture event timing diagram. There is no interrupt clear, so second capture does not save during second rising edge detection.

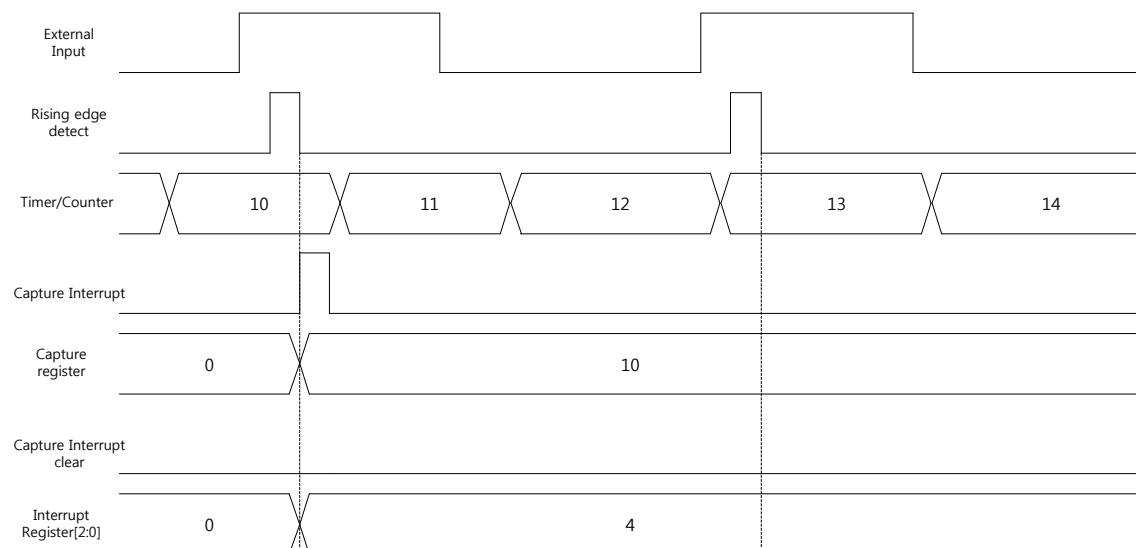


Figure 39 Capture event with no interrupt clear

Figure 40 shows, also, capture event timing diagram with interrupt clear. The second capture is saved at the second rising edge detection because there is interrupt clear.

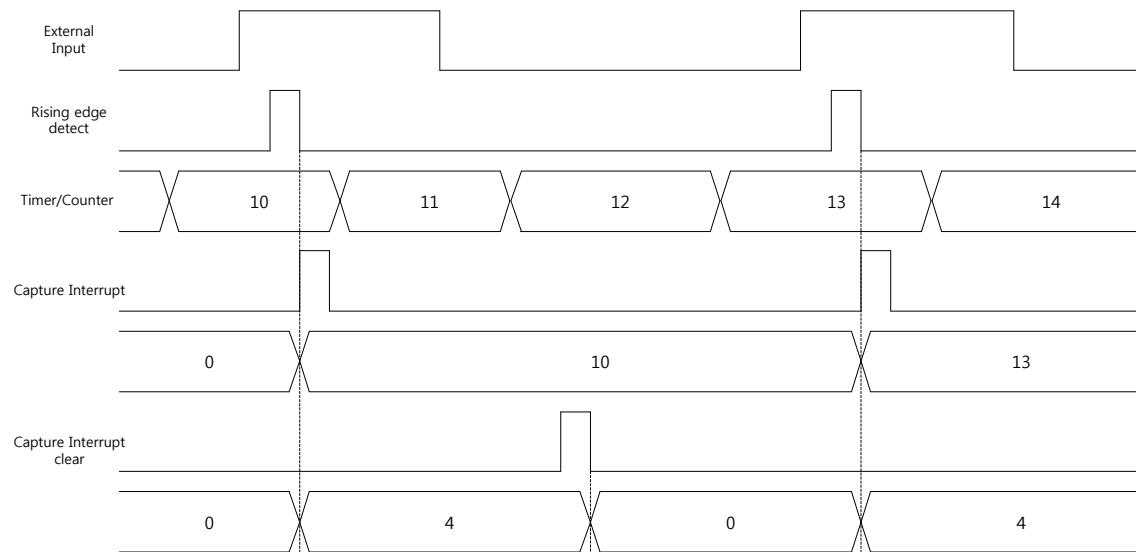


Figure 40 Capture event with interrupt clear

18.3.7 How to set the PWM

Figure 41 shows the PWM setting flow step by step.

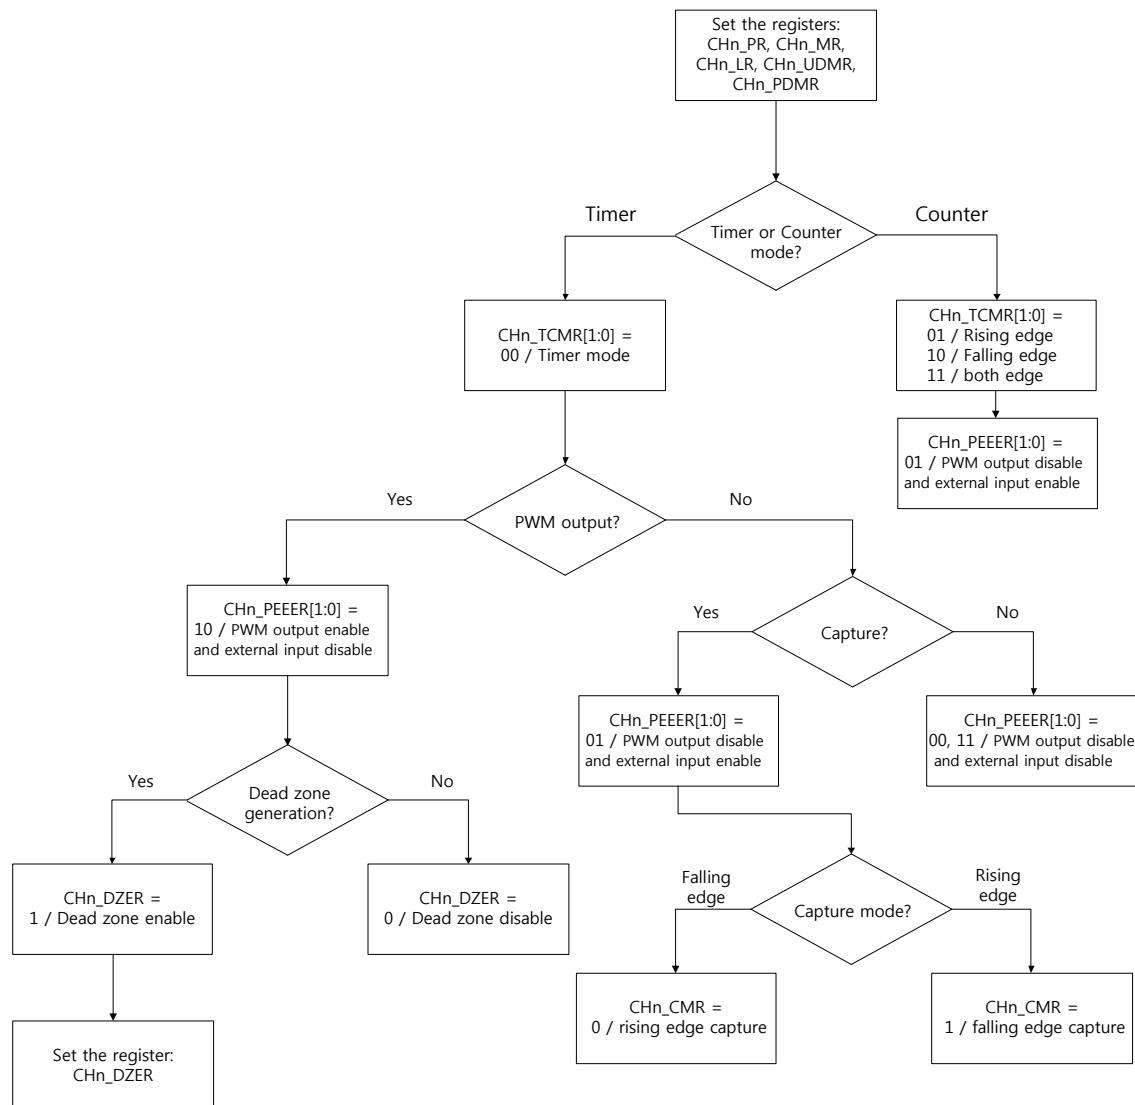


Figure 41 The PWM setting flow

18.4 PWM Channel-0 Registers (Base address : 0x4000_5000)

18.4.1 Channel-0 interrupt register(PWMCH0IR)

Base address : 0x4000_5000

Address offset : 0x00

Reset value : 0x0000_0000

31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	
res																
15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0	
res	CI	OI	MI													
														R	R	R

[0] MI - Match Interrupt

This bit is set by hardware and cleared by interrupt clear register.

0 : Match interrupt does not occur.

1 : Match interrupt occurs.

[1] OI - Overflow Interrupt

This bit is set by hardware and cleared by interrupt clear register.

0 : Overflow interrupt does not occur.

1 : Overflow interrupt occurs.

[2] CI - Capture Interrupt

This bit is set by hardware and cleared by interrupt clear register.

0 : Capture interrupt does not occur.

1 : Capture interrupt occurs.

18.4.2 Channel-0 interrupt enable register(PWMCH0IER)

Base address : 0x4000_5000

Address offset : 0x04

Reset value : 0x0000_0000

31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	
res																
15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0	
res	CIE	OIE	MIE													
														R/W	R/W	R/W

[0] MIE - Match Interrupt Enabled.

0 : Match interrupt is not enabled.

1 : Match interrupt is enabled.

[1] OIE - Overflow Interrupt Enable.

0 : Overflow interrupt is not enabled.

1 : Overflow interrupt is enabled.

[2] CIE - Capture Interrupt Enable.

0 : Capture interrupt is not enabled.

1 : Capture interrupt is enabled.

18.4.3 Channel-0 interrupt clear register(PWMCH0ICR)

Base address : 0x4000_5000

Address offset : 0x08

31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16
res															

15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
res	CIC	OIC	MIC												
													W	W	W

This bit is set by software, cleared by hardware when a capture interrupt becomes 0.

[0] MIC - Match Interrupt

0 : No action.

1 : Match interrupt is cleared.

[1] OIC - Overflow Interrupt

0 : No action.

1 : Overflow Interrupt is cleared.

[2] CIC - Capture Interrupt Clear.

0 : No action.

1 : Capture Interrupt is cleared.

18.4.4 Channel-0 Timer/Counter Register (PWMCH0TCR)

Base address : 0x4000_5000

Address offset : 0x0C

Reset value : 0x0000_0000

31	TCR	0
----	-----	---

[31:0] TCR - Timer/Counter register

Timer/Counter register. These register hold the current values of the Timer/Counter(TC). The TC is incremented every PR cycles. When the TC is reached to value of match register, the match interrupt is occurred and PWM output waveform becomes 0. When the TC is reached to the value of limit register, the overflow interrupt is occurred, the TC is reset as 0.

18.4.5 Channel-0 Prescale Counter Register (PWMCH0PCR)

Base address : 0x4000_5000

Address offset : 0x10

Reset value : 0x0000_0000

31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16
res															

15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
res															

[5:0] PC - Prescale Counter register

Prescale Counter register. These registers hold the current values of prescale counter(PC). The PC is incremented to the value stored in PR. When the PC is reached to PR, the TC is incremented and the PC is reset as 0.

18.4.6 Channel-0 Prescale Register (PWMCH0PR)

Base address : 0x4000_5000

Address offset : 0x14

Reset value : 0x0000_0000

31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16
res															

15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
res															

									R/W
--	--	--	--	--	--	--	--	--	-----

[5 - 0] PR - Prescale Register

Prescale register. The PC is incremented when the PC is reached to the PR.

18.4.7 Channel-0 Match Register (PWMCH0MR)

Base address : 0x4000_5000

Address offset : 0x18

Reset value : 0x0000_0000

31	0
MR	
R/W	

[31:0] MR - Match Register

Match register. The MR can generate a match interrupt and PWM output waveform becomes 0 when the TC is reached to the MR. Match register should be smaller than limit register(LR). If not, match interrupt is not occurred and PWM output waveform is always 1.

18.4.8 Channel-0 Limit Register (PWMCH0LR)

Base address : 0x4000_5000

Address offset : 0x1C

Reset value : 0x0000_0000

31	0
LR	
R/W	

[31:0] LR - Limit Register

Limit Register. The LR can generate an overflow interrupt and PWM output waveform becomes 1 when the TC is reached to the LR. Match register should be smaller than limit register(LR). If not, match interrupt is not occurred and PWM output waveform is always 1.

18.4.9 Channel-0 Up-Down Mode Register (PWMCH0UDMR)

Base address : 0x4000_5000

Address offset : 0x20

Reset value : 0x0000_0000

31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16
res															

15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
res	UDM														
															R/W

[0] UDM - Up-Down mode

0 : TC runs up count.

1 : TC runs down count.

18.4.10 Channel-0 Timer/Counter Mode Register (PWMCH0TCMR)

Base address : 0x4000_5000

Address offset : 0x24

Reset value : 0x0000_0000

31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16
res															

15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
res	TCM														
															R/W

[1:0] TCM - Timer/Counter mode

00 : Timer mode.

01 : Counter mode with counting driven by rising edge external input .

10 : Counter mode with counting driven by falling edge external input.

11 : Counter mode with counting driven by rising and falling edge external input.

18.4.11 Channel-0 PWM output Enable and External input Enable Register (PWMCH0PEEER)

Base address : 0x4000_5000

Address offset : 0x28

Reset value : 0x0000_0000

31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16

res																

15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0	
res	PEEE		R/W													

[1:0] PEEE - PWM output Enable and External input Enable

00 : PWM output is disable and external input is disable.

01 : PWM output is disable and external input is enable.

10 : PWM output is enable and external input is disable.

18.4.12 Channel-0 Capture Mode Register (PWMCH0CMR)

Base address : 0x4000_5000

Address offset : 0x2C

Reset value : 0x0000_0000

31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	
res																

15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0	
res	CM															

[0] CM - Capture mode

0 : Timer/Counter is captured when external input signal is rising edge.

1 : Timer/Counter is captured when external input signal is falling edge.

18.4.13 Channel-0 Capture Register (PWMCH0CR)

Base address : 0x4000_5000

Address offset : 0x30

Reset value : 0x0000_0000

31	0
CR	
R	

[31:0] CR - Capture Register

Capture register. The CR is loaded with the value of the TC when external input signal is triggered.

18.4.14 Channel-0 Periodic Mode Register (PWMCH0PDMR)

Base address : 0x4000_5000

Address offset : 0x34

Reset value : 0x0000_0000

31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16
res															

15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
res	PDM														
															R/W

[0] PDM - Periodic Mode

0 : Periodic mode. When the TC is reached to the LR, the TC returns to 0 and then continues counting periodically.

1 : One-shot mode. When the TC is reached to the LR, the TC returns to 0 and then stops counting.

18.4.15 Channel-0 Dead Zone Enable Register (PWMCH0DZER)

Base address : 0x4000_5000

Address offset : 0x38

Reset value : 0x0000_0000

31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16
res															

15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
res	DZE														
															R/W

[0] DZE - Dead Zone Enable

0 : Dead zone generation is disabled.

1 : Dead zone generation is enabled.

18.4.16 Channel-0 Dead Zone Counter Register (PWMCH0DZCR)

Base address : 0x4000_5000

Address offset : 0x3C

Reset value : 0x0000_0000

31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16
res															

15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
res	res	res	res	res	res										DZC
															R/W

[9:0] DZC - Dead Zone Counter value

Dead zone generation counter value register. If the DZE bit in DZER is 1, dead zone counter counts to this value and during this time, the two PWM output waveforms are all 0.

18.5 Register map

The following Table 21 summarizes the PWM Channel-0 registers.

Table 21 PWM channel 0 register map and reset values

18.6 PWM Channel-1 Registers (Base address : 0x4000_5100)

18.6.1 Channel-1 interrupt register(PWMCH1IR)

Base address : 0x4000_5100

Address offset : 0x00

Reset value : 0x0000_0000

31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16
res															

15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
res	CI	OI													
													R	R	R

[0] MI - Match Interrupt

This bit is set by hardware and cleared by interrupt clear register.

0 : Match interrupt does not occur.

1 : Match interrupt occurs.

[1] OI - Overflow Interrupt

This bit is set by hardware and cleared by interrupt clear register.

0 : Overflow interrupt does not occur.

1 : Overflow interrupt occurs.

[2] CI - Capture Interrupt

This bit is set by hardware and cleared by interrupt clear register.

0 : Capture interrupt does not occur.

1 : Capture interrupt occurs.

18.6.2 Channel-1 interrupt enable register(PWMCH1IER)

Base address : 0x4000_5100

Address offset : 0x04

Reset value : 0x0000_0000

31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16
res															

15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
res	CIE	OIE	MIE												
													R/W	R/W	R/W

[0] MIE - Match Interrupt Enabled.

0 : Match interrupt is not enabled.

1 : Match interrupt is enabled.

[1] OIE - Overflow Interrupt Enable.

0 : Overflow interrupt is not enabled.

1 : Overflow interrupt is enabled.

[2] CIE - Capture Interrupt Enable.

0 : Capture interrupt is not enabled.

1 : Capture interrupt is enabled.

18.6.3 Channel-1 interrupt clear register(PWMCH1ICR)

Base address : 0x4000_5100

Address offset : 0x08

31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16
res															

15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
res	CIC	OIC	MIC												
													W	W	W

This bit is set by software, cleared by hardware when a capture interrupt becomes 0.

[0] MIC - Match Interrupt

0 : No action.

1 : Match interrupt is cleared.

[1] OIC - Overflow Interrupt

0 : No action.

1 : Overflow Interrupt is cleared.

[2] CIC - Capture Interrupt Clear.

0 : No action.

1 : Capture Interrupt is cleared.

18.6.4 Channel-1 Timer/Counter Register (PWMCH1TCR)

Base address : 0x4000_5100

Address offset : 0x0C

Reset value : 0x0000_0000

31

0

TCR

R

[31:0] TCR - Timer/Counter register

Timer/Counter register. These register hold the current values of the Timer/Counter(TC). The TC is incremented every PR cycles. When the TC is reached to value of match register, the match interrupt is occurred and PWM output waveform becomes 0. When the TC is reached to the value of limit register, the overflow interrupt is occurred, the TC is reset as 0.

18.6.5 Channel-1 Prescale Counter Register (PWMCH1PCR)

Base address : 0x4000_5100

Address offset : 0x10

Reset value : 0x0000_0000

31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16
res															

15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
res					PCR										
															R

[5:0] PC - Prescale Counter register

Prescale Counter register. These registers hold the current values of prescale counter(PC). The PC is incremented to the value stored in PR. When the PC is reached to PR, the TC is incremented and the PC is reset as 0.

18.6.6 Channel-1 Prescale Register (PWMCH1PR)

Base address : 0x4000_5100

Address offset : 0x14

Reset value : 0x0000_0000

31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16
res															

15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
res		PR													
												R/W			

[5: 0] PR - Prescale Register

Prescale register. The PC is incremented when the PC is reached to the PR.

18.6.7 Channel-1 Match Register (PWMCH1MR)

Base address : 0x4000_5100

Address offset : 0x18

Reset value : 0x0000_0000

31	0
MR	
R/W	

[31:0] MR - Match Register

Match register. The MR can generate a match interrupt and PWM output waveform becomes 0 when the TC is reached to the MR. Match register should be smaller than limit register(LR). If not, match interrupt is not occurred and PWM output waveform is always 1.

18.6.8 Channel-1 Limit Register (PWMCH1LR)

Base address : 0x4000_5100

Address offset : 0x1C

Reset value : 0x0000_0000

31	0
LR	
R/W	

[31:0] LR - Limit Register

Limit Register. The LR can generate an overflow interrupt and PWM output waveform becomes 1 when the TC is reached to the LR. Match register should be smaller than limit register(LR). If not, match interrupt is not occurred and PWM output waveform is always 1.

18.6.9 Channel-1 Up-Down Mode Register (PWMCH1UDMR)

Base address : 0x4000_5100

Address offset : 0x20

Reset value : 0x0000_0000

31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16
res															

15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
res	UDM														
															R/W

[0] UDM - Up-Down mode

0 : TC runs up count.

1 : TC runs down count.

18.6.10 Channel-1 Timer/Counter Mode Register (PWMCH1TCMR)

Base address : 0x4000_5100

Address offset : 0x24

Reset value : 0x0000_0000

31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16
res															

15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
res	TCM														
															R/W

[1:0] TCM - Timer/Counter mode

00 : Timer mode.

01 : Counter mode with counting driven by rising edge external input .

10 : Counter mode with counting driven by falling edge external input.

11 : Counter mode with counting driven by rising and falling edge external input.

18.6.11 Channel-1 PWM output Enable and External input Enable Register (PWMCH1PEEER)

Base address : 0x4000_5100

Address offset : 0x28

Reset value : 0x0000_0000

31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16
res															

15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
res	PEEE														
															R/W

[1:0] PEEE - PWM output Enable and External input Enable

00 : PWM output is disable and external input is disable.

01 : PWM output is disable and external input is enable.

10 : PWM output is enable and external input is disable.

18.6.12 Channel-1 Capture Mode Register (PWMCH1CMR)

Base address : 0x4000_5100

Address offset : 0x2C

Reset value : 0x0000_0000

31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16
res															

15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
res	CM														
															R/W

[0] CM - Capture mode

0 : Timer/Counter is captured when external input signal is rising edge.

1 : Timer/Counter is captured when external input signal is falling edge.

18.6.13 Channel-1 Capture Register (PWMCH1CR)

Base address : 0x4000_5100

Address offset : 0x30

Reset value : 0x0000_0000

31	0
CR	
R	

[31:0] CR - Capture Register

Capture register. The CR is loaded with the value of the TC when external input signal is triggered.

18.6.14 Channel-1 Periodic Mode Register (PWMCH1PDMR)

Base address : 0x4000_5100

Address offset : 0x34

Reset value : 0x0000_0000

31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16
res															

15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
res	PDM														
															R/W

[0] PDM - Periodic Mode

0 : Periodic mode. When the TC is reached to the LR, the TC returns to 0 and then continues counting periodically.

1 : One-shot mode. When the TC is reached to the LR, the TC returns to 0 and then stops counting.

18.6.15 Channel-1 Dead Zone Enable Register (PWMCH1DZER)

Base address : 0x4000_5100

Address offset : 0x38

Reset value : 0x0000_0000

31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16
res															

15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
res	DZE														
															R/W

[0] DZE - Dead Zone Enable

0 : Dead zone generation is disabled.

1 : Dead zone generation is enabled.

18.6.16 Channel-1 Dead Zone Counter Register (PWMCH1DZCR)

Base address : 0x4000_5100

Address offset : 0x3C

Reset value : 0x0000_0000

31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16
res															

15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
res	res	res	res	res	res							DZC			
												R/W			

[9:0] DZC - Dead Zone Counter value

Dead zone generation counter value register. If the DZE bit in DZER is 1, dead zone counter counts to this value and during this time, the two PWM output waveforms are all 0.

18.7 Register map

The following Table 22 summarizes the PWM Channel-1 registers.

Table 22 PWM channel 1 register map and reset values

18.8 PWM Channel-2 Registers (Base address : 0x4000_5200)

18.8.1 Channel-2 interrupt register(PWMCH2IR)

Base address : 0x4000_5200

Address offset : 0x00

Reset value : 0x0000_0000

31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16
res															

15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
res	CI	OI													
													R	R	R

[0] MI - Match Interrupt

This bit is set by hardware and cleared by interrupt clear register.

0 : Match interrupt does not occur.

1 : Match interrupt occurs.

[1] OI - Overflow Interrupt

This bit is set by hardware and cleared by interrupt clear register.

0 : Overflow interrupt does not occur.

1 : Overflow interrupt occurs.

[2] CI - Capture Interrupt

This bit is set by hardware and cleared by interrupt clear register.

0 : Capture interrupt does not occur.

1 : Capture interrupt occurs.

18.8.2 Channel-2 interrupt enable register(PWMCH2IER)

Base address : 0x4000_5200

Address offset : 0x04

Reset value : 0x0000_0000

31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16
res															

15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
res	CIE	OIE	MIE												
													R/W	R/W	R/W

[0] MIE - Match Interrupt Enabled.

0 : Match interrupt is not enabled.

1 : Match interrupt is enabled.

[1] OIE - Overflow Interrupt Enable.

0 : Overflow interrupt is not enabled.

1 : Overflow interrupt is enabled.

[2] CIE - Capture Interrupt Enable.

0 : Capture interrupt is not enabled.

1 : Capture interrupt is enabled.

18.8.3 Channel-2 interrupt clear register(PWMCH2ICR)

Base address : 0x4000_5200

Address offset : 0x08

31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16
res															

15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
res	CIC	OIC	MIC												
													W	W	W

This bit is set by software, cleared by hardware when a capture interrupt becomes 0.

[0] MIC - Match Interrupt

0 : No action.

1 : Match interrupt is cleared.

[1] OIC - Overflow Interrupt

0 : No action.

1 : Overflow Interrupt is cleared.

[2] CIC - Capture Interrupt Clear.

0 : No action.

1 : Capture Interrupt is cleared.

18.8.4 Channel-2 Timer/Counter Register (PWMCH2TCR)

Base address : 0x4000_5200

Address offset : 0x0C

Reset value : 0x0000_0000

31

0

TCR

R

[31:0] TCR - Timer/Counter register

Timer/Counter register. These register hold the current values of the Timer/Counter(TC). The TC is incremented every PR cycles. When the TC is reached to value of match register, the match interrupt is occurred and PWM output waveform becomes 0. When the TC is reached to the value of limit register, the overflow interrupt is occurred, the TC is reset as 0.

18.8.5 Channel-2 Prescale Counter Register (PWMCH2PCR)

Base address : 0x4000_5200

Address offset : 0x10

Reset value : 0x0000_0000

31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16
res															

15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
res					PCR										
															R

[5:0] PC - Prescale Counter register

Prescale Counter register. These registers hold the current values of prescale counter(PC). The PC is incremented to the value stored in PR. When the PC is reached to PR, the TC is incremented and the PC is reset as 0.

18.8.6 Channel-2 Prescale Register (PWMCH2PR)

Base address : 0x4000_5200

Address offset : 0x14

Reset value : 0x0000_0000

31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16
res															

15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
res		PR													
												R/W			

[5: 0] PR - Prescale Register

Prescale register. The PC is incremented when the PC is reached to the PR.

18.8.7 Channel-2 Match Register (PWMCH2MR)

Base address : 0x4000_5200

Address offset : 0x18

Reset value : 0x0000_0000

31	0
MR	
R/W	

[31:0] MR - Match Register

Match register. The MR can generate a match interrupt and PWM output waveform becomes 0 when the TC is reached to the MR. Match register should be smaller than limit register(LR). If not, match interrupt is not occurred and PWM output waveform is always 1.

18.8.8 Channel-2 Limit Register (PWMCH2LR)

Base address : 0x4000_5200

Address offset : 0x1C

Reset value : 0x0000_0000

31	0
LR	
R/W	

[31:0] LR - Limit Register

Limit Register. The LR can generate an overflow interrupt and PWM output waveform becomes 1 when the TC is reached to the LR. Match register should be smaller than limit register(LR). If not, match interrupt is not occurred and PWM output waveform is always 1.

18.8.9 Channel-2 Up-Down Mode Register (PWMCH2UDMR)

Base address : 0x4000_5200

Address offset : 0x20

Reset value : 0x0000_0000

31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16
res															

15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
res	UDM														
															R/W

[0] UDM - Up-Down mode

0 : TC runs up count.

1 : TC runs down count.

18.8.10 Channel-2 Timer/Counter Mode Register (PWMCH2TCMR)

Base address : 0x4000_5200

Address offset : 0x24

Reset value : 0x0000_0000

31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16
res															

15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
res	TCM														
															R/W

[1:0] TCM - Timer/Counter mode

00 : Timer mode.

01 : Counter mode with counting driven by rising edge external input .

10 : Counter mode with counting driven by falling edge external input.

11 : Counter mode with counting driven by rising and falling edge external input.

18.8.11 Channel-2 PWM output Enable and External input Enable Register (PWMCH2PEER)

Base address : 0x4000_5200

Address offset : 0x28

Reset value : 0x0000_0000

31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16
res															

15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
res	PEEE														
														R/W	

[1:0] PEEE - PWM output Enable and External input Enable

00 : PWM output is disable and external input is disable.

01 : PWM output is disable and external input is enable.

10 : PWM output is enable and external input is disable.

18.8.12 Channel-2 Capture Mode Register (PWMCH2CMR)

Base address : 0x4000_5200

Address offset : 0x2C

Reset value : 0x0000_0000

31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16
res															

15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
res	CM														
															R/W

[0] CM - Capture mode

0 : Timer/Counter is captured when external input signal is rising edge.

1 : Timer/Counter is captured when external input signal is falling edge.

18.8.13 Channel-2 Capture Register (PWMCH2CR)

Base address : 0x4000_5200

Address offset : 0x30

Reset value : 0x0000_0000

31	0
CR	
R	

[31:0] CR - Capture Register

Capture register. The CR is loaded with the value of the TC when external input signal is triggered.

18.8.14 Channel-2 Periodic Mode Register (PWMCH2PDMR)

Base address : 0x4000_5200

Address offset : 0x34

Reset value : 0x0000_0000

31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16
res															

15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
res	PDM														
															R/W

[0] PDM - Periodic Mode

0 : Periodic mode. When the TC is reached to the LR, the TC returns to 0 and then continues counting periodically.

1 : One-shot mode. When the TC is reached to the LR, the TC returns to 0 and then stops counting.

18.8.15 Channel-2 Dead Zone Enable Register (PWMCH2DZER)

Base address : 0x4000_5200

Address offset : 0x38

Reset value : 0x0000_0000

31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16
res															

15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
res	DZE														
															R/W

[0] DZE - Dead Zone Enable

0 : Dead zone generation is disabled.

1 : Dead zone generation is enabled.

18.8.16 Channel-2 Dead Zone Counter Register (PWMCH2DZCR)

Base address : 0x4000_5200

Address offset : 0x3C

Reset value : 0x0000_0000

31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16
res															

15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
res	res	res	res	res	res										DZC
															R/W

[9:0] DZC - Dead Zone Counter value

Dead zone generation counter value register. If the DZE bit in DZER is 1, dead zone counter counts to this value and during this time, the two PWM output waveforms are all 0.

18.9 Register map

The following Table 23 summarizes the PWM Channel-2 registers.

Table 23 PWM channel 2 register map and reset values

18.10 PWM Channel-3 Registers (Base address : 0x4000_5300)

18.10.1 Channel-3 interrupt register(PWMCH3IR)

Base address : 0x4000_5300

Address offset : 0x00

Reset value : 0x0000_0000

31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16
res															

15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
res	CI	OI													
													R	R	R

[0] MI - Match Interrupt

This bit is set by hardware and cleared by interrupt clear register.

0 : Match interrupt does not occur.

1 : Match interrupt occurs.

[1] OI - Overflow Interrupt

This bit is set by hardware and cleared by interrupt clear register.

0 : Overflow interrupt does not occur.

1 : Overflow interrupt occurs.

[2] CI - Capture Interrupt

This bit is set by hardware and cleared by interrupt clear register.

0 : Capture interrupt does not occur.

1 : Capture interrupt occurs.

18.10.2 Channel-3 interrupt enable register(PWMCH3IER)

Base address : 0x4000_5300

Address offset : 0x04

Reset value : 0x0000_0000

31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16
res															

15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
res	CIE	OIE	MIE												
													R/W	R/W	R/W

[0] MIE - Match Interrupt Enabled.

0 : Match interrupt is not enabled.

1 : Match interrupt is enabled.

[1] OIE - Overflow Interrupt Enable.

0 : Overflow interrupt is not enabled.

1 : Overflow interrupt is enabled.

[2] CIE - Capture Interrupt Enable.

0 : Capture interrupt is not enabled.

1 : Capture interrupt is enabled.

18.10.3 Channel-3 interrupt clear register(PWMCH3ICR)

Base address : 0x4000_5300

Address offset : 0x08

31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16
res															

15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
res	CIC	OIC	MIC												
													W	W	W

This bit is set by software, cleared by hardware when a capture interrupt becomes 0.

[0] MIC - Match Interrupt

0 : No action.

1 : Match interrupt is cleared.

[1] OIC - Overflow Interrupt

0 : No action.

1 : Overflow Interrupt is cleared.

[2] CIC - Capture Interrupt Clear.

0 : No action.

1 : Capture Interrupt is cleared.

18.10.4 Channel-3 Timer/Counter Register (PWMCH3TCR)

Base address : 0x4000_5300

Address offset : 0x0C

Reset value : 0x0000_0000

31

0

TCR

R

[31:0] TCR - Timer/Counter register

Timer/Counter register. These register hold the current values of the Timer/Counter(TC). The TC is incremented every PR cycles. When the TC is reached to value of match register, the match interrupt is occurred and PWM output waveform becomes 0. When the TC is reached to the value of limit register, the overflow interrupt is occurred, the TC is reset as 0.

18.10.5 Channel-3 Prescale Counter Register (PWMCH3PCR)

Base address : 0x4000_5300

Address offset : 0x10

Reset value : 0x0000_0000

31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16
res															

15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
res					PCR										
															R

[5:0] PC - Prescale Counter register

Prescale Counter register. These registers hold the current values of prescale counter(PC). The PC is incremented to the value stored in PR. When the PC is reached to PR, the TC is incremented and the PC is reset as 0.

18.10.6 Channel-3 Prescale Register (PWMCH3PR)

Base address : 0x4000_5300

Address offset : 0x14

Reset value : 0x0000_0000

31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16
res															

15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
res		PR													
												R/W			

[5: 0] PR - Prescale Register

Prescale register. The PC is incremented when the PC is reached to the PR.

18.10.7 Channel-3 Match Register (PWMCH3MR)

Base address : 0x4000_5300

Address offset : 0x18

Reset value : 0x0000_0000

31	0
MR	
R/W	

[31:0] MR - Match Register

Match register. The MR can generate a match interrupt and PWM output waveform becomes 0 when the TC is reached to the MR. Match register should be smaller than limit register(LR). If not, match interrupt is not occurred and PWM output waveform is always 1.

18.10.8 Channel-3 Limit Register (PWMCH3LR)

Base address : 0x4000_5300

Address offset : 0x1C

Reset value : 0x0000_0000

31	0
LR	
R/W	

[31:0] LR - Limit Register

Limit Register. The LR can generate an overflow interrupt and PWM output waveform becomes 1 when the TC is reached to the LR. Match register should be smaller than limit register(LR). If not, match interrupt is not occurred and PWM output waveform is always 1.

18.10.9 Channel-3 Up-Down Mode Register (PWMCH3UDMR)

Base address : 0x4000_5300

Address offset : 0x20

Reset value : 0x0000_0000

31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16
res															

15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
res	UDM														
															R/W

[0] UDM - Up-Down mode

0 : TC runs up count.

1 : TC runs down count.

18.10.10 Channel-3 Timer/Counter Mode Register (PWMCH3TCMR)

Base address : 0x4000_5300

Address offset : 0x24

Reset value : 0x0000_0000

31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16
res															

15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
res	TCM														
															R/W

[1:0] TCM - Timer/Counter mode

00 : Timer mode.

01 : Counter mode with counting driven by rising edge external input .

10 : Counter mode with counting driven by falling edge external input.

11 : Counter mode with counting driven by rising and falling edge external input.

18.10.11 Channel-3 PWM output Enable and External input Enable Register (PWMCH3PEEER)

Base address : 0x4000_5300

Address offset : 0x28

Reset value : 0x0000_0000

31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16
res															

15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
res	PEEE														
															R/W

[1:0] PEEE - PWM output Enable and External input Enable

00 : PWM output is disable and external input is disable.

01 : PWM output is disable and external input is enable.

10 : PWM output is enable and external input is disable.

18.10.12 Channel-3 Capture Mode Register (PWMCH3CMR)

Base address : 0x4000_5300

Address offset : 0x2C

Reset value : 0x0000_0000

31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16
res															

15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
res	CM														
															R/W

[0] CM - Capture mode

0 : Timer/Counter is captured when external input signal is rising edge.

1 : Timer/Counter is captured when external input signal is falling edge.

18.10.13 Channel-3 Capture Register (PWMCH3CR)

Base address : 0x4000_5300

Address offset : 0x30

Reset value : 0x0000_0000

31	0
CR	
R	

[31:0] CR - Capture Register

Capture register. The CR is loaded with the value of the TC when external input signal is triggered.

18.10.14 Channel-3 Periodic Mode Register (PWMCH3PDMR)

Base address : 0x4000_5300

Address offset : 0x34

Reset value : 0x0000_0000

31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16
res															

15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
res	PDM														
															R/W

[0] PDM - Periodic Mode

0 : Periodic mode. When the TC is reached to the LR, the TC returns to 0 and then continues counting periodically.

1 : One-shot mode. When the TC is reached to the LR, the TC returns to 0 and then stops counting.

18.10.15 Channel-3 Dead Zone Enable Register (PWMCH3DZER)

Base address : 0x4000_5300

Address offset : 0x38

Reset value : 0x0000_0000

31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16
res															

15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0

res	DZE														
															R/W

[0] DZE - Dead Zone Enable

0 : Dead zone generation is disabled.

1 : Dead zone generation is enabled.

18.10.16 Channel-3 Dead Zone Counter Register (PWMCH3DZCR)

Base address : 0x4000_5300

Address offset : 0x3C

Reset value : 0x0000_0000

31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16
res															

15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
res	res	res	res	res	res										DZC
															R/W

[9:0] DZC - Dead Zone Counter value

Dead zone generation counter value register. If the DZE bit in DZER is 1, dead zone counter counts to this value and during this time, the two PWM output waveforms are all 0.

18.11 Register map

The following Table 24 summarizes the PWM Channel-3 registers.

Table 24 PWM channel 3 register map and reset values

18.12 PWM Channel-4 Registers (Base address : 0x4000_5400)

18.12.1 Channel-4 interrupt register(PWMCH4IR)

Base address : 0x4000_5400

Address offset : 0x00

Reset value : 0x0000_0000

31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16
res															

15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
res	CI	OI													
													R	R	R

[0] MI - Match Interrupt

This bit is set by hardware and cleared by interrupt clear register.

0 : Match interrupt does not occur.

1 : Match interrupt occurs.

[1] OI - Overflow Interrupt

This bit is set by hardware and cleared by interrupt clear register.

0 : Overflow interrupt does not occur.

1 : Overflow interrupt occurs.

[2] CI - Capture Interrupt

This bit is set by hardware and cleared by interrupt clear register.

0 : Capture interrupt does not occur.

1 : Capture interrupt occurs.

18.12.2 Channel-4 interrupt enable register(PWMCH4IER)

Base address : 0x4000_5400

Address offset : 0x04

Reset value : 0x0000_0000

31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16
res															

15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
res	CIE	OIE	MIE												
													R/W	R/W	R/W

[0] MIE - Match Interrupt Enabled.

0 : Match interrupt is not enabled.

1 : Match interrupt is enabled.

[1] OIE - Overflow Interrupt Enable.

0 : Overflow interrupt is not enabled.

1 : Overflow interrupt is enabled.

[2] CIE - Capture Interrupt Enable.

0 : Capture interrupt is not enabled.

1 : Capture interrupt is enabled.

18.12.3 Channel-4 interrupt clear register(PWMCH4ICR)

Base address : 0x4000_5400

Address offset : 0x08

31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16
res															

15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
res	CIC	OIC	MIC												
													W	W	W

This bit is set by software, cleared by hardware when a capture interrupt becomes 0.

[0] MIC - Match Interrupt

0 : No action.

1 : Match interrupt is cleared.

[1] OIC - Overflow Interrupt

0 : No action.

1 : Overflow Interrupt is cleared.

[2] CIC - Capture Interrupt Clear.

0 : No action.

1 : Capture Interrupt is cleared.

18.12.4 Channel-4 Timer/Counter Register (PWMCH4TCR)

Base address : 0x4000_5400

Address offset : 0x0C

Reset value : 0x0000_0000

31	TCR	0
----	-----	---

[31:0] TCR - Timer/Counter register

Timer/Counter register. These register hold the current values of the Timer/Counter(TC). The TC is incremented every PR cycles. When the TC is reached to value of match register, the match interrupt is occurred and PWM output waveform becomes 0. When the TC is reached to the value of limit register, the overflow interrupt is occurred, the TC is reset as 0.

18.12.5 Channel-4 Prescale Counter Register (PWMCH4PCR)

Base address : 0x4000_5400

Address offset : 0x10

Reset value : 0x0000_0000

31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16
res															

15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
res															

[5:0] PC - Prescale Counter register

Prescale Counter register. These registers hold the current values of prescale counter(PC). The PC is incremented to the value stored in PR. When the PC is reached to PR, the TC is incremented and the PC is reset as 0.

18.12.6 Channel-4 Prescale Register (PWMCH4PR)

Base address : 0x4000_5400

Address offset : 0x14

Reset value : 0x0000_0000

31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16
res															

15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
res															

[5: 0] PR - Prescale Register

Prescale register. The PC is incremented when the PC is reached to the PR.

18.12.7 Channel-4 Match Register (PWMCH4MR)

Base address : 0x4000_5400

Address offset : 0x18

Reset value : 0x0000_0000

31	MR	0
	R/W	

[31:0] MR - Match Register

Match register. The MR can generate a match interrupt and PWM output waveform becomes 0 when the TC is reached to the MR. Match register should be smaller than limit register(LR). If not, match interrupt is not occurred and PWM output waveform is always 1.

18.12.8 Channel-4 Limit Register (PWMCH4LR)

Base address : 0x4000_5400

Address offset : 0x1C

Reset value : 0x0000_0000

31	LR	0
	R/W	

[31:0] LR - Limit Register

Limit Register. The LR can generate an overflow interrupt and PWM output waveform becomes 1 when the TC is reached to the LR. Match register should be smaller than limit register(LR). If not, match interrupt is not occurred and PWM output waveform is always 1.

18.12.9 Channel-4 Up-Down Mode Register (PWMCH4UDMR)

Base address : 0x4000_5400

Address offset : 0x20

Reset value : 0x0000_0000

31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16
res															

--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--

15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
res	UDM														
															R/W

[0] UDM - Up-Down mode

0 : TC runs up count.

1 : TC runs down count.

18.12.10 Channel-4 Timer/Counter Mode Register (PWMCH4TCMR)

Base address : 0x4000_5400

Address offset : 0x24

Reset value : 0x0000_0000

31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16
res															

15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
res	TCM														
															R/W

[1:0] TCM - Timer/Counter mode

00 : Timer mode.

01 : Counter mode with counting driven by rising edge external input .

10 : Counter mode with counting driven by falling edge external input.

11 : Counter mode with counting driven by rising and falling edge external input.

18.12.11 Channel-4 PWM output Enable and External input Enable Register (PWMCH4PEEER)

Base address : 0x4000_5400

Address offset : 0x28

Reset value : 0x0000_0000

31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16
res															

--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--

15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
res	PEEE														
														R/W	

[1:0] PEEE - PWM output Enable and External input Enable

00 : PWM output is disable and external input is disable.

01 : PWM output is disable and external input is enable.

10 : PWM output is enable and external input is disable.

18.12.12 Channel-4 Capture Mode Register (PWMCH4CMR)

Base address : 0x4000_5400

Address offset : 0x2C

Reset value : 0x0000_0000

31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16
res															

15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
res	CM														
															R/W

[0] CM - Capture mode

0 : Timer/Counter is captured when external input signal is rising edge.

1 : Timer/Counter is captured when external input signal is falling edge.

18.12.13 Channel-4 Capture Register (PWMCH4CR)

Base address : 0x4000_5400

Address offset : 0x30

Reset value : 0x0000_0000

31	0
CR	
R	

[31:0] CR - Capture Register

Capture register. The CR is loaded with the value of the TC when external input signal is triggered.

18.12.14 Channel-4 Periodic Mode Register (PWMCH4PDMR)

Base address : 0x4000_5400

Address offset : 0x34

Reset value : 0x0000_0000

31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16
res															

15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
res	PDM														
															R/W

[0] PDM - Periodic Mode

0 : Periodic mode. When the TC is reached to the LR, the TC returns to 0 and then continues counting periodically.

1 : One-shot mode. When the TC is reached to the LR, the TC returns to 0 and then stops counting.

18.12.15 Channel-4 Dead Zone Enable Register (PWMCH4DZER)

Base address : 0x4000_5400

Address offset : 0x38

Reset value : 0x0000_0000

31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16
res															

15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
res	DZE														
															R/W

[0] DZE - Dead Zone Enable

0 : Dead zone generation is disabled.

1 : Dead zone generation is enabled.

18.12.16 Channel-4 Dead Zone Counter Register (PWMCH4DZCR)

Base address : 0x4000_5400

Address offset : 0x3C

Reset value : 0x0000_0000

31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16
res															

15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
res	res	res	res	res	res										DZC
															R/W

[9:0] DZC - Dead Zone Counter value

Dead zone generation counter value register. If the DZE bit in DZER is 1, dead zone counter counts to this value and during this time, the two PWM output waveforms are all 0.

18.13 Register map

The following Table 25 summarizes the PWM Channel-4 registers.

Table 25 PWM channel 4 register map and reset values

18.14 PWM Channel-5 Registers (Base address : 0x4000_5500)

18.14.1 Channel-5 interrupt register(PWMCH5IR)

Base address : 0x4000_5500

Address offset : 0x00

Reset value : 0x0000_0000

31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16
res															

15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
res	CI	OI													
													R	R	R

[0] MI - Match Interrupt

This bit is set by hardware and cleared by interrupt clear register.

0 : Match interrupt does not occur.

1 : Match interrupt occurs.

[1] OI - Overflow Interrupt

This bit is set by hardware and cleared by interrupt clear register.

0 : Overflow interrupt does not occur.

1 : Overflow interrupt occurs.

[2] CI - Capture Interrupt

This bit is set by hardware and cleared by interrupt clear register.

0 : Capture interrupt does not occur.

1 : Capture interrupt occurs.

18.14.2 Channel-5 interrupt enable register(PWMCH5IER)

Base address : 0x4000_5500

Address offset : 0x04

Reset value : 0x0000_0000

31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16
res															

15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
res	CIE	OIE	MIE												
													R/W	R/W	R/W

[0] MIE - Match Interrupt Enabled.

0 : Match interrupt is not enabled.

1 : Match interrupt is enabled.

[1] OIE - Overflow Interrupt Enable.

0 : Overflow interrupt is not enabled.

1 : Overflow interrupt is enabled.

[2] CIE - Capture Interrupt Enable.

0 : Capture interrupt is not enabled.

1 : Capture interrupt is enabled.

18.14.3 Channel-5 interrupt clear register(PWMCH5ICR)

Base address : 0x4000_5500

Address offset : 0x08

31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16
res															

15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
res	CIC	OIC	MIC												
													W	W	W

This bit is set by software, cleared by hardware when a capture interrupt becomes 0.

[0] MIC - Match Interrupt

0 : No action.

1 : Match interrupt is cleared.

[1] OIC - Overflow Interrupt

0 : No action.

1 : Overflow Interrupt is cleared.

[2] CIC - Capture Interrupt Clear.

0 : No action.

1 : Capture Interrupt is cleared.

18.14.4 Channel-5 Timer/Counter Register (PWMCH5TCR)

Base address : 0x4000_5500

Address offset : 0x0C

Reset value : 0x0000_0000

31	TCR	0
----	-----	---

[31:0] TCR - Timer/Counter register

Timer/Counter register. These register hold the current values of the Timer/Counter(TC). The TC is incremented every PR cycles. When the TC is reached to value of match register, the match interrupt is occurred and PWM output waveform becomes 0. When the TC is reached to the value of limit register, the overflow interrupt is occurred, the TC is reset as 0.

18.14.5 Channel-5 Prescale Counter Register (PWMCH5PCR)

Base address : 0x4000_5500

Address offset : 0x10

Reset value : 0x0000_0000

31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16
res															

15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
res															

[5:0] PC - Prescale Counter register

Prescale Counter register. These registers hold the current values of prescale counter(PC). The PC is incremented to the value stored in PR. When the PC is reached to PR, the TC is incremented and the PC is reset as 0.

18.14.6 Channel-5 Prescale Register (PWMCH5PR)

Base address : 0x4000_5500

Address offset : 0x14

Reset value : 0x0000_0000

31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16
res															

15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
res															

									R/W
--	--	--	--	--	--	--	--	--	-----

[5: 0] PR - Prescale Register

Prescale register. The PC is incremented when the PC is reached to the PR.

18.14.7 Channel-5 Match Register (PWMCH5MR)

Base address : 0x4000_5500

Address offset : 0x18

Reset value : 0x0000_0000

31	0
MR	
R/W	

[31:0] MR - Match Register

Match register. The MR can generate a match interrupt and PWM output waveform becomes 0 when the TC is reached to the MR. Match register should be smaller than limit register(LR). If not, match interrupt is not occurred and PWM output waveform is always 1.

18.14.8 Channel-5 Limit Register (PWMCH5LR)

Base address : 0x4000_5500

Address offset : 0x1C

Reset value : 0x0000_0000

31	0
LR	
R/W	

[31:0] LR - Limit Register

Limit Register. The LR can generate an overflow interrupt and PWM output waveform becomes 1 when the TC is reached to the LR. Match register should be smaller than limit register(LR). If not, match interrupt is not occurred and PWM output waveform is always 1.

18.14.9 Channel-5 Up-Down Mode Register (PWMCH5UDMR)

Base address : 0x4000_5500

Address offset : 0x20

Reset value : 0x0000_0000

31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16
res															

15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
res	UDM														
															R/W

[0] UDM - Up-Down mode

0 : TC runs up count.

1 : TC runs down count.

18.14.10 Channel-5 Timer/Counter Mode Register (PWMCH5TCMR)

Base address : 0x4000_5500

Address offset : 0x24

Reset value : 0x0000_0000

31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16
res															

15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
res	TCM														
															R/W

[1:0] TCM - Timer/Counter mode

00 : Timer mode.

01 : Counter mode with counting driven by rising edge external input .

10 : Counter mode with counting driven by falling edge external input.

11 : Counter mode with counting driven by rising and falling edge external input.

18.14.11 Channel-5 PWM output Enable and External input Enable Register (PWMCH5PEEER)

Base address : 0x4000_5500

Address offset : 0x28

Reset value : 0x0000_0000

31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16
res															

15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
res	PEEE														
														R/W	

[1:0] PEEE - PWM output Enable and External input Enable

00 : PWM output is disable and external input is disable.

01 : PWM output is disable and external input is enable.

10 : PWM output is enable and external input is disable.

18.14.12 Channel-5 Capture Mode Register (PWMCH5CMR)

Base address : 0x4000_5500

Address offset : 0x2C

Reset value : 0x0000_0000

31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16
res															

15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
res	CM														
															R/W

[0] CM - Capture mode

0 : Timer/Counter is captured when external input signal is rising edge.

1 : Timer/Counter is captured when external input signal is falling edge.

18.14.13 Channel-5 Capture Register (PWMCH5CR)

Base address : 0x4000_5500

Address offset : 0x30

Reset value : 0x0000_0000

31	0
CR	
R	

[31:0] CR - Capture Register

Capture register. The CR is loaded with the value of the TC when external input signal is triggered.

18.14.14 Channel-5 Periodic Mode Register (PWMCH5PDMR)

Base address : 0x4000_5500

Address offset : 0x34

Reset value : 0x0000_0000

31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16
res															

15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
res	PDM														
															R/W

[0] PDM - Periodic Mode

0 : Periodic mode. When the TC is reached to the LR, the TC returns to 0 and then continues counting periodically.

1 : One-shot mode. When the TC is reached to the LR, the TC returns to 0 and then stops counting.

18.14.15 Channel-5 Dead Zone Enable Register (PWMCH5DZER)

Base address : 0x4000_5500

Address offset : 0x38

Reset value : 0x0000_0000

31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16
res															

15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
res	DZE														
															R/W

[0] DZE - Dead Zone Enable

0 : Dead zone generation is disabled.

1 : Dead zone generation is enabled.

18.14.16 Channel-5 Dead Zone Counter Register (PWMCH5DZCR)

Base address : 0x4000_5500

Address offset : 0x3C

Reset value : 0x0000_0000

31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16
res															

15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
res	res	res	res	res	res										DZC
															R/W

[9:0] DZC - Dead Zone Counter value

Dead zone generation counter value register. If the DZE bit in DZER is 1, dead zone counter counts to this value and during this time, the two PWM output waveforms are all 0.

18.15 Register map

The following Table 26 summarizes the PWM Channel-5 registers.

Table 26 PWM channel 5 register map and reset values

18.16 PWM Channel-6 Registers (Base address : 0x4000_5600)

18.16.1 Channel-6 interrupt register(PWMCH6IR)

Base address : 0x4000_5600

Address offset : 0x00

Reset value : 0x0000_0000

31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16
res															

15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
res	CI	OI													
													R	R	R

[0] MI - Match Interrupt

This bit is set by hardware and cleared by interrupt clear register.

0 : Match interrupt does not occur.

1 : Match interrupt occurs.

[1] OI - Overflow Interrupt

This bit is set by hardware and cleared by interrupt clear register.

0 : Overflow interrupt does not occur.

1 : Overflow interrupt occurs.

[2] CI - Capture Interrupt

This bit is set by hardware and cleared by interrupt clear register.

0 : Capture interrupt does not occur.

1 : Capture interrupt occurs.

18.16.2 Channel-6 interrupt enable register(PWMCH6IER)

Base address : 0x4000_5600

Address offset : 0x04

Reset value : 0x0000_0000

31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16
res															

15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
res	CIE	OIE	MIE												
													R/W	R/W	R/W

[0] MIE - Match Interrupt Enabled.

0 : Match interrupt is not enabled.

1 : Match interrupt is enabled.

[1] OIE - Overflow Interrupt Enable.

0 : Overflow interrupt is not enabled.

1 : Overflow interrupt is enabled.

[2] CIE - Capture Interrupt Enable.

0 : Capture interrupt is not enabled.

1 : Capture interrupt is enabled.

18.16.3 Channel-6 interrupt clear register(PWMCH6ICR)

Base address : 0x4000_5600

Address offset : 0x08

31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16
res															

15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
res	CIC	OIC	MIC												
													W	W	W

This bit is set by software, cleared by hardware when a capture interrupt becomes 0.

[0] MIC - Match Interrupt

0 : No action.

1 : Match interrupt is cleared.

[1] OIC - Overflow Interrupt

0 : No action.

1 : Overflow Interrupt is cleared.

[2] CIC - Capture Interrupt Clear.

0 : No action.

1 : Capture Interrupt is cleared.

18.16.4 Channel-6 Timer/Counter Register (PWMCH6TCR)

Base address : 0x4000_5600

Address offset : 0x0C

Reset value : 0x0000_0000

31

0

TCR

R

[31:0] TCR - Timer/Counter register

Timer/Counter register. These register hold the current values of the Timer/Counter(TC). The TC is incremented every PR cycles. When the TC is reached to value of match register, the match interrupt is occurred and PWM output waveform becomes 0. When the TC is reached to the value of limit register, the overflow interrupt is occurred, the TC is reset as 0.

18.16.5 Channel-6 Prescale Counter Register (PWMCH6PCR)

Base address : 0x4000_5600

Address offset : 0x10

Reset value : 0x0000_0000

31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16
res															

15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
res															

[5:0] PC - Prescale Counter register

Prescale Counter register. These registers hold the current values of prescale counter(PC). The PC is incremented to the value stored in PR. When the PC is reached to PR, the TC is incremented and the PC is reset as 0.

18.16.6 Channel-6 Prescale Register (PWMCH6PR)

Base address : 0x4000_5600

Address offset : 0x14

Reset value : 0x0000_0000

31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16
res															

15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
res		PR													
												R/W			

[5:0] PR - Prescale Register

Prescale register. The PC is incremented when the PC is reached to the PR.

18.16.7 Channel-6 Match Register (PWMCH6MR)

Base address : 0x4000_5600

Address offset : 0x18

Reset value : 0x0000_0000

31	0
MR	
R/W	

[31:0] MR - Match Register

Match register. The MR can generate a match interrupt and PWM output waveform becomes 0 when the TC is reached to the MR. Match register should be smaller than limit register(LR). If not, match interrupt is not occurred and PWM output waveform is always 1.

18.16.8 Channel-6 Limit Register (PWMCH6LR)

Base address : 0x4000_5600

Address offset : 0x1C

Reset value : 0x0000_0000

31	0
LR	
R/W	

[31:0] LR - Limit Register

Limit Register. The LR can generate an overflow interrupt and PWM output waveform becomes 1 when the TC is reached to the LR. Match register should be smaller than limit register(LR). If not, match interrupt is not occurred and PWM output waveform is always 1.

18.16.9 Channel-6 Up-Down Mode Register (PWMCH6UDMR)

Base address : 0x4000_5600

Address offset : 0x20

Reset value : 0x0000_0000

31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16
res															

15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
res	UDM														
															R/W

[0] UDM - Up-Down mode

0 : TC runs up count.

1 : TC runs down count.

18.16.10 Channel-6 Timer/Counter Mode Register (PWMCH6TCMR)

Base address : 0x4000_5600

Address offset : 0x24

Reset value : 0x0000_0000

31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16
res															

15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
res	TCM														
															R/W

[1:0] TCM - Timer/Counter mode

00 : Timer mode.

01 : Counter mode with counting driven by rising edge external input .

10 : Counter mode with counting driven by falling edge external input.

11 : Counter mode with counting driven by rising and falling edge external input.

18.16.11 Channel-6 PWM output Enable and External input Enable Register (PWMCH6PEER)

Base address : 0x4000_5600

Address offset : 0x28

Reset value : 0x0000_0000

31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16
res															

15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
res	PEEE														
														R/W	

[1:0] PEEE - PWM output Enable and External input Enable

00 : PWM output is disable and external input is disable.

01 : PWM output is disable and external input is enable.

10 : PWM output is enable and external input is disable.

18.16.12 Channel-6 Capture Mode Register (PWMCH6CMR)

Base address : 0x4000_5600

Address offset : 0x2C

Reset value : 0x0000_0000

31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16
res															

15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
res	CM														
															R/W

[0] CM - Capture mode

0 : Timer/Counter is captured when external input signal is rising edge.

1 : Timer/Counter is captured when external input signal is falling edge.

18.16.13 Channel-6 Capture Register (PWMCH6CR)

Base address : 0x4000_5600

Address offset : 0x30

Reset value : 0x0000_0000

31	0
CR	
R	

[31:0] CR - Capture Register

Capture register. The CR is loaded with the value of the TC when external input signal is triggered.

18.16.14 Channel-6 Periodic Mode Register (PWMCH6PDMR)

Base address : 0x4000_5600

Address offset : 0x34

Reset value : 0x0000_0000

31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16
res															

15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
res	PDM														
															R/W

[0] PDM - Periodic Mode

0 : Periodic mode. When the TC is reached to the LR, the TC returns to 0 and then continues counting periodically.

1 : One-shot mode. When the TC is reached to the LR, the TC returns to 0 and then stops counting.

18.16.15 Channel-6 Dead Zone Enable Register (PWMCH6DZER)

Base address : 0x4000_5600

Address offset : 0x38

Reset value : 0x0000_0000

31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16
res															

15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
res	DZE														
															R/W

[0] DZE - Dead Zone Enable

0 : Dead zone generation is disabled.

1 : Dead zone generation is enabled.

18.16.16 Channel-6 Dead Zone Counter Register (PWMCH6DZCR)

Base address : 0x4000_5600

Address offset : 0x3C

Reset value : 0x0000_0000

31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16
res															

15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
res	res	res	res	res	res										DZC

[9:0] DZC - Dead Zone Counter value

Dead zone generation counter value register. If the DZE bit in DZER is 1, dead zone counter counts to this value and during this time, the two PWM output waveforms are all 0.

18.17 Register map

The following Table 27 summarizes the PWM Channel-5 registers.

Table 27 PWM channel 6 register map and reset values

18.18 PWM Channel-7 Registers (Base address : 0x4000_5700)

18.18.1 Channel-7 interrupt register(PWMCH7IR)

Base address : 0x4000_5700

Address offset : 0x00

Reset value : 0x0000_0000

31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16
res															

15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
res	CI	OI													
													R	R	R

[0] MI - Match Interrupt

This bit is set by hardware and cleared by interrupt clear register.

0 : Match interrupt does not occur.

1 : Match interrupt occurs.

[1] OI - Overflow Interrupt

This bit is set by hardware and cleared by interrupt clear register.

0 : Overflow interrupt does not occur.

1 : Overflow interrupt occurs.

[2] CI - Capture Interrupt

This bit is set by hardware and cleared by interrupt clear register.

0 : Capture interrupt does not occur.

1 : Capture interrupt occurs.

18.18.2 Channel-7 interrupt enable register(PWMCH7IER)

Base address : 0x4000_5700

Address offset : 0x04

Reset value : 0x0000_0000

31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16
res															

15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
res	CIE	OIE	MIE												
													R/W	R/W	R/W

[0] MIE - Match Interrupt Enabled.

0 : Match interrupt is not enabled.

1 : Match interrupt is enabled.

[1] OIE - Overflow Interrupt Enable.

0 : Overflow interrupt is not enabled.

1 : Overflow interrupt is enabled.

[2] CIE - Capture Interrupt Enable.

0 : Capture interrupt is not enabled.

1 : Capture interrupt is enabled.

18.18.3 Channel-7 interrupt clear register(PWMCH7ICR)

Base address : 0x4000_5700

Address offset : 0x08

31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16
res															

15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
res	CIC	OIC	MIC												
													W	W	W

This bit is set by software, cleared by hardware when a capture interrupt becomes 0.

[0] MIC - Match Interrupt

0 : No action.

1 : Match interrupt is cleared.

[1] OIC - Overflow Interrupt

0 : No action.

1 : Overflow Interrupt is cleared.

[2] CIC - Capture Interrupt Clear.

0 : No action.

1 : Capture Interrupt is cleared.

18.18.4 Channel-7 Timer/Counter Register (PWMCH7TCR)

Base address : 0x4000_5700

Address offset : 0x0C

Reset value : 0x0000_0000

31

0

TCR

R

[31:0] TCR - Timer/Counter register

Timer/Counter register. These register hold the current values of the Timer/Counter(TC). The TC is incremented every PR cycles. When the TC is reached to value of match register, the match interrupt is occurred and PWM output waveform becomes 0. When the TC is reached to the value of limit register, the overflow interrupt is occurred, the TC is reset as 0.

18.18.5 Channel-7 Prescale Counter Register (PWMCH7PCR)

Base address : 0x4000_5700

Address offset : 0x10

Reset value : 0x0000_0000

31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16
res															

15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
res					PCR										
															R

[5:0] PC - Prescale Counter register

Prescale Counter register. These registers hold the current values of prescale counter(PC). The PC is incremented to the value stored in PR. When the PC is reached to PR, the TC is incremented and the PC is reset as 0.

18.18.6 Channel-7 Prescale Register (PWMCH7PR)

Base address : 0x4000_5700

Address offset : 0x14

Reset value : 0x0000_0000

31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16
res															

15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
res		PR													
												R/W			

[5:0] PR - Prescale Register

Prescale register. The PC is incremented when the PC is reached to the PR.

18.18.7 Channel-7 Match Register (PWMCH7MR)

Base address : 0x4000_5700

Address offset : 0x18

Reset value : 0x0000_0000

31	0
MR	
R/W	

[31:0] MR - Match Register

Match register. The MR can generate a match interrupt and PWM output waveform becomes 0 when the TC is reached to the MR. Match register should be smaller than limit register(LR). If not, match interrupt is not occurred and PWM output waveform is always 1.

18.18.8 Channel-7 Limit Register (PWMCH7LR)

Base address : 0x4000_5700

Address offset : 0x1C

Reset value : 0x0000_0000

31	0
LR	
R/W	

[31:0] LR - Limit Register

Limit Register. The LR can generate an overflow interrupt and PWM output waveform becomes 1 when the TC is reached to the LR. Match register should be smaller than limit register(LR). If not, match interrupt is not occurred and PWM output waveform is always 1.

18.18.9 Channel-7 Up-Down Mode Register (PWMCH7UDMR)

Base address : 0x4000_5700

Address offset : 0x20

Reset value : 0x0000_0000

31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16
res															

15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
res	UDM														
															R/W

[0] UDM - Up-Down mode

0 : TC runs up count.

1 : TC runs down count.

18.18.10 Channel-7 Timer/Counter Mode Register (PWMCH7TCMR)

Base address : 0x4000_5700

Address offset : 0x24

Reset value : 0x0000_0000

31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16
res															

15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
res	TCM														
															R/W

[1:0] TCM - Timer/Counter mode

00 : Timer mode.

01 : Counter mode with counting driven by rising edge external input .

10 : Counter mode with counting driven by falling edge external input.

11 : Counter mode with counting driven by rising and falling edge external input.

18.18.11 Channel-7 PWM output Enable and External input Enable Register (PWMCH7PEER)

Base address : 0x4000_5700

Address offset : 0x28

Reset value : 0x0000_0000

31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16
res															

15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
res	PEEE														
														R/W	

[1:0] PEEE - PWM output Enable and External input Enable

00 : PWM output is disable and external input is disable.

01 : PWM output is disable and external input is enable.

10 : PWM output is enable and external input is disable.

18.18.12 Channel-7 Capture Mode Register (PWMCH7CMR)

Base address : 0x4000_5700

Address offset : 0x2C

Reset value : 0x0000_0000

31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16
res															

15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
res	CM														
															R/W

[0] CM - Capture mode

0 : Timer/Counter is captured when external input signal is rising edge.

1 : Timer/Counter is captured when external input signal is falling edge.

18.18.13 Channel-7 Capture Register (PWMCH7CR)

Base address : 0x4000_5700

Address offset : 0x30

Reset value : 0x0000_0000

31	0
CR	
R	

[31:0] CR - Capture Register

Capture register. The CR is loaded with the value of the TC when external input signal is triggered.

18.18.14 Channel-7 Periodic Mode Register (PWMCH7PDMR)

Base address : 0x4000_5700

Address offset : 0x34

Reset value : 0x0000_0000

31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16
res															

15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
res	PDM														
															R/W

[0] PDM - Periodic Mode

0 : Periodic mode. When the TC is reached to the LR, the TC returns to 0 and then continues counting periodically.

1 : One-shot mode. When the TC is reached to the LR, the TC returns to 0 and then stops counting.

18.18.15 Channel-7 Dead Zone Enable Register (PWMCH7DZER)

Base address : 0x4000_5700

Address offset : 0x38

Reset value : 0x0000_0000

31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16
res															

15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
res	DZE														
															R/W

[0] DZE - Dead Zone Enable

0 : Dead zone generation is disabled.

1 : Dead zone generation is enabled.

18.18.16 Channel-7 Dead Zone Counter Register (PWMCH7DZCR)

Base address : 0x4000_5700

Address offset : 0x3C

Reset value : 0x0000_0000

31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16
res															

15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
res	res	res	res	res	res										DZC
															R/W

[9:0] DZC - Dead Zone Counter value

Dead zone generation counter value register. If the DZE bit in DZER is 1, dead zone counter counts to this value and during this time, the two PWM output waveforms are all 0.

18.19 Register map

The following Table 28 summarizes the PWM Channel-5 registers.

Table 28 PWM channel 7 register map and reset values

18.20 PWM Common Registers (Base address : 0x4000_5800)

18.20.1 Interrupt Enable Register (IER)

Base address : 0x4000_5800

Address offset : 0x00

Reset value : 0x0000_0000

31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16
res															

15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
res	IE7	IE6	IE5	IE4	IE3	IE2	IE1	IE0							
								R/W							

[0] IE0 - Channel 0 Interrupt Enable

0 : Channel 0 interrupt is disabled.

1 : Channel 0 interrupt is enabled.

[1] IE1 - Channel 1 Interrupt Enable

0 : Channel 1 interrupt is disabled.

1 : Channel 1 interrupt is enabled.

[2] IE2 - Channel 2 Interrupt Enable

0 : Channel 2 interrupt is disabled.

1 : Channel 2 interrupt is enabled.

[3] IE3 - Channel 3 Interrupt Enable

0 : Channel 3 interrupt is disabled.

1 : Channel 3 interrupt is enabled.

[4] IE4 - Channel 4 Interrupt Enable

0 : Channel 4 interrupt is disabled.

1 : Channel 4 interrupt is enabled.

[5] IE5 - Channel 5 Interrupt Enable

0 : Channel 5 interrupt is disabled.

1 : Channel 5 interrupt is enabled.

[6] IE6 - Channel 6 Interrupt Enable

0 : Channel 6 interrupt is disabled.

1 : Channel 6 interrupt is enabled.

[7] IE7 - Channel 7 Interrupt Enable

0 : Channel 7 interrupt is disabled.

1 : Channel 7 interrupt is enabled.

18.20.2 Start/Stop Register (SSR)

Base address : 0x4000_5800

Address offset : 0x04

Reset value : 0x0000_0000

31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16
res															

15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
res	SS7	SS6	SS5	SS4	SS3	SS2	SS1	SS0							
								R/W							

[0] SS0 - Channel 0 Timer/Counter Start or Stop.

0 : Timer/Counter stop.

1 : Timer/Counter start.

[1] SS1 - Channel 1 Timer/Counter Start or Stop.

0 : Timer/Counter stop.

1 : Timer/Counter start.

[2] SS2 - Channel 2 Timer/Counter Start or Stop.

0 : Timer/Counter stop.

1 : Timer/Counter start.

[3] SS3 - Channel 3 Timer/Counter Start or Stop.

0 : Timer/Counter stop.

1 : Timer/Counter start.

[4] SS4 - Channel 4 Timer/Counter Start or Stop.

0 : Timer/Counter stop.

1 : Timer/Counter start.

[5] SS5 - Channel 5 Timer/Counter Start or Stop.

0 : Timer/Counter stop.

1 : Timer/Counter start.

[6] SS6 - Channel 6 Timer/Counter Start or Stop.

0 : Timer/Counter stop.

1 : Timer/Counter start.

[7] SS7 - Channel 7 Timer/Counter Start or Stop.

0 : Timer/Counter stop.

1 : Timer/Counter start.

18.20.3 Pause Register (PSR)

Base address : 0x4000_5800

Address offset : 0x04

Reset value : 0x0000_0000

31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16
res															

15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
res	PS7	PS6	PS5	PS4	PS3	PS2	PS1	PS0							
								R/W							

The Timer/Counter is paused after TC is reached to value of limit register.

[0] PS0 - Channel 0 Timer/Counter Pause.

0 : Timer/Counter is not paused.

1 : Timer/Counter is paused.

[1] PS1 - Channel 1 Timer/Counter Pause.

0 : Timer/Counter is not paused.

1 : Timer/Counter is paused.

[2] PS2 - Channel 2 Timer/Counter Pause.

0 : Timer/Counter is not paused.

1 : Timer/Counter is paused.

[3] PS3 - Channel 3 Timer/Counter Pause.

0 : Timer/Counter is not paused.

1 : Timer/Counter is paused.

[4] PS0 - Channel 4 Timer/Counter Pause.

0 : Timer/Counter is not paused.

1 : Timer/Counter is paused.

[5] PS0 - Channel 5 Timer/Counter Pause.

0 : Timer/Counter is not paused.

1 : Timer/Counter is paused.

[6] PS0 - Channel 6 Timer/Counter Pause.

0 : Timer/Counter is not paused.

1 : Timer/Counter is paused.

[7] PS0 - Channel 7 Timer/Counter Pause.

0 : Timer/Counter is not paused.

1 : Timer/Counter is paused.

18.21 Register map

The following Table 29 summarizes the PWM Common registers.

Table 29 PWM common register map and reset values

Offset	Register	31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
0x00	IER	res																															
	reset value	res																															
0x04	SSR	res																															
	reset value	res																															
0x08	PSR	res																															
	reset value	res																															

Interrupt enable register

Start/Stop register

Pause register

19 Dual timers

19.1 Introduction

The dual timer consists two programmable 32-bit or 16-bit Free-running counters(FRCs) that can generate interrupts when they reach 0. There are two dual timers and 4 FRCs. One dual timer has one interrupt handler, resulting in two interrupts of timers. Also one dual timer has one clock but two clock enable signals. Users can select one repetition modes one-shot or wrapping mode, and wrapping mode consists free-running and periodic mode. Two FRCs are one set so two FRCs has one clock, reset, and interrupt but each FRC has an individual clock enable.

19.2 Features

- One dual timer has two Free-Running Counters(FRCs).
- One dual timer has one interrupt handler and one clock.
- One dual timer has two clock enable signals.
- There are 2 dual timers.
- A 32-bit or a 16-bit down counter.
- One of the following repetition modes: one-shot and wrapping mode.
- One of the following wrapping modes: Free-running and periodic mode.
- There is a prescaler that can divide down the clock rate by 1, 16, or 256.

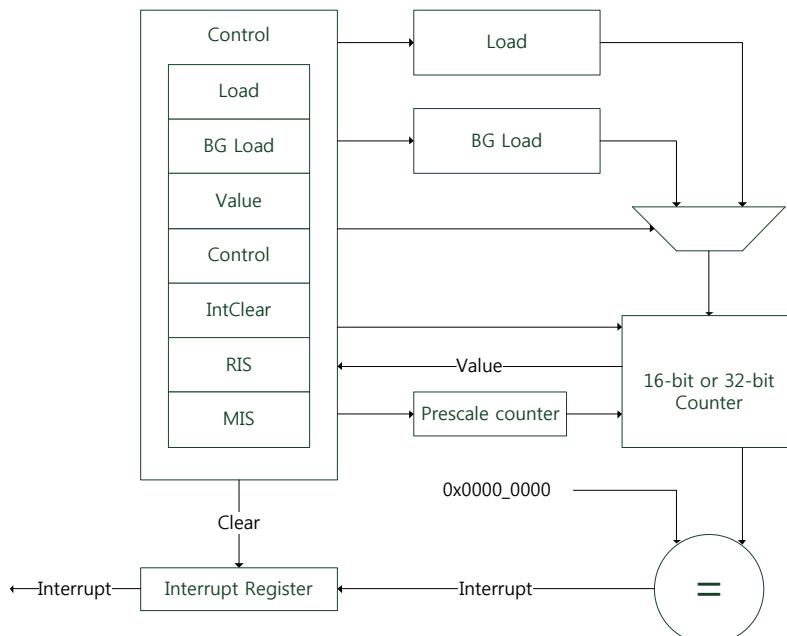


Figure 42 Block diagram of Dualtimer

19.3 Functional description

19.3.1 Clock and clock enable

The dual timers contain PCLK and TIMERCLK clock inputs. PCLK is the main APB system clock and is used by the register interface. TIMERCLK is the input to the prescale units and the decrementing counters. PCLK and TIMERCLK are synchronous.

The dual timers consist two programmable 32-bit Free-Running Counters(FRC) which operate independently. The two timers operate from one TIMERCLK but Each FRC is controlled independently by individual clock enable.

19.3.2 Timer size

Users can select FRC as 16-bit or 32-bit using the control register.

19.3.3 Prescaler

The timer has a prescaler that can divide down the enabled clock rate by 1, 16 or 256.

19.3.4 Repetition mode

There are two repetition mode: one-shot and wrapping mode. Wrapping mode has two modes: free-running and periodic mode.

One-shot mode

The counter generates an interrupt once. When the counter reaches 0, it halts until users reprogram it. Users can do this as below:

- Clear the one-shot count bit in the control register, in which case the count proceeds according to the selection of wrapping mode(free-running or periodic mode).
- Write a new value to the Load Value register.

Wrapping mode

Free-running mode

The counter wraps after reaching its zero value, and continues to count down from the maximum value. This is the default mode.

Periodic mode

The counter generates an interrupt at a constant interval, reloading the original value after wrapping past zero.

19.3.5 Interrupt

An interrupt is generated when the counter reaches 0 and is only cleared when the interrupt clear register is accessed.

The register holds the value until the interrupt is cleared.

Users can mask interrupts by writing 0 to the Interrupt Enable bit in the control register. Users can read the following from status registers:

- Raw interrupt status before masking.
- Final interrupt status after masking.

The interrupts from the individual timers after masking are logically ORed into a combined interrupt.

19.3.6 Operation

The operation of each timer is identical. The timer is loaded by writing to the load register and counts down to 0 if enabled. When a counter is already running, writing to the load register causes the counter to immediately restart at the new value. Writing to the background load value has no effect on the current count. In periodic mode, the counter continues to decrease to 0 and restart from the new load value.

An interrupt is generated when 0 is reached. Users can clear the interrupt by writing to the clear register. If users select one-shot mode, the counter halts when it reaches 0 until users deselect one-shot mode or write a new load value.

Otherwise, after reaching a zero count, if the timer is operating in free-running mode, it continues to decrease from its maximum value. If users select periodic mode, the timer reloads the count value from the load register and continues to decrease. In this mode, the counter effectively generates a periodic interrupt.

19.3.7 How to set the dual timers

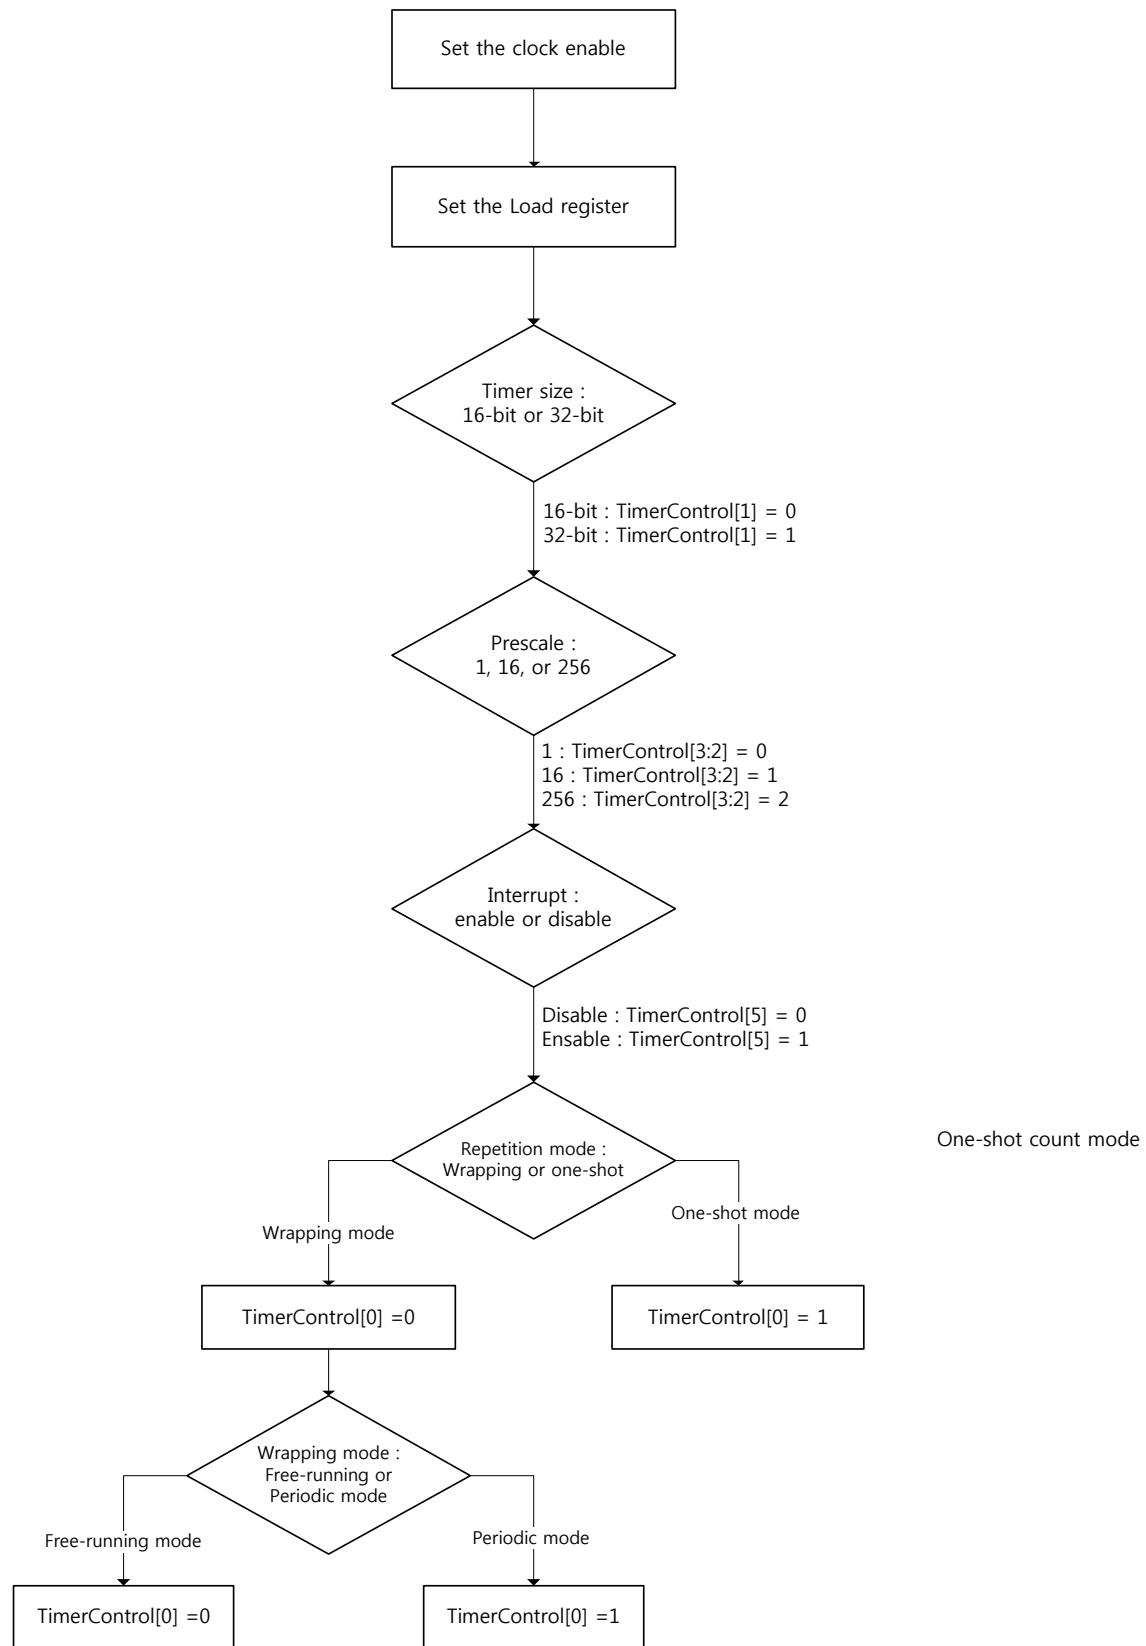


Figure 43 The Dual timer setting flow

19.4 Dual timer0_0 Registers (Base address : 0x4000_1000)

19.4.1 Timer0_0 Load Register(DUALTIMER0_0TimerLoad)

Base address : 0x4000_1000

Address offset : 0x00

Reset value : 0x0000_0000

31	0
TLR	
R/W	

[31:0] TLR - Timer Load Register

This register contains the value from which the counter is to decrement. This is the value used to reload the counter when Periodic mode is enabled, and the current count reaches 0.

19.4.2 Timer0_0 Value Register(DUALTIMER0_0TimerValue)

Base address : 0x4000_1000

Address offset : 0x04

Reset value : 0xFFFF_FFFF

31	0
TVR	
R	

[31:0] TVR - Timer Value Register

This register provides the current value of the decrementing counter.

19.4.3 Timer0_0 Control Register(DUALTIMER0_0TimerControl)

Base address : 0x4000_1000

Address offset : 0x08

Reset value : 0x0000_0020

31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16
res															

15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
res	TE	TM	IE	res	TP	TS	OC								

[0] OC - One-shot Count

0 : Wrapping mode, default.

1 : One-shot mode.

[1] TS - Timer Size

0 : 16-bit counter, default.

1 : 32-bit counter.

[3:2] TP - Timer Prescale.

00 : 0 stages of prescale, clock is divided by 1, default.

01 : 4 stages of prescale, clock is divided by 16.

10 : 8 stages of prescale, clock is divided by 256.

11 : Undefined, do not use.

[5] IE - Interrupt Enable.

0 : Timer Interrupt disable.

1 : Timer Interrupt enabled, default.

[6] TM - Timer Mode.

0 : Timer is in free-running mode, default.

1 : Timer is in periodic mode.

[7] TE - Timer Enable.

0 : Timer disabled, default.

1 : Timer enabled.

19.4.4 Timer0_0 Interrupt Clear Register (DUALTIMER0_0TimerIntClr)

Base address : 0x4000_1000

Address offset : 0x0C

31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16
res															

15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
res	TIC														

[0] TIC - Interrupt Clear

Set to this register clears the interrupt output from the counter.

19.4.5 Timer0_0 Raw Interrupt Status Register (DUALTIMER0_0TimerRIS)

Base address : 0x4000_1000

Address offset : 0x10

Reset value : 0x0000_0000

31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16
res															

15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
res	RIS														
															R

[0] RIS - Raw Interrupt Status Register

This register indicates the raw interrupt status from the counter. This value is ANDed with the timer interrupt enable bit from the Timer Control Register to create the masked interrupt, that is passed to the interrupt output pin.

19.4.6 Timer0_0 Masked Interrupt Status Register (DUALTIMER0_0TimerMIS)

Base address : 0x4000_1000

Address offset : 0x14

Reset value : 0x0000_0000

31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16
res															

15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
res	MIS														
															R

[0] MIS - Masked Interrupt Status Register

This register indicates the masked interrupt status from the counter. This value is the logical AND of the raw interrupt status with the timer interrupt enable bit from the Timer Control Register, and is the same value that is passed to the interrupt output pin.

19.4.7 Timer0_0 Background Load Register (DUALTIMER0_0TimerBGLoad)

Base address : 0x4000_1000

Address offset : 0x18

Reset value : 0x0000_0000

31		0
BGL		
R/W		

[31:0] BGL - Background Load Register

This register contains the value from which the counter is to decrement. This is the value used to reload the counter when Periodic mode is enabled, and the current count reaches 0.

This register provides an alternative method of accessing the TimerLoad Register. The difference is that writes to TimerBGLoad Register do not cause the counter to immediately restart from the new value.

Reading from this register returns the same value returned from TimerLoad Register.

19.5 Register map

The following Table 30 summarizes the Dual timer 0_0 registers.

Table 30 Dual timer 0_0 register map and reset values

Offset	Register	31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0	비고
0x00	DUALTIMER0_0TimerLoad	res	Timer0_0 Load Register																															
	reset value	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0			
0x04	DUALTIMER0_0TimerValue	res	Timer0_0 Value Register																															
	reset value	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1			
0x08	DUALTIMER0_0TimerContro	res	Timer0_0 Control Register																															
	reset value	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	OC		
0x0C	DUALTIMER0_0TimerIntClr	res	Timer0_0 Interrupt Clear Register																															
	reset value	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	Write only register		
0x10	DUALTIMER0_0TimerRIS	res	Timer0_0 Raw Interrupt Status Register																															
	reset value	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0		
0x14	DUALTIMER0_0TimerMIS	res	Timer0_0 Masked Interrupt Status Register																															
	reset value	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0		
0x18	DUALTIMER0_0TimerBGLoad	res	Timer0_0 Background Load Register																															
	reset value	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0		

19.6 Dual timer0_1 Registers (Base address : 0x4000_1020)

19.6.1 Timer0_1 Load Register(DUALTIMER0_1TimerLoad)

Base address : 0x4000_1020

Address offset : 0x00

Reset value : 0x0000_0000

31	0
TLR	
R/W	

[31:0] TLR - Timer Load Register

This register contains the value from which the counter is to decrement. This is the value used to reload the counter when Periodic mode is enabled, and the current count reaches 0.

19.6.2 Timer0_1 Value Register(DUALTIMER0_1TimerValue)

Base address : 0x4000_1020

Address offset : 0x04

Reset value : 0xFFFF_FFFF

31	0
TVR	
R	

[31:0] TVR - Timer Value Register

This register provides the current value of the decrementing counter.

19.6.3 Timer0_1 Control Register(DUALTIMER0_1TimerControl)

Base address : 0x4000_1020

Address offset : 0x08

Reset value : 0x0000_0020

31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16
res															

15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
res	TE	TM	IE	res	TP	TS	OC								
								R/W	R/W	R/W		R/W	R/W	R/W	

[0] OC - One-shot Count

0 : Wrapping mode, default.

1 : One-shot mode.

[1] TS - Timer Size

0 : 16-bit counter, default.

1 : 32-bit counter.

[3:2] TP - Timer Prescale.

00 : 0 stages of prescale, clock is divided by 1, default.

01 : 4 stages of prescale, clock is divided by 16.

10 : 8 stages of prescale, clock is divided by 256.

11 : Undefined, do not use.

[5] IE - Interrupt Enable.

0 : Timer Interrupt disable.

1 : Timer Interrupt enabled, default.

[6] TM - Timer Mode.

0 : Timer is in free-running mode, default.

1 : Timer is in periodic mode.

[7] TE - Timer Enable.

0 : Timer disabled, default.

1 : Timer enabled.

19.6.4 Timer0_1 Interrupt Clear Register (DUALTIMER0_1TimerIntClr)

Base address : 0x4000_1020

Address offset : 0x0C

31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16
res															

15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
res	IC														
															W

[0] IC - Interrupt Clear

Set to the this register clears the interrupt output from the counter.

19.6.5 Timer0_1 Raw Interrupt Status Register (DUALTIMER0_1TimerRIS)

Base address : 0x4000_1020

Address offset : 0x10

Reset value : 0x0000_0000

31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16
res															

15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
res	RIS														
															R

[0] RIS - Raw Interrupt Status Register

This register indicates the raw interrupt status from the counter. This value is ANDed with the timer interrupt enable bit from the Timer Control Register to create the masked interrupt, that is passed to the interrupt output pin.

19.6.6 Timer0_1 Masked Interrupt Status Register (DUALTIMER0_1TimerMIS)

Base address : 0x4000_1020

Address offset : 0x14

Reset value : 0x0000_0000

31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16
res															

15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
res	MIS														
															R

[0] MIS - Masked Interrupt Status Register

This register indicates the masked interrupt status from the counter. This value is the logical AND of the raw interrupt status with the timer interrupt enable bit from the Timer Control Register, and is the same value that is passed to the interrupt output pin.

19.6.7 Timer0_1 Background Load Register (DUALTIMER0_1TimerBGLoad)

Base address : 0x4000_1020

Address offset : 0x18

Reset value : 0x0000_0000

BGL
R/W

[31:0] BGL - Background Load Register

This register contains the value from which the counter is to decrement. This is the value used to reload the counter when Periodic mode is enabled, and the current count reaches 0.

This register provides an alternative method of accessing the TimerLoad Register. The difference is that writes to TimerBGLoad Register do not cause the counter to immediately restart from the new value.

Reading from this register returns the same value returned from TimerLoad Register.

19.7 Register map

The following Table 31 summarizes the Dual timer 0_1 registers.

Table 31 Dual timer 0_1 register map and reset values

19.8 Dual Timer 0 Clock Enable Register (Base address : 0x4000_1080)

19.8.1 Timer0_0 Clock Enable Register (TIMCLKENO_0)

Base address : 0x4000_1080

Address offset : 0x00

Reset value : 0x0000_0000

31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16
res															
15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
res	CE														
															R/W

[0] CE - Clock Enable Register

0 : Clock disable

1 : Clock enable

19.8.2 Timer0_1 Clock Enable Register (TIMCLKENO_1)

Base address : 0x4000_1080

Address offset : 0x20

Reset value : 0x0000_0000

31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16
res															
15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
res	CE														
															R/W

[0] CE - Clock Enable Register

0 : Clock disable

1 : Clock enable

19.9 Register map

The following Table 32 summarizes the Dual timer 0 registers.

Table 32 Dual timer 0 clock enable register map and reset values

19.10 Dual timer1_0 Registers (Base address : 0x4000_2000)

19.10.1 Timer1_0 Load Register(DUALTIMER1_0TimerLoad)

Base address : 0x4000_2000

Address offset : 0x00

Reset value : 0x0000_0000

31	0
TLR	
R/W	

[31:0] TLR - Timer Load Register

This register contains the value from which the counter is to decrement. This is the value used to reload the counter when Periodic mode is enabled, and the current count reaches 0.

19.10.2 Timer1_0 Value Register(DUALTIMER1_0TimerValue)

Base address : 0x4000_2000

Address offset : 0x04

Reset value : 0xFFFF_FFFF

31	0
TVR	
R	

[31:0] TVR - Timer Value Register

This register provides the current value of the decrementing counter.

19.10.3 Timer1_0 Control Register(DUALTIMER1_0TimerControl)

Base address : 0x4000_2000

Address offset : 0x08

Reset value : 0x0000_0020

31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16
res															

15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
res	TE	TM	IE	res	TP	TS	OC								

[0] OC - One-shot Count

0 : Wrapping mode, default.

1 : One-shot mode.

[1] TS - Timer Size

0 : 16-bit counter, default.

1 : 32-bit counter.

[3:2] TP - Timer Prescale.

00 : 0 stages of prescale, clock is divided by 1, default.

01 : 4 stages of prescale, clock is divided by 16.

10 : 8 stages of prescale, clock is divided by 256.

11 : Undefined, do not use.

[5] IE - Interrupt Enable.

0 : Timer Interrupt disable.

1 : Timer Interrupt enabled, default.

[6] TM - Timer Mode.

0 : Timer is in free-running mode, default.

1 : Timer is in periodic mode.

[7] TE - Timer Enable.

0 : Timer disabled, default.

1 : Timer enabled.

19.10.4 Timer1_0 Interrupt Clear Register (DUALTIMER1_0TimerIntClr)

Base address : 0x4000_2000

Address offset : 0x0C

31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16
res															

15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
res	IC														

[0] IC - Interrupt Clear

Set to the this register clears the interrupt output from the counter.

19.10.5 Timer1_0 Raw Interrupt Status Register (DUALTIMER1_0TimerRIS)

Base address : 0x4000_2000

Address offset : 0x10

Reset value : 0x0000_0000

31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16
res															

15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
res	RIS														
															R

[0] RIS - Raw Interrupt Status Register

This register indicates the raw interrupt status from the counter. This value is ANDed with the timer interrupt enable bit from the Timer Control Register to create the masked interrupt, that is passed to the interrupt output pin.

19.10.6 Timer1_0 Masked Interrupt Status Register (DUALTIMER1_0TimerMIS)

Base address : 0x4000_2000

Address offset : 0x14

Reset value : 0x0000_0000

31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16
res															

15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
res	MIS														
															R

[0] MIS - Masked Interrupt Status Register

This register indicates the masked interrupt status from the counter. This value is the logical AND of the raw interrupt status with the timer interrupt enable bit from the Timer Control Register, and is the same value that is passed to the interrupt output pin.

19.10.7 Timer1_0 Background Load Register (DUALTIMER1_0TimerBGLoad)

Base address : 0x4000_2000

Address offset : 0x18

Reset value : 0x0000_0000

31	0
BGL	

R/W

[31:0] BGL - Background Load Register

This register contains the value from which the counter is to decrement. This is the value used to reload the counter when Periodic mode is enabled, and the current count reaches 0.

This register provides an alternative method of accessing the TimerLoad Register. The difference is that writes to TimerBGLoad Register do not cause the counter to immediately restart from the new value.

Reading from this register returns the same value returned from TimerLoad Register.

19.11 Register map

The following Table 33 summarizes the Dual timer 1_0 registers.

Table 33 Dual timer 1_0 register map and reset values

Offset	Register	31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
0x00	DUALTIMER1_0TimerLoad	RES																															
	reset value	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0		
0x04	DUALTIMER1_0TimerValue	RES																															
	reset value	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1		
0x08	DUALTIMER1_0TimerControl	RES																															
	reset value	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0		
0x0C	DUALTIMER1_0TimerIntClr	RES																															
	reset value	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0		
0x10	DUALTIMER1_0TimerRIS	RES																															
	reset value	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0		
0x14	DUALTIMER1_0TimerMIS	RES																															
	reset value	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0		
0x18	DUALTIMER1_0TimerBGLoad	RES																															
	reset value	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0		

19.12 Dual timer1_1 Registers (Base address : 0x4000_2020)

19.12.1 Timer1_1 Load Register(DUALTIMER1_1TimerLoad)

Base address : 0x4000_2020

Address offset : 0x00

Reset value : 0x0000_0000

31	0
TLR	
R/W	

[31:0] TLR - Timer Load Register

This register contains the value from which the counter is to decrement. This is the value used to reload the counter when Periodic mode is enabled, and the current count reaches 0.

19.12.2 Timer1_1 Value Register(DUALTIMER1_1TimerValue)

Base address : 0x4000_2020

Address offset : 0x04

Reset value : 0xFFFF_FFFF

31	0
TVR	
R	

[31:0] TVR - Timer Value Register

This register provides the current value of the decrementing counter.

19.12.3 Timer1_1 Control Register(DUALTIMER1_1TimerControl)

Base address : 0x4000_2020

Address offset : 0x08

Reset value : 0x0000_0020

31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16
res															

15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
res	TE	TM	IE	res	TP	TS	OC								
								R/W	R/W	R/W		R/W	R/W	R/W	

[0] OC - One-shot Count

0 : Wrapping mode, default.

1 : One-shot mode.

[1] TS - Timer Size

0 : 16-bit counter, default.

1 : 32-bit counter.

[3:2] TP - Timer Prescale.

00 : 0 stages of prescale, clock is divided by 1, default.

01 : 4 stages of prescale, clock is divided by 16.

10 : 8 stages of prescale, clock is divided by 256.

11 : Undefined, do not use.

[5] IE - Interrupt Enable.

0 : Timer Interrupt disable.

1 : Timer Interrupt enabled, default.

[6] TM - Timer Mode.

0 : Timer is in free-running mode, default.

1 : Timer is in periodic mode.

[7] TE - Timer Enable.

0 : Timer disabled, default.

1 : Timer enabled.

19.12.4 Timer1_1 Interrupt Clear Register (DUALTIMER1_1TimerIntClr)

Base address : 0x4000_2020

Address offset : 0x0C

31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16
res															

15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
res	IC														

[0] IC - Interrupt Clear

Set to the this register clears the interrupt output from the counter.

19.12.5 Timer1_1 Raw Interrupt Status Register (DUALTIMER1_1TimerRIS)

Base address : 0x4000_2020

Address offset : 0x10

Reset value : 0x0000_0000

31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16
res															

15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
res	RIS														
															R

[0] RIS - Raw Interrupt Status Register

This register indicates the raw interrupt status from the counter. This value is ANDed with the timer interrupt enable bit from the Timer Control Register to create the masked interrupt, that is passed to the interrupt output pin.

19.12.6 Timer1_1 Masked Interrupt Status Register (DUALTIMER1_1TimerMIS)

Base address : 0x4000_2020

Address offset : 0x14

Reset value : 0x0000_0000

31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16
res															

15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
res	MIS														
															R

[0] MIS - Masked Interrupt Status Register

This register indicates the masked interrupt status from the counter. This value is the logical AND of the raw interrupt status with the timer interrupt enable bit from the Timer Control Register, and is the same value that is passed to the interrupt output pin.

19.12.7 Timer1_1 Background Load Register (DUALTIMER1_1TimerBGLoad)

Base address : 0x4000_2020

Address offset : 0x18

Reset value : 0x0000_0000

BGL
R/W

[31:0] BGL - Background Load Register

This register contains the value from which the counter is to decrement. This is the value used to reload the counter when Periodic mode is enabled, and the current count reaches 0.

This register provides an alternative method of accessing the TimerLoad Register. The difference is that writes to TimerBGLoad Register do not cause the counter to immediately restart from the new value.

Reading from this register returns the same value returned from TimerLoad Register.

19.13 Register map

The following Table 34 summarizes the Dual timer 1_1 registers.

Table 34 Dual timer 1_1 register map and reset values

19.14 Dual Timer 1 Clock Enable Register (Base address : 0x4000_2080)

19.14.1 Timer1_0 Clock Enable Register (TIMCLKEN1_0)

Base address : 0x4000_2080

Address offset : 0x00

Reset value : 0x0000_0000

31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16
res															
15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
res	CE														
															R/W

[0] CE - Clock Enable Register

0 : Clock disable

1 : Clock enable

19.14.2 Timer1_1 Clock Enable Register (TIMCLKEN1_1)

Base address : 0x4000_2080

Address offset : 0x20

Reset value : 0x0000_0000

31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16
res															
15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
res	CE														
															R/W

[0] CE - Clock Enable Register

0 : Clock disable

1 : Clock enable

19.15 Register map

The following Table 35 summarizes the Dual timer 1 registers.

Table 35 Dual timer 1 clock enable register map and reset values

20 Watchdog timer

20.1 Introduction

The watchdog is based on a 32-bit down-counter that is initialized from the Reload Register, WDTLoad. The watchdog generates a regular interrupt depending on a programmed value. The counter decreases by one on each positive clock edge of watchdog clock.

The watchdog monitors the interrupt and asserts a reset request signal when the counter reaches 0 and the counter is stopped. On the next enabled watchdog clock edge, the counter is reloaded from the WDTLoad Register and the countdown sequence continues. The watchdog reasserts the reset signal if the interrupt is not cleared by the time the counter next reaches 0.

The watchdog applies a reset to a system in the event of a software failure to provide a way to recover from software crashes. Users can enable or disable the watchdog unit as required.

20.2 Features

- 32-bit down counter.
- Internally resets chip if not periodically reloaded.
- The watchdog timer has lock register to prevent rogue software from disabling the watchdog timer functionality.
- The watchdog timer clock(WDTCLK) and system clock(PCLK) are synchronous.

20.3 Functional description

20.3.1 Clock

The watchdog timer contains PCLK and WDTCLK clock inputs.

PCLK is the main APB system clock and is used by the register interface.

20.3.2 Interrupt and reset request

An interrupt is generated when the counter reaches 0 and is only cleared when the interrupt clear register is accessed.

The register holds the value until the interrupt is cleared.

Reset request is asserted when the counter reaches 0 repeatedly and is not reprogrammed.

Users can mask interrupts by writing 0 to the Interrupt Enable bit in the control register.

Users can read the following from status registers:

- Raw interrupt status, before masking.
- Final interrupt status, after masking.

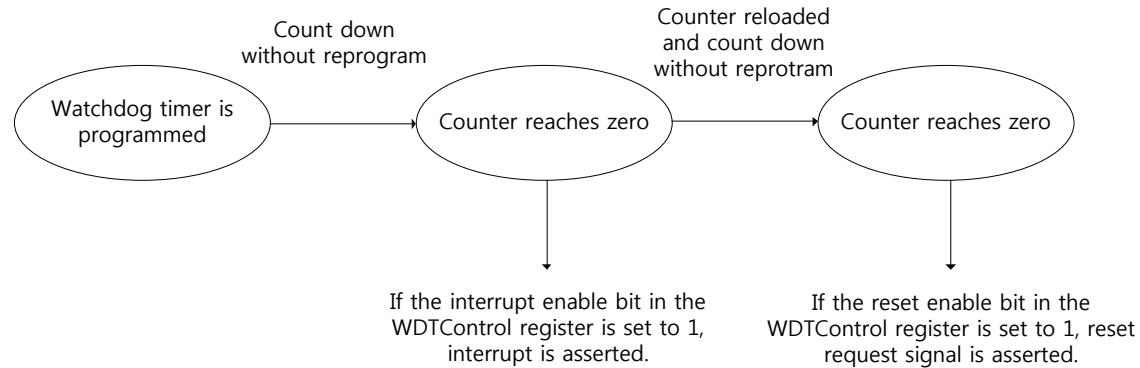


Figure 44 Watchdog timer operation flow diagram

20.4 Watchdog timer Registers (Base address : 0x4000_0000)

20.4.1 Watchdog timer Load Register(WDTLoad)

Address offset : 0x000

Reset value : 0xFFFF_FFFF

31	0
	WLR
	R/W

[31:0] WLR - Watchdog timer Load Register.

This register contains the value from which the counter is to decrement.

When this register is written to, the count is immediately restarted from the new value. The minimum valid value for WDTLoad is 1.

20.4.2 Watchdog timer Value Register(WDTVValue)

Address offset : 0x004

Reset value : 0xFFFF_FFFF

31	0
	WVR
	R

[31:0] WVR - Watchdog timer Value Register.

This register gives the current value of the decrementing counter.

20.4.3 Watchdog timer Control Register(WDTControl)

Address offset : 0x008

Reset value : 0x0000_0000

31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16
res															
15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
res	REN	IEN													
														R/W	R/W

[0] IEN - Interrupt Enable.

0 : Disable the counter and the interrupt.

1 : Enable the counter and the interrupt. Reloads the counter from the value in WDTLoad, after previously being disabled.

[1] REN - Reset Request Enable.

0 : Disable watchdog reset output.

1 : Enable watchdog reset output.

20.4.4 Watchdog timer Interrupt Clear Register (WDTIntClr)

Address offset : 0x00C

31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16
res															
15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
res	WIC														
															W

[0] WIC - Watchdog timer Interrupt Clear

A write of 1 to this register clears the watchdog interrupt, and reloads the counter from the value in WDTLoad.

20.4.5 Watchdog timer Raw Interrupt Status Register (WDTRIS)

Address offset : 0x010

Reset value : 0x0000_0000

31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16
res															

15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
res	RIS														
															R

[0] RIS - Watchdog timer Raw Interrupt Status.

This register indicates the raw interrupt status from the counter. This value is ANDed with the interrupt enable bit from the control register to create the masked interrupt, that is passed to the interrupt output pin.

20.4.6 Watchdog timer Masked Interrupt Status Register (WDTMIS)

Address offset : 0x014

Reset value : 0x0000_0000

31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16
res															

15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
res	MIS														
															R

[0] MIS - Watchdog timer Masked Interrupt Status.

This register indicates the masked interrupt status from the counter. This value is the logical AND of the raw interrupt status with the interrupt enable(IEN) bit from the control register, and is the same value that is passed to the interrupt output pin.

20.4.7 Watchdog timer Lock Register(WDTLock)

Address offset : 0xC00

Reset value : 0x0000_0000

31	1	0
ERW		WES
W		R

This register disables write accesses to all other registers. This is to prevent rogue software from disabling the watchdog functionality. Writing a value of 0x1ACCE551

enables write access to all other registers. Writing any other value disables write accesses. A read from this register returns only the bottom bit.

[0] WES - Register Write Enable status.

0 : Indicates that write access is enabled, not locked. Default.

1 : Indicates that write access is disabled, locked.

[31:1] ERW - Enable Register Writes

Enable write access to all other registers by writing 0x1ACCE551. Disable write access by writing any other value.

20.5 Register map

The following Table 36 summarizes the Watchdog timer registers.

Table 36 Watchdog Timer register map and reset values

21 Inter-integrated circuit interface (I²C)

21.1 Introduction

The I^2C (inter-integrated circuit) bus interface handles communications between the microcontroller and the serial I^2C bus. It supports standard speed mode(100Kbps). In the case of W7500, it discards the repeating data in continuative data transmission. It causes data loss. To avoid it, W7500 uses GPIO instead of I^2C . In this case, SCL has limited speed, 100KHz.

For the details, the Errata Sheet is supported.

(<http://wizwiki.net/wiki/doku.php?id=products:w7500:documents>)

22 Universal Asynchronous Receive Transmit(UART0,1)

22.1 Introduction

The UART supports synchronous one-way communication, half-duplex single wire communication, and multiprocessor communications(CTS/RTS).

22.2 Features

- Serial-to-parallel conversion on data received from a peripheral device
- Parallel-to-serial conversion on data transmitted to the peripheral device
- Data size of 5,6,7 and 8 its
- One or two stop bits
- Even, odd, stick, or no-parity bit generation and detection
- Support of hardware flow control
- Programmable FIFO disabling for 1-byte depth.
- Programmable use of UART or IrDA SIR input/output
- False start bit detection

22.3 Functional description

UART bidirectional communication requires a minimum of two pins: RX, TX

The frame are comprised of:

- An Idle Line prior to transmission or reception
- A start bit
- A data word (8 or 9 bits) least significant bit first
- 1, 1.5, 2 Stop bits indicating that the frame is complete
- The USART interface uses a baud rate generator
- A status register (UART1_RISR)

- data registers (UART1DR)
- A baud rate register (UART1_IBRD, UART1_FBRD)

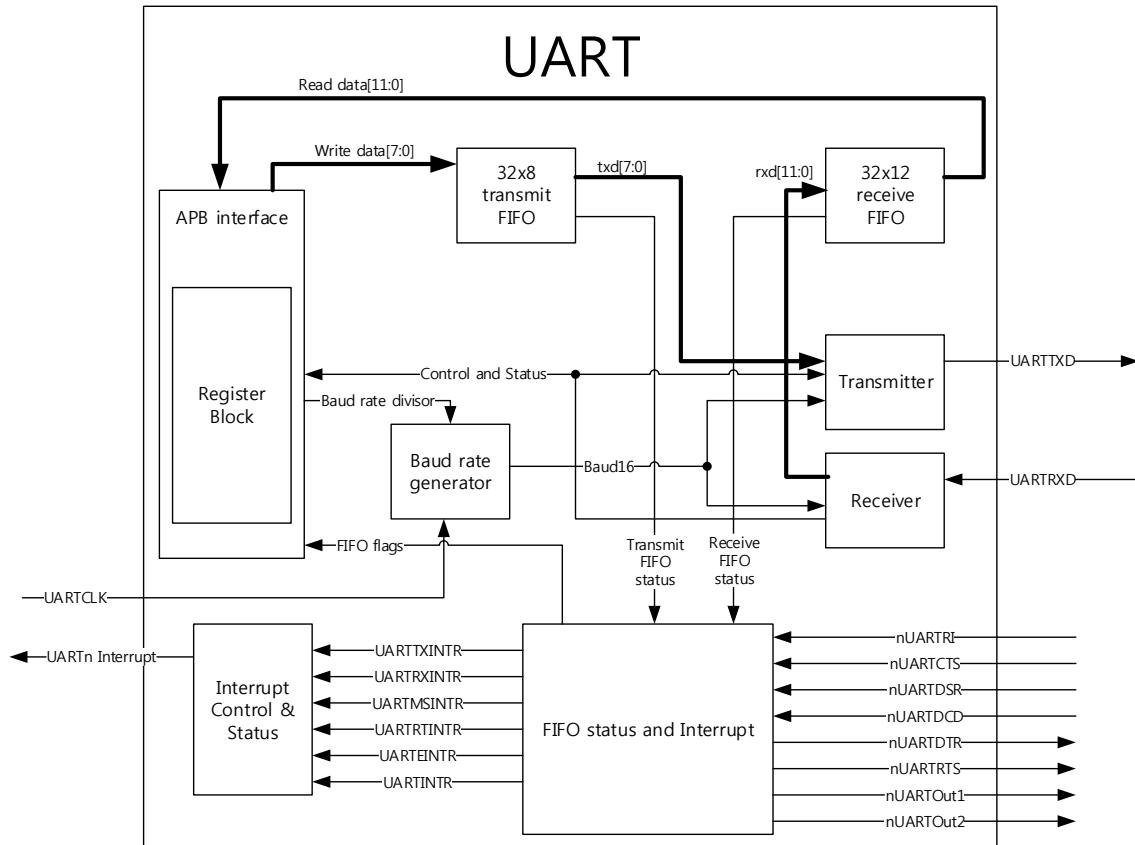


Figure 45. UART0,1 Block diagram

Figure 46 shows the UART character frame

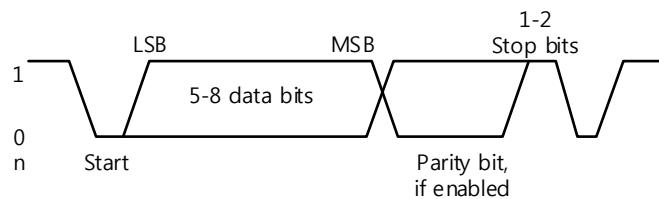


Figure 46. UART character frame

22.3.1 Baud rate calculation

UARTx can operate with or without using the Fractional Divider. The baud rate divisor is a 22-bit number consisting of the UARTxIBRD(16-bit integer) and the UARTxFBRD(6-bit fractional). This is used by the baud rate generator to determine the bit period.

- Baud Rate Divisor = $\frac{\text{UARTCLK}}{(16 * \text{baud rate})} = BRD_I + BRD_F$

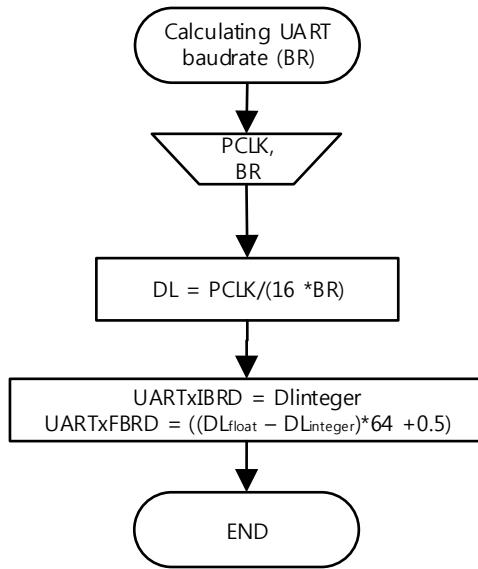


Figure 47. UART divider flow chart

Figure 48 show how to set the UART Initial value.

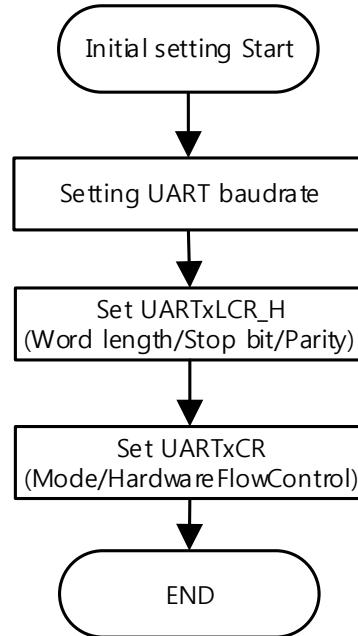


Figure 48. UART Initial setting flow chart

22.3.2 Data transmission

Data transmitted is stored in a 32-byte FIFOs. Transmit data is written into the transmit FIFO for transmission. If UART is enabled, it causes a data frame to start transmitting with parameters indicated in the UARTxLCR_H.

Data continues to transmit until there is no data left in the transmit FIFO. The BUSY bit of UARTxFR is ‘1’ as soon as data is written to the transmit FIFO, which means the FIFO is not empty, and remains as ‘1’ while data is being transmitted.

22.3.3 Data receive

Received data is stored in the 32-byte FIFOs. When a start bit has been received, it begins running and data is sampled on the eighth cycle of that counter in UART mode. A valid stop bit is confirmed if UARTRXD is ‘1’. When a full word is received, the data is stored in the receive FIFO. Error bit is stored in bit[10:8] of UARTxCR and overrun is stored in bit[11] of UARTxCR.

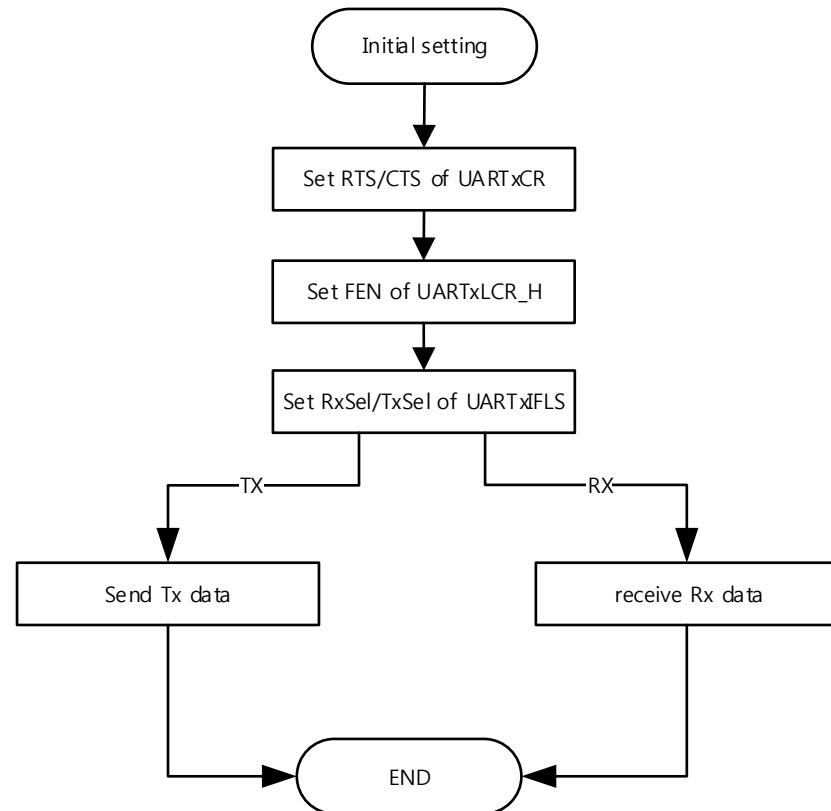


Figure 49. Transmit and Receive data flow chart

22.3.4 Hardware flow control

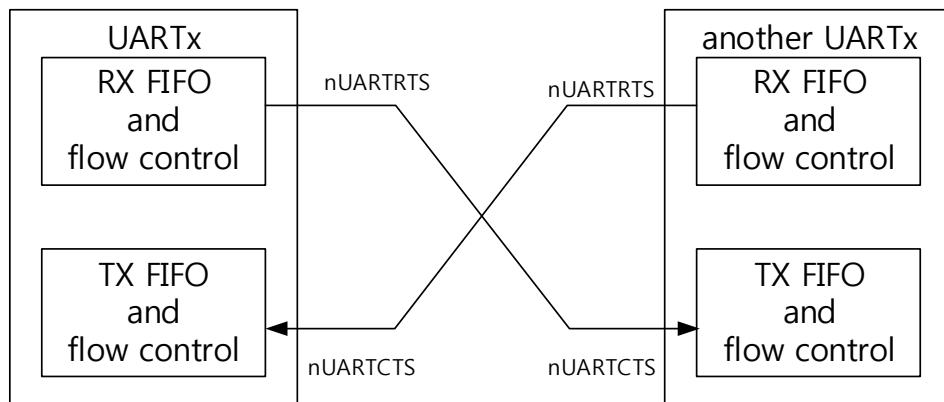


Figure 50. Hardware flow control description

The RTS flow control is enabled by setting the RTSen of UARTxCR. If RTS is enabled, the data flow is controlled as follows.

When the receiver FIFO level reaches the programmed trigger level, nUARTRTS(pin) is asserted(to a low value). nUARTRTS is reasserted(to a low level) once the receiver FIFO has reached the previous trigger level. The reasserted of nUARTRTS signals to the sending UART to continue transmitting data.

The CTS flow control is enabled, the transmitter can only transmit data when nUARTCTS is asserted. When nUARTCTR is re-asserted(to a low) the transmitter sends the next byte. To stop the transmitter from sending the following byte, nUARTCTS must be released before the middle of the last stop bit that is currently being sent.

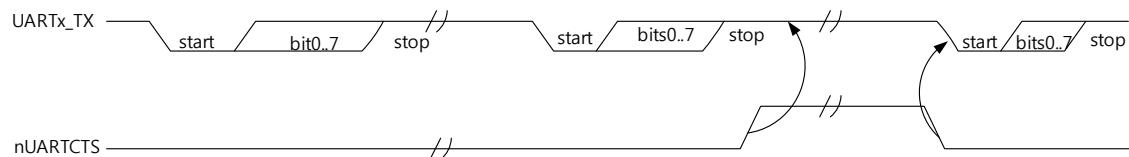


Figure 51. CTS Functional Timing

Figure 52 shows how software should use the RTS/CTR.

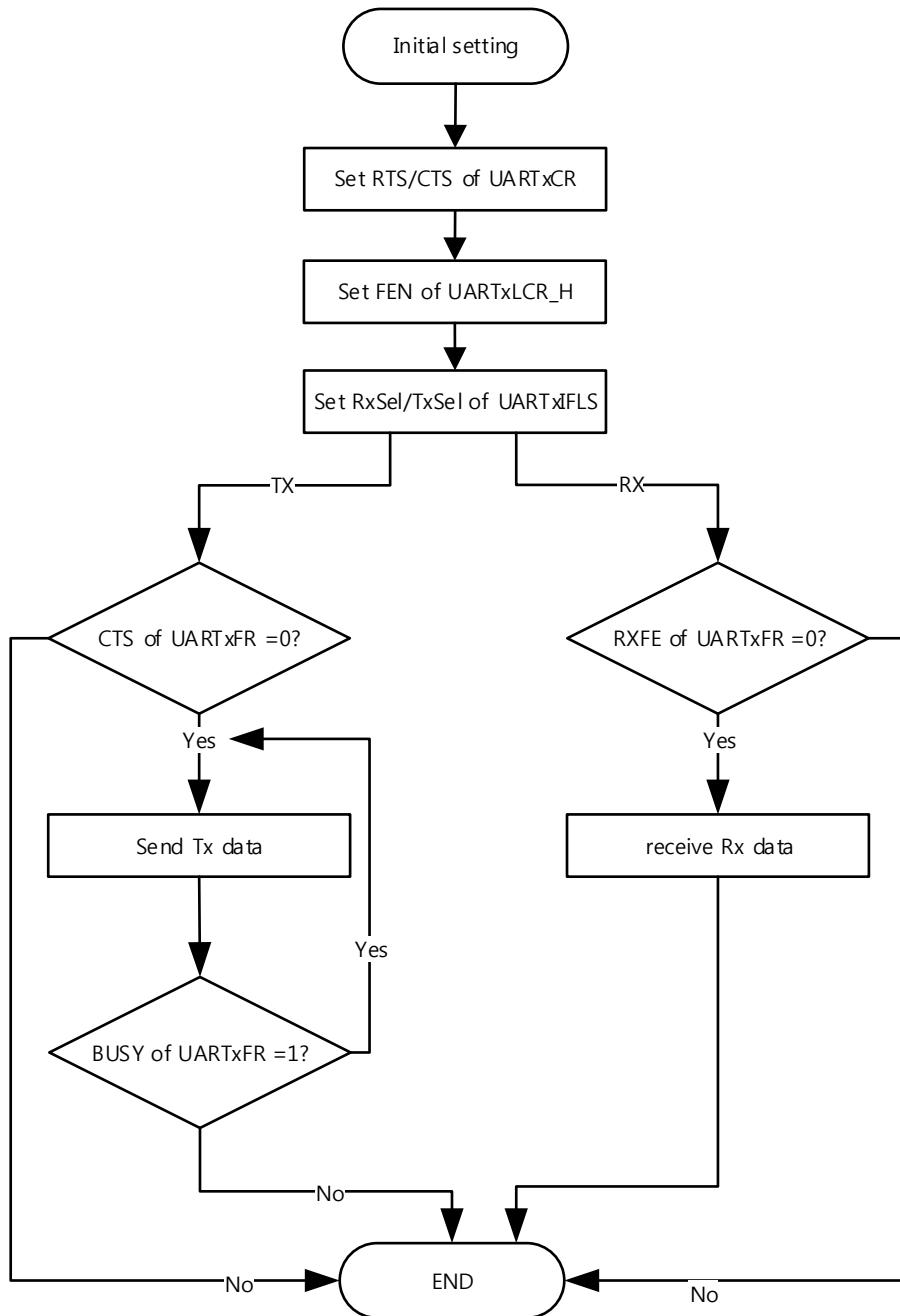


Figure 52. Algorithm for setting CTS/RTS flowchart

22.4 UART0 Registers(Base address: 0x4000_C000)

22.4.1 UART0DR (UART0 Data Register)

Address offset: 0x000

Reset value: 0x0000_0000

The UART0DR is the data register.

The write operation initiates transmission from the UART. The data is prefixed with a start bit, appended with the appropriate parity bit(if parity is enabled), and a stop bit. The resultant word is then transmitted.

The received data byte is read by performing reads from the UARTDR register along with the corresponding status information.

31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16
res															

15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
res	res	res	res	OE	BE	PE	FE								DATA
				R	R	R	R								R/W

[11] OE - Overrun error

0: data is empty

1: data is received and the receive FIFO is already full.

[10] BE - Break error

1: if a break condition was detected, indicating that the received data input was held LOW of longer than a full-word transmission time(defined as start, data, parity and stop bits)

[9] PE - Parity error

1: it indicates that the parity of the received, it indicates that the parity of the received data character does not match the parity that the EPS and SPS bits in the line control register, UARLCSR_H

[8] FE - Framing error

1: it indicates that the received

[7:0] DATA - Receive (READ)/Transmit (WRITE) data

22.4.2 UART0RSR/ECR (UART0 Receive Status Register/Error Clear Register)

Address offset: 0x004

Reset value: 0x0000_0000

The UART0RSR/ECR is the receive status register/error clear register.

Receive status can also be read from the UART0RSR register.

A write to the UART0ECR register clears the framing, parity, break, and overrun errors.

31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16
res															

15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
res	OE	BE	PE												
															FE

[3] OE - Overrun error

This bit is set to 1 if data is received and the FIFO is already full.

This bit is cleared to 0 by a write to UART0ECR

[2] BE - Break error

This bit is cleared to 0 by a write to UART0ECR

[1] PE - Parity error

When set to 1, it indicates that the parity of the received data character does not match

the parity that the EPS and SPS bits in the line control register, UARTLCR_H select

This bit is cleared to 0 by a write to UART0ECR

[0] FE - Framing error

When set to 1, it indicates that the received character didn't have a valid stop bit

This bit is cleared to 0 by a write to UART0ECR

22.4.3 UART0FR (UART0 Flag Register)

Address offset: 0x0018

Reset value: 0bx11000xxx

31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16
res															

15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
res	RI	TXFE	RXFF	TXFF	RXFE	BUSY	DCD	DSR	CTS						
							R	R	R	R	R	R	R	R	R

[8] RI - Ring indicator

This bit is the complement of the UART ring indicator, UART0RI.

1: When nUART0RI is LOW

[7] TXFE - Transmit FIFO empty

This bit depends on the state of the FEN bit in the line control register, UARTLCR_H.

0: The bit is set when transmit holding register is empty.

1: The bit is set when transmit FIFO is empty

[6] RXFF - Receive FIFO full

This bit depends on the state of the FEN bit in the line control register, UARTLCR_H.

0: The bit is set when the receive holding register is full

1: The bit is set when the receive FIFO is full

[5] TXFF - Transmit FIFO full

This bit depends on the state of the FEN bit in the line control register, UARTLCR_H.

0: The bit is set when transmit holding register is full.

1: The bit is set when transmit FIFO is full.

[4] RXFE - Receive FIFO empty

This bit depends on the state of the FEN bit in the line control register, UARTLCR_H.

0: The bit is set when the receive holding register is empty.

1: The bit is set when the receive FIFO is empty.

[3] BUSY - UART busy

1: the UART is busy transmitting data

[2] DCD - Data carrier detect

This bit is the complement of the UART data carrier detect, UART0DCD, status input

1: The bit is the complement of the UART data carrier detect

[1] DSR - Data set ready

This bit is the complement of the UART data set ready, UART0DSR, status input

1: The bit is the complement of the UART data set ready

[0] CTS - Clear to send

This bit is the complement of the UART clear to send, UART0CTS, status input

1: The bit is the complement of the UART clear to send

22.4.4 UART0ILPR (UART0 IrDA Low-Power Counter Register)

Address offset: 0x0020

Reset value: 0x00

The UARTILPR Register is the IrDA low-power counter register

31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16
res															

15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
res	ILPDVSR														

								R/W
--	--	--	--	--	--	--	--	-----

[7:0] ILPDVSR - 8-bit low-power divisor value

These bits are cleared to 0 at reset.

$$\text{ILPDVSR} = (F_{\text{UARTCLK}} / F_{\text{IrLPBaud16}})$$

Where, $F_{\text{IrLPBaud16}}$ is nominally 1.8432MHz

The divisor is $1.42\text{MHz} < F_{\text{IrLPBaud16}} < 2.12\text{MHz}$, results in a low-power pulse duration of 1.41 - 2.11us.

22.4.5 UART0IBRD (UART0 Integer Baud Rate Register)

Address offset: 0x0024

Reset value: 0x00

The UART0IBRD Register is the integer part of the baud rate divisor value.

31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16
res	res	res	res	res	res	res	res	res	res	res	res	res	res	res	res
BAUD DIVINT															
W															

[15:0] BAUD DIVINT - The integer baud rate divisor.

These bits are cleared to 0 on reset

22.4.6 UART0FBRD (UART0 Fractional Baud Rate Register)

Address offset: 0x0028

Reset value: 0x00

The UART0FBRD register is the fractional part of the baud rate divisor value.

31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16
res	res	res	res	res	res	res	res	res	res	res	res	res	res	res	res
BAUD DIVFRAC															
W															

[5:0] BAUD DIVFRAC - The fractional baud rate divisor.

These bits are cleared to 0 on reset

The baud rate divisor is calculated as follows:

$$\text{Baud rate divisor BAUDDIV} = (F_{\text{UARTCLK}} / (16 \times \text{Baud rate}))$$

Where, F_{UARTCLK} is the UART reference clock frequency.

The BAUDDIV is comprised of the integer value (BAUD DIVINT) and the fractional value (BAUD DIVFRAC).

Example 1

If the required baud rate is 115200 and $\text{UARTCLK} = 8\text{MHz}$ then:

$$\text{Baud rate divisor} = (8 \times 10^6) / (16 \times 115200) = 4.340278$$

This means $\text{BRD}_I = 4$ and $\text{BRD}_F = 0.340278$

(Therefore, $\text{UART0IBRD} = 4$)

Therefore, $\text{UART0FBRD} = \lceil (0.340278 \times 64) + 0.5 \rceil = 22$

Generated baud rate divider = $\text{UART0IBRD} + (\text{UART0FBRD}/64) = 4.34375$

Generated baud rate = $(8 \times 10^6) / (16 \times 4.34375) = 115107.914$

Error = $(115108 - 115200) / (115200) \times 100 = -0.07861\%$

When $\text{UartCLK} = 8\text{MHz}$

Integer divisor	Fractional divisor	Required bit rate(bps)	Generated bit rate(bps)	Error%
0x2	0x0B	230400	2.171875	-0.07994
0x4	0x16	115200	4.34375	-0.07994
0x6	0x21	76800	6.515625	-0.07994
0x8	0x2C	57600	8.6875	-0.07994
0x22	0x2E	14400	34.71875	0.010001

22.4.7 UART0LCR_H (UART0 Line Control Register)

Address offset: 0x002C

Reset value: 0x00

The **UART0LCR_H** register is the line control register. This register accesses bits 29 to 22 of the UART line control register, **UART0LCR**.

31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16
res															

15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
res	SPS	WLEN	FEN	STP2	EPS	PEN	BRK								
								R/W							

[7] SPS - Stick parity select

0: stick parity is disable

1: either:

The parity bit is transmitted and checked as a 1 when EPS bit set '0'

The parity bit is transmitted and checked as a 0 when EPS bit set '1'

[6:5] WLEN - Word length

00	01	10	11
5 bits	6 bits	7 bits	8 bits

[4] FEN - Enable FIFO

0: The FIFO become 1-byte-deep holding register.

1: The transmit and receive FIFO buffers are enable (FIFO mode)

[3] STP2 - Two stop bit select

1: Two stop bits are transmitted at the end of the frame

[2] EPS - Even parity select

0: odd parity.

1: even parity

[1] PEN - Parity enable

0: parity is disabled and no parity bit added to the data frame

1: parity checking and generations is enabled

[0] BRK - Send break

0: For normal use, the bit must be cleared to 0

1: The low-level is continually output on the UARTRXD output

PEN	EPS	SPS	Parity bit(Transmitted or checked)
0	X	X	Not transmitted or checked
1	1	0	Even parity
1	0	0	Odd parity
1	0	1	1
1	1	1	0

22.4.8 UART0CR (UART0 Control register)

Address offset: 0x0030

Reset value: 0x0300

The UART0CR register is the control register

31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16
res															

15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
----	----	----	----	----	----	---	---	---	---	---	---	---	---	---	---

CTSEn	RTSEn	Out2	Out1	RTS	DTR	RXE	TXE	res	SIRLP	SIREN	UARTEN

[15] CTSEn - CTS hardware flow control enable.

1: CTS hardware flow control is enable. Data is only transmitted when the UART0CTS signal is asserted.

[14] RTSEn - RTS hardware flow control enable

1: RTS hardware flow control is enable. Data is only requested when there is space in the receive FIFO for it to be received.

[13] Out2

This bit is the complement of the UART Out2 (nUARTOut2) modem status output.

That is, when the bit is programmed to 1, the output is 0.

For DTE this can be used as “Ring Indicator” (RI).

[12] Out1

This bit is the complement of the UART Out1 (nUARTOut1) modem status output.

That is, when the bit is programmed to 1 the output is 0.

For DTE this can be used as “Data Carrier Detect”(DCD).

[11] RTS - Request to send

This bit is the complement of the UART request to send, UART0RTS, modem status output.

That is, when the bit is programmed to 1 then UART0RTS is LOW.

[10] DTS - Data transmit ready

This bit is the complement of the UART data transmit ready, UART0DTR, modem status output.

That is, when the bit is programmed to 1 then UART0DTR is LOW.

[9] RXE - Receive enable

If this bit is set to 1, the receive section of the UART is enabled.

Data reception occurs for either UART signals or SIR signals depending on the setting of the SIREN bit. When the UART is disabled in the middle of reception, it completes the current character before stopping.

[8] TXE - Transmit enable

1: The transmit section of the UART is enabled,

[7:3] Reserved

[2] SIRLP - SIR low-power IrDA mode

0: low-level bits are transmitted as an active high pulse with a width of 3/16th of the bit period.

1: low-level bits are transmitted with a pulse width that is 3 times the period of the IrLPBaud16 input signal, regardless of the selected bit rate.

[1] SIREN - SIR enable

0: IrDA SIR ENDEC is disable

1: IrDA SIR ENDEC is enable

[0] UARTEN - Loopback enable

0: UART is disabled

1: UART is enabled

Program the control registers as follows:

1. Disable the UART.
2. Wait for the end of transmission or reception of the current character.
3. Flush the transmit FIFO by setting the FEN bit to 0 in the Line Control Register, UARTLCR_H.
4. Reprogram the UARTCR Register.
5. Enable the UART.

22.4.9 UART0IFLS (UART0 Interrupt FIFO Level Select Register)

Address offset: 0x0034

Reset value: 0x12

The UARTIFLS register is the interrupt FIFO level select register.

31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16
res															

15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
res	RXIFLSEL		TXIFLSEL												
												W		W	

[5:3] RXIFLSEL - Receive interrupt FIFO level select

7	6	5	4	3	2	1	0
Reserved			7/8 full	3/4 full	1/2 full	1/4 full	1/8 full

[2:0] TXIFLSEL - Transmit interrupt FIFO level select

7	6	5	4	3	2	1	0
Reserved			7/8 full	3/4 full	1/2 full	1/4 full	1/8 full

22.4.10 UART0IMSC (UART0 Interrupt Mask Set/Clear Register)

Address offset: 0x0038

Reset value: 0x00

The UART0IMSC register is the interrupt mask set/clear interrupts. When a bit of UART0IMSC is ‘1’ and the corresponding bit of interrupt register is ‘1’, an interrupt will be issued.

In other words, if a bit of UART0IMSC is ‘0’, an interrupt will not be issued even if the corresponding bit of interrupt register is ‘1’.

31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16
res															

15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
res	Res	res	res	res	OEIM	BEIM	PEIM	FEIM	RTIM	TXIM	RXIM	DSR MIM	DCD MIM	CTS MIM	RIMI M
					R/W	R/W	R/W	R/W							

[10] OEIM - Overrun error interrupt mask

0: Disable UART0OEINTR

1: Enable UART0OEINTR

[9] BEIM - Break error interrupt mask

0: Disable UART0BEINTR

1: Enable UART0BEINTR

[8] PEIM - Parity error interrupt mask

0: Disable UART0EINTR

1: Enable UART0EINTR

[7] FEIM - Framing error interrupt mask

0: Disable UART0FEINTR

1: Enable UART0FEINTR

[6] RTIM - Receive timeout interrupt mask

0: Disable UART0RTINTR

1: Enable UART0RTINTR

[5] TXIM - Transmit interrupt mask

0: Disable UART0TXINTR

1: Enable UART0TXINTR

[4] RXIM - Receive interrupt mask

0: Disable UART0RXINTR

1: Enable UART0RXINTR

[3] DSRMIM - nUART0DSR modem interrupt mask

0: Disable UART0DSRINTR

1: Enable UART0DSRINTR

[2] DCDMIM - nUART0DCD modem interrupt mask

0: Disable UART0DCDINTR

1: Enable UART0DCDINTR

[1] CTSMIM - nUART0CTS modem interrupt mask

0: Disable UART0CRSINTR

1: Enable UART0CRSINTR

[0] RIMIM - nUART0RI modem interrupt mask

0: Disable UART0RIINTR

1: Enable UART0RIINTR

22.4.11 UART0RIS (UART0 Raw Interrupt Status Register)

Address offset: 0x003C

Reset value: 0x00-

The UART0RIS register indicates the raw interrupt status register.

31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16
res															

15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
res	res	res	res	res	OE RIS	BE RIS	PE RIS	FE RIS	RT RIS	TX RIS	RX RIS	DRR RMIS	DCD RMIS	CTSR MIS	RI RMIS

[10] OERIS - Overrun error interrupt status

It indicates state of the UART0OEINTR interrupt.

[9] BERIS - Break error interrupt status

It indicates state of the UART0BEINTR interrupt.

[8] PERIS - Parity error interrupt status

It indicates state of the UART0PEINTR interrupt.

[7] FERIS - Framing error interrupt status

It indicates state of the UART0FEINTR interrupt.

[6] RTRIS - Receive timeout interrupt status

It indicates state of the UART0RTINTR interrupt.

[5] TXRIS - Transmit interrupt status

It indicates state of the UART0TXINTR interrupt.

[4] RXRIS - Receive interrupt status

It indicates state of the UART0RXINTR interrupt.

[3] DSRRMIS - nUART0DSR modem interrupt status

It indicates state of the UART0DSRINTR interrupt.

[2] DCDRMIS - nUART0DCD modem interrupt status

It indicates state of the UART0DCDINTR interrupt.

[1] CTSRMIS - nUART0CTS modem interrupt status

It indicates state of the UART0CTSINTR interrupt.

[0] RIMMIS - nUART0RI modem interrupt status

It indicates state of the UART0RIINTR interrupt.

22.4.12 UART0MIS (UART0 Masked Interrupt Status Register)

Address offset: 0x0040

Reset value: 0x00-

The UART0MIS register is the masked interrupt status register.

31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16
res															

15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
res	res	res	res	res	OE MIS	BE MIS	PE MIS	FE MIS	RT MIS	TX MIS	RX MIS	DRR MMIS	DCD MMIS	CTS MMIS	RI MMIS
					R	R	R	R	R	R	R	R	R	R	R

[10] OEMIS - Overrun error masked interrupt status

It indicates state of the UART0OEINTR interrupt.

[9] BEMIS - Break error masked interrupt status

It indicates state of the UART0BEINTR interrupt.

[8] PEMIS - Parity error masked interrupt status

It indicates state of the UART0PEINTR interrupt.

[7] FEMIS - Framing error masked interrupt status

It indicates state of the UART0FEINTR interrupt.

[6] RTMIS - Receive timeout masked interrupt status

It indicates state of the UART0RTINTR interrupt.

[5] TXMIS - Transmit masked interrupt status

It indicates state of the UART0TXINTR interrupt.

[4] RXMIS - Receive masked interrupt status

It indicates state of the UART0RXINTR interrupt.

[3] DSRMMS - nUART0DSR modem masked interrupt status

It indicates state of the UART0DSRINTR interrupt.

[2] DCDMMIS - nUART0DCD modem masked interrupt status

It indicates state of the UART0DCDINTR interrupt.

[1] CTSMMIS - nUART0CTS modem masked interrupt status

It indicates state of the UART0CTSINTR interrupt.

[0] RIMMIS - nUART0RI modem masked interrupt status

It indicates state of the UART0RIINTR interrupt.

22.4.13 UART0ICR (UART0 Interrupt Clear Register)

Address offset: 0x0044

Reset value: -

The UART0ICR register is the interrupt clear register and is write-only.

31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16
res	res	res	res	res	res	res	res	res	res	res	res	res	res	res	res
15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
res	res	res	res	res	OEIC	BEIC	PEIC	FEIC	RTIC	TXIC	RXIC	DSR MIC	DCD MIC	CTS MIC	RI MIC
					R	R	R	R	R	R	R	R	R	R	R

[10] OEIC - Overrun error interrupt clear

Clear the UART0OEINTR interrupt.

[9] BEIC - Break error interrupt clear

Clear the UART0BEINTR interrupt.

[8] PEIC - Parity error interrupt clear

Clear the UART0PEINTR interrupt.

[7] FEIC - Framing error interrupt clear

Clear the UART0FEINTR interrupt.

[6] RTIC - Receive timeout interrupt clear

Clear the UART0RTINTR interrupt.

[5] TXIC - Transmit interrupt clear

Clear the UART0TXINTR interrupt.

[4] RXIC - Receive interrupt clear

Clear the UART0RXINTR interrupt.

[3] DSRMIC - nUART0DSR modem interrupt clear

Clear the UART0DSRINTR interrupt.

[2] DCDMIC - nUART0DCD modem interrupt clear

Clear the UART0DCDINTR interrupt.

[1] CTSMIC - nUART0CTS modem interrupt clear

Clear the UART0CTSINTR interrupt.

[0] RIMIC - nUART0RI modem interrupt clear

Clear the UART0RIINTR interrupt.

22.5 Register map

The following Table 37 summarizes the UART0 registers.

Table 37 UART0 register map and reset values

22.6 UART1 Registers(Base address: 0x4000_D000)

22.6.1 UART1DR (UART1 Data Register)

Address offset: 0x000

Reset value: 0x0000_0000

The UART1DR is the data register.

The write operation initiates transmission from the UART. The data is prefixed with a start bit, appended with the appropriate parity bit(if parity is enabled), and a stop bit. The resultant word is then transmitted.

The received data byte is read by performing reads from the UARTDR register along with the corresponding status information.

31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16
res															

15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
res	res	res	res	OE	BE	PE	FE								DATA
				R	R	R	R								R/W

[11] OE - Overrun error

0: data is empty

1: data is received and the receive FIFO is already full.

[10] BE - Break error

1: if a break condition was detected, indicating that the received data input was held LOW of longer than a full-word transmission time(defined as start, data, parity and stop bits)

[9] PE - Parity error

1: it indicates that the parity of the received, it indicates that the parity of the received data character does not match the parity that the EPS and SPS bits in the line control register, UARLCSR_H

[8] FE - Framing error

1: it indicates that the received

[7:0] DATA - Receive (READ)/Transmit (WRITE) data

22.6.2 UART1RSR/ECR (UART1 Receive Status Register/Error Clear Register)

Address offset: 0x004

Reset value: 0x0000_0000

The UART1RSR/ECR is the receive status register/error clear register.

Receive status can also be read from the UART1RSR register.

A write to the UART1ECR register clears the framing, parity, break, and overrun errors.

31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16
res															

15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
res	OE	BE	PE	FE											

[3] OE - Overrun error

This bit is set to 1 if data is received and the FIFO is already full.

This bit is cleared to 0 by a write to UART1ECR

[2] BE - Break error

This bit is cleared to 0 by a write to UART1ECR

[1] PE - Parity error

When set to 1, it indicates that the parity of the received data character does not match

the parity that the EPS and SPS bits in the line control register, UARTLCR_H select

This bit is cleared to 0 by a write to UART1ECR

[0] FE - Framing error

When set to 1, it indicates that the received character didn't have a valid stop bit

This bit is cleared to 0 by a write to UART1ECR

22.6.3 UART1FR (UART1 Flag Register)

Address offset: 0x0018

Reset value: 0bx11000xxx

31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16
res															

15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
res	RI	TXFE	RXFF	TXFF	RXFE	BUSY	DCD	DSR	CTS						
							R	R	R	R	R	R	R	R	R

[8] RI - Ring indicator

This bit is the complement of the UART ring indicator, UART1RI.

1: When nUART1RI is LOW

[7] TXFE - Transmit FIFO empty

This bit depends on the state of the FEN bit in the line control register, UARTLCR_H.

0: The bit is set when transmit holding register is empty.

1: The bit is set when transmit FIFO is empty

[6] RXFF - Receive FIFO full

This bit depends on the state of the FEN bit in the line control register, UARTLCR_H.

0: The bit is set when the receive holding register is full

1: The bit is set when the receive FIFO is full

[5] TXFF - Transmit FIFO full

This bit depends on the state of the FEN bit in the line control register, UARTLCR_H.

0: The bit is set when transmit holding register is full.

1: The bit is set when transmit FIFO is full.

[4] RXFE - Receive FIFO empty

This bit depends on the state of the FEN bit in the line control register, UARTLCR_H.

0: The bit is set when the receive holding register is empty.

1: The bit is set when the receive FIFO is empty.

[3] BUSY - UART busy

1: the UART is busy transmitting data

[2] DCD - Data carrier detect

This bit is the complement of the UART data carrier detect, UART1DCD, status input

1: The bit is the complement of the UART data carrier detect

[1] DSR - Data set ready

This bit is the complement of the UART data set ready, UART1DSR, status input

1: The bit is the complement of the UART data set ready

[0] CTS - Clear to send

This bit is the complement of the UART clear to send, UART1CTS, status input

1: The bit is the complement of the UART clear to send

22.6.4 UART1ILPR (UART1 IrDA Low-Power Counter Register)

Address offset: 0x0020

Reset value: 0x00

The UARTILPR Register is the IrDA low-power counter register

31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16
res															

15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
res	ILPDVSR														
								R/W							

[7:0] ILPDVSR - 8-bit low-power divisor value

These bits are cleared to 0 at reset

$$\text{ILPDVSR} = (F_{\text{UARTCLK}} / F_{\text{IrLPBaud16}})$$

Where, $F_{\text{IrLPBaud16}}$ is nominally 1.8432MHz

The divisor is $1.42\text{MHz} < F_{\text{IrLPBaud16}} < 2.12\text{MHz}$, results in a low-power pulse duration of 1.41 - 2.11us.

22.6.5 UART1IBRD (UART1 Integer Baud Rate Register)

Address offset: 0x0024

Reset value: 0x00

The UART1IBRD Register is the integer part of the baud rate divisor value.

31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16
res	res	res	res	res	res	res	res	res	res	res	res	res	res	res	res
BAUD DIVINT															
w															

[15:0] BAUD DIVINT - The integer baud rate divisor.

These bits are cleared to 0 on reset

22.6.6 UART1FBRD (UART1 Fractional Baud Rate Register)

Address offset: 0x0028

Reset value: 0x00

The UART1FBRD register is the fractional part of the baud rate divisor value.

31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16
res	res	res	res	res	res	res	res	res	res	res	res	res	res	res	res
BAUD DIVFRAC															
w															

[5:0] BAUD DIVFRAC - The fractional baud rate divisor.

These bits are cleared to 0 on reset

The baud rate divisor is calculated as follows:

$$\text{Baud rate divisor BAUDDIV} = (F_{\text{UARTCLK}} / (16 \times \text{Baud rate}))$$

Where, $F_{UARTCLK}$ is the UART reference clock frequency.

The BAUDDIV is comprised of the integer value (BAUD DIVINT) and the fractional value (BAUD DIVFRAC).

Example 1

If the required baud rate is 115200 and $UARTCLK = 8MHz$ then:

$$\text{Baud rate divisor} = (8 \times 10^6) / (16 \times 115200) = 4.340278$$

This means $BRD_I = 4$ and $BRD_F = 0.340278$

(Therefore, $UART1IBRD = 4$)

Therefore, $UART1FBRD = \lceil (0.340278 \times 64) + 0.5 \rceil = 22$

Generated baud rate divider = $UART1IBRD + (UART1FBRD/64) = 4.34375$

Generated baud rate = $(8 \times 10^6) / (16 \times 4.34375) = 115107.914$

Error = $(115108 - 115200) / (115200) \times 100 = -0.07861\%$

When $UartCLK = 8MHz$

Integer divisor	Fractional divisor	Required bit rate(bps)	Generated bit rate(bps)	Error%
0x2	0x0B	230400	2.171875	-0.07994
0x4	0x16	115200	4.34375	-0.07994
0x6	0x21	76800	6.515625	-0.07994
0x8	0x2C	57600	8.6875	-0.07994
0x22	0x2E	14400	34.71875	0.010001

22.6.7 UART1LCR_H (UART1 Line Control Register)

Address offset: 0x002C

Reset value: 0x00

The UART1LCR_H register is the line control register. This register accesses bits 29 to 22 of the UART line control register, UART1LCR.

31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16
res															

15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
res	SPS	WLEN	FEN	STP2	EPS	PEN	BRK								
								R/W							

[7] SPS - Stick parity select

0: stick parity is disable

1: either:

The parity bit is transmitted and checked as a 1 when EPS bit set '0'

The parity bit is transmitted and checked as a 0 when EPS bit set '1'

[6:5] WLEN - Word length

00	01	10	11
5 bits	6 bits	7 bits	8 bits

[4] FEN - Enable FIFO

0: The FIFO become 1-byte-deep holding register.

1: The transmit and receive FIFO buffers are enable (FIFO mode)

[3] STP2 - Two stop bit select

1: Two stop bits are transmitted at the end of the frame

[2] EPS - Even parity select

0: odd parity.

1: even parity

[1] PEN - Parity enable

0: parity is disabled and no parity bit added to the data frame

1: parity checking and generations is enabled

[0] BRK - Send break

0: For normal use, the bit must be cleared to 0

1: The low-level is continually output on the UARTRXD output

PEN	EPS	SPS	Parity bit(Transmitted or checked)
0	X	X	Not transmitted or checked
1	1	0	Even parity
1	0	0	Odd parity
1	0	1	1
1	1	1	0

22.6.8 UART1CR (UART1 Control register)

Address offset: 0x0030

Reset value: 0x0300

The UART1CR register is the control register

31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16
res															

15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
CTSEn	RTSEn	Out2	Out1	RTS	DTR	RXE	TXE	res	res	res	res	res	SIRLP	SIREN	UARTEN

[15] CTSEn - CTS hardware flow control enable.

1: CTS hardware flow control is enable. Data is only transmitted when the UART1CTS signal is asserted.

[14] RTSEn - RTS hardware flow control enable

1: RTS hardware flow control is enable. Data is only requested when there is space in the receive FIFO for it to be received.

[13] Out2

This bit is the complement of the UART Out2 (nUARTOut2) modem status output.

That is, when the bit is programmed to 1, the output is 0.

For DTE this can be used as “Ring Indicator” (RI).

[12] Out1

This bit is the complement of the UART Out1 (nUARTOut1) modem status output.

That is, when the bit is programmed to 1 the output is 0.

For DTE this can be used as “Data Carrier Detect”(DCD).

[11] RTS - Request to send

This bit is the complement of the UART request to send, UART1RTS, modem status output.

That is, when the bit is programmed to 1 then UART1RTS is LOW.

[10] DTS - Data transmit ready

This bit is the complement of the UART data transmit ready, UART1DTR, modem status output.

That is, when the bit is programmed to 1 then UART1DTR is LOW.

[9] RXE - Receive enable

If this bit is set to 1, the receive section of the UART is enabled.

Data reception occurs for either UART signals or SIR signals depending on the setting of the SIREN bit. When the UART is disabled in the middle of reception, it completes the current character before stopping.

[8] TXE - Transmit enable

1: The transmit section of the UART is enabled,

[7:3] Reserved

[2] SIRLP - SIR low-power IrDA mode

0: low-level bits are transmitted as an active high pulse with a width of 3/16th of the bit period.

1: low-level bits are transmitted with a pulse width that is 3 times the period of the IrLPBaud16 input signal, regardless of the selected bit rate.

[1] SIREN - SIR enable

0: IrDA SIR ENDEC is disable

1: IrDA SIR ENDEC is enable

[0] UARLEN - Loopback enable

0: UART is disabled

1: UART is enabled

Program the control registers as follows:

1. Disable the UART.
2. Wait for the end of transmission or reception of the current character.
3. Flush the transmit FIFO by setting the FEN bit to 0 in the Line Control Register, [UARTLCR_H](#) on page 3-12.
4. Reprogram the [UARTCR](#) Register.
5. Enable the UART.

22.6.9 UART1IFLS (UART1 Interrupt FIFO Level Select Register)

Address offset: 0x0034

Reset value: 0x12

The [UARTIFLS](#) register is the interrupt FIFO level select register.

31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16
res															

15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
res	RXIFLSEL		TXIFLSEL												
											W		W		

[5:3] RXIFLSEL - Receive interrupt FIFO level select

7	6	5	4	3	2	1	0
Reserved		7/8 full		3/4 full		1/2 full	

[2:0] TXIFLSEL - Transmit interrupt FIFO level select

7	6	5	4	3	2	1	0
Reserved		7/8 full		3/4 full		1/2 full	

22.6.10 UART1IMSC (UART1 Interrupt Mask Set/Clear Register)

Address offset: 0x0038

Reset value: 0x00

The [UART1IMSC](#) register is the interrupt mask set/clear register. When a bit of [UART1IMSC](#) is ‘1’ and the corresponding bit of interrupt register is ‘1’, an interrupt will be issued.

In other words, if a bit of [UART1IMSC](#) is ‘0’, an interrupt will not be issued even if the corresponding bit of interrupt register is ‘1’.

31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16
res															

15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
res	Res	res	res	res	OEIM	BEIM	PEIM	FEIM	RTIM	TXIM	RXIM	DSR MIM	DCD MIM	CTS MIM	RIMI M
					R/W	R/W	R/W	R/W							

[10] OEIM - Overrun error interrupt mask

0: Disable UART1OEINTR

1: Enable UART1OEINTR

[9] BEIM - Break error interrupt mask

0: Disable UART1BEINTR

1: Enable UART1BEINTR

[8] PEIM - Parity error interrupt mask

0: Disable UART1EINTR

1: Enable UART1EINTR

[7] FEIM - Framing error interrupt mask

0: Disable UART1FEINTR

1: Enable UART1FEINTR

[6] RTIM - Receive timeout interrupt mask

0: Disable UART1RTINTR

1: Enable UART1RTINTR

[5] TXIM - Transmit interrupt mask

0: Disable UART1TXINTR

1: Enable UART1TXINTR

[4] RXIM - Receive interrupt mask

0: Disable UART1RXINTR

1: Enable UART1RXINTR

[3] DSRMIM - nUART1DSR modem interrupt mask

0: Disable UART1DSRINTR

1: Enable UART1DSRINTR

[2] DCDMIM - nUART1DCD modem interrupt mask

0: Disable UART1DCDINTR

1: Enable UART1DCDINTR

[1] CTSMIM - nUART1CTS modem interrupt mask

0: Disable UART1CRSINTR

1: Enable UART1CRSINTR

[0] RIMIM - nUART1RI modem interrupt mask

0: Disable UART1RIINTR

1: Enable UART1RIINTR

22.6.11 UART1RIS (UART1 Raw Interrupt Status Register)

Address offset: 0x003C

Reset value: 0x00-

The UART1RIS register indicates the raw interrupt status register.

31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16
res															

15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
res	res	res	res	res	OE RIS	BE RIS	PE RIS	FE RIS	RT RIS	TX RIS	RX RIS	DRR RMIS	DCD RMIS	CTSR MIS	RI RMIS

[10] OERIS - Overrun error interrupt status

It indicates state of the UART1OEINTR interrupt.

[9] BERIS - Break error interrupt status

It indicates state of the UART1BEINTR interrupt.

[8] PERIS - Parity error interrupt status

It indicates state of the UART1PEINTR interrupt.

[7] FERIS - Framing error interrupt status

It indicates state of the UART1FEINTR interrupt.

[6] RTRIS - Receive timeout interrupt status

It indicates state of the UART1RTINTR interrupt.

[5] TXRIS - Transmit interrupt status

It indicates state of the UART1TXINTR interrupt.

[4] RXRIS - Receive interrupt status

It indicates state of the UART1RXINTR interrupt.

[3] DSRRMIS - nUART1DSR modem interrupt status

It indicates state of the UART1DSRINTR interrupt.

[2] DCDRMIS - nUART1DCD modem interrupt status

It indicates state of the UART1DCDINTR interrupt.

[1] CTSRMIS - nUART1CTS modem interrupt status

It indicates state of the UART1CTSINTR interrupt.

[0] RIRMIS - nUART1RI modem interrupt status

It indicates state of the UART1RIINTR interrupt.

22.6.12 UART1MIS (UART1 Masked Interrupt Status Register)

Address offset: 0x0040

Reset value: 0x00-

The UART1MIS register is the masked interrupt status register.

31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16
res															

15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
res	res	res	res	res	OE MIS	BE MIS	PE MIS	FE MIS	RT MIS	TX MIS	RX MMIS	DRR MMIS	DCD MMIS	CTS MMIS	RI MMIS

[10] OEMIS - Overrun error masked interrupt status

It indicates state of the UART1OEINTR interrupt.

[9] BEMIS - Break error masked interrupt status

It indicates state of the UART1BEINTR interrupt.

[8] PEMIS - Parity error masked interrupt status

It indicates state of the UART1PEINTR interrupt.

[7] FEMIS - Framing error masked interrupt status

It indicates state of the UART1FEINTR interrupt.

[6] RTMIS - Receive timeout masked interrupt status

It indicates state of the UART1RTINTR interrupt.

[5] TXMIS - Transmit masked interrupt status

It indicates state of the UART1TXINTR interrupt.

[4] RXMIS - Receive masked interrupt status

It indicates state of the UART1RXINTR interrupt.

[3] DSRMMIS - nUART1DSR modem masked interrupt status

It indicates state of the UART1DSRINTR interrupt.

[2] DCDMMIS - nUART1DCD modem masked interrupt status

It indicates state of the UART1DCDINTR interrupt.

[1] CTSMMIS - nUART1CTS modem masked interrupt status

It indicates state of the UART1CTSINTR interrupt.

[0] RIMMIS - nUART1RI modem masked interrupt status

It indicates state of the UART1RIINTR interrupt.

22.6.13 UART1ICR (UART1 Interrupt Clear Register)

Address offset: 0x0044

Reset value: -

The UART1ICR register is the interrupt clear register and is write-only.

31	30	29	28	27	26	25	24	23		22	21	20	19	18	17	16
res		res														

15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
res	res	res	res	res	OEIC	BEIC	PEIC	FEIC	RTIC	TXIC	RXIC	DSRM IC	DCDM IC	CTSM IC	RI MIC
					R	R	R	R	R	R	R	R	R	R	R

[10] OEIC - Overrun error interrupt clear

Clear the UART1OEINTR interrupt.

[9] BEIC - Break error interrupt clear

Clear the UART1BEINTR interrupt.

[8] PEIC - Parity error interrupt clear

Clear the UART1PEINTR interrupt.

[7] FEIC - Framing error interrupt clear

Clear the UART1FEINTR interrupt.

[6] RTIC - Receive timeout interrupt clear

Clear the UART1RTINTR interrupt.

[5] TXIC - Transmit interrupt clear

Clear the UART1TXINTR interrupt.

[4] RXIC - Receive interrupt clear

Clear the UART1RXINTR interrupt.

[3] DSRMIC - nUART1DSR modem interrupt clear

Clear the UART1DSRINTR interrupt.

[2] DCDMIC - nUART1DCD modem interrupt clear

Clear the UART1DCDINTR interrupt.

[1] CTSMIC - nUART1CTS modem interrupt clear

Clear the UART1CTSINTR interrupt.

[0] RIMIC - nUART1RI modem interrupt clear

Clear the UART1RIINTR interrupt.

22.7 Register map

The following Table 38 summarizes the UART1 registers.

Table 38 UART1 register map and reset values

23 Universal Asynchronous Receive Transmit(UART2)

23.1 Introduction

The UART supports synchronous one-way communication, half-duplex single wire communication, and without CTS/RTS. UART2 is called the simple UART.

23.2 Feature

- Serial-to-parallel conversion on data received from a peripheral device
- Parallel-to-serial conversion on data transmitted to the peripheral device

23.3 Functional description

UART bidirectional communication requires a minimum of two pins: RX, TX

The frame are comprised of:

- An Idle Line prior to transmission or reception
- The UART interface uses a baud rate generator
- A status register (UART2_SR)
- data registers (UART2DR)
- A baud rate register (UART2_B,UART1_FBRD)

23.3.1 Baud rate calculation

UART2 can operate with or without using the Fractional Divider. The baud rate divisor is a 20-bit number consisting the UART2BDR.

This is used by the baud rate generator to determine the bit period.

$$- \text{ Baud Rate Divisor} = \frac{\text{UARTCLK}}{(\text{baud rate})}$$

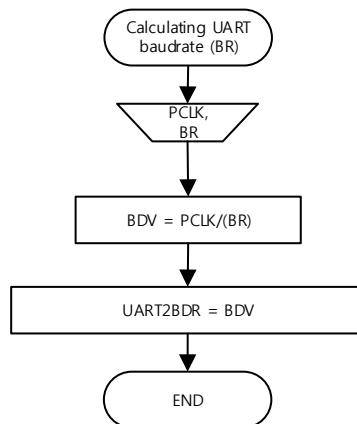


Figure 53. UART2 divider flow chart

Figure 54 show how to set the UART Initial value.




Figure 54. UART2 Initial setting flow chart

23.4 UART2 Registers(Base address: 0x4000_6000)

23.4.1 UART2DR (UART2 Data Register)

Address offset: 0x000

Reset value: 0x0000_0000

The UART2DR is the data register.

The write operation initiates transmission from the UART. The received data byte is read by performing reads from the UARTDR register along with the corresponding status information.

31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16
res															

15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
res							DATA								
															R/W

[7:0] DATA - Receive (READ)/Transmit (WRITE) data

23.4.2 UART2SR (UART2 Status Register)

Address offset: 0x004

Reset value: 0x0000_0000

The UART2SR is the status register. RXFF and TXFF is read only.

A write to the UART2SR register clears the TX/RX overrun errors.

31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16
res															

15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
res	RXO	TXO	RXFF												
													R/W	R/W	R

[3] RXO -Receive Overrun

[2] TXO - Transmit Overrun

[1] RXFF - Receive FIFO full

Read Only

0: The bit is set when the receive holding register is full

1: The bit is set when the receive FIFO is full

[0] TXFF - Transmit FIFO full

Read Only

0: The bit is set when transmit holding register is full.

1: The bit is set when transmit FIFO is full.

23.4.3 UART2CR (UART2 Control Register)

Address offset: 0x008

Reset value: 0x0000_0000

The UART2CTR is the control register. RXFF and TXFF is read only.

A write to the UART2SR register clears the TX/RX overrun errors.

31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16
Res	res	res	res	res	res										
15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
Res	ROIE	TOIE	RXIE	TXIE	RXE	TXE									
										R/W	R/W	R/W	R/W	R/W	R/W

[5] ROIE - Receive Overrun Interrupt Enable

[4] TOIE - Transmit Overrun Interrupt Enable

[3] RXIE - Receive Interrupt Enable

[2] TXIE - Transmit Interrupt Enable

[1] RXE - Receive enable

If this bit is set to 1, the receive section of the UART is enabled.

When the UART is disabled in the middle of reception, it completes the current character before stopping.

[0] TXE - Transmit enable

If this bit is set to 1, the transmit section of the UART is enabled

23.4.4 UART2ISR/ICR (UART2 Interrupt Status/Interrupt Clear Register)

Address offset: 0x00C

Reset value: 0x0000_0000

The UART2SR is the status register. RXFF and TXFF is read only.

A write to the UART2SR register clears the TX/RX overrun errors.

31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16
res															

15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
res	RXOI	TXOI	RXI	TXI											
												R/W	R/W	R/W	R/W

[3] RXOI -Receive Overrun Interrupt

This bit depends on the state of the ROIE bit in the control register, UART2CR

[2] TXOI - Transmit Overrun Interrupt

This bit depends on the state of the TOIE bit in the control register, UART2CR

[1] RXI - Receive Interrupt

This bit depends on the state of the RXIE bit in the control register, UART2CR

[0] TXI - Transmit Interrupt

This bit depends on the state of the TXIE bit in the control register, UART2CR

23.4.5 UART2BDR (UART2 Baud Rate Divider Register)

Address offset: 0x010

Reset value: 0x0000_0000

The UART2BDR r is the integer part of the baud rate divisor value.

31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16
res															
															R/W

15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
BAUDDIV															
R/W															

[19:0] Baud rate divider

The minimum number is 16. These bits are cleared to 0 on reset

Example 1

If the required baud rate is 115200 and UARTCLK = 8MHz then:

$$\text{Baud rate divisor BAUDDIV} = (F_{\text{UARTCLK}} / \text{Baud rate})$$

$$\text{Baud rate divisor} = (8 \times 10^6) / (115200) = 69.4$$

This means BRD = 69

23.4.6 Register map

The following Table 38 summarizes the UART1 registers.

Table 39 UART2 register map and reset values

Offset	Register	31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0	Hi	Lo
0x00	UART2DR	RES	Data register																																
	reset value	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0				
0x04	UART2SR	RES	Status Register																																
	reset value	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0				
0x08	UART2CR	RES	Control Register																																
	reset value	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0				
0x0C	UART2ISR/ ICR	RES	Interrupt Status / Interrupt Clear Register																																
	reset value	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0				
0x10	UART2BVDR	RES	Baud Rate Divider Register																																
	reset value	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0				
BAUD DIV																																			

24 Synchronous Serial Port (SSP)

24.1 Introduction

The SSP block is an IP provided by ARM (PL022 “PrimeCell® Synchronous Serial Port”).

Additional details about its functional blocks may be found in “ARM PrimeCell® Synchronous Serial Port (PL022) Technical Reference Manual”.

24.2 Features

- The SSP is a master or slave interface that enables synchronous serial communication with slave or master peripherals having one of the following:
 - A MOTOROLA SPI-compatible interface
 - A TEXAS INSTRUMENTS synchronous serial interface
 - A National Semiconductor MICROWIRE® interface.
- The SPI interface operates as a master or slave interface. It supports bit rates up to 20 MHz in both master and slave configurations. The SPI has the following features:
 - Parallel-to-serial conversion on data written to an internal 16-bit wide, 8-location deep transmit FIFO
 - Serial-to-parallel conversion on received data, buffering it in a 16-bit wide, 8-location deep receive FIFO
 - Programmable data frame size from 4 to 16 bits
 - Programmable clock bit rate and prescaler. The input clock may be divided by a factor of 2 to 254 in steps of two to provide the serial output clock
 - Programmable clock phase and polarity.

24.3 Functional description

Figure 55 shows the SSP block diagram.

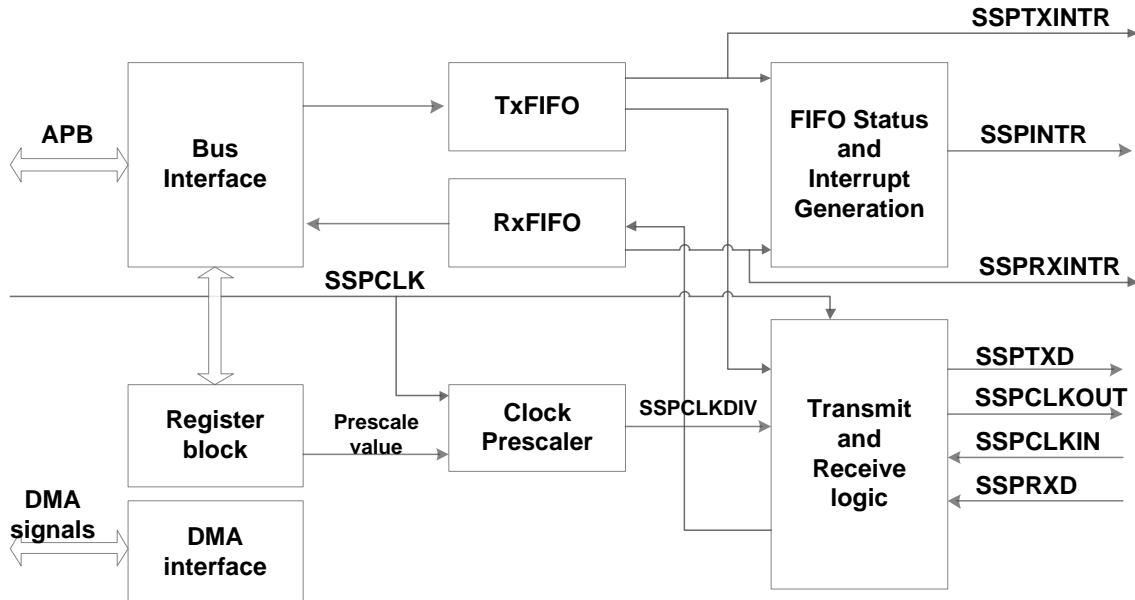


Figure 55. SSP block diagram

24.3.1 Clock prescaler

When configured as a master, an internal prescaler is used to provide the serial output clock. The prescaler may be programmed through the SSPCPSR register to divide the SSPCLK by a factor of 2 to 254 in two steps. As the least significant bit of the SSPCPSR register is not used, division by an odd number is impossible and this ensures a symmetrical (equal mark space ratio) clock is generated.

The output of this prescaler is further divided by a factor 1 to 256 through the programming of the SSPCR0 control register, to give a final master output clock.

24.3.2 Transmit FIFO

The common transmit FIFO is a 16-bit wide, 8-locations deep, First-In, First-Out (FIFO) memory buffer. CPU data written across the AMBA APB interface are stored in the buffer until it is read out by the transmit logic.

When configured as a master or a slave, parallel data is written into the transmit FIFO prior to serial conversion and is transmitted to the attached slave or master through the SSPTXD pin.

24.3.3 Receive FIFO

The common receive FIFO is a 16-bit wide, 8-locations deep, first-in, first-out memory buffer. Received data from the serial interface are stored in the buffer until it is read out by the CPU across the AMBA APB interface.

When configured as a master or slave, serial data received through the SSPRXD pin is registered prior to parallel loading into the attached slave or master receive FIFO.

24.3.4 Interrupt generation logic

The PrimeCell SSP generates four individual maskable, active-HIGH interrupts. A combined interrupt output is also generated as an OR function of the individual interrupt requests.

Users can use the single combined interrupt with a system interrupt controller that provides another level of masking on a per-peripheral basis. This enables use of modular device drivers that always know where to find the interrupt source control register bits.

Users can also use the individual interrupt requests with a system interrupt controller that provides masking for the outputs of each peripheral. In this way, a global interrupt controller service routine can read the entire set of sources from one wide register in the system interrupt controller. This is attractive when the time to read from the peripheral registers is significant compared to the CPU clock speed in a real-time system.

The peripheral supports both methods above.

The transmit and receive dynamic data-flow interrupts, SSPTXINTR and SSPRXINTR, are separated from the status interrupts so that data can be read or written in response to the FIFO trigger levels.

24.3.5 DMA interface

The PrimeCell SSP provides an interface to connect to the DMA controller. The PrimeCell SSP DMA control register, SSPDMACR controls the DMA operation of the PrimeCell SSP.

Receive - The DMA interface includes the following signals for receive:

- SSPRXDMASREQ
 - Single-character DMA transfer request asserted by the SSP. This signal is asserted when the receive FIFO contains at least one character.

- SSPRXDMABREQ
 - Burst DMA transfer request, asserted by the SSP. This signal is asserted when the receive FIFO contains four or more characters.
- SSPRXDMACLR
 - DMA request clear asserted by the DMA controller to clear the receive request signals. If DMA burst transfer is requested, the clear signal is asserted during the transfer of the last data in the burst.

Transmit - The DMA interface includes the following signals for transmit:

- SSPTXDMASREQ
 - Single-character DMA transfer request asserted by the SSP. This signal is asserted when there is at least one empty location in the transmit FIFO.
- SSPTXDMABREQ
 - Burst DMA transfer request asserted by the SSP. This signal is asserted when the transmit FIFO contains four characters or fewer.
- SSPTXDMACLR
 - DMA request clear asserted by the DMA controller to clear the transmit request signals. If a DMA burst transfer is requested, the clear signal is asserted during the transfer of the last data in the burst.

The burst transfer and single transfer request signals are not mutually exclusive. They can both be asserted at the same time. For example, when there is more data than the watermark level of four in the receive FIFO, the burst transfer request and the single transfer request are asserted.

When the amount of data left in the receive FIFO is less than the watermark level, the single request only is asserted. This is useful for situations when the number of characters left to be received in the stream is less than a burst.

For example, if 19 characters must be received, the DMA controller then transfers four bursts of four characters and three single transfers to complete the stream.

The PrimeCell SSP does not assert the burst request for the remaining three characters.

Each request signal remains asserted until the relevant DMA clear signal is asserted. After the request clear signal is de-asserted, a request signal can become active again depending on the conditions that previous sections describe. All request signals are de-asserted if the PrimeCell SSP is disabled or the DMA enable signal is cleared.

Table 40 shows the trigger points for DMABREQ of both the transmit and receive FIFOs.

Table 40 DMA trigger points for the transmit and receive FIFOs.

Burst length

Watermark level	Transmit, number of empty locations	Receive, number of filled locations
1/2	4	4

Figure 56 shows the timing diagram for both a single transfer request, and a burst transfer request, with the appropriate DMA clear signal. The signals are all synchronous to PCLK.

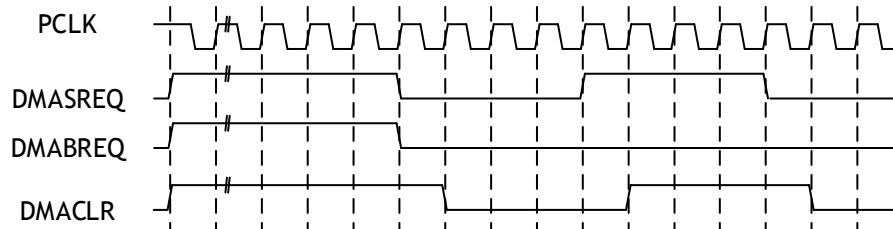


Figure 56. DMA transfer waveforms

24.3.6 Interface reset

The PrimeCell SSP is reset by the global reset signal, PRESETn, and a block-specific reset signal, nSSPRST. An external reset controller must use PRESETn to assert nSSPRST asynchronously and negate it synchronously to SSPCLK. PRESETn must be asserted LOW for a period long enough to reset the slowest block in the on-chip system, and then taken HIGH again. The PrimeCell SSP requires PRESETn to be asserted LOW for at least one period of PCLK.

24.3.7 Configuring the SSP

The Following reset, the PrimeCell SSP logic is disabled and must be configured when in this state.

It is necessary to program control registers SSPCR0 and SSPCR1 to configure the peripheral as a master or slave operating under one of the following protocols:

- Motorola SPI
- Texas Instruments SSI
- National Semiconductor.

The bit rate, derived from the external SSPCLK, requires the programming of the clock prescale register SSPCPSR.

24.3.8 Enable PrimeCell SSP operation

You can either prime the transmit FIFO, by writing up to eight 16-bit values when the PrimeCell SSP is disabled, or permit the transmit FIFO service request to interrupt the CPU. Once enabled, transmission or reception of data begins on the transmit, SSPTXD, and receive, SSPRXD, pins.

24.3.9 Clock ratios

There is a constraint on the ratio of the frequencies of PCLK to SSPCLK. The frequency of SSPCLK must be less or equal to that of PCLK. This ensures that control signals from the SSPCLK domain to the PCLK domain are guaranteed to get synchronized before one frame duration:
 $F_{SSPCLK} \leq F_{PCLK}$.

In the slave mode of operation, the SSPCLKIN signal from the external master is double-synchronized and then delayed to detect an edge. It takes three SSPCLKs to detect an edge on SSPCLKIN. SSPTXD has less setup time to the falling edge of SSPCLKIN on which the master is sampling the line.

The setup and hold times on SSPRXD, with reference to SSPCLKIN, must be more conservative to ensure that it is at the right value when the actual sampling occurs within the SSPMS. To ensure correct device operation, SSPCLK must be at least 12 times faster than the maximum expected frequency of SSPCLKIN.

The frequency selected for SSPCLK must accommodate the desired range of bit clock rates. The ratio of minimum SSPCLK frequency to SSPCLKOUT maximum frequency in the case of the slave mode is 12, and for the master mode, it is two.

To generate a maximum bit rate of 1.8432Mbps in the master mode, the frequency of SSPCLK must be at least 3.6864MHz. With an SSPCLK frequency of 3.6864MHz, the SSPCPSR register must be programmed with a value of 2, and the SCR[7:0] field in the SSPCR0 register must be programmed with a value of 0.

To work with a maximum bit rate of 1.8432Mbps in the slave mode, the frequency of SSPCLK must be at least 22.12MHz. With an SSPCLK frequency of 22.12MHz, the SSPCPSR register can be programmed with a value of 12 and the SCR[7:0] field in the SSPCR0 register can be programmed with a value of 0. Similarly, the ratio of SSPCLK maximum frequency to SSPCLKOUT minimum frequency is 254 x 256.

The minimum frequency of SSPCLK is calculated by the following equations, both of which must be satisfied:

$$F_{SSPCLK(min)} \Rightarrow 2 \times F_{SSPCLKOUT(max)}, \text{ for master mode}$$

FSSPCLK(min) => 12 x FSSPCLKIN(max), for slave mode.

The maximum frequency of SSPCLK is calculated by the following equations, both of which must be satisfied:

FSSPCLK(max) <= 254 x 256 x FSSPCLKOUT(min), for master mode

FSSPCLK(max) <= 254 x 256 x FSSPCLKIN(min), for slave mode.

24.3.10 Programming the SSPCR0 Control Register

The SSPCR0 register is used to:

- program the serial clock rate
- select one of the three protocols
- select the data word size, where applicable.

The Serial Clock Rate (SCR) value in conjunction with the SSPCPSR clock prescale divisor value, CPSDVSR, is used to derive the PrimeCell SSP transmit and receive bit rate from the external SSPCLK.

The frame format is programmed through the FRF bits and the data word size through the DSS bits.

Bit phase and polarity applicable to Motorola SPI format only are programmed through the SPH and SPO bits.

24.3.11 Programming the SSPCR1 Control Register

The SSPCR1 register is used to:

- select master or slave mode
- enable a loop back test feature
- enable the PrimeCell SSP peripheral.

To configure the PrimeCell SSP as a master, clear the SSPCR1 register master or slave selection bit, MS, to 0. This is the default value on reset.

Setting the SSPCR1 register MS bit to 1 configures the PrimeCell SSP as a slave. When configured as a slave, enabling or disabling of the PrimeCell SSP SSPTXD signal is provided through the SSPCR1 slave mode SSPTXD output disable bit, SOD. You can use this in some multi-slave environments where masters might parallel broadcast.

Set the Synchronous Serial Port Enable (SSE) bit to 1 to enable the operation of the PrimeCell SSP.

Bit rate generation

The serial bit rate is derived by dividing down the input clock SSPCLK. The clock is first divided by an even prescale value CPSDVSR in the range of 2-254, and is programmed in SSPCPSR. The clock is divided again by a value in the range of 1-256, that is 1 + SCR, where SCR is the value programmed in SSPCR0.

The following equation defines the frequency of the output signal bit clock, SSPCLKOUT:

$$F_{SSPCLKOUT} = \frac{F_{SSPCLK}}{CPSDVSR \times (1 + SCR)}$$

For example, if SSPCLK is 20MHz, and CPSDVSR = 2, then SSPCLKOUT has a frequency range of 39.06kHz~10MHz.

24.3.12 Frame format

Each data frame is between 4-16 bits long depending on the size of data programmed and is transmitted starting with the MSB. Users can select the following basic frame types:

- Texas Instruments synchronous serial
- Motorola SPI
- National Semiconductor Microwire.

For all formats, the serial clock SSPCLKOUT is held inactive while the PrimeCell SSP is idle and transitions at the programmed frequency only during active transmission or reception of data. The idle state of SSPCLKOUT is utilized to provide a receive timeout indication that occurs when the receive FIFO still contains data after a timeout period.

For Motorola SPI and National Semiconductor Microwire frame formats, the serial frame SSPFSSOUT pin is active-LOW and is asserted and pulled-down during the entire transmission of the frame.

For Texas Instruments synchronous serial frame format, the SSPFSSOUT pin is pulsed for one serial clock period starting at its rising edge prior to the transmission of each frame. For this frame format, both the PrimeCell SSP and the off-chip slave device drive their output data on the rising edge of SSPCLKOUT and latch data from the other device on the falling edge.

Unlike the full-duplex transmission of the other two frame formats, the National Semiconductor Microwire format uses a special master-slave messaging technique which operates at half-duplex. In this mode, an 8-bit control message is transmitted to the off-chip slave when a frame begins. During this transmit, the SSP receives no incoming data. After the message has been sent, the off-chip slave decodes it and responds with the requested data after waiting one serial clock after the last bit of the 8-bit control message has been sent. The returned data can be 4-16 bits in length making the total frame length in the range of 13-25 bits.

Texas Instruments synchronous serial frame format

Figure 57 shows the Texas Instruments synchronous serial frame format for a single transmitted frame.

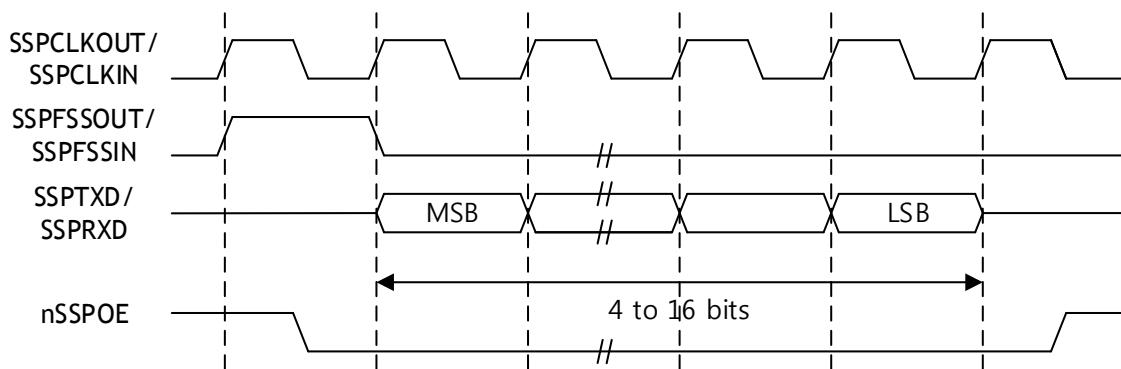


Figure 57. Texas Instruments synchronous serial frame format, single transfer

In this mode, SSPCLKOUT and SSPFSSOUT are forced LOW and the transmit data line SSPTXD is tristated whenever the PrimeCell SSP is idle. When the bottom entry of the transmit FIFO contains data, SSPFSSOUT is pulsed HIGH for one SSPCLKOUT period. The value to be transmitted is also transferred from the transmit FIFO to the serial shift register of the transmit logic. On the next rising edge of SSPCLKOUT, the MSB of the 4-bit to 16-bit data frame is shifted out on the SSPTXD pin. In a similar way, the MSB of the received data is shifted onto the SSPRXD pin by the off-chip serial slave device.

Both the PrimeCell SSP and the off-chip serial slave device then clock each data bit into their serial shifter on the falling edge of each SSPCLKOUT. The received data is transferred from the serial shifter to the receive FIFO on the first rising edge of PCLK after the LSB has been latched.

Figure 58 shows the Texas Instruments synchronous serial frame format when back-to-back frames are transmitted.

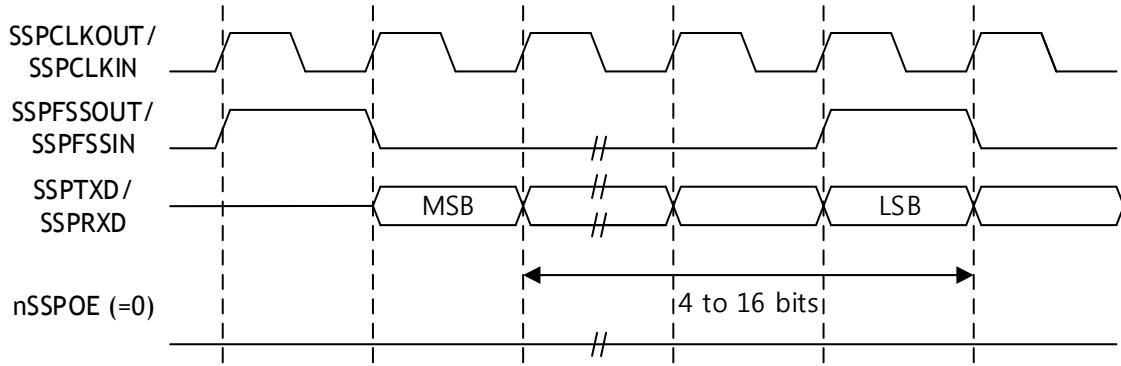


Figure 58. Texas Instruments synchronous serial frame format, continuous transfers

24.3.13 Motorola SPI frame format

The Motorola SPI interface is a four-wire interface where the SSPFSSOUT signal behaves as a slave select. The main feature of the Motorola SPI format is that you can program the inactive state and phase of the SSPCLKOUT signal using the SPO and SPH bits of the SSPSCRO control register.

SPO, clock polarity

When the SPO clock polarity control bit is LOW, it produces a steady state LOW value on the SSPCLKOUT pin. If the SPO clock polarity control bit is HIGH, a steady state HIGH value is placed on the SSPCLKOUT pin when data is not being transferred.

SPH, clock phase

The SPH control bit selects the clock edge that captures data and enables it to change state. It has the most impact on the first bit transmitted by either permitting or not permitting a clock transition before the first data capture edge.

When the SPH phase control bit is LOW, data is captured on the first clock edge transition.

When the SPH clock phase control bit is HIGH, data is captured on the second clock edge transition.

Figure 59 and Figure 60 show single and continuous transmission signal sequences for Motorola SPI format with SPO=0, SPH=0.

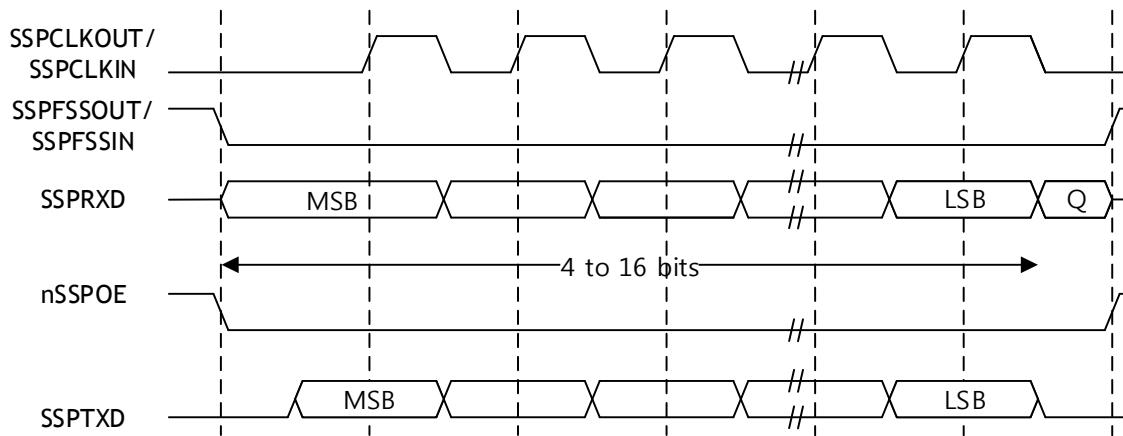


Figure 59 Motorola SPI frame format, single transfer, with SPO=0 and SPH=0

Figure 60 shows a continuous transmission signal sequence for Motorola SPI frame format with SPO=0, SPH=0.

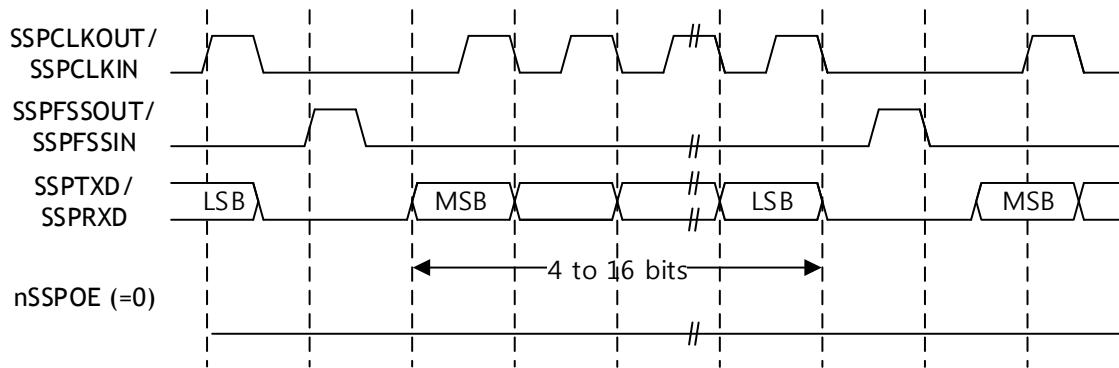


Figure 60 Motorola SPI frame format, continuous transfers, with SPO=0 and SPH=0

In this configuration, during idle periods:

- the SSPCLKOUT signal is forced LOW
- the SSPFSSOUT signal is forced HIGH
- the transmit data line SSPTXD is arbitrarily forced LOW
- the nSSPOE pad enable signal is forced HIGH, making the transmit pad high impedance
- when the PrimeCell SSP is configured as a master, the nSSPCTLOE line is driven LOW, enabling the SSPCLKOUT pad, active-LOW enable
- when the PrimeCell SSP is configured as a slave, the nSSPCTLOE line is driven HIGH, disabling the SSPCLKOUT pad, active-LOW enable.

If the PrimeCell SSP is enabled and there is valid data within the transmit FIFO, the start of transmission is signified by the SSPFSSOUT master signal being driven LOW. This causes the slave data to be enabled onto the SSPRXD input line of the master. The nSSPOE line is driven LOW, enabling the master SSPTXD output pad.

One half SSPCLKOUT period later, valid master data is transferred to the SSPTXD pin. Now that both the master and slave data have been set, the SSPCLKOUT master clock pin goes HIGH after one additional half SSPCLKOUT period.

The data is now captured on the rising and propagated on the falling edges of the SSPCLKOUT signal.

In the case of a single word transmission after all bits of the data word have been transferred, the SSPFSSOUT line is returned to its idle HIGH state one SSPCLKOUT period after the last bit has been captured.

However, in the case of continuous back-to-back transmissions, the SSPFSSOUT signal must be pulsed HIGH between each data word transfer. This is because the slave select pin freezes the data in its serial peripheral register and does not permit it to be altered if the SPH bit is logic zero. Therefore, the master device must raise the SSPFSSIN pin of the slave device between each data transfer to enable the serial peripheral data write. On completion of the continuous transfer, the SSPFSSOUT pin is returned to its idle state one SSPCLKOUT period after the last bit has been captured.

Figure 61 shows the transfer signal sequence for Motorola SPI format with SPO=0, SPH=1, and it covers both single and continuous transfers.

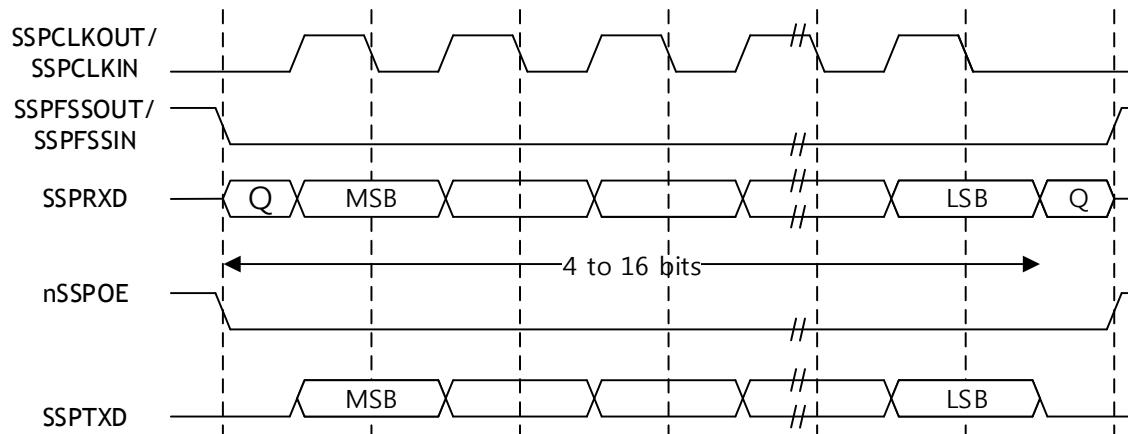


Figure 61 Motorola SPI frame format, single and continuous transfers, with SPO=0 and SPH=1

In this configuration, during idle periods:

- the SSPCLKOUT signal is forced LOW
- The SSPFSSOUT signal is forced HIGH
- the transmit data line SSPTXD is arbitrarily forced LOW

- the nSSPOE pad enable signal is forced HIGH, making the transmit pad high impedance
- when the PrimeCell SSP is configured as a master, the nSSPCTLOE line is driven LOW, enabling the SSPCLKOUT pad, active-LOW enable
- when the PrimeCell SSP is configured as a slave, the nSSPCTLOE line is driven HIGH, disabling the SSPCLKOUT pad, active-LOW enable.

If the PrimeCell SSP is enabled and there is valid data within the transmit FIFO, the start of transmission is signified by the SSPFSSOUT master signal being driven LOW. The nSSPOE line is driven LOW, enabling the master SSPTXD output pad. After an additional one half SSPCLKOUT period, both master and slave valid data is enabled onto their respective transmission lines. At the same time, the SSPCLKOUT is enabled with a rising edge transition.

Data is then captured on the falling edges and propagated on the rising edges of the SSPCLKOUT signal.

In the case of a single word transfer after all bits have been transferred, the SSPFSSOUT line is returned to its idle HIGH state one SSPCLKOUT period after the last bit has been captured.

For continuous back-to-back transfers, the SSPFSSOUT pin is held LOW between successive data words and termination is the same as that of the single word transfer.

Figure 62 shows a single transmission signal sequence for Motorola SPI format with SPO=1, SPH=0.

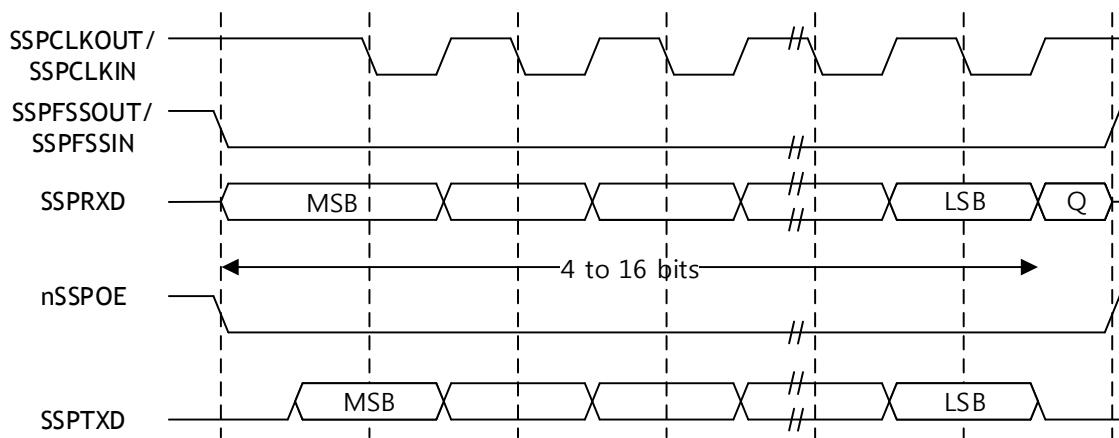


Figure 62 Motorola SPI frame format, single transfer, with SPO=1 and SPH=0

Figure 63 shows a continuous transmission signal sequence for Motorola SPI format with SPO=1, SPH=0. In Figure 9, Q is an undefined signal.

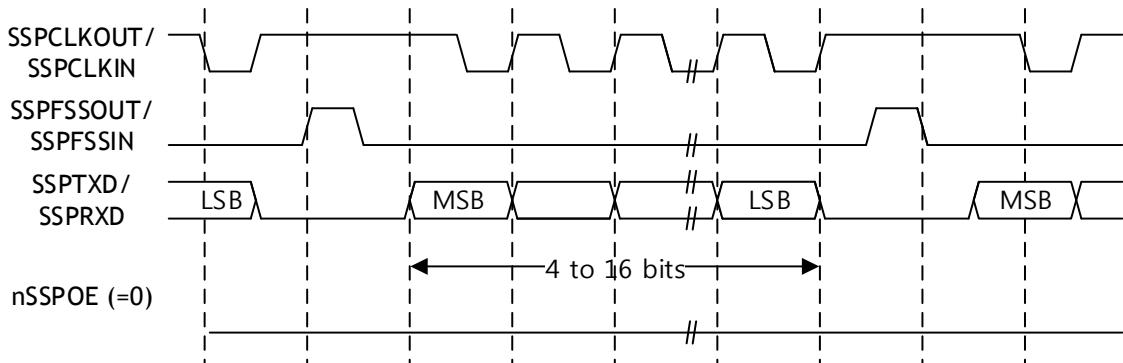


Figure 63. Motorola SPI frame format, continuous transfers, with SPO=1 and SPH=0

In this configuration, during idle periods:

- the SSPCLKOUT signal is forced HIGH
- the SSPFSSOUT signal is forced HIGH
- the transmit data line SSPTXD is arbitrarily forced LOW
- the nSSPOE pad enable signal is forced HIGH, making the transmit pad high impedance
- when the PrimeCell SSP is configured as a master, the nSSPCTLOE line is driven LOW, enabling the SSPCLKOUT pad, active-LOW enable
- when the PrimeCell SSP is configured as a slave, the nSSPCTLOE line is driven HIGH, disabling the SSPCLKOUT pad, active-LOW enable.

If the PrimeCell SSP is enabled and there is valid data within the transmit FIFO, the start of transmission is signified by the SSPFSSOUT master signal being driven LOW, and this causes slave data to be immediately transferred onto the SSPRXD line of the master. The nSSPOE line is driven LOW, enabling the master SSPTXD output pad.

One half period later, valid master data is transferred to the SSPTXD line. Now that both the master and slave data have been set, the SSPCLKOUT master clock pin becomes LOW after one additional half SSPCLKOUT period. This means that data is captured on the falling edges and be propagated on the rising edges of the SSPCLKOUT signal.

In the case of a single word transmission after all bits of the data word are transferred, the SSPFSSOUT line is returned to its idle HIGH state one SSPCLKOUT period after the last bit has been captured.

However, in the case of continuous back-to-back transmissions, the SSPFSSOUT signal must be pulsed HIGH between each data word transfer. This is because the slave select pin freezes the data in its serial peripheral register and does not permit it to be altered if the SPH bit is logic zero. Therefore, the master device must raise the SSPFSSIN pin of the slave device between

each data transfer to enable the serial peripheral data write. On completion of the continuous transfer, the SSPFSSOUT pin is returned to its idle state one SSPCLKOUT period after the last bit has been captured.

Figure 64 shows the transfer signal sequence for Motorola SPI format with SPO=1, SPH=1, and it covers both single and continuous transfers. In Q is an undefined signal.

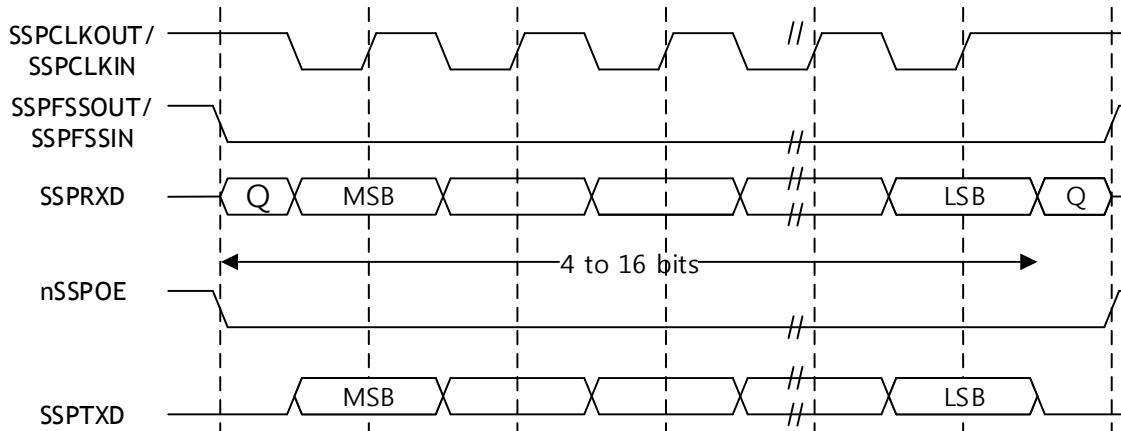


Figure 64. Motorola SPI frame format, single and continuous transfers, with SPO=1 and SPH=1

In this configuration, during idle periods:

- the SSPCLKOUT signal is forced HIGH
- the SSPFSSOUT signal is forced HIGH
- the transmit data line SSPTXD is arbitrarily forced LOW
- the nSSPOE pad enable signal is forced HIGH, making the transmit pad high impedance
- when the PrimeCell SSP is configured as a master, the nSSPCTLOE line is driven LOW, enabling the SSPCLKOUT pad, active-LOW enable
- when the PrimeCell SSP is configured as a slave, the nSSPCTLOE line is driven HIGH, disabling the SSPCLKOUT pad, active-LOW enable.

If the PrimeCell SSP is enabled and there is valid data within the transmit FIFO, the start of transmission is signified by the SSPFSSOUT master signal being driven LOW. The nSSPOE line is driven LOW, enabling the master SSPTXD output pad. After an additional one half SSPCLKOUT period, both master and slave data are enabled onto their respective transmission lines. At the same time, the SSPCLKOUT is enabled with a falling edge transition. Data is then captured on the rising edges and propagated on the falling edges of the SSPCLKOUT signal.

After all bits have been transferred in the case of a single word transmission, the SSPFSSOUT line is returned to its idle HIGH state one SSPCLKOUT period after the last bit has been captured.

For continuous back-to-back transmissions, the SSPFSSOUT pin remains in its active-LOW state, until the final bit of the last word has been captured, and then returns to its idle state as the previous section describes.

For continuous back-to-back transfers, the SSPFSSOUT pin is held LOW between successive data words and termination is the same as that of the single word transfer.

National Semiconductor Microwire frame formatFigure 65 shows the National Semiconductor Microwire frame format for a single frame.

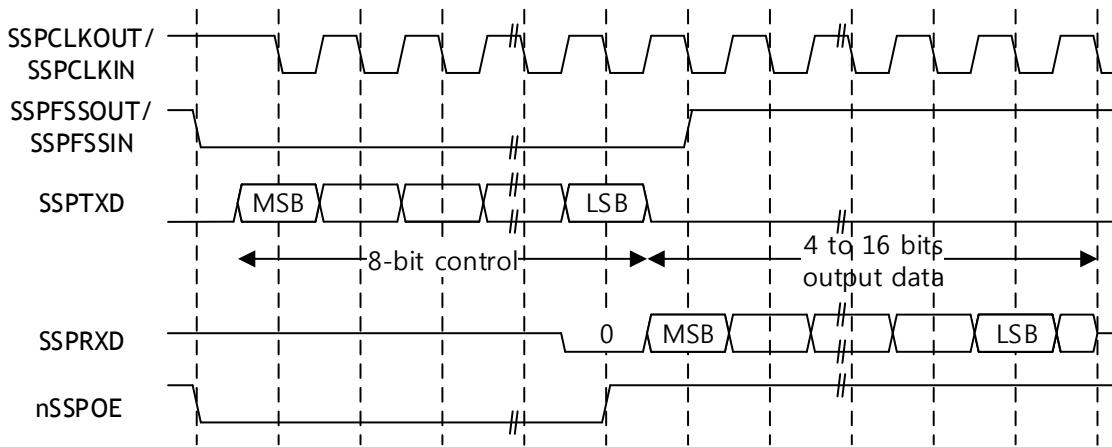


Figure 65. National Semiconductor Microwire frame format, single transfer

Microwire format is very similar to the SPI format except that transmission is half-duplex instead of full-duplex using a master-slave message passing technique. Each serial transmission begins with an 8-bit control word that is transmitted from the PrimeCell SSP to the off-chip slave device. During this transmission, the PrimeCell SSP receives no incoming data. After the message has been sent, the off-chip slave decodes it and responds with the required data after waiting one serial clock after the last bit of the 8-bit control message has been sent. The returned data is 4 to 16 bits in length, making the total frame length in the range of 13-25 bits.

In this configuration, during idle periods:

- SSPCLKOUT is forced LOW
- SSPFSSOUT is forced HIGH
- the transmit data line, SSPTXD, is arbitrarily forced LOW
- the nSSPOE pad enable signal is forced HIGH, making the transmit pad high impedance.

A transmission is triggered by writing a control byte to the transmit FIFO. The falling edge of SSPFSSOUT causes the value contained in the bottom entry of the transmit FIFO to be

transferred to the serial shift register of the transmit logic and the MSB of the 8-bit control frame to be shifted out onto the SSPTXD pin. SSPFSSOUT remains LOW for the duration of the frame transmission. The SSPRXD pin remains tristated during this transmission.

The off-chip serial slave device latches each control bit into its serial shifter on the rising edge of each SSPCLKOUT. After the last bit is latched by the slave device, the control byte is decoded during a one clock wait-state and the slave responds by transmitting data back to the PrimeCell SSP. Each bit is driven onto the SSPRXD line on the falling edge of SSPCLKOUT. The PrimeCell SSP in turn latches each bit on the rising edge of SSPCLKOUT. At the end of the frame for single transfers, the SSPFSSOUT signal is pulled HIGH one clock period after the last bit has been latched in the receive serial shifter, which causes the data to be transferred to the receive FIFO.

The off-chip slave device can tristate the receive line either on the falling edge of SSPCLKOUT after the LSB has been latched by the receive shifter or when the SSPFSSOUT pin goes HIGH.

For continuous transfers, data transmission begins and ends in the same manner as a single transfer. However, the SSPFSSOUT line is continuously asserted, held LOW, and transmission of data occurs back-to-back. The control byte of the next frame follows directly after the LSB of the received data from the current frame. Each of the received values is transferred from the receive shifter on the falling edge SSPCLKOUT, after the LSB of the frame has been latched into the PrimeCell SSP.

Figure 66 shows the National Semiconductor Microwire frame format when back-to-back frames are transmitted.

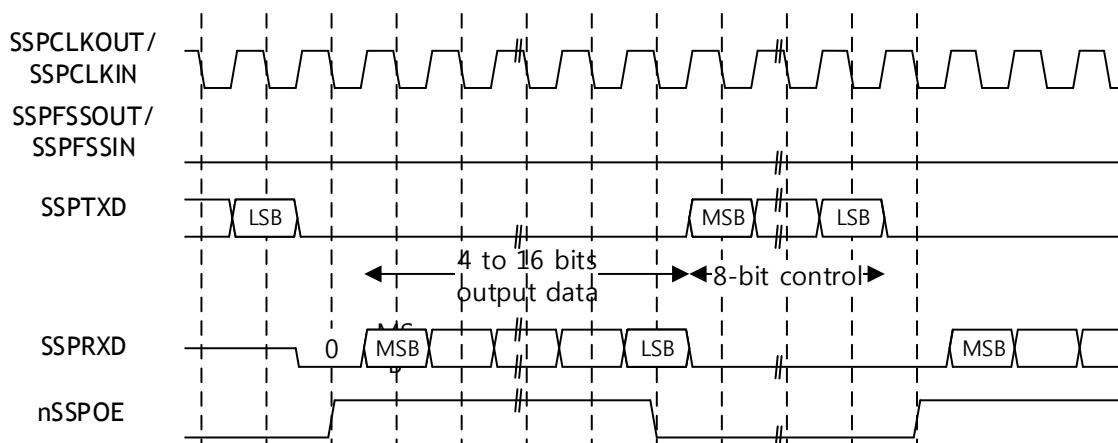


Figure 66. National Semiconductor Microwire frame format, continuous transfers

24.3.14 Master and Slave configurations

Figure 67 shows how a PrimeCell SSP (PL022) configured as master, interfaces to a Motorola SPI slave. The SPI Slave Select (SS) signal is permanently tied LOW and configures it as a slave. Similar to the above operation, the master can broadcast to the slave through the master PrimeCell SSP SSPTXD line. In response, the slave drives its SPI MISO port onto the SSPRXD line of the master.

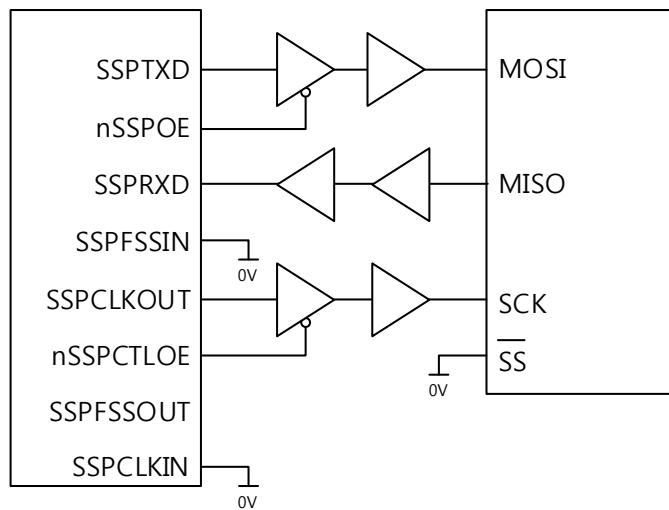


Figure 67. PrimeCell SSP master coupled to an SPI slave

Figure 68 shows a Motorola SPI configured as a master and interfaced to an instance of a PrimeCell SSP (PL022) configured as a slave. In this case, the slave Select Signal (SS) is permanently tied HIGH to configure it as a master. The master can broadcast to the slave through the master SPI MOSI line. In response, the slave drives its nSSPOE signal LOW. This enables its SSPTXD data onto the MISO line of the master.

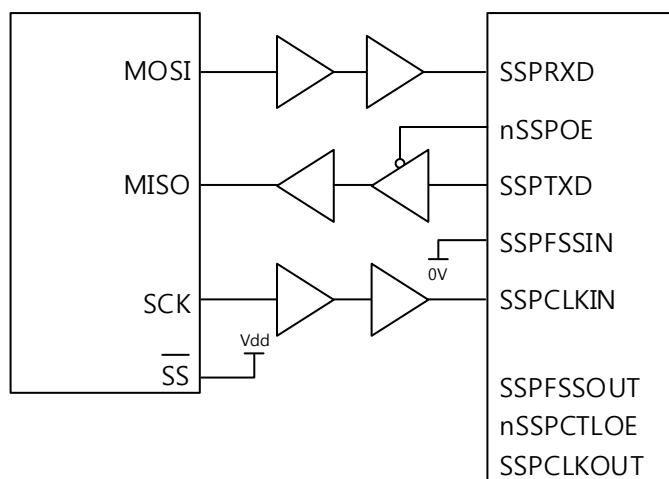


Figure 68. SPI master coupled to a PrimeCell SSP slave

24.3.15 SSP Flow chart

Figure 69 shows how to setting TI or Microwire mode.

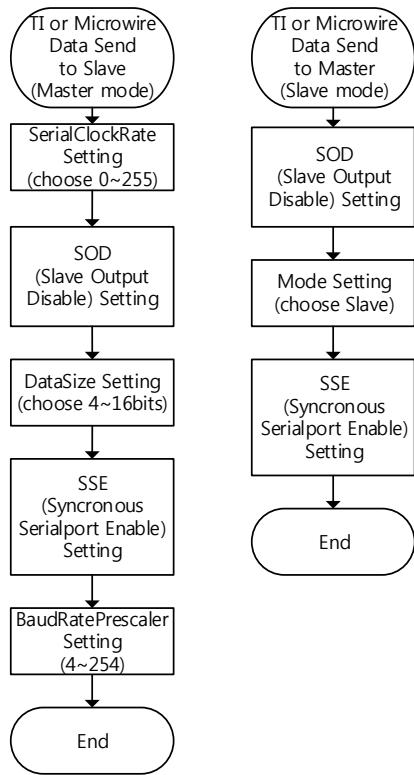


Figure 69. how to setting TI or Microwire mode flow chart

Figure 70 shows how to setting SPI mode.

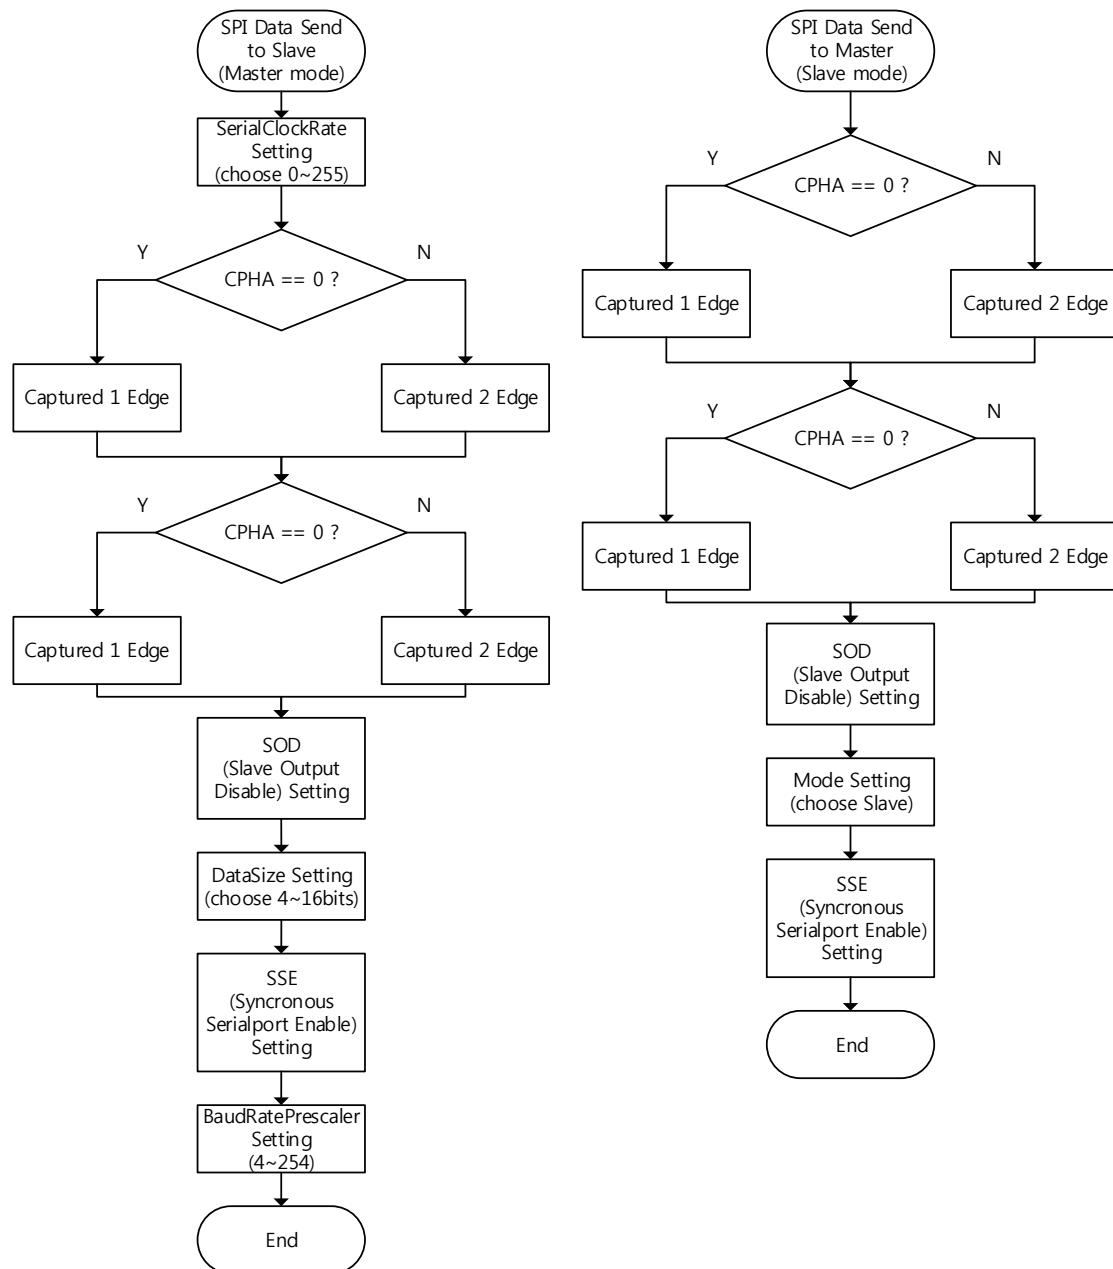


Figure 70. how to setting SPI mode flow chart

24.4 SSP0 Registers (Base Address : 0x4000_A000)

This section describes the SSP0 registers.

24.4.1 SSP0 Control register 0 (SSP0CR0)

Address offset: 0x0000

Reset value: 0x0000_0000

31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16
res															
15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
SCR								SPH	SPO	FRF	DSS				
R/W								R/W	R/W	R/W	R/W				

[3:0] DSS - Data size select:

0000 : reserved, undefined operation

0001 : reserved, undefined operation

0010 : reserved, undefined operation

0011 : 4-bit data

[5:4] FRF - Frame Format

00 : Motorola SPI frame format

01 : TI synchronous serial frame format

10 : National Microwire frame format

11 : Reserved, undefined operation

[6] SPO - SSPCLKOUT polarity

This is applicable to Motorola SPI frame format only.

[7] SPH - SSPCLKOUT phase

This is applicable to Motorola SPI frame format only.

[15:8] SCR - Serial clock rate

The value SCR is used to generate the transmit and receive bit rate of the SSP. The bit rate is:

$$f_{SSPCLK} / (CPSDVSR * (1 + SCR))$$

where

CPSDVSR is an even value from 2-254, programmed through the SSPCPSR register and SCR is a value from 0-255.

24.4.2 SSP0 Control register 1 (SSP0CR1)

Address offset: 0x0004

Reset value: 0x0000_0000

31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16
res															

15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
res	SOD	MS	SSE	LBM											
												R/W	R/W	R/W	R/W

[0] LBM - Loop back mode:

0 : normal serial port operation enabled

1 : output of transmit serial shifter is connected to input of receive serial shifter internally

[1] SSE - Synchronous serial port enable:

0 : SSP0 operation disabled.

1 : SSP0 operation enabled.

[2] MS - Master or Slave mode select:

0 : device configured as master, default.

1 : device configured as slave.

[3] SOD - Slave-mode output disable.

This bit is relevant only in the slave mode, MS = 1. In multiple-slave systems, it is possible for a SSP0 master to broadcast a message to all slaves in the system while ensuring that only one slave drives data onto its serial output line. In such systems the RXD lines from multiple slaves could be tied together.

To operate in such systems, the SOD bit can be set if the SSP0 slave is not supposed to drive the SSPTXD line:

0 : SSP0 can drive the SSPTXD output in slave mode.

1 : SSP0 must not drive the SSPTXD output in slave mode.

24.4.3 SSP0 Data register (SSP0DR)

Address offset: 0x0008

Reset value: 0x0000_0000

31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16
res															

15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
Data															
R/W															

[15:0] DATA - Transmit/Receive FIFO:

Read: Read: receive FIFO.

Write: transmit FIFO.

You must right-justify data when the SSP0 is programmed for a data size that is less than 16 bits. Unused bits at the top are ignored by transmit logic. The receive logic automatically right-justifies.

24.4.4 SSP0 Status register (SSPOSR)

Address offset: 0x000C

Reset value: 0x0000_0003

31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16
res															

15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
res	BSY	RFF	RNE	TNF	TFE										
											R/W	R/W	R/W	R/W	R/W

[0] TFE - Transmit FIFO empty, RO

0 : Transmit FIFO is not empty.

1 : Transmit FIFO is empty.

[1] TNF - Transmit FIFO not full, RO:

0 : Transmit FIFO is full.

1 : Transmit FIFO is not full.

[2] RNE - Receive FIFO not empty, RO:

0 : Receive FIFO is empty.

1 : Receive FIFO is not empty.

[3] RFF - Receive FIFO full, RO:

0 : Receive FIFO is not full.

1 : Receive FIFO is full.

[4] BSY - SSP busy flag, RO:

0 : SSP is idle.No effect

1 : SSP is currently transmitting and/or receiving a frame or the transmit FIFO is not empty.

24.4.5 SSP0 Clock prescale register (SSP0CPSR)

Address offset: 0x0010

Reset value: 0x0000_00000

31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16
res															
15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
res								CPSDVSR							
								R/W							

[7:0] CPSDVSR - Clock prescale divisor

This must be an even number from 2-254, depending on the frequency of SSPCLK. The least significant bit always returns zero on reads.

24.4.6 SSP0 Interrupt mask set or clear register (SSP0IMSC)

Address offset: 0x0014

Reset value: 0x0000_00000

31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16
res	res	res	res												
15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
res	TXI M	RXI M	RTI M	ROR IM											
												R/W	R/W	R/W	R/W

[0] RORIM - Receive overrun interrupt mask:

0 : Receive FIFO written to while full condition interrupt is masked.

1 : Receive FIFO written to while full condition interrupt is not masked.

[1] RTIM - Receive timeout interrupt mask:

0 : Receive FIFO not empty and no read prior to timeout period interrupt is masked.

1 : Receive FIFO not empty and no read prior to timeout period interrupt is not masked.

[2] RXIM - Receive FIFO interrupt mask:

0 : Receive FIFO half full or less condition interrupt is masked.

1 : Receive FIFO half full or less condition interrupt is not masked.

[3] TXIM - Transmit FIFO interrupt mask:

0 : Transmit FIFO half empty or less condition interrupt is masked.

1 : Transmit FIFO half empty or less condition interrupt is not masked.

24.4.7 SSP0 Raw interrupt status register (SSPORIS)

Address offset: 0x0018

Reset value: 0x0000_00004

31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16
res															

15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
res	TXRI S	RXRI S	RTRI S	ROR RIS											
												R/W	R/W	R/W	R/W

[0] RORRIS - Gives the raw interrupt state, prior to masking, of the SSPRORINTR interrupt

[1] RTRIS - Gives the raw interrupt state, prior to masking, of the SSPRTINTR interrupt

[2] RXRIS - Gives the raw interrupt state, prior to masking, of the SSPRXINTR interrupt

[3] TXRIS - Gives the raw interrupt state, prior to masking, of the SSPTXINTR interrupt

24.4.8 SSP0 Masked interrupt status register, (SSP0MIS)

Address offset: 0x001C

Reset value: 0x0000_00000

31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16
res															

15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
res	TXM IS	RXM IS	RTM IS	ROR MIS											
												R/W	R/W	R/W	R/W

[0] RORMIS - Gives the receive over run masked interrupt status, after masking, of the SSPRORINTR interrupt

[1] RTMIS - Gives the receive timeout masked interrupt state, after masking, of the SSPRTINTR interrupt

[2] RXMIS - Gives the receive FIFO masked interrupt state, after masking, of the SSPRXINTR interrupt

[3] TXMIS - Gives the transmit FIFO masked interrupt state, after masking, of the SSPTXINTR interrupt

24.4.9 SSP0 Interrupt clear register (SSP0ICR)

Address offset: 0x0020

Reset value: 0x0000_00000

31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16
res															

15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
res	ROR IC														
														R/W	R/W

[0] RORICS - Clears the SSPRORINTR interrupt

[1] RTIC - Clears the SSPRTINTR interrupt

24.4.10 SSP0 DMA control register, (SSP0DMACR)

Address offset: 0x0024

Reset value: 0x0000_00000

31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16
res															

15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
res	TXD MAE	RXD MAE													
														R/W	R/W

[0] RXDMAE - Receive DMA Enable:

0 : DMA for the receive FIFO is disabled.

1 : DMA for the receive FIFO is enabled.

[1] TXDMAE - Transmit DMA Enable:

0 : DMA for the transmit FIFO is disabled.

1 : DMA for the transmit FIFO is enabled.

24.5 Register map

The following Table 41 summarizes the SSP0 registers.

Table 41 SSP0 register map and reset values

24.6 SSP1 Registers (Base Address : 0x4000_B000)

This section describes the SSP0 registers.

24.6.1 SSP1 Control register 0 (SSP1CR0)

Address offset: 0x0000

Reset value: 0x0000_0000

31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16
res															
15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
SCR								SPH	SPO	FRF	DSS				
R/W								R/W	R/W	R/W	R/W				

[3:0] DSS - Data size select:

0000 : reserved, undefined operation

0001 : reserved, undefined operation

0010 : reserved, undefined operation

0011 : 4-bit data

[5:4] FRF - Frame Format

00 : Motorola SPI frame format

01 : TI synchronous serial frame format

10 : National Microwire frame format

11 : Reserved, undefined operation

[6] SPO - SSPCLKOUT polarity

This is applicable to Motorola SPI frame format only.

[7] SPH - SSPCLKOUT phase

This is applicable to Motorola SPI frame format only.

[15:8] SCR - Serial clock rate

The value SCR is used to generate the transmit and receive bit rate of the SSP. The bit rate is:

$$f_{SSPCLK} / (CPSDVSR * (1 + SCR))$$

where

CPSDVSR is an even value from 2-254, programmed through the SSPCPSR register and SCR is a value from 0-255.

24.6.2 SSP1 Control register 1 (SSP1CR1)

Address offset: 0x0004

Reset value: 0x0000_0000

31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16
res															

15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
res	SOD	MS	SSE	LBM											
												R/W	R/W	R/W	R/W

[0] LBM - Loop back mode:

0 : normal serial port operation enabled

1 : output of transmit serial shifter is connected to input of receive serial shifter internally

[1] SSE - Synchronous serial port enable:

0 : SSP1 operation disabled.

1 : SSP1 operation enabled.

[2] MS - Master or Slave mode select:

0 : device configured as master, default.

1 : device configured as slave.

[3] SOD - Slave-mode output disable.

This bit is relevant only in the slave mode, MS = 1. In multiple-slave systems, it is possible for a SSP1 master to broadcast a message to all slaves in the system while ensuring that only one slave drives data onto its serial output line. In such systems the RXD lines from multiple slaves could be tied together.

To operate in such systems, the SOD bit can be set if the SSP1 slave is not supposed to drive the SSPTXD line:

0 : SSP1 can drive the SSPTXD output in slave mode.

1 : SSP1 must not drive the SSPTXD output in slave mode.

24.6.3 SSP1 Data register (SSP1DR)

Address offset: 0x0008

Reset value: 0x0000_0000

31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16
res	res	res	res	res	res	res	res	res	res	res	res	res	res	res	res
15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
Data															
R/W															

[15:0] DATA - Transmit/Receive FIFO:

Read: Read: receive FIFO.

Write: transmit FIFO.

You must right-justify data when the SSP1 is programmed for a data size that is less than 16 bits. Unused bits at the top are ignored by transmit logic. The receive logic automatically right-justifies.

24.6.4 SSP1 Status register (SSP1SR)

Address offset: 0x000C

Reset value: 0x0000_0003

31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16
res															
15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
res	BSY	RFF	RNE	TNF	TFE										
											R/W	R/W	R/W	R/W	R/W

[0] TFE - Transmit FIFO empty, RO

0 : Transmit FIFO is not empty.

1 : Transmit FIFO is empty.

[1] TNF - Transmit FIFO not full, RO:

0 : Transmit FIFO is full.

1 : Transmit FIFO is not full.

[2] RNE - Receive FIFO not empty, RO:

0 : Receive FIFO is empty.

1 : Receive FIFO is not empty.

[3] RFF - Receive FIFO full, RO:

0 : Receive FIFO is not full.

1 : Receive FIFO is full.

[4] BSY - SSP busy flag, RO:

0 : SSP is idle.No effect

1 : SSP is currently transmitting and/or receiving a frame or the transmit FIFO is not empty.

24.6.5 SSP1 Clock prescale register (SSP1CPSR)

Address offset: 0x0010

Reset value: 0x0000_00000

31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16
res															
15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
res								CPSDVSR							
								R/W							

[7:0] CPSDVSR - Clock prescale divisor

This must be an even number from 2-254, depending on the frequency of SSPCLK. The least significant bit always returns zero on reads.

24.6.6 SSP1 Interrupt mask set or clear register (SSP1IMSC)

Address offset: 0x0014

Reset value: 0x0000_00000

31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16
res	res	res	res												
15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
res	TXI M	RXI M	RTI M	ROR IM											
												R/W	R/W	R/W	R/W

[0] RORIM - Receive overrun interrupt mask:

0 : Receive FIFO written to while full condition interrupt is masked.

1 : Receive FIFO written to while full condition interrupt is not masked.

[1] RTIM - Receive timeout interrupt mask:

0 : Receive FIFO not empty and no read prior to timeout period interrupt is masked.

1 : Receive FIFO not empty and no read prior to timeout period interrupt is not masked.

[2] RXIM - Receive FIFO interrupt mask:

0 : Receive FIFO half full or less condition interrupt is masked.

1 : Receive FIFO half full or less condition interrupt is not masked.

[3] TXIM - Transmit FIFO interrupt mask:

0 : Transmit FIFO half empty or less condition interrupt is masked.

1 : Transmit FIFO half empty or less condition interrupt is not masked.

24.6.7 SSP1 Raw interrupt status register (SSP1RIS)

Address offset: 0x0018

Reset value: 0x0000_00004

31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16
res															

15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
res	TXRI S	RXRI S	RTRI S	ROR RIS											
												R/W	R/W	R/W	R/W

[0] RORRIS - Gives the raw interrupt state, prior to masking, of the SSPrORINTR interrupt

[1] RTRIS - Gives the raw interrupt state, prior to masking, of the SSPrTINTR interrupt

[2] RXRIS - Gives the raw interrupt state, prior to masking, of the SSPrXINTR interrupt

[3] TXRIS - Gives the raw interrupt state, prior to masking, of the SSPrTXINTR interrupt

24.6.8 SSP1 Masked interrupt status register, (SSP1MIS)

Address offset: 0x001C

Reset value: 0x0000_00000

31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16
res															

15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
res	TXM IS	RXM IS	RTM IS	ROR MIS											
												R/W	R/W	R/W	R/W

[0] RORMIS - Gives the receive over run masked interrupt status, after masking, of the SSPRORINTR interrupt

[1] RTMIS - Gives the receive timeout masked interrupt state, after masking, of the SSPRTINTR interrupt

[2] RXMIS - Gives the receive FIFO masked interrupt state, after masking, of the SSPRXINTR interrupt

[3] TXMIS - Gives the transmit FIFO masked interrupt state, after masking, of the SSPTXINTR interrupt

24.6.9 SSP1 Interrupt clear register (SSP1ICR)

Address offset: 0x0020

Reset value: 0x0000_00000

31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16
res															

15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
res	RTIC	ROR IC													
														R/W	R/W

[0] RORICS - Clears the SSPRORINTR interrupt

[1] RTIC - Clears the SSPRTINTR interrupt

24.6.10 SSP1 DMA control register, (SSP1DMACR)

Address offset: 0x0024

Reset value: 0x0000_00000

31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16
res															

15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0

res	TXD MAE	RXD MAE													
														R/W	R/W

[0] RXDMAE - Receive DMA Enable:

0 : DMA for the receive FIFO is disabled.

1 : DMA for the receive FIFO is enabled.

[1] TXDMAE - Transmit DMA Enable:

0 : DMA for the transmit FIFO is disabled.

1 : DMA for the transmit FIFO is enabled.

24.7 Register map

The following Table 42 summarizes the SSP1 registers.

Table 42 SSP1 register map and reset values

Document History Information

Version	Date	Descriptions
Ver. 1.0.0	01MAY2015	Initial Release
Ver. 1.0.1	12JUNE2015	Corrected typing error: I2C block
Ver. 1.0.2	17AUG2015	<ul style="list-style-type: none"> 1. Deleted 1.1 List of abbreviations 2. Corrected Register acronym in Table 3. Offset Address for Common Register : PSID -> PSIDR 3. Deleted PP mode with Figure 6 operation of boot code& Table 5 operation of mode selection in Chapter 8. Booting Sequence 4. Changed words : polling INT bit -> checking INT register in 17.3.2 Operation ADC with interrupt 5. Deleted unneeded content in 9.2.2 Read operations 6. Corrected nUARTRTS asserted condition : HIGH -> LOW , Corrected the sentence, ‘When nUARTCTR is re-asserted(to a low value) the transmitter sends the next byte.’ : de-asserted -> re-asserted in 22.3.4 Hardware flow control 7. Added contents about 19.4.7 Timer0_0 Background Load Register (DUALTIMER0_0TimerBGLoad) /19.6.7/19.10.7/19.12.7 .
Ver. 1.0.3	08JAN2016	<ul style="list-style-type: none"> 1. Bit rate in SPI interface changed ‘up to 2MHz and higher’ to ‘up to 20MHz’. 2. Bit rate generation example changed in 23.3.11 Programming the SSPCR1 Control Register
Ver. 1.0.4	08MAR2016	<ul style="list-style-type: none"> 1. In 2.2.2Memory map, GPIO0,1,2,3 changed to GPIOA,B,C,D
Ver. 1.0.5	22APR2016	<ul style="list-style-type: none"> 1. Added UART2 Description and Register 23.Universal Asynchronous Receive Transmit(UART2) 2. Deleted the greater part of I^2C, set up the Errata Sheet Link (http://wizwiki.net/wiki/doku.php?id=products:w7500:documents)
Ver. 1.0.6	06JAN2017	<ul style="list-style-type: none"> 1. Corrected Sn_DHAR1 bit R/W information

Copyright Notice

Copyright 2015 WIZnet Co., Ltd. All Rights Reserved.

Technical Support: <http://wizwiki.net/forum>

Sales & Distribution: sales@wiznet.co.kr

For more information, visit our website at <http://www.wiznet.co.kr>