




HEXAGON

Coordinate Measuring Machines (CMMs)

EXPLORER CLASSIC
BRIDGE COORDINATE
MEASURING MACHINE

COMPREHENSIVE SOLUTION

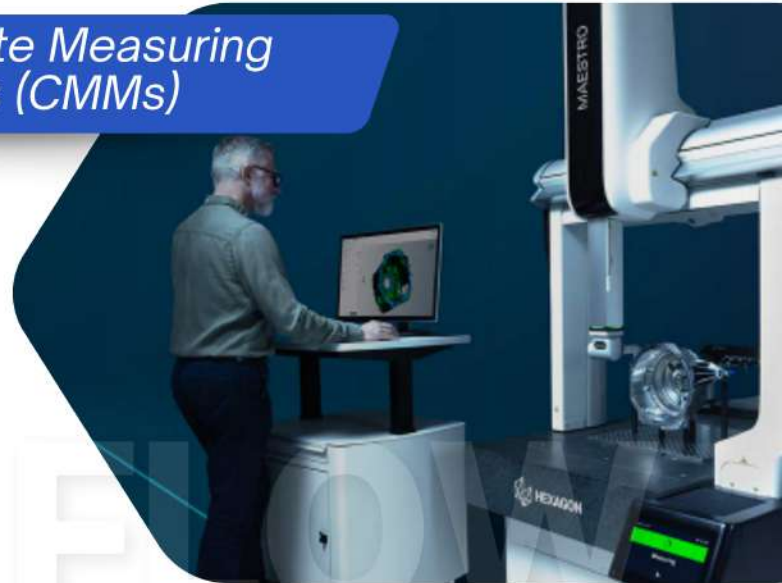

EXPLORER CLASSIC 04.XX.04 SPECIFICATIONS

Model	MPE (µm), L(mm)		Max.3D Speed (mm/s)	Max. 3D Accel (mm/s2)
	HH-MI/HP-T/HP-TM			
	MPEE(1)	MPEP(2)		
04.xx.04	3.0 + 4.0L/1000	3.5	340	1730

(1) MPEE according to ISO 10360-2: 2001

(2) MPEP according to ISO 10360-2: 2001



Performance data are valid if the following specifications are met:

- Temperature range: 18 - 22°C
- Max. air temperature variation: 1°C/h - 2°C/24h
- Max. gradient in space: 1°C/m
- Relative humidity: 25% - 75%

Probe configuration for performance test:

- HH-MI: stylus length 21 mm, tip diameter 4 mm
- HP-T/HP-TM: stylus length 10 mm, tip diameter 4 mm

EXPLORER CLASSIC 04.05.04 STROKES, DIMENSIONS AND WEIGHTS

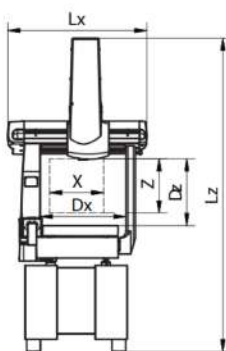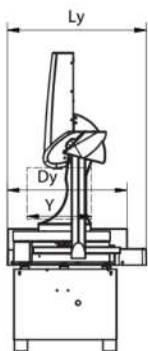

TECHNICAL CHARACTERISTICS

Mechanical Frame Stiff mechanical structure made entirely of aluminum alloy	Surface Plate Material: granite Part locking: threaded inserts M10 x 1.25	Measuring System METALLUR linear scales System resolution: 0.078µm
Environment Temperature range: 10 - 45 °C Relative humidity: 90%, non-condensing	Thermal Compensation Linear: 18 - 22 °C	Air Supply Minimum air supply pressure: 5.2 bar-8.0bar Air consumption: 90NL/min
Sliding System Air bearing on all axes	Ram Counterbalance Pneumatic, adjustable	Power Voltage: 220 V/50Hz

Model	Strokes (mm)			Overall Dimensions (mm)			Daylights (mm)			Max.Part Weight (kg)	CMM Weight X Y Z (kg)
	X	Y	Z (1)	Lx	Ly	Lz	Dx	Dy	Dz		
04.05.04	440	490	390	1030	1160	2340	559	750	483	227	321
04.07.04	440	690	390	1030	1285	2340	559	995	483	200	423



บริการติดตั้ง สอนการใช้งาน



CERTIFICATE ISO/IEC 17025