

## DATA OUTPUT


## DIGITAL DEPTH GAUGES WITH MOUNTING HOLES FOR EXTENSION BASE

- Non waterproof
- Resolution: 0.01mm/0.0005"
- Buttons: on/off, zero, mm/inch
- Automatic power off, move the digital unit to turn on power
- Meet DIN862
- Battery CR2032
- Made of stainless steel
- Optional accessory: extension base (code 6141)




1147-300

extension base (optional)



6141 series

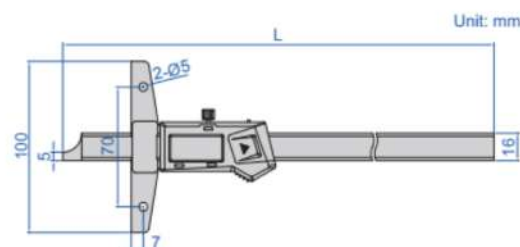

With data interface (optional data output cable: code 7315-25 receiver is needed page 5, 7214-25 page 11, 7302-21 page 20)

| Code     | Range         | Accuracy | L     |
|----------|---------------|----------|-------|
| 1147-150 | 0-150mm/0-6"  | ±0.03mm  | 237mm |
| 1147-200 | 0-200mm/0-8"  | ±0.03mm  | 287mm |
| 1147-300 | 0-300mm/0-12" | ±0.03mm  | 403mm |
| 1147-500 | 0-500mm/0-20" | ±0.05mm  | 605mm |
| 1147-700 | 0-700mm/0-28" | ±0.06mm  | 805mm |

Built-in wireless (receiver code 7315-2/3/6/7/8/9 is needed)

| Code       | Range         | Accuracy | L     |
|------------|---------------|----------|-------|
| 1147-150WL | 0-150mm/0-6"  | ±0.03mm  | 237mm |
| 1147-200WL | 0-200mm/0-8"  | ±0.03mm  | 287mm |
| 1147-300WL | 0-300mm/0-12" | ±0.03mm  | 403mm |
| 1147-500WL | 0-500mm/0-20" | ±0.05mm  | 605mm |
| 1147-700WL | 0-700mm/0-28" | ±0.06mm  | 805mm |




## DATA OUTPUT

## DIGITAL HOOK DEPTH GAUGES

- Non waterproof
- Resolution: 0.01mm/0.0005"
- Buttons: on/off, zero, mm/inch
- Automatic power off, move the digital unit to turn on power
- Battery CR2032
- Made of stainless steel



1142-150A



With data interface

| Code        | Range          | Accuracy | L      | d     | a    | b   | c      | Data output cable (optional)                                          |
|-------------|----------------|----------|--------|-------|------|-----|--------|-----------------------------------------------------------------------|
| 1142-150A   | 0-150mm/0-6"   | ±0.03mm  | 230mm  | 100mm | 5mm  | 2mm | 14.5mm | 7315-25 (receiver is needed) page 5, 7214-25 page 11, 7302-21 page 20 |
| 1142-200A   | 0-200mm/0-8"   | ±0.03mm  | 280mm  | 100mm | 5mm  | 2mm | 14.5mm |                                                                       |
| 1142-300A   | 0-300mm/0-12"  | ±0.04mm  | 380mm  | 150mm | 5mm  | 2mm | 14.5mm |                                                                       |
| 1142-500A   | 0-500mm/0-20"  | ±0.05mm  | 585mm  | 150mm | 8mm  | 3mm | 15mm   |                                                                       |
| 1142-5001A  | 0-500mm/0-20"  | ±0.05mm  | 585mm  | 200mm | 8mm  | 3mm | 15mm   | 7315-22 (receiver is needed) page 5, 7214-22 page 11, 7302-22 page 20 |
| 1142-1000A  | 0-1000mm/0-40" | ±0.07mm  | 1188mm | 150mm | 10mm | 4mm | 18mm   |                                                                       |
| 1142-10001A | 0-1000mm/0-40" | ±0.07mm  | 1188mm | 200mm | 10mm | 4mm | 18mm   |                                                                       |
| 1142-10002A | 0-1000mm/0-40" | ±0.07mm  | 1188mm | 250mm | 10mm | 4mm | 18mm   |                                                                       |

Built-in wireless (receiver code 7315-2/3/6/7/8/9 is needed)

| Code          | Range          | Accuracy | L      | d     | a    | b   | c      |
|---------------|----------------|----------|--------|-------|------|-----|--------|
| 1142-150AWL   | 0-150mm/0-6"   | ±0.03mm  | 230mm  | 100mm | 5mm  | 2mm | 14.5mm |
| 1142-200AWL   | 0-200mm/0-8"   | ±0.03mm  | 280mm  | 100mm | 5mm  | 2mm | 14.5mm |
| 1142-300AWL   | 0-300mm/0-12"  | ±0.04mm  | 380mm  | 150mm | 5mm  | 2mm | 14.5mm |
| 1142-500AWL   | 0-500mm/0-20"  | ±0.05mm  | 585mm  | 150mm | 8mm  | 3mm | 15mm   |
| 1142-5001AWL  | 0-500mm/0-20"  | ±0.05mm  | 585mm  | 200mm | 8mm  | 3mm | 15mm   |
| 1142-1000AWL  | 0-1000mm/0-40" | ±0.07mm  | 1188mm | 150mm | 10mm | 4mm | 18mm   |
| 1142-10001AWL | 0-1000mm/0-40" | ±0.07mm  | 1188mm | 200mm | 10mm | 4mm | 18mm   |
| 1142-10002AWL | 0-1000mm/0-40" | ±0.07mm  | 1188mm | 250mm | 10mm | 4mm | 18mm   |

